



IntechOpen

Electric Vehicles

The Benefits and Barriers

Edited by Seref Soylu



ELECTRIC VEHICLES – THE BENEFITS AND BARRIERS

Edited by **Seref Soylu**

INTECHOPEN.COM

Electric Vehicles - The Benefits and Barriers

<http://dx.doi.org/10.5772/717>

Edited by Seref Soylu

Contributors

Francisco Perez-Pinal, Cristina Inês Camus, Jonas Fluhr, Theo Lutz, Samuel E. De Lucena, Wang Yan, Yin Tianming, Yin Haochun, Nicola Briguglio, Marco Ferraro, Laura Andaloro, Vincenzo Antonucci, Borong Wu, Yonghuan Ren, Ning Li, Aling Zhang, Jing Yang, Wei Shen, Adolfo Perujo, Christian Thiel, Françoise Nemry, Vít Bršlica, Junhua Song, Mao Xiaojian, Wang Junxi, Tang Hangbo, Zhuo Bin, Danilo Santini

© The Editor(s) and the Author(s) 2011

The moral rights of the and the author(s) have been asserted.

All rights to the book as a whole are reserved by INTECH. The book as a whole (compilation) cannot be reproduced, distributed or used for commercial or non-commercial purposes without INTECH's written permission.

Enquiries concerning the use of the book should be directed to INTECH rights and permissions department (permissions@intechopen.com).

Violations are liable to prosecution under the governing Copyright Law.



Individual chapters of this publication are distributed under the terms of the Creative Commons Attribution 3.0 Unported License which permits commercial use, distribution and reproduction of the individual chapters, provided the original author(s) and source publication are appropriately acknowledged. If so indicated, certain images may not be included under the Creative Commons license. In such cases users will need to obtain permission from the license holder to reproduce the material. More details and guidelines concerning content reuse and adaptation can be found at <http://www.intechopen.com/copyright-policy.html>.

Notice

Statements and opinions expressed in the chapters are these of the individual contributors and not necessarily those of the editors or publisher. No responsibility is accepted for the accuracy of information contained in the published chapters. The publisher assumes no responsibility for any damage or injury to persons or property arising out of the use of any materials, instructions, methods or ideas contained in the book.

First published in Croatia, 2011 by INTECH d.o.o.

eBook (PDF) Published by IN TECH d.o.o.

Place and year of publication of eBook (PDF): Rijeka, 2019.

IntechOpen is the global imprint of IN TECH d.o.o.

Printed in Croatia

Legal deposit, Croatia: National and University Library in Zagreb

Additional hard and PDF copies can be obtained from orders@intechopen.com

Electric Vehicles - The Benefits and Barriers

Edited by Seref Soylu

p. cm.

ISBN 978-953-307-287-6

eBook (PDF) ISBN 978-953-51-6037-3

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,100+

Open access books available

116,000+

International authors and editors

120M+

Downloads

151

Countries delivered to

Our authors are among the
Top 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Meet the editor

Dr. Seref Soylu received his Ph.D degree in Mechanical Engineering from Iowa State University in 2001. His Ph.D. research work mostly focused on internal combustion engines and thermodynamic engine modeling that were supported by John Deere Product Engineering Center. Through end of his Ph.D. study, he also worked for Caterpillar Inc. as an analytical engineer in their technical center in Peoria, IL for the development of the advanced diesel engines. After receiving his Ph.D. degree in 2001, Dr. Soylu joined to Sakarya University to perform research and teach thermal science courses. His research interests centered on the development of environmentally friendly road transport vehicles including hybrid electrical vehicles. Dr. Soylu also worked as a visiting scientist in the Joint Research Center of European Commission for a year from November 2004 to November 2005 to provide technical and scientific support to the policymakers of the Commission for their legislative works. His work in the Joint Research Center focused on fuels for internal combustion engines, exhaust emission measurement techniques for zero emission vehicles, portable emission measurement systems, and small engines. Dr. Soylu has also worked as independent expert for European Commission in the field of Energy and Transport to evaluate and review Framework Programme (6 & 7th) projects on behalf of the Commission.

Dr. Soylu is currently an Associate Professor of Sakarya University. He is teaching undergraduate and graduate level thermal science courses and leading a research project entitled "Measurement and Modelling of Hybrid City Bus Real-World Emissions" funded by Turkish Ministry of Industry and Trade and TEMSA R&D.

Contents

Preface XI

- Chapter 1 **A Survey on Electric and Hybrid Electric Vehicle Technology 1**
Samuel E. de Lucena
- Chapter 2 **Electric Vehicles in an Urban Context: Environmental Benefits and Techno-Economic Barriers 19**
Adolfo Perujo, Christian Thiel and Françoise Nemry
- Chapter 3 **Plug-in Electric Vehicles a Century Later – Historical lessons on what is different, what is not? 35**
D. J. Santini
- Chapter 4 **What is the Role of Electric Vehicles in a Low Carbon Transport in China? 63**
Jing Yang, Wei Shen and Aling Zhang
- Chapter 5 **Plug-in Hybrid Vehicles 73**
Vít Bršlica
- Chapter 6 **Fuel Cell Hybrid Electric Vehicles 93**
Nicola Briguglio, Laura Andaloro,
Marco Ferraro and Vincenzo Antonucci
- Chapter 7 **Supercapacitors as a Power Source in Electrical Vehicles 119**
Zoran Stević and Mirjana Rajčić-Vujasinović
- Chapter 8 **Integration of Electric Vehicles in the Electric Utility Systems 135**
Cristina Camus, Jorge Esteves and Tiago Farias

- Chapter 9 **Communication with and for Electric Vehicles** 159
Jonas Fluhr and Theo Lutz
- Chapter 10 **Applications of SR Drive
Systems on Electric Vehicles** 173
Wang Yan, Yin Tianming and Yin Haochun
- Chapter 11 **LiFePO₄ Cathode Material** 199
Borong Wu, Yonghuan Ren and Ning Li
- Chapter 12 **An Integrated Electric Vehicle Curriculum** 217
Francisco J. Perez-Pinal

Preface

Internal combustion engines have experienced an enjoyed monopoly for almost a century as power sources of road transport vehicles. But, in the same period, vehicle ownership and mileages increased to a level that the resulting petroleum based fuel consumption, urban air pollutants and green house gas emissions (the challenging triad) have become great concern especially for past a few decades. There have been several regulations issued to be remedy for the challenging triad, but even in the most developed countries, the challenging triad has been still one of the biggest threats for sustainable transport and development of urban agglomerations.

Development in internal combustion engines and their fuels was very fast in the early decades of the 20th century, but today internal combustion engines are at their mature levels that any further development to increase engine efficiency and minimize the emissions is expected to be very little if ever possible. Any improvement in engine and fuel technology for better efficiency and emissions either increases the cost to uncompetitive levels or brings additional environmental problems when especially considering life cycle of the engines and fuels.

Electric vehicles, on the other hand, are becoming promising alternatives to be remedy for the challenging triad and sustainable transport as they use centrally generated electricity as a power source. It is well known that power generation at centralized plant is much more efficient and its emissions can be controlled much easier than those emitted from internal combustion engines that scattered all over the world. Additionally, an electric vehicle can convert the vehicle's kinetic energy to electrical energy and store it during braking and coasting.

All these benefits of electrical vehicles are starting to justify, a century later, attention of industry, academia and policy makers again as promising alternatives for urban transport. Nowadays, industry and academia are striving to overcome the challenging barriers that block widespread use of electric vehicles. Lifetime, energy density and power density, weight, cost of battery packs are major barriers to overcome. In this sense there is growing demand for knowledge to overcome the barriers and optimize the components and energy management system of electrical vehicles.

In this book, theoretical basis and design guidelines for electric vehicles have been emphasized chapter by chapter with valuable contribution of many researchers who work on both technical and regulatory sides of the field. Multidisciplinary research results from electrical engineering, chemical engineering and mechanical engineering were examined and merged together to make this book a guide for industry, academia and policy maker.

To be effective chapters of the book were designed in a logical order. It started with the examination of historical development of electrical vehicles. Then, an overview of the electrical vehicle technology with the benefits and barriers was presented. After that current state of the art technology and promising alternatives for electrical vehicle components were examined. Finally, to establish the required knowledge for overcoming the major barriers electrical vehicles, the state of the art curriculum from technician to PhD education was introduced.

As the editor of this book, I would like to express my gratitude to the chapter authors for submitting such a valuable works that already published or presented in prestigious journals and conferences. I hope you will get maximum benefit from this book to take the urban transport system to a sustainable level.

Seref Soylu, PhD
Sakarya University
Department of Environmental Engineering, Sakarya,
Turkey

A Survey on Electric and Hybrid Electric Vehicle Technology

Samuel E. de Lucena
Unesp – São Paulo State University
Brazil

1. Introduction

Internal combustion engine vehicles (ICEVs) have experienced continuous development in manufacturing technology, materials science, motor performance, vehicle control, driver comfort and security for more than a century. Such ICEV evolution was accompanied by the creation of a huge network of roads, refuelling stations, service shops and replacement part manufacturers, dealers and vendors. No doubt, these fantastic industrial activities and business have had a central role in shaping the world and, in many aspects, the society as well. Today, the number of ICEV models and applications is astonishing, ranging from small personal transport cars to a hundred passenger buses, to heavy load and goods transportation trucks and heavy work caterpillars. Modern ICE vehicles encompass top comfort, excellent performance and advanced security, for relatively low prices and, needless to say, have become since the beginning the most attractive consumer products. However, despite approximately a century-long industry and academia struggle to improve ICE efficiency, this is, and will continue to be, incredibly low. As illustrated in Fig. 1, solely circa 30% of the energy produced in the ICE combustion reaction is converted into mechanical power. In other words, approximately 70% of the energy liberated by combustion is lost. In fact and worse than that, the wasted energy of thermal motors, as ICEs may be called, is transformed into motor and exhaust gases heat. The exhaust gases are a blend formed mostly of carbon dioxide (CO_2) and, to a lower extent, nitrogen oxides (NO_x), hydrocarbons (C_xH_y), carbon monoxide (CO) and soot. Carbon dioxide is known to block the earth's radiation emissions back into the outer space thus promoting global temperature rise – the so-called greenhouse effect. This, climate researchers say, is silently creating other global catastrophic changes, as for example, sea level rise. Air pollution in big cities is another serious problem caused by exhaust gases, which leads to respiratory system diseases, including lung cancer. Disturbing noise level is another issue related to big fleet of ICEVs in big cities. Yet, this brings about another headache for city administrators and authorities: the daily jamming, though this last nuisance might be alleviated only by mass transport systems (i.e., subways and trains).

Whether none of the above listed problems ever existed, yet a challenging situation had to be dealt with urgently: the finite amount of fossil fuel available for an ever-increasing world fleet. As petrol wells vanish, this commodity price skyrockets, also motivated by political tension around production areas in Middle East. On the other hand, renewable energy

sources, like ethanol produced from sugarcane or maize crops, are an alternative solution being tried in some countries. In Brazil, for instance, sugarcane bio-fuel is an established option, with more than two decades on the road, with ICE automobiles prepared to run interchangeably on gasoline or ethanol automatically. Any driver could choose which fuel type to use at the refuelling station, much based on their prices. There is a criticism over this solution as regards to the demands on food availability and prices, once crop fields are used to produce bio-fuels instead of food. Greenhouse effect gas generation and air pollution problems are still present though to a somewhat lower extent.

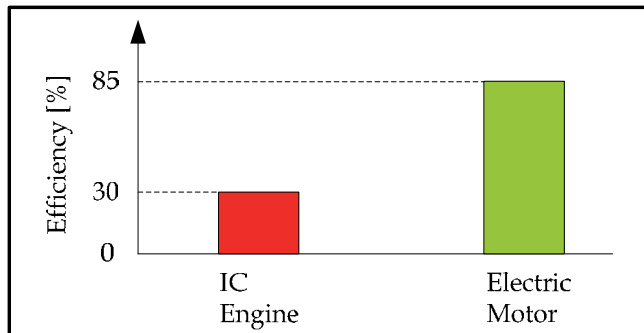


Fig. 1. ICEs are very inefficient energy converters as compared to electric motors

An accurate look at Fig. 1 reveals that electric motors are far superior to ICE and could do an excellent job in propulsion of vehicles, helping to solve the serious climate, air pollution and noise problems created by ICEVs. As a matter of fact, electric vehicles (EVs) were invented in 1834, before ICE vehicles, being manufactured by several companies of the U.S.A, England, and France (Chan, 2007). Fig. 2(a) shows a picture of commercial EV in 1920. Poor performance of their batteries contrasting to fast development of ICE technology, extremely high energy density and power density of gasoline and petrol, and the abundance and low price offer of fossil fuel, all conspired against those days' EVs that rapidly became defunct. Interestingly, more than 150 years later, triggered by the world energy crisis in the 1970s, EVs entered the agendas of world's greatest carmakers, governments' energy and climate policy, and of worldwide non-governmental organizations worried about environmental pollution and greenhouse effect.

Today, although their sales are negligible in relation to that of ICEVs, pure EVs and hybrid EVs (HEVs), i.e., those that combine ICE with electrical machines fed by batteries or fuel cells (hydrogen derived electricity), are offered by world's greatest carmakers. The performance of HEVs, from the driver's standpoint, rivals or outdoes that of modern ICEVs. Their energy consumption ranges from circa 10% to 70% lower than that of an equivalent ICE car, depending on their power, battery size, control strategy, etc. For the sake of illustration, until 2008, Toyota Prius, the world's first commercially mass-produced and marketed HEV, sold over 500,000 units on the world's market (Xiang et al., 2008). Fig. 2(b) shows a photograph of a modern 2010 Toyota Prius HEV whose selling price begins at 23,000 USD. The dramatic gain in energy efficiency, besides much lower or zero gas emission and noise-free operation, is due to the much higher efficiency of electric motors and control strategies such as regenerative braking and storage of excess energy from the ICE during coasting.



Fig. 2. a) 1920 Detroit Electric b) 2010 Toyota Prius (HEV) [Toyota Motor Co., 2011]

There are many reasons for EVs and HEVs to represent so low a share of today's car market. For EVs, the most important are their shorter range, the lack of recharging infrastructure, and higher initial cost. Though HEVs feature range, performance and comfort equivalent or better than ICEVs, their initial cost is higher and the lack of recharging infrastructure is a great barrier for their diffusion. Nevertheless, the energy efficiency of the latter, though far higher than that of ICEVs', seems not capable of solving the greenhouse gas emissions by world vehicle fleet. And this situation is expected to become worse and worse, given that world fleet is expected to triple by 2050, in relation to 2000, due to massive car use in countries such as China, India and Brazil. To limit the planet's average temperature to 2-2.4 °C above the pre-industrial era level, scientists calculate a needed reduction of 50-85% in CO₂ emissions in all sectors by 2050. EVs may play a fundamental role in this struggle, given that the transportation sector is one of the largest emitters of CO₂ (Bento, 2010). To that end, industry, government, and academia must strive to overcome the huge barriers that block EVs widespread use: battery energy and power density, battery weight and price, and battery recharging infrastructure.

This chapter presents a synthetic review on the technology of modern EVs. This includes the types and classification of EVs, electric motor kinds employed by EV manufacturers, power electronics driver topologies, control strategies, battery types and performance, and infrastructure demands.

2. General classification of electric vehicles

A more universal classification of the many different types of electric vehicles will certainly appear, perhaps in a near future, as a result of their mass production, originating from carmaker associations and research teams efforts worldwide. As a matter of fact, a literature review makes it clear that a nomenclature convergence is already easily perceived. This nomenclature is stronger and more definitive when EVs classification is carried out based on either the energy converter type(s) used to propel the vehicles or the vehicles' power and function (Chan, 2007; Maggetto & van Mierlo, 2000). When referring to the energy converter types, by far the most used EV classification, two big classes are distinguished, as depicted in Fig. 3, namely: battery electric vehicles (BEVs), also named pure electric vehicle, and hybrid electric vehicles (HEVs). BEVs use batteries to store the energy that will be transformed into mechanical power by electric motor(s) only, i. e., ICE is not present. In hybrid electric vehicles(HEVs), propulsion is the result of the combined actions of electric motor and ICE. The different manners in which the hybridization can occur give rise to different architectures: series hybrid, parallel hybrid, series-parallel hybrid, and complex hybrid,

which are here detailed in separate sections. As the reader may expect, there is no universal architecture that can be considered superior in all practical aspects: energy efficiency, vehicle performance and range, driver comfort, manufacturing complexity, and production cost. Therefore, in practice, carmakers may choose different architectures to achieve different goals and meet distinct transport segment requirements.

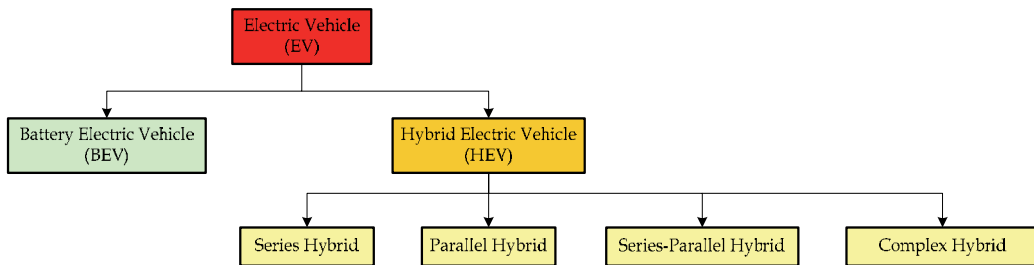


Fig. 3. Classification of EVs according to the type(s) and combination (if any) of energy converters used (electric motor & ICE)

Under the large umbrella of HEVs, there is another category (not shown in Fig. 3) that utilizes a fuel cell instead of an ICE together with the electric motor, always in the series-hybrid architecture. This is the fuel cell vehicle (FCV). The following rationale is to justify FCVs absence in Fig. 3 and in the rest of this chapter. The hydrogen-based chemical reaction of FCVs generates the electricity either to be used by the EM or stored in battery or supercapacitor. The by-product of hydrogen and oxygen reaction is simply pure water, which renders FCVs emission-free and consequently an environmentally friendly technology (Gulhane et al., 2006). A recent research about the dynamic competition for market between plug-in HEVs (PHEVs) and FCVs showed that the early deployment PHEVs is almost certain to close the market for FCV in the future (Bento, 2010). Another study shows that from 2006 onwards auto makers decreased sharply the prototyping activities with FCVs and much of the public funding in the U.S.A. and other industrial countries shifted from FCVs to BEVs and PHEVs. Despite some controversy over the reasons, which range from the lack of a hydrogen infrastructure, absence of a technological breakthrough in hydrogen technology, to very high cost production of FCVs (Honda FCX Clarity, an FCV most close to market, costs circa 1 million USD, clearly not an attractive pricing), as a matter of fact these vehicles do not seem an option anymore (Bakker, 2010). Nevertheless, hopefully fuel cells may play a very important role in replacing ICE of stationary machines.

A second useful classification for HEVs (Fig. 4) places them into the following three categories, according to the electric motor power under the hood: *micro hybrid*, *mild hybrid*, and *full hybrid* (Chan, 2007). In effect, this classification is a measure of the hybridization degree of the HEV (Maggetto, 2000). In other words, it indicates how much important is the role played by the electric motor in the car propulsion. *Micro hybrids* use electric motor of about 2.5 kW at 12 V. The EM is only a helping hand to the ICE, in the start and stop operations, which dominate in city driving. Even in this driving mode, energy savings is of only about 5% to 10%. This is a very poor economy, obviously with a negligible impact on fossil fuel dependence, metropolitan area air pollution and greenhouse gas emissions, the challenging triad. C3 Citroen is a commercial example. EM in *mild hybrids* is of 10-20 kW at

100-200 V. As expected, energy savings is greater and reaches about 20%-30%. Commercial models are Honda Civic and Honda Insight. Though fuel (and thus operational) economy may compensate for their greater initial cost as compared to ICE equivalents, turning mild HEVs attractive for consumers, from the aforementioned triad's viewpoint, even if massively adopted, they could not be a remedy, given the targeted global CO₂ reduction and, even worse, if one takes into account that world fleet (vastly of ICE vehicles) is increasing more and more, as new consumers come into life in emerging countries. For the sake of illustration, only in Brazil, passenger car fleet doubled in the last decade. The last member of this category is the *full hybrid*, which embeds an EM of circa 50 kW at 200-300 V and, in city driving, yields energy saving of 30%-50%, thanks to complex control algorithms that manage to operate the ICE, when needed, always at maximum efficient region, directing the excess energy to batteries. Energy is also recovered and saved into the battery and/or supercapacitor, during coasting and regenerative braking. Toyota Prius is a genuine member of this family. Though full hybrids can be an auxiliary player to combat the triad, their efficiency figures are much less than needed to curb the triad by themselves, for the same reasons discussed above. At best, in this author's opinion, they serve to delay the climate tragedy and to give some psychological relief to their owners.

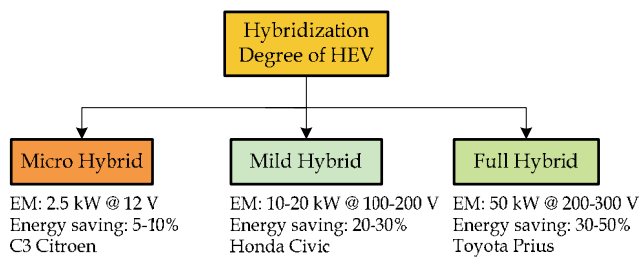


Fig. 4. Classification of EVs according to the hybridization degree (EM: electric motor) (Chan, 2007)

A last classification for HEVs divides the automobile market into a number of categories (or segments) mostly based on their prices (Maggetto, 2000). Five segments are identified, as depicted in Fig. 5. HEVs of the *second family-car* segment are for frequent use in town and move a relatively low daily distance. If propelled mainly by ICE, in urban areas, the overall efficiency is very low. Conversely, if propulsion relies only on electric motor, high efficiency can be reached, and an effective combat to the triad (greenhouse gas emission, air pollution, and fossil fuel dependence) might be given. The ICE (with its fuel tank) might serve as a range extender, in practice, an efficient manner to null drivers' anxiety of being run out of charge. Even though this classification has been used for HEVs, it is interesting to extend it to BEVs since, as discussed just above, the latter can play a very important role in alleviating problems in metropolitan areas and world climate changes. The *intermediate car* segment is planned to be frequently the family's unique car. Therefore, it must be appropriate for use in town and present also a good road performance. Toyota Prius can be allocated in this segment. HEVs of the *high class car* segment are not convenient for city use. They feature extraordinary road performance, excellent technical performance and perfect comfort. Of course, the excellent technical performance does not take into account the environmental viewpoint. The *small delivery vehicle* segment is intended mainly for city use. However,

unlike the second family car segment, vehicles of the former segment must be capable of moving a great number of relatively short-distance trips everyday. Therefore, high efficiency would be welcome, from the environmental, climate and fuel economy viewpoints. The *city bus* segment is dedicated to urban public transport, including tourist transport in urban areas. Vehicles of this segment feature low speed and circa 250-km driving range. Once more, the higher the hybridization degree the better for the environment and climate. Chinese manufacturer Dongfeng argues that its EQ6121HEV hybrid bus achieves 80 km/h and reduces in 30% greenhouse gas emission and in 20-30%, fuel consumption (Xiang et al., 2008).

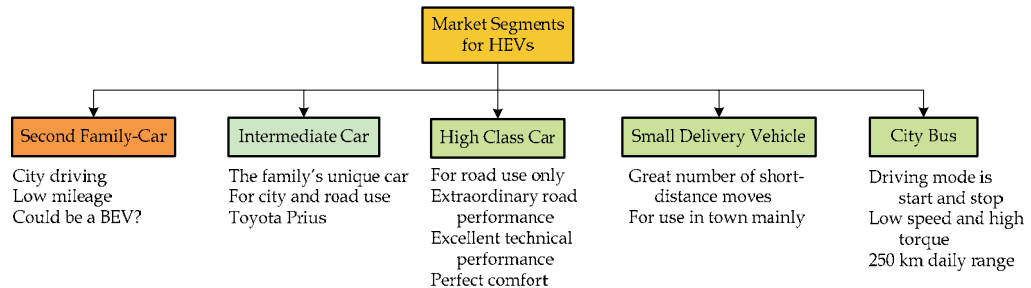


Fig. 5. Classification of EVs according to the market segment

3. Architecture of BEVs and HEVs

As cars go electric, new design methodologies and power train topologies come to life to optimize them according to criteria such as energy efficiency, types of energy sources, types of energy storage devices, hybridization rate, driving range, power performance, driver's comfort, production cost, ownership cost, and so on (Chen et al., 2009). As market has different demands in distinct regions of the world, and in every region there are different market segments as already discussed, it is normal that a great number of BEVs and HEVs models exist and will continue to increase (Xiang et al., 2008; Gulhane et al., 2006). Automakers strive to create car models that better fulfil the market needs, while maximize their income.

3.1 BEVs architectures

Fig. 6 illustrates one of the simplest topology for battery-electric vehicles. The energy stored in the battery (or in a battery pack) is used by the power converter to drive the electric motor. This, in turn, drives the two wheels by means of a fixed or changeable gear and a power splitting differential gear. The power converter unit may include a dc-dc converter and a motor driver. It all depends on the motor type and ratings and on the battery voltage, energy and power density. For maximum efficiency, the vehicle's kinetic energy must be converted to electrical energy by the motor/generator and stored in the battery pack via the power converter, whenever the break pedal is pressed and during coasting. Of course, the electronic detail of the power converter (e.g., topology, control strategy) is a function of the employed motor type, battery technology and ratings, etc. Anyway, in order to regenerate energy, the power converter must be able to control the power flow in both directions: from the battery to the motor as well as from the motor to the battery. If the battery type cannot

be fast charged with the recovered kinetic energy, either a supercapacitor or a flywheel may be used for temporary energy storage. If possible, the changeable (or fixed) gear may be cut out, to diminish the mechanical parts counting. In this case, it is replaced by more complex variable speed controller for the motor.

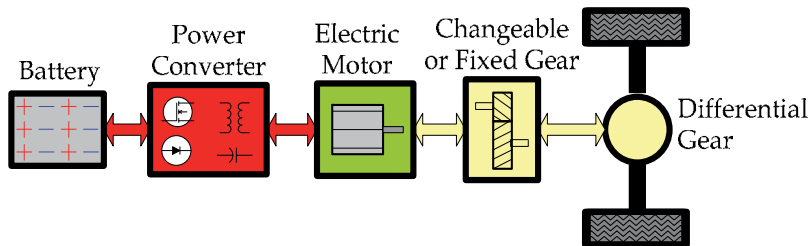


Fig. 6. One-motor BEV

Pure electric vehicles may adopt two (or four) in-wheel motors in their powertrains, as sketched in Fig. 7. In this case, every motor is driven by a dedicated power converter that must control wheel's speed and torque. Moreover, a central electronic controller must coordinate speed differences (in steering wheels), whenever needed or as a result of wheel slippage, as long as a differential power splitting device is no more present. As expected, the simplification of the mechanical design is attained at the expense of increased complexity of the power electronics and controllers. On the other hand, augmenting the motor number, for a desired vehicle power and performance, leads to significantly smaller motors and, what is less obvious, to lower rated power switches and passive electronic parts, which influence on drive cost and reliability. One interesting operating mode for multiple-motor BEVs is that the vehicle can continue to operate, though at a somewhat reduced power, if one of the motors (in case of two-motor BEVs) gets out of service. Comparing Figs. 7 and 6, one notices that in-wheel motor propulsion topology reduces radically EV's number of mechanical links.

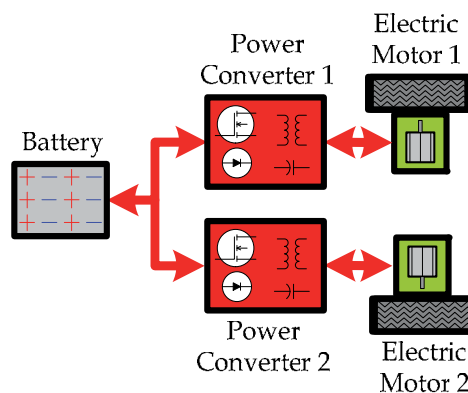


Fig. 7. Two-motor BEV

To this date, owing to battery limitations such as high initial cost, relatively low energy and power density, and excessive weight, BEVs are not as attractive as HEVs, because of limited

driving range, performance and comfort. Nevertheless, as BEVs are the only zero-emission cars, they must be viewed as an effective tool to combat greenhouse gas emissions, air pollution and petrol dependency. There are arguments to reinforce the idea that strong governmental incentive policies should be adopted in as many countries as possible to benefit owners of BEVs. Examples of such incentives are: government rebate to each BEV owner (say 10% of vehicle price), exemption of purchase tax, exemption of road maintenance fee, road passing fee and parking fee. In some countries some of these actions are under way (Xiang et al., 2008). Data of the U. S. Department of Transportation reveal that 50% of daily vehicle travel is less than 48 km and average daily vehicle trip is about 16 km (Kruger & Leaver, 2010). Today's batteries feature enough energy to easily enable *second-car family* BEVs (though this class was originally proposed to HEVs) to travel these distances without recharge. Therefore, there is room for a massive production (and adoption) of pure electric vehicles. However, the massive use of BEVs will be no good from the carbon emission viewpoint, if fossil fuel (coal or petrol) is used to generate the electricity that is ultimately put into the car batteries. To be effective, car batteries must be recharged with energy coming from carbon-free resources (such as solar, wind, hydro, and nuclear). On the other hand, every country must study its grid capacity to deal with a big number of new (and of special profile) consumers. The impact of massive use of BEVs on the power grid might be considerable. Yet, in the future, BEVs can serve as distributed energy storage devices that may play an important role in regulating energy demand.

3.2 HEVs architectures

While BEVs are propelled by electric motors only, HEVs employ both ICE and electric motor in their powertrains. The way these two energy converters are combined to propel the vehicle determines to the three basic powertrain architectures: series hybrid, parallel hybrid, and series-parallel hybrid. Complex hybrid refers to architectures that cannot be classified as one of these three basic types.

3.2.1 Series HEV

As depicted in Fig. 8, in series HEVs the wheels are only driven by the electric motor that also operates as generator during break and coasting, augmenting thus the overall energy efficiency. This topology simplifies the powertrain design, since clutch and reduction gear are not necessary. Speed and torque control is carried out by controlling the electric motor only, which is a very efficient power converter. The ICE's role is charging (or recharging) the battery and supplying energy to the electric motor, always being operated at maximum efficiency. This is another strategy that helps increasing the overall energy efficiency. Series HEVs are said to be ICE-assisted electric vehicles, for obvious reasons. An ICE, one generator and one motor are one of the main disadvantages of series HEV. Moreover, as the vehicles must be capable of cruising with maximum load against a graded road, all the machines, i.e., the ICE, the generator and, of course, the electric motor, must be powerful enough, which will result in relatively over-dimensioned machines. This leads to cost increase. As Eq. 1 indicates (Chen et al., 2009), given the constants for initial rolling force, F_0 , the rolling coefficient, r , the drag coefficient, d , the total mass (vehicle's mass plus the passenger and luggage masses), m , and the gravity, g , the resistance force, F_{res} , the electric motor must be capable of surpassing increases with vehicle's speed, V , and the road's grade, θ .

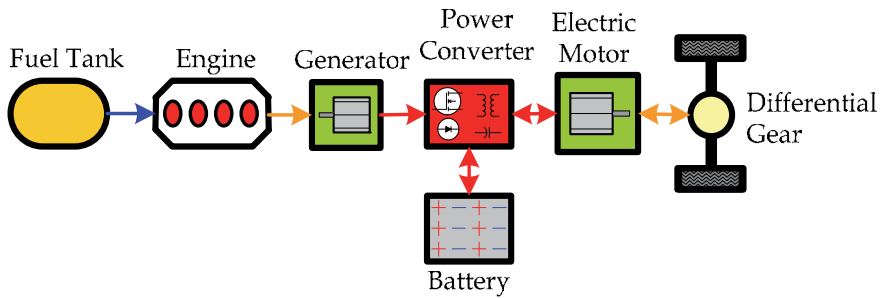


Fig. 8. Architecture of series HEV

$$F_{res} = F_0 + rV + dV^2 + mg \sin\theta \tag{1}$$

On the other hand, as indicated by Eq. 2, the motor’s torque is proportional to the inertia, J , and the first derivative of angular speed, ω , i.e., the angular acceleration. Eqs. 1 and 2 are interrelated to each other by the ratio of wheel to transmission radii. These two equations govern the vehicle’s dynamic performance (acceleration power) and cruising speed. It is easy to note how stronger should be the powertrain if a desired series HEV had its maximum speed specification changed from, say, 80 km/h to 120 km/h. But, is such a performance always needed? As the ICE does not add its effort to aid in propelling the vehicle, this architecture is appropriate for small HEVs, as for instance, those of the *micro* category or *second-family car* segment already mentioned, for which cruising speed can be very modest.

$$T_m = J(d\omega/dt) \tag{2}$$

Before proceeding to next section, it is worth making it clear that HEVs of all architectures can be recharged in two very distinct ways, as shown in Fig. 9: the so-called plug-in hybrids (PHEV) and the conventional HEVs. While PHEVs can have their batteries recharged directly from the power grid, which is an enormous advantage, the conventional HEVs have their batteries recharged by means of the ICE. In this case, the advantage is the omnipresence of gas stations. Studies indicate that conventional HEVs are potentially less eco-friendly than PHEVs. While the latter can take advantage of the ubiquitous power grid,

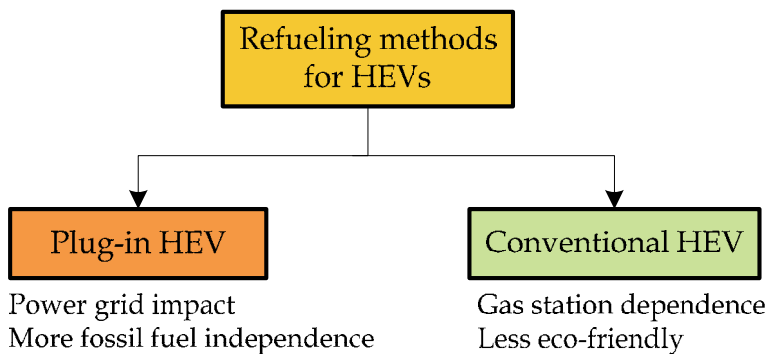


Fig. 9. Recharging methods for HEVs

the impact they can cause to the grid is far from being negligible and depends on the way charging and discharging (as PHEVs can return stored energy to the grid) are done: controlled or not by utilities companies (Clement-Nyns et al., 2011; Sioshansi et al., 2010; Kruger & Leaver, 2010). Moreover, if the electrical energy generated to the grid comes from fossil fuel plants, then to a great extent the environmental and climatic appeal of these vehicles is no more valid.

3.2.2 Parallel HEV

In parallel HEVs, propulsion can be the result of torque generated simultaneously by ICE and the electric motor. As illustrated in Fig. 10, this technology provides for independent use of the ICE and electric motor, thanks to the use of two clutches. One of the key features of parallel HEVs is that, for a given vehicle performance, the electric motor and ICE too, can be significantly smaller than that achieved with series architecture, what allows for a relatively less expensive vehicle. On the other hand, wheel propulsion by the ICE leads to superior dynamic performance of this topology. Complex powertrain controller may enable up to the following six different operation modes: electric motor on and ICE off; ICE on and electric motor off; electric motor on and ICE on, with both of them cooperating to propel the vehicle; ICE on supplying power to drive the vehicle and to drive the electric machine that, in this case, runs as generator to recharge the batteries with energy coming from the fuel tank (maximum overall energy savings can be achieved by running the ICE at maximum efficiency speed, while pumping the excess energy to the batteries); ICE on and dedicated to recharge the batteries through the electric machine (i.e., the vehicle is stopped); regenerative braking, with energy being stored in the batteries (or in a supercapacitor), via the electric machine. This profusion of operation modes can be conveniently handled by the controller to optimize the driving performance or fuel savings, for example. Parallel HEVs are said to be electric motor-assisted ICE vehicles and their architecture are most appropriate for vehicles of the *high class car* segment and *full hybrid*. As already commented, powertrain sizing is carried out based on the desired dynamic performance for the vehicle, cruising speed, and a set of parameters such as maximum road grade, car weight, load, and so on. As expected, this activity counts heavily on computer simulation programs, before prototyping begins (Wu et al., 2011).

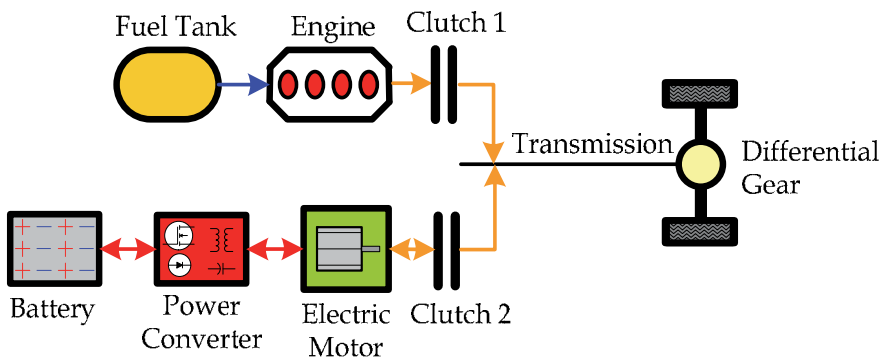


Fig. 10. Architecture of parallel HEV

3.2.3 Series-parallel HEV

At the expense of one more electric generator and a planetary gear, a quite interesting architecture for the powertrain is obtained (Fig. 11), which blends features of both series and hybrid topologies, and is conveniently named series-parallel architecture. Though more expensive than any of the parent architectures, series-parallel is one of the preferred topologies for HEVs, specially when automakers target excellence in dynamic performance and high cruising speeds for their models. Like parallel HEVs, the hybridization degree is adjusted as a trade-off of performance, cruising speed, fuel economy, driveability, and comfort. As can be concluded by a rapid exam in Fig. 11, half of dozen or more operation modes are possible for series-parallel HEVs, which put pressure over the controller development and test. Needless to say, these are devised and developed with the help of computer simulators and experience.

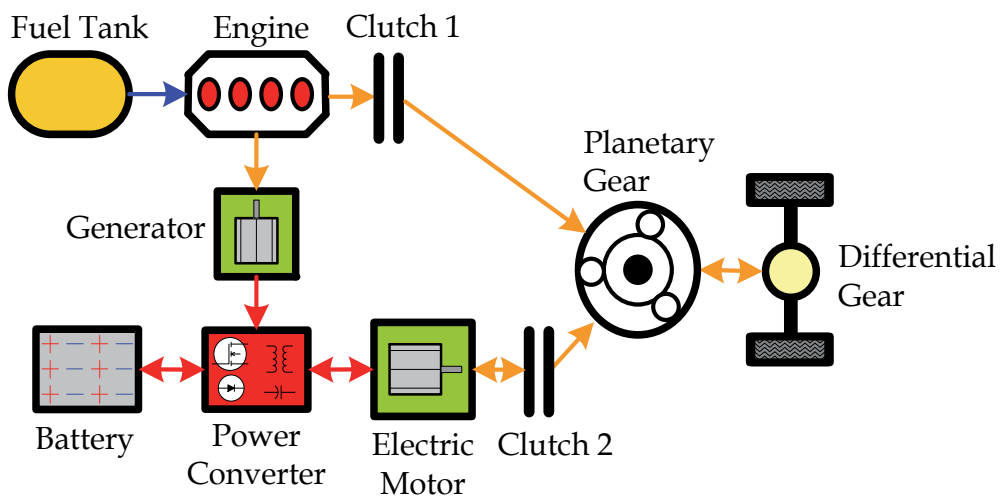


Fig. 11. Architecture of series-parallel HEV

3.2.4 Complex HEV

Fig. 11 sketches an architecture named complex HEV. This name is reserved to the topologies that cannot be classified as a combination (or rearrangement) of the basic architecture types analysed to this point. As can be seen in Fig. 11, two bidirectional power converters are utilized, one for the main electric motor, and another one for the auxiliary electric motor. Unlike in series-parallel HEVs, both these motors can propel the wheels concomitantly. In other words, three different torque sources add up to drive the wheels, thus leading to a better foreseeable dynamic performance vehicle and clearly higher cruising speed car. At times, the secondary electric machines operates as generator, in order to recharge the battery or to save into this the excess ICE energy, as this can run at optimal speed generating more power than needed by the vehicle. Once more, the number of possible operation modes for the complex HEVs is half a dozen or greater. Component sizing (electric motors/generators, ICE, gears, battery, power converters, etc) is a very complex task. Control program development and test are highly challenging.

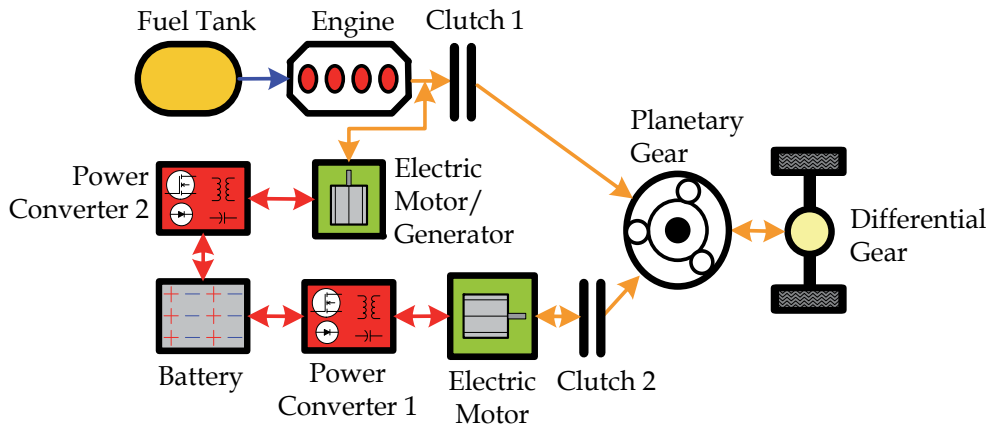


Fig. 12. Architecture of complex HEV

4. Electric motors for EVs

Squirrel cage rotor, three phased, asynchronous induction motors absolutely dominates the industrial applications scenario, as is largely known. Their relative low-cost, high robustness and good dynamic performance make them a good candidate for driving EVs as well. As a matter of fact, they are utilized in a number of commercial EVs. However, the dynamic performance needed by EVs is met by induction motor at a relatively high price, for the necessary vector control is a highly complex technique. Furthermore, there are drive alternatives, as illustrated in Fig. 13, that better satisfy specific EVs' demands such as high torque and power density, high efficiency over a wide torque and speed range, and wide-constant-power operating capacity (Chau et al., 2008; Gulhane et al., 2006). Permanent magnet brushless dc motor (PMBL) is a very promising technology that has been in wide

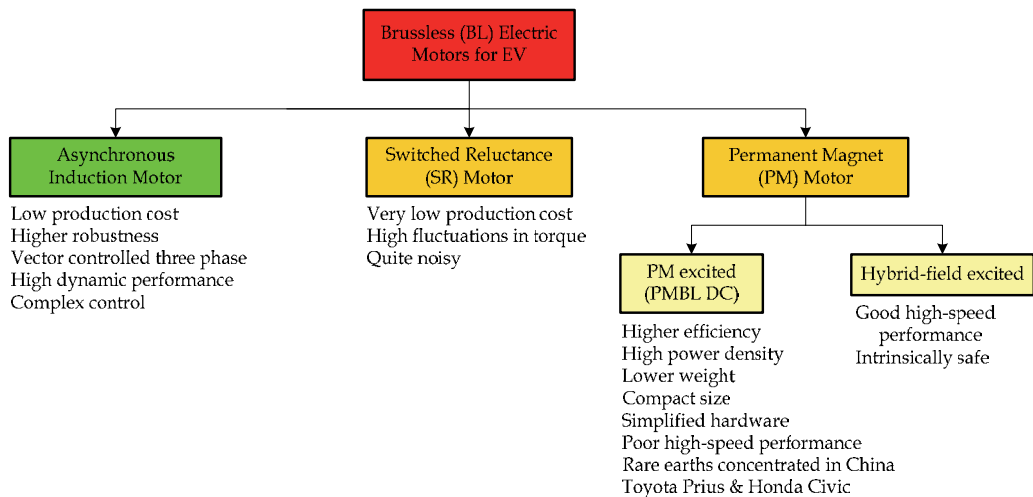


Fig. 13. Electric motor for Evs

use with EVs. It seems this drive type will be a major market leader, though automakers outside China should be cautious and seek drive alternatives, as long as world reserves of rare earths used in the permanent magnets are practically totally situated in China, whose government could apply export restrictions. Hybrid-field excited PMBL offers superior performance, as field can be strengthened and weakened. The penalty for this choice is higher production cost and increased control complexity.

A last electromagnetic torque generator option for EVs is the brushless switched-reluctance (BLSR) motor. The very low production cost of BLSR motors (even lower than that for induction motors), together with some other important characteristics (e.g., wide speed range), make them a serious candidate for driving EVs. Nevertheless, they are plagued with (acoustic) noise and high fluctuation in torque, which might be compensated for with a more complex (and expensive) controller.

5. Power electronics driver topologies for EVs

Power converters are highly specialized circuits constructed with high power electronic switches and analog and digital control circuitry, to convert one unregulated dc (direct current) voltage level to either a regulated and different dc voltage level or a regulated ac (alternate current) voltage level. The former are called dc-dc converters, whereas the latter are named dc-ac converters (often called frequency inverters). In buck converters the output voltage level is lower than the input voltage level, whereas boost converters supply an elevated output voltage level relative to their inputs. Buck-boost converters may either reduce or elevate the output voltage in relation to their inputs, depending on the control signal duty cycle. Fig. 14 illustrates the application of power converters in a commercial HEV. Converters are used to charge the battery pack from the grid voltage (in PHEV), to recharge the battery pack from the fuel tank (ICE and generator involved), to save energy into the battery pack (or ultracapacitor) during regenerative braking and coasting, as already discussed. They are used to drive the electric motor(s) and to feed the vehicle loads such as HVAC (heating, ventilation and air conditioner).

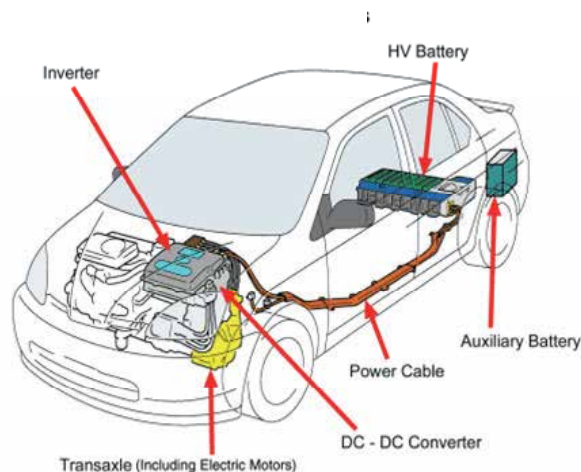


Fig. 14. Power converters in a 2001 Toyota Prius HEV [Automobile Research Bolletin, 2008]

As illustrated in Fig. 15, classical power converter topologies, which are adequate to EVs, include the (transformer) isolated and non-isolated types and a family of bidirectional converters. Key characteristics of power converters for EVs are high efficiency (typically higher than 90%), high reliability, electromagnetic compatibility, and miniaturization (Bellur & Kazimierczuk, 2007). High-voltage, high-power, high temperature, fast switching and very low on-resistance semiconductor switches are of paramount importance in converters for EVs. These modern switches are metal-semiconductor oxide field-effect transistors (MOSFETs) and insulated-gate bipolar transistors (IGBT). Overall speaking, MOSFETs are faster than IGBTs, whereas these are capable of supporting high currents than MOSFETs. A number of world-class semiconductor manufacturers (such as International Rectifier, Motorola, and ST Microelectronics) develop special power switches and auxiliary circuits (as gate drivers) appropriate for EV applications. Safety is a very critical issue in EVs, for the voltages of up to 600 V under the hood are lethal.

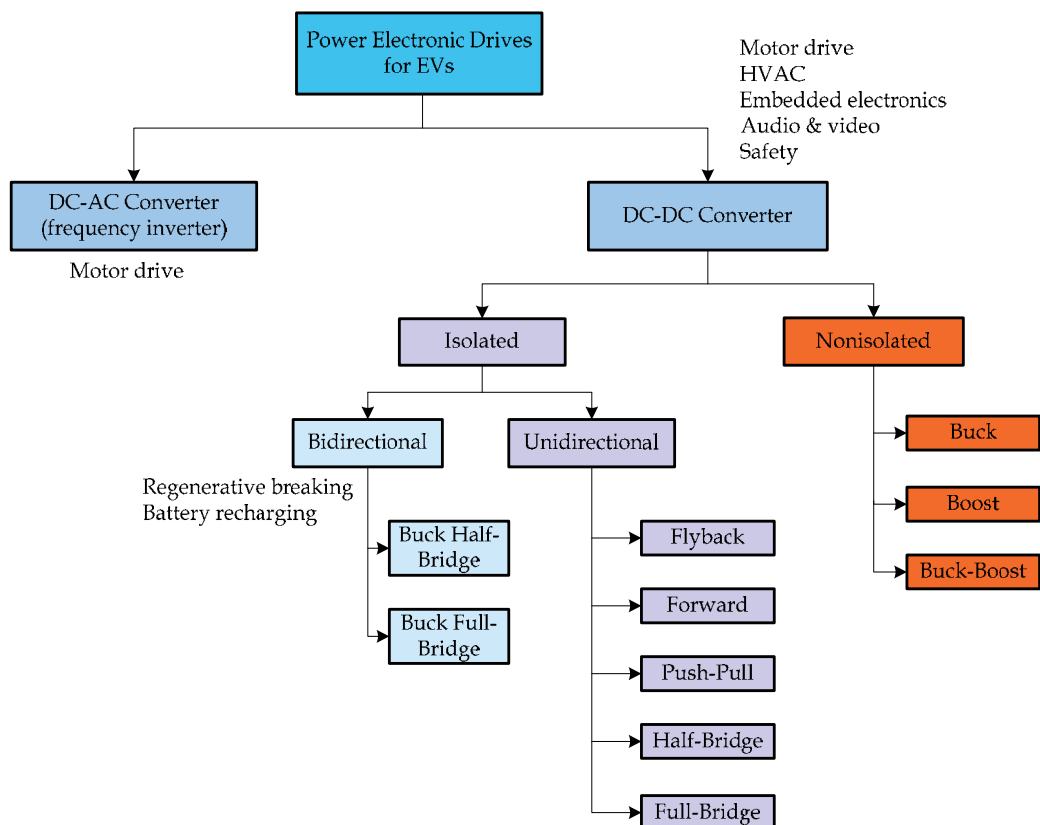


Fig. 15. Power converters for EVs

6. Control strategies

Control is a fundamental part of a successful EV design. Control engineering has matured for decades and nowadays counts on sophisticated microcontrollers and digital signal processors hardware and advanced integrated development environments. Despite all the

available powerful tools and techniques, “efficient” control of EVs continues to challenge engineers and researchers, for the EVs embrace nonlinear processes (like battery behaviour), devices that are difficult to model (such as the ICE), and some conflicting goals, as for instance control for energy efficiency and control for better dynamic performance. It is not a coincidence that this area is one of the most prolific in the technical literature. Advanced digital control technique, such as optimal control and fuzzy control, are used by researchers and carmakers as they strive to improve EVs behaviour (Ambühl et al., 2010; Ohn et al., 2010).

Fig. 16 shows a power converter (frequency inverter) and a controller developed to equip a small off-road electric vehicle that is traditionally propelled by an ICE (Lucena et al., 1997). The ICE was replaced by a 3-phase induction motor and a gearbox. High voltage, high power, fast switching MOSFETs were arranged to allow for the generation of 3-phase PWM voltage to feed the induction motor. Integrated bootstrap gate drivers facilitated MOSFET control by a microcontroller. The PWM was synthesized with the aid of a look-up table containing constant voltage-to-frequency ratio sinusoidal PWM, to implement constant torque at a wide speed range (Fig. 17). The control program featured slow start function to limit current in switches and motor. The control signal comes from a potentiometer attached to the accelerator pedal.

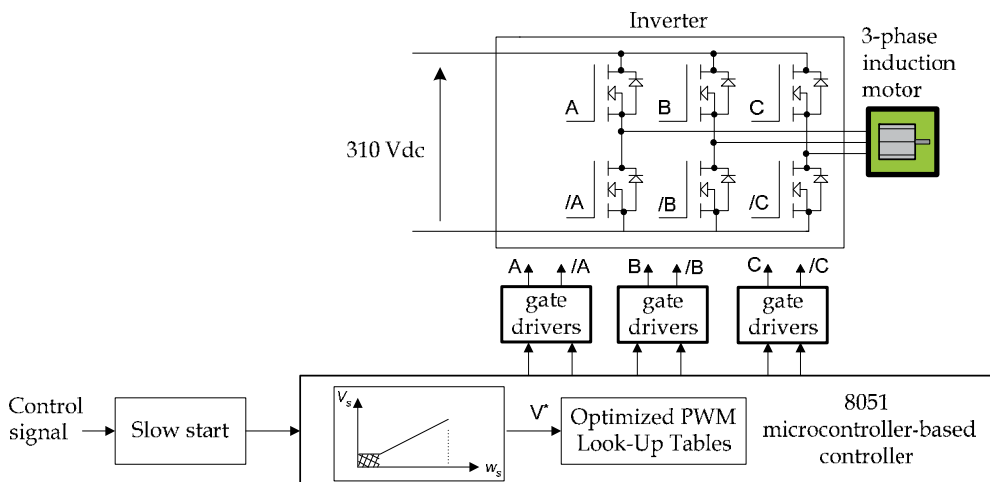


Fig. 16. Power converter and controller for 3-phase induction motor

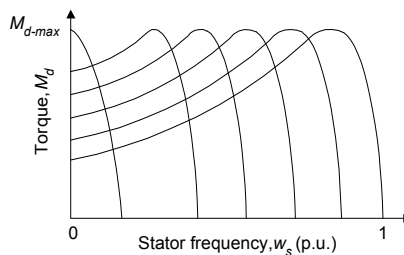


Fig. 17. Induction motor torque versus stator frequency curves at different speeds

7. Battery types

Hopefully research on batteries will end up by boosting their energy and power densities as well as significantly decreasing their production cost. In a nutshell, these are the main barriers for mass diffusion of BEVs, PHEVs and conventional HEVs. Though today's technology is appropriate to EVs, from the technical viewpoint (driving range and vehicle performance), cost is still quite high for consumers.

As to the most promising technology for batteries, there seems to be no consensus among researchers. Some believe lithium-ion batteries will dominate the market for EVs (Burke, 2007), whereas others point out that nickel-metal hydride batteries are the best option (Wu et al., 2011). Meanwhile, commercial EVs are utilizing the following electrochemical technologies: Li-ion battery pack (388 V, 360 Ah), lead-acid batteries (12 V, 170 Ah), iron-lithium batteries (30 kWh) and sodium sulphate batteries (Xiang et al., 2008).

Carbon/carbon ultracapacitors feature capacitance as high as 4000 F with voltage rating up to 3 V per cell (Gulhane et al, 2006). These very high specific-power energy-storage devices can be fully charged within a few seconds and are ideal for regenerative braking and high acceleration of the vehicle, as they are much faster than batteries. Sadly, their low energy density does not enable them to be the principal storage devices.

Commercially available EV charging stations are spreading in countries like the U.S.A. (Fig. 18) that provide for simultaneous multiple vehicle charging per station, and authentication using RFID, IC Cards and Synchronized Cell Phone. Home charging stations are also available, as well as solar photovoltaic charging station. Perhaps the latter is a seed for the carbon-free world of the future.

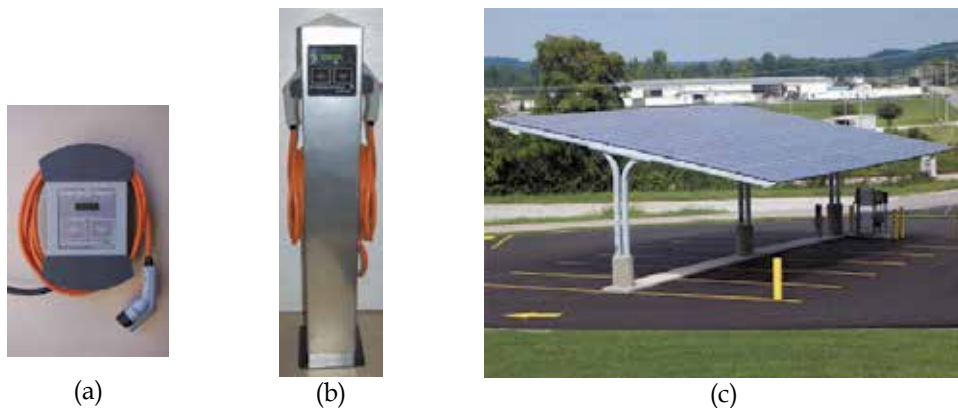


Fig. 18. Commercial charging stations for EVs: a) Home battery charging station (240 V, 40 A), b) commercial battery charging station (240 V, 40 A), c) solar powered battery charging station [EV-Charge America, 2011]

8. Conclusion

World concerns on climate change and the rapid vanishing of global crude-oil stock, besides air quality degradation caused by exhaust gas and car noise in megacities, guarantee a steady struggle to replace world noisy ICE-based fleet by a silent EV-based one in the

coming decades. To that end, in spite of the enormous progress in EV technology, the following barriers are still to be overcome, before widespread use of EVs: first, the price of EVs, mainly due to battery cost, has to be lowered – which can be the result of present and future investigations on battery technology; secondly, the driving range of EVs has to be significantly extended, at reasonable battery prices; finally, huge investments in infrastructure for EVs have to be carried out. The latter is a very complex problem, which deserves cooperation of governments, carmakers, technical societies, researchers, etc, to establish standards, for instance, for battery charging infrastructure and power grid energy taxes.

9. Acknowledgment

The author wishes to acknowledge the financial assistance of Fundunesp (Foundation for the Development of Unesp) and the Post-Graduation Program in Mechanical Engineering of Unesp - São Paulo State University at Guaratinguetá (Brazil).

10. References

- Ambühl, D.; Sundström, O.; Sciarretta, A. & Guzzella, L. (2010). Explicit Optimal Control Policy and its Practical Application for Hybrid Electric Powertrains. *Control Engineering Practice*, Vol.18, (2010), pp. 1429-1439.
- Automobile Research Bolletín 2008-8, (2008). Toyota Prius Service Precautions. March 19, 2011, Available from: <<http://www.tech-cor.net/AutoResBulletin/2000-8/2000-8.htm>>
- Bakker, S. (2010). The Car Industry and the Blow-Out of the Hydrogen Hype. *Energy Policy*, Vol.38, (2010), pp. 6540-6544.
- Bellur, D. M. & Kazimierczuk, M. K. (2007). DC-DC Converters for Electric Vehicle Applications, *Proceedings of Electrical Insulation Conference and Electrical Manufacturing Expo*, pp. 286-293, 2007.
- Bento, N. (2010). Dynamic Competition between Plug-in Hybrid and Hydrogen Fuel Cell Vehicles for Personal Transportation. *International Journal of Hydrogen Energy*, Vol.35, pp. 11271-11283.
- Burke, A. F. (2007). Batteries and Ultracapacitors for Electric, Hybrid, and Fuel Cell Vehicles. *Proceedings of the IEEE*, Vol.95, No.4, (April 2007), pp. 806-820.
- Chan, C. C. (2007). The State of the Art of Electric, Hybrid, and Fuel Cell Vehicles. *Proceedings of the IEEE*, Vol.95, No.4, (April 2007), pp. 704-718.
- Chen, K.; Bouscayrol, A.; Berthon, A.; Delarue, P.; Hissel, D. & Trigui, R. (2009). Global Modeling of Different Vehicles. *IEEE Vehicular Technology Magazine*, (June 2009), pp. 80-89.
- Clement-Nyns, K.; Haesen, E. & Driesen, J. (2011). The Impact of Vehicle-to-Grid on the Distribution Grid. *Electric Power System Research*, Vol.81, (2011), pp. 185-192.
- EV-Charge America. March 27, 2011, Available from: <<http://www.ev-chargeamerica.com>>
- Gulhane, V.; Tarambale, M. R. & Nerkar, Y. P. (2006). A Scope for the Research and Development Activities on Electric Vehicle Technology in Pune City, *Proceedings of IEEE Conference on Electric and Hybrid Vehicles*, pp. 1-8, 2006.
- Kruger, P. & Leaver, J. D. (2010). Comparative Requirements for Electric Energy for Production of Hydrogen Fuel and/or Recharging of Battery Electric Automobile

- Fleets in New Zealand and the United States. *International Journal of Hydrogen Energy*, Vol.35, pp. 11284-11290.
- Lucena, S. E. de; Marcelino, M. A. & Grandinetti, F. J. (2007). Low-Cost PWM Speed Controller for an Electric Mini-Baja Type Vehicle. *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, Vol.28, No.1, 2007, pp. 21-25.
- Ohn, H.; Yu, S. & Min, K. (2010). Spark Timing and Fuel Injection Strategy for Combustion Stability on HEV Powertrain. *Control Engineering Practice*, Vol.18, (2010), pp. 1272-1284.
- Maggetto, G. & Van Mierlo, J. (2000). Electric and Electric Hybrid Vehicle Technology: a Survey, *Proceedings of IEE Seminar on Electric, Hybrid and Fuel Cell Vehicles*, pp. 1/1-1/11, 2000.
- Sioshansi, R.; Fagiani, R. & Marano, V. (2010). Cost and Emissions Impacts of Plug-in Hybrid Vehicles on the Ohio Power System, *Energy Policy*, Vol.38, pp. 6703-6712.
- Toyota Motor Corporation. March 19, 2011, Available from:
<<http://www.toyota.com/prius/specs.html>>
- Xiang, Z.; Jia, W.; Jianzhong, Y.; Zhibiao, C.; Qinglin, H. & Yuanzhang, H. (2008). Prospects of New Energy Vehicles for China Market, *Proceedings of Hybrid and Eco-Friendly Vehicle Conference*, pp. 1-8, 2008.
- Wu, X.; Cao, B.; Li, X.; Xu, J. & Ren, X. (2011). Component Sizing Optimization of Plug-in Hybrid Electric Vehicles, *Applied Energy*, Vol.88, pp. 799-804.

Electric Vehicles in an Urban Context: Environmental Benefits and Techno-Economic Barriers

Adolfo Perujo¹, Christian Thiel² and Françoise Nemry³

European Commission, Joint Research Centre,

¹Institute for Energy (IE) Ispra (VA)

²Institute for Energy (IE), Petten,

³Institute for Prospective Technological Studies (IPTS), Seville

¹Italy

²The Netherlands

³Spain

1. Introduction

Mobility of persons and goods is a crucial component of the competitiveness of the economy; mobility is also an essential citizen right. Effective transportation systems are important for social prosperity, having significant impacts on economic growth, social development and the environment. The goal of any sustainable transport policy is to ensure that our transport systems meet society's economic, social and environmental needs.

In 2006 the transport sector consumed 31% of the total final energy consumption (of which 82% is due to road transport) and was responsible for 25% of CO₂ emissions (EU-27). In 2007 road transport constituted about 83% of passenger total transport demand. Road transport accounts for 71% of transport related CO₂ emissions and passenger cars constitute 63% of these road transport related CO₂ emissions. Currently, road transport is also totally dependent (>90%) of fuel oil making it very sensitive to foreseeable shortage of crude oil, besides largely contributing to air pollutants such as NO_x, PM10 and volatile organic compounds.

It is estimated that more than 80% of the developed world population lives in an urban environment and therefore it is in this environment where a larger concentration of vehicles are found. As example there were about 230 million passenger vehicles in the EU-27 in 2007 and the new vehicle sales were nearly 16 million vehicles in that year. Consequently the urban population is very much at risk by directly suffering the impact of conventional vehicles because their closeness to the pollutant source. Air pollution is one of the important external costs of transport as it impacts on the health of the population (it is estimated to be 0.75% of the EU GDP). On the other hand, the large concentration of vehicles causes traffic congestions in metropolitan urban areas that can be considered a threat to economic

competitiveness (a recent study on the subject showed that the external costs of road traffic congestion alone amount to about 1.25% of the EU GDP) and it also increases the inefficiency of an overcrowded transport infrastructure.

Electric vehicles (EV) might offer a step change technology based on the much higher efficiency of electric motors compared to ICEs as well as the potential to de-carbonise the energy chain used in transportation and in particular in the well to tank pathway (JRC et al., 2008, Thiel et al., 2010). This will also open the possibility to use alternative energy paths to secure mobility and making the road transport more independent from crude oil.

This chapter analyses the possible role that EVs (it includes Battery Electric Vehicles –BEV, and Plug-in Hybrid Vehicles – PHEV) might play within the urban environment in the short, medium and long term, discusses the expected gains in environmental performance, presents the main bottlenecks in its deployment and addresses the possible additional cost bare by the technology.

The chapter also examines the possible business models and policy options that might be put in place in order to support a faster market intake for the electrification of the urban transport.

However, the potential of EV to reduce the impact of transportation varies from impact to impact and also depends on the time scale. In other words it does not represent the “silver bullet” to face the problem of environmental decay and transportation inefficiencies (traffic congestions) in our metropolitan areas and as such, it needs to be considered as an option in a wide range of possibilities at our disposal to meet this challenge. These options include also non-technological alternatives that together with the technological ones need to be considered in a holistic approach.

The chapter finalises with a summary and recommendations on how EVs can be brought to the forefront of urban/city vehicles as a good option to reduce the impact caused by transportation in the urban environment.

2. Technical characteristics of available electric vehicles

Recently customers are continuously impacted by announcements of new electrical vehicles models by the automotive industry that seems to be putting a large effort in bringing to the market electrified vehicles. The analysis of the technical features of the electric vehicles already available or that will be available in the next years is fundamental in order to understand their potential penetration. The understanding of their characteristics (range, battery capacity, energy consumption and others) as well as its limitations will define the type of customers attracted to this technology as well as the type of operations these vehicles will undertake. The automotive industry plans for the roll-out of EV have been recently reviewed in different literature sources (City of Westminster, 2009, Hacker et al, 2009). How these plans will materialise in the short to medium term will depend on both the manufacturing capacities and on the number of car models proposed to the consumer. This last aspect will indeed determine the variety of choices offered for the consumer, and thus the probability of purchase of BEVs and PHEVs.

A non-exhaustive list of available vehicle models is reported in Table 1. The data presented in the table are consistent with both; what is declared by the manufacturer and what can be found in the open literature.

	Brand	Model	Capacity (kWh)	Range (km)	Consumption (kWh/100km)	Vehicle segment
Cars	Audi	e-Tron EV	42.40	248	17.10	Large
	BMW	MINI-E	35.00	180	19.44	Small
	BYD Auto	BYDe6	72.00	400	18.00	Large
	Chery Automobile	S18 EV	15.00	135	11.11	Small
	Chrysler	Dodge Circuit EV	26.00	175	14.86	Large
	CODA	Sedan-EV	33.80	180	18.78	Large
	Daimler	SmartED	14.00	125	11.20	Small
	Detroit	e63	25.00	180	13.89	Mid-Size
	Fiat	Panda	19.68	120	16.40	Small
	FIAT	500	22.00	113	19.53	Small
	Ford	Focus Ev	23.00	160	14.38	Mid-Size
	Ford	Transit Connect	24.00	160	15.00	Mid-Size
	Heuliez	WILL EV	18.00	300	6.00	Small
	Hyundai	i10 Ev	16.00	140	11.43	Small
	Lighting	GTS	35.00	175	20.00	Large
	Loremo EV	Loremo Ev	10.00	150	6.67	Mid-Size
	Lumeneo	Smera EV	10.00	150	6.67	Small
	Mercedes	SLS eDrive	48.00	160	30.00	Large
	MILES	ZX40S/ ZX40ST	10.00	105	9.56	Small
	Mitsubishi	i-MIEV	20.00	160	12.50	Small
	NICE	Micro-Vett	10.50	80	13.05	Small
	Nissan	Leaf	24.00	160	15.00	Mid-Size
	Peugeot	iOn	20.00	140	14.29	Small
	Phoenix	SUV/SUT	35.00	209	16.73	Mid-Size
	Pininfarina	Bluecar	30.00	250	12.00	Small
	Citroen	C-Zero	16.00	110	14.55	Small
	Renault	Kangoo	15.00	160	9.38	Small
	Renault	Zoe ZE	15.00	160	9.38	Small
	Renault	TwingoQuickshift E	21.45	129	16.60	Small
	Renault	Fluence	30.00	160	18.75	Mid-Size
	REVA	NXR	14.00	160	8.75	Small
	REVA	NXG	25.00	200	12.50	Small
	Rud. Perf. Roadstar	Spyder	16.00	125	12.80	Large
	SUBARU	R1e	9.00	80	11.25	Small
SUBARU	Stella	9.00	80	11.25	Small	
Tata Motors	Indica EV	25.00	200	12.50	Small	
TESLA	Roadster/Model S	55.00	300	18.33	Large	

	Think	City	28.50	180	15.83	Small
	Toyota	FT-Ev	11.00	150	7.33	Small
	Volkswagen	E-Up!	18.00	130	13.85	Small
	Volvo	C30 BEV	24.00	150	16.00	Mid-Size
	Zenn	CityZENN	52.00	400	13.00	Small
	Brand	Model	Capacity (kWh)	Range (km)	Consumption (kWh/100km)	Classification
LDVs	Alke	ATX	8.40	70	12.00	LDV
	Piaggio	Porter	25.74	110	23.40	LDV
	Melex	XTR	4.32	60	7.20	LDV
	Modec	Delivery	50.00	100	50.00	LDV

Table 1. Main features of the fully electric vehicles (cars and light duty vehicles) already present in the market or expected to be commercialised in the near-term (energy consumption is not well-to-wheel). Technical information has been retrieved from different official and non-official sources. Official sources have been reported in the references.

3. Electrical vehicles and the urban environment

It can be said that the main reason for urging towards the introduction of Electric Vehicles in the private vehicle market is its possibility to reduce the pollutant emissions in the urban environment. This consideration only partially holds for greenhouse gases and in particular for the carbon dioxide (CO₂). Indeed considering that a high percentage of electric energy is produced by means of power plants using fossil fuels and that the impact of greenhouse gases has to be seen at a global level, it is worth estimating the possible reduction (if any) of the total CO₂ emitted by the vehicle fleet in an urban environment. It is obvious that to be able to do this an estimation of the electric vehicle market penetration and its evolution in an urban environment is required.

3.1 Market penetration of electric vehicles

The deployment of electric vehicles will depend on a large variety of factors. This includes the performance and costs of batteries, the access to the distribution grid and its efficiency, the type of business model implemented to supply the consumer with reliable batteries and electricity, the acceptance by the consumer of new vehicle types and possible implied driving habits.

This diversity of, and interlinks between these factors make any market projection extremely difficult and impossible to define one single scenario about the penetration of electric vehicles. Several sets of assumptions can be made on the above-mentioned aspects, resulting in different expectations on the market penetration of electric cars.

In the open literature it is possible to find studies in which the market penetration estimation is very optimistic. In Clement et al. (2007-2008), PHEVs reach the 28% of the total Belgian vehicle fleet in 2030. In Hadley and Tsvetkova (2008), it has been estimated that by the year 2020, PHEVs will achieve a constant 25% market share, reaching the number of 50 million of vehicles in 2030 in the USA. Other studies also confirm these estimations although present fleet composition does not seem to support these penetration scenarios; however, as

already stated above, the problem has too many degrees of freedom (as outlined also in Simpson, 2006).

More recently two studies addresses within the broader aim of the work the market penetration of electrical vehicles. In the first one (Perujo and Ciuffo, 2010) the approach was to make three scenarios and it was constraint to the case study of the city of Milan and its metropolitan area:

Scenario (1) assumed in 2010 that 0.5% of the vehicle fleet is made up of electric vehicles. Then the number of vehicles evolves in time assuming that the forecasted market share follows a logistic trend calibrated on the trend that methane (CNG) and Liquefied Petroleum Gas (LPG) powered vehicles have had in the period 2000-2009. This assumption is based on the idea that from the consumer perspective the electric technology has fairly the same appeal as the other "alternative" ones.

Scenario (2) assumed in 2010 that 1% of the vehicle fleet is made up of electric vehicles. Then the number of vehicles evolves in time assuming that the forecasted market share follows a logistic trend double than the one calibrated on the trend that CNG and LPG powered vehicles had in the period 2000-2009. This assumption is based on the idea that from the consumer perspective the electric technology has fairly the same appeal than the other "alternative" ones apart from the fact that electric vehicles do not suffer from the limited availability of service stations.

Scenario (3) did not considered a specific future trend, the impact of different percentages of electric vehicles on the whole fleet at a 2030 time horizon were evaluated (from 10 to 30%). This evaluation was carried out in order to show the impact on the electric supply system of a wider penetration of electric vehicles on the vehicle market, also according to the scenarios forecasted in Clement et al. (2007-2008) and in Hadley and Tsvetkova (2008).

With these assumptions the authors arrived to an EV-fleet share in the area of study in 2030 of 1.55 and 3.09% for scenarios (1) and (2) respectively.

The second study addresses the market share at European level. Having developed an enhanced version of the TREMOVE 3.1 model, Nemry and Brons, (2010) constructed and compared four market penetration projections taking into account two major drivers, i.e. technology progress of batteries and access to charging infrastructure. For each of them, two extremes scenarios (conservative and ambitious) were considered. The four projections are compared with a reference scenario in which the electric vehicle market doesn't develop. The energy efficiency of ICE cars gradually improves in accordance to the EU target on CO₂ emissions. This means that by 2015 and 2020, new ICE cars average emissions in the EU would be respectively 135 g CO₂/km and 115 g CO₂/km. Then, from 2025 onwards, the emissions are limited to 95 g CO₂/km.

In all four scenarios, the market deployment of pure electric cars and plug-in cars is endogenously determined by the cost efficiency (especially fuel costs and investment/maintenance costs) and by their effective range (determined by both battery capacity and access to charging).

Scenario assumptions on batteries cover two extreme future trends. In the conservative case, technical progress is slow and limited to a better durability while the usable SOC window remains unchanged. A continuous cost reduction is assumed, up to ~300 €/kWh. In the ambitious case progress is faster and more radical (200 €/kWh by 2030). Technology progress results in a much better durability and, also a higher useable SOC window.

With respect to infrastructure charging, given the already planned investments in various countries, the access to charging facilities is expected to increase in the future. At least,

current charging possibilities – mainly at home, where garages exist - are already or will be extended in a relatively short term. These existing national plans are implicitly considered in the most conservative scenario but are not assumed to get much more ambitious in the future. In the second scenario (ambitious scenario), an even larger scale infrastructure charging deployment is assumed for all countries. It is to be noted that the potential role of fast charging is neglected in both scenarios.

Without surprise, the estimated market shares drawn by Nemry and Brons (2010) of electric cars (BEVs and PHEVs) are shown to increase when charging infrastructure deployment and battery progress are fast and significant. Charging infrastructure deployment, through a wide access to the grid at home and in other places (especially work places) contribute to offer to more car buyers a wide range of car options able to meet their need – not only conventional car but also electric cars. Battery progress seems to be the second-order driving factor and contributes to make the electric cars more performing and cost efficient so that it can better compete with its conventional counterparts.

The expected trends on these two aspects explain that in all cases the BEVs sales shares remain limited until 2020 (0.5% to 3%). On the contrary, PHEVs, rapidly penetrate as soon as they are available on the market. This results from the fact that battery and charging infrastructure represent higher constraints for BEVs.

The EV-fleet share calculated (modelled) by both studies are consistent in the time horizon 2020-2030 albeit the area of study (metropolitan area of Milan and the EU) are quite diverse and the bases for the scenario choice are different.

3.2 Potential EV impact on the overall CO₂ emission in an urban environment

In 2009, both the European Union (EU) and G8 leaders agreed that CO₂ emissions must be cut by 80% by 2050 if atmospheric CO₂ is to stabilise at 450 parts per million (CO₂ equivalent) keeping the global warming below what it is considered to be the safe level of 2°C. But 80% decarbonisation overall by 2050 requires 95% decarbonisation of the road transport sector.

There are many options to achieved decarbonisation (through efficiency, biofuels and electric power-trains including hydrogen). However with a forecasted large increase of the number of passenger cars (rising up to 273 million only in Europe – and to 2.5 billion worldwide) by 2050, full decarbonisation may not be achievable through the expected improvements in the traditional internal combustion engine or alternative fuels alone. Furthermore if this scenario is combined with the increasing scarcity and cost of energy resources, it seems that electrification of road transport using low-carbon electric power-trains and hydrogen fuel cells is vital to ensure the long-term sustainability of mobility in Europe (European Commission, 2010a)

It is obvious that electric vehicles do not have tailpipe emissions of pollutants i.e. CO, NO_x, THC, NMHC, particles or others (aldehyde and VOCs). However, the electricity needed to propel the vehicle needs to be produced somewhere and that energy production depending upon the type of power station used will contribute to the overall environmental impact of EV. Nevertheless, it can be argued that the pollutants mentioned above have a local impact and therefore the use of EV in the urban environment will contribute to a drastic reduction of those pollutants in the urban air. One major benefit of electric vehicles is the "displacement" of harmful air pollutants from urban to rural areas, where population exposure is lower. Noise levels are also lower, particularly in urban driving conditions. However, the GHG (here we are mainly referring to CO₂) emissions have a more global

effect and therefore the energy production needed to be used in EVs have a role in the overall global CO₂ balance. This section addresses the levels of CO₂ reduction that the introduction of electric vehicles could provide depending upon the different EV penetration levels in an urban vehicle fleet.

This duality of electrification of road transport and emissions from the power sector has been studied by Unger et al. (2009). They compared the overall impact on climate and air quality by using energy resources for electric power for vehicles with zero carbon intensity, such as wind and solar power, and those from standard power plants. Their study suggests that a 50 per cent reduction in road transport emissions as a result of using more electric vehicles will result in a cooling effect on the climate. Their conclusion is based on different combinations of the warming and cooling effects due to the contribution of road transport and power plants to climate change by emitting long-lived CO₂ and short-lived pollutants. Non-CO₂, short-lived pollutants also contribute to air pollution and include ground-level ozone and the fine aerosol particles: sulphates, organic carbon and black carbon. CO₂, ozone and black carbon contribute to global warming, but sulphates and organic carbon reflect the sun's heat back into space, causing a cooling effect. They considered scenarios over 20-year and 100-year periods. For all scenarios, they estimated whether emissions from road transport and power generation would have a warming or a cooling effect on the climate. For both cases (no carbon base and standard power plants) a net overall cooling effect is achieved, albeit in the first case the level of cooling achieved is higher and in a shorter period.

The effect on CO₂ reduction of different penetration level in the urban fleet has been studied recently for the case of Milan and its hinterland (Perujo & Ciuffo, 2010). They used for their calculation the Italian electricity mix that consist of 81% non-renewable sources, thus causing important emissions of CO₂ to the atmosphere, and assuming that for 2030 the CO₂ emissions due to electric energy production will not change as compared with the present values (worse case scenarios as it is expected that the mix will change to lower CO₂ intensities). A similar approach was used for the evaluation of the CO₂ emissions generated by a number of vehicles equal to the number of electric vehicles estimated for the year 2030 in the different scenarios (resulting from the estimated EV share in the passenger cars fleet as reported above). In this case, however, due to the constant technological improvements, it was not realistic to think that in 2030 the vehicles' CO₂ emissions will have the same levels as today. For this reason they evaluated three cases: a) 2030 emission factors equal to 2005 ones (considering only EURO IV technology); b) 2030 emission factors reflecting European 2012 objective to have an average of 120 g CO₂/veh*km on the passenger cars fleet and a 50% emission reduction for LDVs, and c) 2030 emission factors reflecting European 2020 objective to have an average of 95 g CO₂/veh*km on the passenger cars fleet and a 50% emission reduction for LDVs. This three scenarios goes from a very pessimistic one (scenario a) to a very optimistic one (scenarios b) and c)), since the European objectives refer to a standard driving cycle whose emission factors are lower than those deriving considering an urban real driving cycle.

The results of this exercise showed that even in the most optimistic case, the emission due to ICE vehicles is much higher than emissions due to the electrical power generation. In particular the abatement of CO₂ emissions ranges from the 90% in the scenario a) case, to the 70% with the most optimistic scenario c).

Furthermore, the authors also estimated the average vehicles' emissions value under which the introduction of electric vehicles would not lead to any emissions abatement. An emission

value for CO₂ of 40 g CO₂/km for ICE vehicles was estimated, which is much lower than that reported in previous studies (e.g. Mackay, 2009). It is worth underlying that these results strengthens the claim that the potential impacts on emission abatement of introducing electric vehicles is larger than further development of engines only apparently “clean”.

The authors also indicated that in order to reach a 20% of global CO₂ emissions reduction, in 2030 the electric vehicles should represent approximately the 25% of the entire fleet of passenger cars and light duty vehicles. Although it could seem quite difficult to be reached, this target may represent a practical objective for policy makers.

4. Cost of EV as compared with other technologies

Consumers buy a new vehicle because many and diverse reasons, including purchase price (one of the main concerns of the majority of buyers when approaching to purchase a new vehicle), depreciation rate, styling, performance and handling, brand preference and social image. However, car owners tend to underestimate the costs of running a vehicle. Although they are very well aware of fuel costs, road tax and insurance, they do not always account for servicing, repair and cost of depreciation. Therefore, if one is interested in comparing the cost of EV with other competing vehicle technologies the parameter of interest should be the Total Cost of Ownership (TCO). The TCO takes into consideration not only the purchase price but also the running cost of the vehicle (i.e. the cost of maintenance, replacement and repair costs, reliability, insurance premiums, taxes, and fuel/energy cost) in other words it describes the costs associated over the vehicle’s entire lifetime.

At present the additional purchase costs of a plug-in hybrid electric vehicle as compared with a gasoline one is almost 11000 € and for the case of a pure battery electric vehicle the amount is more than 15000 €, this cost takes into consideration the underlying specific battery costs that is assumed to be 600 €/kWh for hybrid vehicles as well as the PHEV and BEV. This indicates that the high cost driver for both PHEV and BEV is the battery. In reality, the hybrid vehicles will likely use power batteries, while the batteries in the PHEV and BEV will likely be more biased towards higher energy capacity (JRC et al., 2008, Thiel et al., 2010). At the moment the additional cost born by BEV and PHEV is a challenge for the uptake of this class of vehicles.

Many studies have been published trying to look into the future (2020, 2030 horizon) cost of electric vehicles. Most of them include essentially three types of scenarios that can be described generally as a low, medium and high EV uptake (see for example McKinsey, 2009 and Deutsche Bank, 2008).

A recent study (Thiel et al., 2010) makes forecasts of the cost of EV in the above indicated scenarios by taken into consideration the indicative improvement levels in vehicle technology for both EVs and ICEs (including a broad spectrum of vehicles technologies: gasoline, gasoline hybrid, diesel, diesel hybrid, PHEV and BEV). They considered that ICE powered vehicle would have 15% better energy efficiency in 2020 than in 2010, while for the BEV and PHEV no further efficiency improvement was anticipated for 2020 versus 2010 as these vehicles probably feature all near-term conceivable advanced efficiency measures.

In the 2030 time horizon no further energy efficiency improvements were assumed for any vehicle type as they considered that possible incremental improvements were equal for ICE powered vehicles, PHEVs and BEVs in this time frame. Hence, in the relative comparison this would not change the picture.

Learning effects and cost reduction by economies-of-scale are related to the volume production of vehicles. For 2010 it can be considered that all the compared vehicle types would have annual sales volumes above 100,000 units. This number needs to be understood

as a proxy for wider market introduction as the 100,000 unit volumes might not be reached by every compared vehicle type exactly in 2010, but for some only in the following years. However, this would not change the comparison as the 2020 snapshot has to be understood as a proxy for the medium term and the 2030 snapshot should be seen as a longer term outlook. With realized production volumes for the years subsequent to 2010 the authors (Thiel et al., 2010) obtained learning effects that should reduce the costs of the newly introduced components. For the non-hybridized ICE vehicles, a learning rate of 5% was applied only on the newly introduced powertrain/vehicle components. The considered components were those contemplated in a previous study (JRC et al., 2008) and they are amongst others: (i) additional exhaust aftertreatment measures due to stricter emission limits, (ii) starter based stop-start systems, (iii) more sophisticated injection systems for gasoline direct injection but also downsized diesel engines and (iv) turbocharger for the downsized gasoline engine. The 5% learning rate was also applied on 50% of the costs of the ICE engine in the case of the PHEV as a dedicated range extender design of the ICE engine creates cost reduction possibilities. For PHEV and BEV, a learning rate of 10% was applied on the battery, electric motors and other vehicle upgrade costs that are directly linked to the electrification of the vehicle.

The possible cost reduction achievable by learning effect for the components necessary for vehicle electrification (i.e. cooling system upgrade, high voltage wiring, electric power steering, electric drive AC compressor, power electronics and modifications to enable regenerative braking) were based on the cumulative global sales volumes of the respective components. For the year 2020 only one volume scenario was used, while for 2030, two volume scenarios were used, a medium volume scenario and a high volume scenario for the number of BEVs and PHEVs.

These numbers are based on the assumption of 61 million new vehicle sales in 2010, 75 million new vehicle sales in 2020 and 90 million new vehicle sales in 2030, globally. The 2010 figures were used as a starting point for the subsequent calculation of the cumulated volumes (McKinsey, 2009). The 2020 new sales volume of the BEV and PHEV were also derived from McKinsey, 2009 using their mixed technology scenario. Advanced gasoline and diesel vehicles are already on the market today and it was assumed that they continue to penetrate the market reaching each 5 million global sales by 2020. For 2030 it was assumed that advanced diesel and gasoline new sales reach 15 million vehicles each. For these vehicle types, no distinction was made between the high and medium scenario.

The above assumptions, scenarios and learning rate leads to significant cost reductions for the BEVs and PHEVs. In the 2030 high scenario, their calculated purchase costs are already very close to the one of the diesel hybrid. However the additional purchase costs for EV versus the advanced gasoline vehicle in the 2030 high volume scenario is still over 2800 €. This value implies that the specific costs for the battery pack would reach a level below 200 € per kWh for the BEV and PHEV.

The above analysis only considered purchase costs, however concerning the TCO it must be recognized that apart from taxes and incentives, many of the above listed additional factors that influence the TCO most probably play further against the BEV and PHEV in the beginning. For example, the higher vehicle component costs in the BEV and PHEV lead to higher replacement costs and these again adversely influence insurance premiums. However, through continuous improvement and learning effects these disadvantages versus the conventional vehicles presumably reduce over time.

If one considers the long term energy prices (the cost of crude oil will always increase) the payback time for off-setting the higher initial investment for the car owner through the savings that will be achieved in the use phase as a result from the lower use of energy and

lower energy prices for this technology can also be estimated. With a very much conservative calculation of 2030 oil price of 62.8 US \$ per barrel crude oil (2010: 54.5 US \$ per barrel; 2020: 61.1 US \$ per barrel, all given in 2005 \$) the estimated payback time for EV are about 20 years for 2010; however, for the time horizon 2020 the time is reduced to about 8 years while in 2030 (medium scenario) this become 6 years and for the high scenarios it reaches below 5 years. If the longer term oil price is significantly higher (as it can be expected) than the assumed 62.8 US \$ per barrel, the payback period would further improve for the BEV and also the PHEV.

5. Challenges in the deployment of electric vehicle fleets

A number of factors can hamper or attenuate a larger scale deployment of electric vehicles. They can be grouped into factors that influence on the one hand the attractiveness of the EV for potential customers and subsequently the field experience of the EV users, and on the other hand the commercial interest of the industry to invest in EV development, manufacturing, sales as well as in re-charging and maintenance networks.

The customer interest will be amongst others determined by:

- Purchase price or lease costs
- Total cost of ownership
- Market offers (brands, models, trim levels etc.)
- Driving experience
- Convenience of re-charging
- Safety perception
- Familiarity with EV technology

The commercial interest of the industry will be constrained by:

- Potential EV market size and its uncertainty
- Profit margin
- Investment needs
- Supply risks
- Risk averseness.

Most experts are in agreement that the technology costs and here mainly the battery costs make the currently offered EVs uncompetitive for the mainstream market when compared with conventional vehicles, even when total cost of ownership (TCO) is taken into consideration. Once, this initial barrier can be overcome learning effects and further technology progress could lead to acceptable payback periods for rational customers in the long term (Thiel et al., 2010). An important factor for the TCO is the residual value of the car. The residual value of EVs is strongly influenced by the expected durability and lifetime of the batteries. Appropriate warranty schemes can help to alleviate related customer concerns. As many private customers do not necessarily perform a TCO calculation but focus very much on the purchase price during their purchase decision, the higher purchase price will remain an attenuating factor in the longer term.

Driving range limitations of fully electric vehicles are a critical factor when comparing to conventional vehicles. Although this factor might not play a big role in the urban and suburban context for most of the vehicle users today, it can prevent potential customers from choosing an EV if they are unwilling to compromise vis-à-vis current conventional vehicle ranges. Fast charging or battery swapping could be one possibility to overcome this negative aspect of today's EVs. Other driving aspects like limited top speed and other

typical characteristics of EV driving are not expected to create major acceptance problems for EVs, in particular in the urban and sub-urban context.

EVs are a new vehicle propulsion technology that requires the set-up of a new re-fuelling or in this case re-charging infrastructure in parallel to the vehicle technology deployment. Research work by Flynn (2002), and Struben and Sterman (2008) have studied in more detail the interaction between infrastructure and vehicle deployment. The main lessons that can be learned from these studies are that a strong synchronisation is needed regarding an adequate coverage of re-charging points and the deployment of electrified vehicles. As electricity distribution systems are abundant especially in urban and sub-urban areas, the main challenges remain with the actual set-up of re-charging points and associated to this the setting up of standardised re-charging interfaces, vehicle to grid communication protocols as well as billing procedures and payment schemes. All these aspects need to be carefully addressed to ensure convenient EV re-charging for the EV user. In the urban context adequate re-charging solutions need to be found for city dwellers that have no possibility to re-charge their EV at home.

An important aspect for the potential EV users is that the EVs fulfil the same high safety standards as the conventional vehicle options. The fact that the recently launched EVs fulfil all pertinent safety standards for vehicles and also achieved a high EURO-NCAP rating should positively influence the safety perception of EVs. Nevertheless, some further work needs to be done on improving or creating EV safety, electromagnetic interference and health standards.

Before a larger deployment of EVs is reached, the familiarity of the broader public with this new propulsion technology can be a challenge. The familiarity can be increased through dedicated marketing and media campaigns before a critical mass of EVs is on the road and word of mouth enhances further the public attention.

As already outlined in chapter 3.1, the future market size of EVs is unknown and predictions are highly uncertain. In the past, there have been examples of unsuccessful attempts to bring BEVs into the market. Some of these attempts were accompanied by optimistic outlooks on the future deployment of electromobility; however, a broader EV roll-out did not become reality (Frery, 2000). This uncertainty reduces the willingness of the industry to invest into EV and its related infrastructure. As the automotive industry and the needed infrastructure investment is capital intensive, the industry players are rather risk adverse in this context.

The profit margin for the first EVs will be low. As a matter of fact, it can be expected that the first generation of EVs that are currently deployed will constitute a negative business case for the industry that can be justified as an upfront investment into a potential future growth market. Although, as seen in chapter 2, many manufacturers are preparing for entering the EV market, they will try to limit their investment risk by deploying a limited number of models in the beginning. This limits the offered choices and can turn away potential customers that have a certain affinity to specific brands or models. Another possibility for the manufacturers to limit their investment needs in the beginning is to share common component sets across brands (e.g. Mitsubishi i-MiEV, Citroen C-Zero, Peugeot iOn) or to focus their deployment on selected lead-markets. The latter option will on the one hand limit the necessary investments in the dealer and maintenance network, but on the other hand also reduce the number of potential customers. The re-charging infrastructure providers will also want to ensure an adequate return on their investment which could potentially lead to unsatisfactory infrastructure coverage in the beginning.

Supply chains need to be built up for the new EV specific technologies and components. This can slow down the ramp-up of the EV deployment in the beginning but should not

lead to a sustained supply bottleneck. Material bottlenecks are expected to become an issue for permanent magnet motors (e.g. neodymium) and some cathode materials for lithium ion batteries (e.g. Cobalt) (European Commission, 2010b).

6. Policy options and business model for EV penetration

It may be considered that the trend towards transport electrification is on its way and is irreversible. This is for instance suggested by the fact that every large automotive company has or is currently developing electric models and that a considerable number of countries have established plans to foster the development and deployment of EVs.

However, overcoming the challenges discussed in the previous section is essential to enabling a viable market for electric-drive vehicles. This requires strategic planning, public intervention and synergies with private initiatives.

Developing advanced common standards for safety, environmental performance and interoperability are seen as indispensable (European Commission, 2010a).

Both public and private initiatives are needed, and given that electric cars are expected to deploy faster in urban and sub-urban zones, such intervention would, at least in a first stage focus on such areas.

Public-private collaborative strategies at different levels (supra-national, national and local) are needed to address different types of barriers. For instance, within the Public Private Partnership (PPP) “European Green Car Initiative” (EGCI) which is part of the European Economic Recovery Plan¹ these barriers are addressed through a mix of R&D funding and other instruments. A broad range of improvements of performance, reliability and durability of batteries need to be achieved to increase the attractiveness, range and affordability that will condition the consumer willingness to purchase electric-drive cars.

In parallel to those R&D funding initiatives, charging infrastructure needs to be deployed progressively, taking into account of travel patterns, achievable autonomy ranges, urban land use constraints and time availability for car charging at the different parking places, e.g. residential, workplaces, commercial centres, shopping, cinemas.

In Europe, several national or local governments have adopted charging infrastructure plans (e.g. Portugal, Denmark, Netherlands, Spain, Germany). As it is hard to predict how fast and to which extent the market will grow, achieving any "optimal" deployment is improbable. Continuous monitoring of the market, including on consumer attitudes should however guide public planning. Surveys often represent the available basis for establishing such plans. In a survey carried out on behalf the South and West London Transport Conference (Sweltrac), towns - followed by home, work and supermarkets - appeared to be the most popular location for charging points (SWELTRAC, 2007)². In many cases, Governments plans are targeting specific areas and networks (first residential areas and urban zones) and niche markets. Several plans concentrate in cities (Berlin³, Paris⁴, London). Besides charging spots in towns, incentives can also be created to broaden the access to the grid at home and at work place. For instance, the French Government plans to require, by 2012, new apartment's buildings with parking to include charging stations. It also plans to

¹ <http://www.green-cars-initiative.eu/public/>

² SWELTRAC, 2007, Provision of Electric Vehicle Recharging Points Across the SWELTRAC Region

³ Two projects planned covering 100 electric vehicles and 500 charging points (Daimler and RWE)

⁴ A network charging was already installed by EDF over the last ten years (84 charging points through 20 Arrondissements in Paris)

make the installation of charging sockets mandatory in office parking lots by 2015. Member States are introducing incentives to companies to install recharging spots (21.5% tax exemption is granted in Belgium). The requirement of installing charging infrastructure could also be integrated into sustainability housing plans and renewable energy targets (see for instance Sheffield – UK).

Progress on battery performance, especially on energy density should help reducing the upfront costs of electric vehicles. In the meantime, innovative policy instruments and business models need to be envisaged and put into place for improving affordability and reducing risk perception associated with a non mature technology could be facilitated with different instruments.

Various business models are being explored and tested involving the automotive industry and new emerging business companies in order to spread the costs of batteries over several years. This includes Battery leasing, Mobile phone style subscription service. Vehicle leasing and Car-sharing also constitute solutions.

Subsidies targeted to niche markets (e.g. taxi fleet), and specific provisions for electric in public purchase procurement (Green Public Procurement) could be used as an instrument in favor of technology learning, experience acquiring of user attitudes, and consumer trust to the new technology.

For the short term, generalizing such subsidies to the mass market may be both unrealistic given available public budget and counterproductive, especially as long as technology maturity is not fully achieved. Also, it is to be expected that ICE cars will still represent an important fraction of the future fleet (by 2030 and even beyond), this also means that their energy performance will largely determine the energy consumption and CO₂ emissions of the transport sector, especially road transport.

For the longer term, a consistent overall fiscal and regulatory framework will be needed to both encourage the most energy efficient technology options and secure public budgets, in accordance with the new fuel consumption revenues.

Long term prospect is also needed with respect to the reliability and sustainability of the supply chain, especially regarding raw materials such as Lithium and rare materials.

These different policies and initiatives will need to be designed and implemented in the light of continuous experience on the new electric car market, both at producer and supply sides and at consumer side. Demonstration projects can help improving knowledge and understanding about consumer behaviour.

7. Sustainability of urban transport

In previous sections we have seen how the electrification of the road transport and in particular its use in the urban environment has the potential to reduce the CO₂ and other pollutants emissions in our cities. However this technological change only address one of the three pillars of sustainability; i.e. the environmental dimension, while the other dimensions, economy and society, needs also to be addressed if the challenge of sustainability will be met.

The concept of sustainable transport is derived from the general term of sustainable development. Sustainable transportation can be considered by examining the sustainability of the transport system itself, in view of its positive and negative external effects on: the environment; public health; safety and security; land use; congestion; economic growth; and social inclusion (OECD, 2000).

The social dimension of sustainability of transport is at the core of the main reason for the transport system to exist - to provide access to: resources, services and markets (central

components for the generation of welfare). While the notion of economically sustainable transport relies on full cost accounting and full cost-pricing systems reflecting economic factors which originate from transport activity inhibiting sustainable development (namely, externalities; spillover effects and non-priced inter-sectorial linkages; public goods; uncompetitive markets; risk and uncertainty, irreversibility and policy failures) (Panayotou, 1992). Other definitions of economically sustainable transport state that transport must be "cost-effective and responsive to continuously changing demands in a way that commercial and free market can operate without significant adverse externalities and distributional consequences" (UN, 2001).

To achieve sustainable transport a wide range of positive and negative effects (contribution to climate change, congestion, local air pollution and noise) need to be addressed. Research on public attitudes to transport (Goodwin and Lyons, 2010) identifies congestion as a key issue and behaviour change to address environmental issues.

In order to address these negative effects three measures can be identified: (i) pricing measures, most typically road pricing; (ii) alternatives to car based transport (here investment in public transport is a key theme); and (iii) new technologies and fuels.

The use of pricing measurements will reduce transport demand and/or ensure that the demand is "optimal" hence positively impacting on congestion of urban roads. However in order to make pricing generally accepted, alternatives to car based transport needs to be considered. This could include for example increased public transport levels which might ensure that modal shift from car will be met. This measure will contribute to the public perception that non-coercive or "pull" measures are fairer, more effective and correspondingly more acceptable in comparison with "push" measures such as pricing (e.g. Eriksson et al, 2008).

Furthermore, measures to reduce distance travelled, for example through telecommuting or spatial planning, are identified as helping to reduce kilometres travel by personal cars and therefore positively impacting on achieving carbon reduction in the transport sector as well as improving congestion levels in cities and generally on roads.

8. Conclusion

With more than 80% of the European population concentrated in an urban environment, the need to insure their mobility while at the same time to safeguard their health and their environment becomes a paradox. Several overarching European policies both in the energy and transport front are trying to change the mobility versus environment conflict.

Electrification of road transport in the urban environment has the potential to significantly reduce the CO₂ emissions (and other pollutants) in the roads of our cities as well as our nearly complete reliance on fossil fuels. This is based on the much higher efficiency of electric motors compared to ICEs as well as the potential to de-carbonise the energy chain used in transportation and in particular in the well to tank pathway. BEVs are much more favourable from a CO₂ Well-to-Wheel emission perspective and PHEVs are a good option as an intermediate step.

However, the high cost penalty that is linked to BEVs and PHEVs will remain a problem until 2030 when learning effects could have reduced the cost penalty to a level that would guarantee acceptable payback periods shorter than six years for the BEV and a level that is comparable to other hybrids cost penalties for the case of the PHEV. If the replacement costs for components or insurance premiums are higher and stay higher than for conventional cars, it could take a longer time until a competitive level for the TCO is reached. Therefore a consistent overall fiscal and regulatory framework will be needed to both encourage the

most energy efficient technology options and secure public budgets, in accordance with the new fuel consumption revenues.

Moreover, to reach a larger deployment of EVs, the familiarity of the broader public with this new propulsion technology need to be addressed. The familiarity can be increased through dedicated marketing and media campaigns before a critical mass of EVs is on the road and word of mouth enhances further the public attention.

Finally, a word of caution: supporting an extensive use of EV will not contribute per se to the development of a sustainable transportation system. Indeed it can contribute to reduce the environmental pressure due to road transportation, but this represents only one aspect of the sustainable development. In order to really address the paradigm of sustainability it is definitely necessary to implement appropriate measures to reduce the usage of personal transport means (personal car) in favour to collective public transport. This means changing the decisional perspective from a sustainable transport to a sustainable mobility stand point.

9. References

- Alke, 2009 <http://www.alke.com/electric-vehicles.html>.
- Altairnano, 2009 <http://www.altairnano.com>.
- Atea, 2009a <http://www.atea.it/twingo-eletriche.htm>.
- Atea, 2009b <http://www.atea.it/panda-eletriche.htm>.
- City of Westminster, 2009, Understanding electric vehicle recharging infrastructure, vehicles available on the market and user behaviour and profiles.
<http://www.westminster.gov.uk/workspace/assets/publications/Electric-charging-and-EV-vehicles-1247227333.pdf>
- Clement, K., Van Reusel, K., Driesen, K. (2007). The consumption of Electrical Energy of Plug-in Hybrid Electric Vehicles in Belgium. European Ele-Drive Conference. Brussels, Belgium
- Clement, K., Heasen, E., Driesen, K. (2008). The Impact of Charging Plug-in Hybrid Electric Vehicles on the Distribution Grid. Proceedings 2008 - 4th IEEE BeNeLux Young Researchers Symposium in Electrical Power Engineering. Eindhoven, The Netherlands.
- Coda, 2009 <http://www.codaautomotive.com>.
- Deutsche Bank, 2008. Electric Cars: Plugged In – batteries must be included.
- Eriksson L., Garvill J., Nordlund A.M (2008) Acceptability of single and combined transport policy measures. The importance of environmental and policy specific beliefs. *Transportation Research Part A* 42; 2008. pp. (1117–1128).
- European Commission, 2010a A European strategy on clean and energy efficient vehicles (COM(2010)186 final, April 2010).
- European Commission, 2010b. Critical raw materials for the EU - Report of the Ad-hoc Working Group on defining critical raw materials.
- Flynn, P. (2002). Commercializing an alternate vehicle fuel: lessons learned from natural gas for vehicles. *Energy Policy* 30; 2002. pp.(613-619).
- Fréry F., (2000). Un cas d'amnésie stratégique : l'éternelle émergence de la voiture électrique, Actes de la 9ème Conférence Internationale de Management Stratégique, 2000, 24-26 mai, Montpellier.
- Goodwin, P. and Lyons, G. (2010). Public attitudes to transport: interpreting the evidence. *Journal of Transportation Planning and Technology: UTSG special issue*, 33(1); (2010). pp. (3-17).

- Hacker F., Harthan R., Matthes F., Zimmer W, 2009, Environmental impacts and impact on the electricity market of a large scale introduction of electric cars in Europe – Critical Review of Literature, Report of the European Topic Centre on Air and Climate Change.
- Hadley, S. W., Tsvetkova, A. (2008). Potential Impacts of Plug-in Hybrid Electric Vehicles on Regional Power Generation. Oak Ridge National Laboratory. Oak Ridge, Tennessee, U.S.A.
- Italiaspeed, 2009 <http://www.italiaspeed.com/>.
- JRC, EUCAR, CONCAWE, 2008 Well-to-wheels analysis of future automotive fuels and power-trains in the European context, Available from <http://ies.jrc.ec.europa.eu/about-jec> Ldv, 2009 <http://www.ldv.com>.
- Lighting, 2009 <http://www.lightningcarcompany.co.uk/>.
- Logghe, S., Van Herbruggen, B., Van Zeebroeck, B., Emissions of road traffic in Belgium. Transport & Mobility Leuven, January 2006.
- Mackay, D.J.C., 2009. Sustainable Energy – Without the Hot Air. UIT Cambridge Ltd., Cambridge, England.
- McKinsey, 2009. Roads toward a low-carbon future: reducing CO2 emissions from passenger vehicles in the global road transportation system.
- Miles, 2009 <http://www.milesev.com/>.
- Mini, 2009 <http://www.miniusa.com/minie-usa/>.
- Mitsubishi, 2009 <http://www.mitsubishi-motors.com>.
- Nemry F., Brons M., Plug-in Hybrid and Battery Electric Vehicles. Market penetration scenarios of electric drive vehicles. European Commission, Joint Research Centre. Technical Note JRC 58748 (<http://ipts.jrc.ec.europa.eu/>)
- Nice, 2009 <http://www.nicecarcompany.co.uk/>.
- Organization for Economic Co-operation and Development – OECD (2000) Environmentally Sustainable Transport: futures, strategies and best practices. Synthesis Report of the OECD Project on Environmentally Sustainable Transport (EST) - International EST Conference 4th to 6th October 2000, Vienna, Austria.
- Panaytou, T. (1992) Economics of Environmental Degradation. The Earthscan Reader in Environmental Economics. Markandya, A., and Richardson, J. Earthscan. London.
- Perujo A., Ciuffo B., (2010) The introduction of electric vehicles in the private fleet: Potential impact on the electric supply system and on the environment. A case study for the Province of Milan, Italy, *Energy Policy* 38 (8), pp (4549-4561)
- Piaggio, CH, 2009 http://www.ch.vtl.piaggio.com/porter_el.htm.
- Phoenix, 2009 <http://www.phoenixmotorcars.com/>.
- Sinanet, 2009 <http://www.sinanet.apat.it/it/sinanet/fetransp>.
- Smartgrids, 2009 <http://www.smartgrids.eu/>.
- Struben, J., Sterman, J., 2008. Transition challenges for alternative fuel vehicle and transportation systems, Environment and Planning B: Planning and Design 2008, volume 35, p. 1070 - 1097
- Tesla, 2009 <http://www.teslamotors.com/>.
- Thiel C., Perujo A., Mercier A., (2010). Cost and CO2 aspects of future vehicle options in Europe under new energy policy scenarios, *Energy Policy* 38 (11); pp. (7142-7151).
- United Nations (2001) Sustainable Transport Pricing and Charges – Principles and Issues. Economic and Social Commission for Asia and the Pacific/ Asian Institute of Transport Development.
- Unger, N., Shindell, D.T., Wang, J.S. (2009) Climate forcing by the on-road transportation and power generation sectors. *Atmospheric Environment*. 43, pp (3077-3085).

Plug-in Electric Vehicles a Century Later – Historical lessons on what is different, what is not?

D. J. Santini

Argonne National Laboratory 9700 South Cass Avenue Argonne, IL,
USA

1. Introduction

Fundamental trade-offs between gasoline and electric vehicles. In contrast to either the internal or external combustion engine, the fundamental advantage of electric vehicles (EVs) powered by electricity stored on-board in batteries has always been quiet, efficient, emissions free operation. Although emissions do result from fossil fueled generation of electricity, these emissions are removed in both space and time from the point of operation of the EV. High low revolution per minute (rpm) torque, with excellent initial acceleration is another advantage.

The fundamental disadvantage is storage capability. The fuel tank for an internal combustion engine in a “conventional” automobile (CV) can store *far* more energy, in a *much* smaller space than a battery pack, at a much lower initial cost. The gasoline vehicle can therefore refuel *far* more rapidly and travel much further on a single refill. Low top speed relative to gasoline vehicles is also a disadvantage.

An important attribute of electric vehicles is a relatively high peak power capability for short bursts of a few seconds. However, the peak power level tends to be much higher than the sustainable power.

The storage disadvantage of EVs becomes much less important when the vehicles are driven at low average speeds within urban areas. At such speeds, it can take a long time to deplete the battery pack. Further, as average speed declines, the average energy requirement per hour of operation drops off considerably more rapidly than for conventional gasoline and diesel engines, extending the hours that can be driven on a full charge. Unfortunately, at these speeds the fuel saved per hour of operation relative to gasoline and diesel is less than at higher average speeds (Vyas, Santini and Johnson, 2009), and this can require considerably more hours of vehicle use to pay off battery pack costs. Thus, to get the fuel saving per hour of operation up, intensive intra-urban operation of EVs outside of the densest city centers can be more financially attractive (Santini et al, 2011).

2. Waves of History I: 1890s through the 1930s

Personal use electric vehicles. In the United States in the 1890s and early 1900s, EVs competed successfully with gasoline and steam cars predominantly in the Northeastern

U.S., the most densely developed part of the nation, but also in Chicago. The highest volume manufacturer of EVs at the turn of the century was the Pope Manufacturing Company of Hartford Connecticut (Sulzberger, 2004). New York was then and remains today the most densely developed metropolitan area in the United States. In 1900 the nationwide registration of 4192 vehicles in the U.S. was 1681 steam, 1575 electric and 936 gasoline (Mom, 2004, p. 31). According to Sulzberger, in 1899 electric vehicles outnumbered gasoline by two to one in the major metro areas – New York, Boston, and Chicago. A total of 2370 vehicles were in these three metro areas, so the start of the motor vehicle in the U.S. was clearly in relatively affluent, large major cities. The technological historian G. Mom (2004) indicated that the dollar value of production of electric cars in 1900 was more than half of the total, despite the share of unit volume being 38%. Half of all passenger cars were produced in New England. However, over the next two decades production of motor vehicles in the U.S. moved westward and significantly toward gasoline.

When EVs were in the market from the 1890s to 1920s, they consistently served urbanized areas, rather than rural households and businesses. A caveat, however, is that for the personal EV in the U.S. in about 1914 the share of “home kept” electrics rose as city population dropped, as did the market share of EVs (Mom, 2004, p. 254). A logical deduction is that home kept EV share increased as city density decreased and as the share of single family dwelling units rose. The availability of a parking spot within or beside the electrified dwelling unit was then, and can be expected to be in the future, a major determinant of market success for personal use EVs. Mom concluded that the electric car of 1914 “functioned as the affluent suburban family’s second car” (p. 254) having been identified as “an environmentally friendly secondary car” (p. 250). At this time the EV in the U.S. held a share of the market similar to hybrids today (<3%, far below the turn of the century), but it was a shrinking rather than rising share. Mom also noted that in 1916 the EV was no longer successful in the Northeast – “the electric passenger car seemed to prefer the medium-sized town in the Midwest.” (Mom, p. 261). Midwest EVs were supported by “active central stations” that were Electric Vehicle Association of America members. By 1920 the personal use EV was no longer sold in New York, the densest and largest of U.S. cities, with steep hills and long commutes from the suburbs to downtown being blamed (Mom, p 262).

Vyas, Santini and Johnson (2009) drew attention to the suburban target market for personal use EVs a century later, pointing out that the suburbs of U.S. metropolitan areas are where affluence is greatest, as are the numbers and proportions of garages and multi-vehicle households. Ironically, although the Western U.S. (California) and Northeast have adopted regulations designed to encourage EVs, and the U.S. West Coast is aggressively pursuing electric infrastructure, the largest shares of single family dwelling units are found elsewhere – in the South and Midwest regions (Vyas, Santini and Johnson, p. 60). Typically, regardless of region, about half of all garages and carports are found in suburbs, and half of the households with two or more vehicles are found there. Only about one fifth of either garages or multi-vehicle households are found in center cities (Vyas, Santini and Johnson, p. 61). For the EV market, Santini et al (2011) recently deduced that charging infrastructure costs can be significant, so electric commuting with both house and workplace charging is probably not the least cost market. They therefore examined vehicles not driven to work, on the assumption that the home charger could be used more than once a day. They estimated that only those EVs driven more intensively than average could be financially desirable. Greater affluence is associated with higher annual distance driven.

Mom concluded that 1910 infrastructure and maintenance costs were an important drawback for the individual household. Despite the fact that “most *newly built* (italics mine) houses came complete with a connection to the electricity grid” ... the battery and its charging equipment had an important indirect effect” ... pushing ... “purchase and maintenance costs of the electric passenger car far above an acceptable level for middle-class gasoline vehicles.” (Mom, pp. 286-287). He also noted that at the time the middle class – the utilitarian user – could only afford one car and therefore could not make a “fleet” choice, purchasing and using both a gasoline and electric vehicle for their respective advantages.

Mom noted that the motorization of areas outside cities was far slower in Europe than in the U.S. The mild success of the personal passenger car EV in the U.S. from about 1905 to 1920 accompanied the wave of gasoline vehicle motorization and regional growth in the Midwestern U.S. Recent investigation of household charging infrastructure cost suggests that installation of suitable charge circuits is far less expensive when designed into new houses than when houses are retrofitted (Santini, 2010). Thus, the growing Midwest would have had the opportunity to install charging infrastructure as it grew and its expanding major cities electrified. Nevertheless, by the early 1920s the personal electric vehicle in the U.S. was rapidly shrinking toward zero production. The counterintuitive computation that Santini et al (2011) made for the 4-5 passenger *personal use* EV of 2020 was that the rate of utilization (hours of driving) in dense center cities would not be adequate to pay off the added costs of the pure electric vehicle. This is a quantitative candidate explanation for the 1900-1920 failure of the personal-use EV in Europe while it succeeded mildly in the U.S. Congested stop and go driving has financial advantage for the EV only if it is driven many hours per day, such as by a commercial delivery vehicle.

When commercial applications of horses, EVs and gasoline trucks were studied in the U.S. in 1912, it was concluded that horse wagons remained the most cost effective option up to 19 km per day (Mom, p. 223). If the attainable average speed on the local roadway network in most European nations was then less than about 15 km/h, and if daily travel for personal activities was between one and one and a half hours, then the implication is that it would have been a financially correct decision at the time for European households to continue to use horses rather than either gasoline or electric vehicles. In reference to first generation electric taxi cab capabilities for Berlin and Cologne in 1907, Mom notes that “first generation taxicabs could go 15 km/h” which compared unfavorably to the 40-50 km/h for gasoline taxis that could only be achieved in practice at night (Mom, p. 142). It was also clear that the speed competition drove up the costs of operating EVs, since a 25 km/h top speed required pneumatic, rather than hard tires; a stronger heavier frame; and a larger battery pack to provide needed power. This increased consumption from 220-250 Wh/km to 350-425 Wh/km (Mom pp. 142-143). It was estimated that only larger fleets of taxicabs could afford to own and operate electric vehicles, a finding perfectly consistent with a conclusion that a less intensively used electric vehicle in a household fleet of one would not be economic, as Mom reiterated in his conclusions (p. 291).

The electric passenger car in 1913-14 was far more successful in the United States than in Europe. Mom reports a count of about 1600 electric passenger cars in Europe in 1914, compared to 20,000 in the U.S. Passenger cars were about 56% of European electric cars and trucks with more than three wheels, while the U.S. share was about 67% (Mom, p. 252).

Although the peak number of electric passenger cars produced in the U.S. in 1915, at 4,715 (Mom, p. 254), was well in excess of the production of 1900, at 1575 (Mom, p. 31), and can be

called a success, the sales of 611,695 gasoline cars *in the first nine months* of 1915 (Mom, p. 283) was an overwhelmingly greater increase relative to the 936 gasoline cars produced in 1900 (Mom, p. 31). At this point, 43% of gasoline vehicles were sold with an electric starter, which had been introduced in 1912. According to Mom, “it is not correct to claim that the electric starter motor meant the deathblow for the electric car. But it did mean the last nail in its coffin” (Mom, p. 283).

In the U.S., the Ford Model T (initiated in 1908), which did not adopt an electric starter, had accounted for more than half of total vehicle sales during most of its lifetime. However, during the early 1920s its market share began to erode as more powerful cars with electric starters gained market share at its expense. The “T” had also been designed for low speed operation on poor dirt roads, having large diameter wheels and a high ground clearance. The 1920s saw increasing adoption of gasoline taxes to support state road building (Majahan and Peterson). The needs of the electric vehicle for reliable tires with low rolling resistance had led to development of the bias ply tire, a technology that was then adapted for use by gasoline vehicles in 1915 (Mom, p. 260). As noted by Loeb (1995), the electric starter, which itself had been developed for hybrids (Mom, p. 282) allowed reliable starting of engines with power well in excess of that of the 15 kW Model T. The electric starter ultimately allowed higher cranking power than a human arm could provide, allowing reliable starting of an engine with a much higher compression ratio, which in turn enabled more efficient gasoline engines, once octane enhancers had been added to gasoline (Loeb, 1995). The higher average speeds attainable by gasoline vehicles with more powerful engines, good roads, better tires and reduced ground clearance (thus reducing aerodynamic drag) most likely played a role in the 1920s demise of the personal electric vehicle, whose sustainable top speed was inherently limited.

The widespread 1912-16 adaptation of a cost effective combination of electrical and mechanical features in the predominantly mechanical gasoline vehicle signaled the end of the electric passenger car about a decade later. While attempts to combine electric and mechanical drive in hybrids failed in the marketplace, about a century later the new question is whether an increase in electrification of the gasoline vehicle, in the form of hybrids and the plug-in hybrid will again keep the market potential of the pure electric vehicle to less than 3% of the U.S. and European markets in coming decades. Mom, quotes a vice president for research from Ford in his closing pages, saying that “the most cost-effective and efficient road to a greener world is through the gradual electrification of vehicles ... rather than switching to an all-electric powertrain.” (Mom, p. 299). Mom praises the electric car for pressuring the gasoline vehicle to adapt and be better, advocating exploration of alternative powertrains. However, he does not quote a contrary opinion from another auto executive advocating the desirability of a technological jump to the all-electric powertrain.

Trucks and taxis. The demise of the personal use EV did not mean the demise of the EV. Mom demonstrates that commercial trucks, and industrial (non-road) trucks continued to grow in use during most or all of the 1920s and in some applications on into the 1930s. The electric taxi was abandoned mid-1920s-decade. From the early 1900s, growth rates for commercial trucks in New York and Chicago were dramatic (Mom, pp. 211, 228) and considerably faster than for passenger cars. The pattern had a similarity to that of the personal use vehicle. Motorization of services that had been provided largely by horse wagons and horse driven taxis was generally rapid, so that absolute totals of both electrics and gasoline business vehicles grew rapidly. The share of the motorized services held by

electricity was considerably higher than in personal use vehicles – “a quarter of the entire American truck fleet” in 1912. In 1914 a quarter of all U.S. electric trucks were in New York City, and those represented 39 percent of New York’s fleet of motorized trucks (Mom, p. 228).

In general, this was accomplished by much greater utilization of the electric vehicles and the battery packs in the business vehicles than was the case for personal use vehicles. Many of the business fleets in both the U.S. and Europe used battery swapping, with more than one battery pack per vehicle (Mom, p. 94, 231). The importance of assuring intensive use via reliable operation, with low maintenance, led to expenditures on well trained battery maintenance staff and also more expensive, more reliable batteries in commercial applications. Mom said that “for the electric car owner ... the character of the lead battery formed a virtually insurmountable barrier ... looking after the battery ... really needed the constant attention of a physician and a trained nurse.” (Mom, p. 287). As of about 1911, commercial fleets found the “tubular lead and Edison batteries to reduce maintenance, though at a much higher cost. The commercial vehicle fleets made intensive enough use of their batteries to make this trade-off pay off. A private owner could not (Mom, P. 288). This shows the potential problem of mistranslating good reliability in fleet applications to an argument that a technology will also be reliable in the hands of an individual consumer.

Commercial fleets frequently charged battery packs overnight, very often at much lower cost per kWh than for daytime charging. With battery swapping, a 24 hour operation could be implemented with overnight charging and maintenance and checking on one battery when out of the vehicle while the other battery was in use. With swaps made in a matter of minutes, it also allowed the vehicle to stay in service for many hours of operation per day, rather than slowly recharging during the day. This significantly increased fuel saving per vehicle per day, helping pay off the investment.

Even so, the key to economic viability was to find the appropriate field of application. A 1924 book on the merits of the electric truck was written by E.E. La Schum of the American Railway Express Company. In this book La Schum was effusive in his praise for the electric truck, “the speediest of trucks where stops or delivery are frequent and traffic congested.” (Mom, p. 245). He predicted that electric trucks, which then were used in a normal range of 48 km (perhaps about 7 km/h for an 8 hour workday, less if the truck were used on two or more shifts with battery swapping) would increase their competitive daily range to 64 km and more. At the time the American Railway Express Company had 1225 electric trucks, 575 other electric vehicles, 8200 horse wagons, and 2,500 gasoline trucks. The superior average speed of the electric truck, when stops were involved, probably included an advantage of a quicker start once the driver returned to the truck, in part because the electric did not have to be put into gear with a manual transmission, nor shifted. If the competing gasoline truck were turned off at stops in order to save fuel, this would also slow the start-up process upon return to the truck.

Santini et al (2011) recently estimated that financial viability of hypothetical 2020 mass market pure electric passenger cars with from 120-160 km of range would require full depletion of the pack and some recharging during the day under recent U.S. average gasoline prices and electricity rates. Typical passenger cars would not be driven enough to cause full depletion of such an EV. Only those driven far more hours per day than average could fully deplete the pack on a normal day, enabling additional gasoline saving via a daily recharge. Santini et al note that such vehicles are far more likely to be driven in suburbs than center cities. Identical electrical rates of \$0.10 per kWh were assumed for both nighttime and

daytime charging. However, the goal of the U.S. Federal Energy Regulatory Commission is to enable and encourage implementation of time-of-day pricing in the U.S. This will increase summertime average daytime electric rates to above \$0.20/kWh, but will lower overnight rates by only a few dollar cents. Should time of day rates become common, second charges during the day might actually lead to higher energy costs per mile for the second charge than if a full hybrid gasoline vehicle were used.

High daytime electric rates were a problem in the past. Mom noted that public garages that had to return fully charged vehicles to customers suffered when the customer demanded delivery “during expensive peak hours” (Mom, p. 217). In fact, utilities (central stations in Mom’s terminology), under the guidance of Samuel Insull, chose to offer “multistep” rates to stimulate charging overnight charging between 10 pm and 7 am. Today’s term is “off-peak” or “time-of-day” rates. The truck was preferred as a customer over the passenger car because the “truck used 400 to 933 times more energy than a light bulb” while the car “consumed only 107 times more energy” (Mom, p. 208). In part, this difference was due to the greater hours per day of operation of the truck, not only the greater vehicle mass.

Mom found that electric vehicles serving business were consistently found in fleets of much larger size than were gasoline vehicles (Mom, p. 246). These fleets found it necessary to hire “competent men to take care of the batteries” (Mom, 229; see also p. 216). Costly maintenance made it imperative to spread the maintenance expertise costs over a number of vehicles. The idea of implementing battery rental services that thereby spread the cost of maintenance over a large number of vehicles of several different owners was tried in the “Hartford system” set up in 1910 (Mom, p. 230). This system, which involved a fixed fee and a mileage charge, with battery pack exchange using packs charged overnight, was implemented in many cities by 1916, though only hundreds of vehicles were involved. Battery pack exchange was also common in taxi fleets in Europe, though this was implemented by the taxi fleet itself, not as a rental service such as the Hartford system.

Another cost that promoted larger fleets was the per vehicle infrastructure cost involved in setting up in-house charging facilities for relatively few vehicles. However, if the infrastructure costs could be paid, a large fleet could then get a discounted electricity price. At “a purchase of 50 kW or more and a garaged fleet of 75 to 150 electric cars”, Commonwealth Edison of Chicago offered a rate of \$0.02/kWh (Mom, p 254).

In Detroit in 1914 a taxi company tried the innovation of “curb boosting” — recharging of taxis while waiting at taxi stands. This idea was also implemented in Chicago and St. Louis in 1917, but it involved considerably fewer vehicles than the Hartford battery rental system and did not become common practice. Daytime rates for electricity may have been a deterrent.

Britain came late to the electric delivery truck, but found the very successful market niche – low speed urban delivery with many stops. In particular, milk trucks, which made quiet, clean early morning deliveries, became electrified in large numbers. Growth was dramatic from 1934 through 1949, by which time nearly 20,000 electric trucks were in service (Mom, p. 268).

Today, it is recognized that a portfolio of powertrain technologies is likely to be necessary in coming decades, as nations of the world slowly switch transportation from oil to other fuels. In effect, this process took place from 1895-1945 as nations switched from the grain fed horse and from the coal fed iron horse (steam locomotive) to the automobile. The electric passenger car and truck competed against horse drawn vehicles to a much greater extent than it competed with the iron horse, which dominated intercity travel. For commercial

trucking services, a careful, but optimistic assessment was made by researchers from the Massachusetts Institute of Technology, indicating that the electric truck was more costly than horse drawn wagons at short distances up to 19 km, but less costly than a gasoline truck up to its maximum range of 72 km (Mom, p. 223). The study optimism criticized by Mom involved an assumption of a cost of electricity only available to large fleets served by large central stations supportive of electric drive. The key point here is that the electric vehicle did not supplant the current technology – horse wagons – when delivery wagons were used in short daily distances.

Mom, discussing the 1915 time period, said that “only *after* the electric vehicle had broken the most ardent resistance of the horse economy could the gasoline rival invade the city” (p. 293) and “the gasoline car even stole the entire city car concept” (p. 298). The position here is that this is an overstatement at the least, and perhaps simply incorrect. The personal electric car did not work in dense urban environments with multi-family rental housing units, where short distances to needed services made the electric vehicle far more expensive than walking, the horse taxi, or other public transportation. The American Railway Express Company – a company that very carefully evaluated the most viable applications of electricity to its fleet and adopted electricity with enthusiasm – retained more horse wagons than gasoline and electric trucks combined in 1924. Thus, it seems dubious to assert that the horse economy had been broken in 1915, much less by 1924, when the personal electric passenger car – which apparently never succeeded in large dense center cities – was no longer available. It would appear that the horse economy was probably fully broken later by the gasoline vehicle, well after the horse economy had held its own against the electric vehicle.

This interpretation of the past is identical to the conclusion that Santini et al (2011) reached with regard to the probable status of the hypothetical electric passenger car of 2020. The less expensive existing technology – gasoline in the 2020 case – is financially superior in the event of a low daily utilization rate. Accordingly, the financially viable four-five passenger electric car of 2020 was found to be a heavily utilized suburban vehicle, not a “city car”, contrary to recent graphics generated by several automakers (Berretta, 2009; Satyapal and Aceves, 2009; Suckow, 2009; Yokoyama, 2009). The fact that the personal use electric passenger car failed earlier in New York City than elsewhere in the U.S. was not a coincidence. That Mom concluded that the personal use electric vehicle was a second car for the urban affluent also was not a coincidence.

In Europe, electrification of taxi fleets was often promoted by municipalities via regulation, so financial viability was not the only criterion. The regulations were adopted in order to prevent the noisy and smelly gasoline vehicle from capturing the downtown urban market. Although Mom did not associate the city regulations with preferences of affluent customers, it seems likely that relatively affluent business leaders had a strong influence on these decisions. Taxis were more likely the for-fee transportation service chosen by the urban affluent, while the typical urban resident most likely used trolleys and wagons (Omnibuses). Generally speaking, the downtowns of the largest metro areas within a nation are habited on a business day by some of the nation’s most affluent citizens. New York City certainly falls into this category within the United States. Thus, to the extent that the electric truck and electric taxi were chosen instead of horse taxis and wagons, and instead of gasoline taxis and trucks, there was most likely a relationship to the preferences of the affluent for better hygiene (vs. horse taxis and wagons) and quieter operation (vs. gasoline taxis and trucks). Reduction of odor was probably a goal in both cases.

Mom called the commercial truck competition the “decisive battle”, emphasizing that it was fought in the city. Advantages for particular niches were: “easy speed control (sweeping and sprinkling trucks), trouble free stop-start operations (door-to-door delivery, garbage trucks), absence of smell and noise (ambulances, transportation of food supplies)” (Mom, p. 285). To the smell and noise list taxis may be added. This decisive battle was largely (though not completely) lost by the 1930s. The gasoline vehicle improved so dramatically in the 1925-35 period (Naul, 1978; Naul, 1980) that it eclipsed both the horse and the electric vehicle, which will be discussed below.

Thus, the hypothesis is that the positive environmental features of the electric vehicle accounted for its limited success among the well-educated affluent in leading industrialized nations from 1895-1935, but its expense and other shortcomings prevented it from ever becoming a standard vehicle serving the majority of the population. Mom noted that many electric vehicle advocates thought that a part of the problem was behavioral — that consumers who did not purchase electrics were unwise, uneducated, or perhaps uncivilized. An alternative hypothesis is that the market worked well and there were very sound reasons, based on fundamental financial and systems engineering principles and perfectly reasonable consumer preferences, which accounted for the degrees of success and failure exhibited by electric drive.

3. Causes of Success or Failure

This examination and interpretation of the first waves of limited success for the electric vehicle hints that a study of history tells us that the past problems of electric vehicles are fundamental, and implies there is a significant risk that history will repeat itself and the pure electric vehicle will not represent a significant competitor to adapting gasoline or diesel passenger vehicles and trucks. However, it is important to concede that there are some significant differences in the present, so the outcome may not be the same.

For interpretation of this discussion, it is useful to summarize the three vehicle failure vs. success factors identified broadly by A. Loeb in 1995, and in more detail by Mom in 2004 — (1) power, (2) energy storage, and (3) adequacy of infrastructure. In the case of infrastructure, multiple types of infrastructure-related constraints were discussed by Mom — roads, electricity, water (with reference to the failure of steam cars), maintenance, refueling methods (exchange charging systems for business vehicles), safety of interacting modes operating at different speeds, flexibility of destination options.

By the 1920s, the electric passenger car was relegated to being marketed as a “lady’s car” for the affluent. “It was called a lady’s car’ it was said it wouldn’t run up hills; it was said it couldn’t go fast enough ... I would ride in an electric car if it were not for the fact that all my neighbors coming to the city pass me with their gasoline machines.” (Mom, pp. 280-281).

Within the section on limited energy content, Mom paraphrased the 1928 statements of an executive of Accumulatorenfabrik AG, a German battery manufacturing company that had existed since 1887 — “the electric car fell into disuse for private purposes, because it presented problems when one wanted to use it as a touring car.” (Mom, p. 288). For a 1914 400 km publicity run between Boston and New York, the “aerodynamic runabout” Bailey Roadster spent almost half of the 23 hours in five “boosts”, implying recharging at about 80 km intervals. In the same paragraph it is stated that the manufacturer claimed that the Bailey had a range between 130 and 190 km (Mom, p. 256). This highlights the problem of electrics for intercity travel — such travel results in highest electricity consumption per km

and lowest range, and a need to recharge frequently at a time when vehicle occupants place a high premium on average speed to destination (Santini, 2010).

Gasoline vs. Electric Vehicle Supporting Infrastructure. With the exception of the detailed explanations of Mom, historians generally regard range and cost as the primary reason that EVs failed, while CVs succeeded. However, A.P. Loeb (1995) also emphasized the absence of fueling infrastructure for the EV, vs. presence of supporting infrastructure for the gasoline powered vehicle, as an unrecognized cause of a very rapid U.S. expansion of gasoline fueled vehicles by 1904. In 1900, there were 4192 vehicles registered in the U.S. (Sulzberger, 2004). In 1905, there were 78000 (Melaina, 2007). The vast majority were fueled by gasoline. Loeb (1995) stated that the “issue was settled by 1904-5”. Mom does not quantify electricity availability constraints until one is far into his book. He notes that in 1917 “7 million of the 22 million houses in the United States were connected to an electricity grid” (Mom, p. 233). Loeb noted that the rapid expansion from 1901 to 1904 was largely due to sales of the two-passenger, single cylinder gasoline fueled Oldsmobile. This important “take-off” of the gasoline vehicle in the U.S., well before the singularly successful Model T (1908) and the electric starter (1912) were introduced, is not mentioned by Mom.

As noted earlier, the year 1900 concentration of steamers within Boston, New York and Chicago was even greater than for electrics. Although also capable of using widely available petroleum products, steam cars proved to be limited in range and overall average speed by the availability of water. Winter temperatures below freezing were clearly problematic, as was high mineral content in the Midwest (Mom, p. 291). Sulzberger (2004) reports that the range of an early steam car, before requiring replenishment of water, was 25-30 miles, no more than an electric vehicle of the time. The development of condensers to allow reuse of water and a range of 150 miles were implemented too late – in the 1920s – and added cost. Loeb credits superb road infrastructure in France for early emergence of automobiles there. Mom noted that the improving roadway infrastructure in the U.S. appeared to be an enabling technology for expanding truck services (heavier vehicles than passenger cars) in the 1920s, while the previously existing roadway infrastructure had been adequate for well adapted light passenger cars. “A direct relation could be demonstrated between the number of trucks and the length of the paved roads in cities with more than 30,000 inhabitants.” (Mom, p. 238). Although the improved U.S. roads were clearly not necessary for success of light gasoline passenger cars (the Model T in particular), they were probably sufficient (along with other developments) to help cause the demise of the electric passenger car. Majahan and Peterson (1985) examine the diffusion of the state gasoline tax in the United States, showing that it swept the nation in the 1920s. It seems doubtful that business truck interests alone could account for this sweeping support of improved roads. Thus, private vehicle users must have seen a benefit. I presume that the benefit was higher speed and greater reliability (reduced tire failures). The practical realization of the benefits of dramatic increase of power and top speed of gasoline vehicles from the mid-1920s to mid-1930s (Naul, 1978, 1980) – unmatched by electrics – was undoubtedly enabled as a practical matter by the improved roads that were built in the 1920s.

Over a decade after Loeb’s examination of the role of gasoline infrastructure, Melaina (2007) provided more extensive details of early gasoline refueling infrastructure. He asserts that “a key issue during early phases of infrastructure development is the requirement to provide a fuel inexpensively and in small volumes from many locations dispersed across large geographic regions.” Melaina shows clearly that gasoline was a relatively simple add-on to

an extensive delivery infrastructure for kerosene. “100 refineries and vast networks of bulk storage facilities and tank wagons” existed. In 1906 Standard Oil operated 3573 bulk stations, receiving barrels and tank wagon loads, distributing refined products (mostly kerosene) locally. Gasoline, used as a solvent, was widely available to both urban and rural populations before the automobile. Gasoline was in excess supply, effectively a waste product, often dumped into nearby rivers.

That the electric vehicle market could not have grown as rapidly as gasoline vehicles in a largely rural nation should not be surprising. In 1907 less than 10% of households had electricity (U.S. Department of Commerce, 1975). Another problem of the time was that the competition between AC and DC electricity had not yet been resolved, making national standardization of charging infrastructure very unlikely. Perhaps the fear of electrocution, used by Edison to promote continued use of DC electricity instead of the ultimate switch to AC played a role in the reluctance of individuals to assume the risk of field repairs of a malfunctioning electric vehicle, while familiarity with powered steam farm equipment made the gasoline vehicle transition seem more manageable. The war of the currents was underway during the 1890s and was not settled until after the turn of the century (Wikipedia, 2011).

Melaina’s infrastructure requirements for successful introduction are encouraging for implementation of electric drive over 100 years from the first attempt. Nearly 100% of households in Europe and the U.S. now have electricity. The distribution system cannot deliver energy to electric vehicles at anywhere near the rate of gasoline, but small amounts can be delivered over several hours, at the dwelling unit, in the same way that cans of gasoline were originally stored at the house to fuel early gasoline cars. Because of the advent of air conditioning, afternoon summertime cooling requirements in the U.S. have led to construction of many very efficient combined cycle natural gas power plants which sit idle overnight and in off seasons.

Technological developments in drilling technology have only recently led to significant increases in estimates of the proven reserves of U.S. natural gas, and great optimism about its potential elsewhere. Thus, as gasoline was in excess in 1900, U.S. natural gas producers, along with utilities that own natural gas powerplants, are looking for new customers. Further, a movement toward the “smart” grid, with time of day rates encouraging use of electricity overnight via reduced price, can encourage electric vehicle use, although the required metering is not inexpensive. In any case, it is clear that for plug-in electric drive today, initial infrastructure is not the limiting factor it was in 1900.

Melaina observed that the emergence of the refueling station followed the emergence of the gasoline car by a couple of decades. He noted that “non-station refueling methods allowed vehicles to be mass-produced without sales being inhibited by consumer concerns over limited refueling availability” (Melaina, 2007, p. 4922). Cans, barrels, and home refueling pumps emerged concurrently with gasoline vehicles. Next came refueling at repair shops and curbside dispensers (both will be used to support EVs). The ability to “fast fuel” many vehicles at a location dedicated to refueling followed in 1915-24, long after the vehicles.

The working assumption at this time, however, is that electric vehicles must have a network of public charging stations in place before electric vehicles are to be sold, if electric vehicles are to be successfully introduced into the market. The Electrification Coalition (2009) contends that the minimum number of public chargers per electric vehicle to be 1.5 in 2010, 1.0 in 2020, and 0.5 in 2030. In Germany in 1914, there were 862 passenger EVs, 554 electric trucks, 270 commercial-and-mail three-wheeler EVs, and 3 private 3-wheeler EVs. There

were 39 charging stations, 13 for taxis only, 13 for mail vans, and 11 for private car owners (Mom, p. 252). In other words, there were 11 passenger car charging stations for 862 passenger cars, which is 0.013 stations per car.

Powertrain vs. Vehicle Body Technology. Study of the nature of the evolution of early gasoline automobiles illustrates rapid technological development which has an analogy for recent (and anticipated) battery chemistry developments. While the need for specific energy in batteries is well known, and was not a problem for gasoline powertrains in the late 1800s, specific power was indeed a problem. Presnell (1992) clearly illustrates the importance of rapid improvements in specific power for gasoline engines in Europe. The power from the original Benz car of 1885 to its volume production version jumped from “an estimated 1/5 kW to around 2 kW”, from a single cylinder engine and with a maximum speed of 19 km/h. Light vehicle weight was initially necessary – the engine was mounted in a “tricycle”. By 1899 Daimler – the first to produce a purpose built automotive engine - had developed a 18kW 4 cylinder racer good for over 80 km/h. The Daimler automotive engine was one sixth the weight of a representative conventional stationary Otto four stroke engine of 1886.

De Dion-Bouton in France also started with a modest engine – ½ hp mounted in a tricycle, soon switching to four wheels with a single cylinder engine design rated at 2.5 kW by 1900, and 6 kW in 1905 (Presnell pp. 12, 14) . This engine type provided the foundation for the early French automotive industry, being used in “a hundred different makes of vehicle in the 1898-1908 period and launched many a respected marque”, among them Renault (Pressnell, p. 12).

The single cylinder engine in a small vehicle was also the starting point for sales of thousands of vehicles from a single manufacturer in the U.S. The curved dash, single bench seat Oldsmobile was “a clever exercise in minimal motoring” with “long springs giving a comfortable ride on poor roads”, with a “chug along” engine limited to 500 rpm (Presnell). The 1901 version of the Oldsmobile is reported by General Motors to have a 4 kW engine, increasing to 5 kW in the 1904 model (Generations of GM History: Heritage Center, 2011).

Loeb emphasized the importance of consumer reaction to increasing power and speed in the early phase of the development of the automobile in the U.S., followed by ascension of the automotive virtue of utility realized in the Model T Ford. The desire for cost-effective mobility had been demonstrated by the Oldsmobile success. On both sides of the Atlantic, the power density of Otto cycle engines jumped in the 1890s, then leveled off in a mass produced engine design that was the foundation for production of tens of thousands of vehicles. Where France’s start was via mass production of a De Dion-Bouton single cylinder engine used by many vehicle manufacturers, Ford took this a step further and mass produced the whole vehicle, providing affordable and reliable automotive transportation to the middle class (Loeb, p. 75). The Ford Model T engine produced 15 kW. With two bench seats, this mass market car seated four or more people. The Model T weighed 544 kg, the single bench seat Oldsmobile 318. The Model T engine had four cylinders and 2.9 liters of displacement, while the prior Oldsmobile had a single cylinder engine with 1.6 liters of displacement (Vivian, 1994). The Model T engine power rating was unchanged throughout its nearly two decade lifetime, according to Naul (1978).

Sulzberger stated that lead acid batteries of the time had to have 76 kg/kW. The 1897 Pope Columbia Electric Phaeton Mark III weighed 816.5 kg, 386 of which was battery. If the battery had achieved the best performance cited by Sulzberger, this would give 6.2 W per kilogram of vehicle weight. The Ford Model T had more than four times more kW/kg. Further, since the battery power number is likely a peak power rating, it is likely that the relationship of continuous power per kg was even more favorable toward the Model T.

Thomas Edison spent millions of dollars and years to develop better batteries, but, despite considerable improvement, increased cost was a problem too great to overcome for personal automotive use.

The significant and rapid rise of specific power of Otto cycle engines in the 1890s was a key enabler of the initial success of the gasoline engine. More than two decades later, from 1926 to 1935 the power of a base model Ford went from 20 to 95. There were similar, though less pronounced increases across all models (Naul, 1978, 1980). This second jump in engine power was undeniably a key cause of the final demise of the personal electric vehicle and taxi, and later the commercial truck.

Today, the next wave of EVs is benefiting from a shift in battery chemistry to lithium-ion (li-ion), a chemistry that not only provides higher specific energy; it also can provide considerably higher specific power (Kalheimer et al, 2007) – nearly an order of magnitude more gravimetric specific power than the present NiMH battery chemistry in some circumstances. Dramatic improvement in performance capabilities of engines gave the gasoline vehicle its early foothold in small vehicles capable of carrying one or two passengers. A possible historical analogy is that an enthusiastic base of consumers finding the improved performance made possible by li-ion batteries has provided one anchor for the modern EV technology. The two-seat Tesla Roadster and BMW Mini EVs have been received relatively enthusiastically by those who drive them. Based in large part on reactions by drivers in its Mini EV tests, BMW is proceeding with multiple EV designs in four passenger vehicles, one of which will use lightweight composites and aluminum - a significant redesign of the vehicle body comparable to what Tesla has done with the Roadster. Tesla is also putting into production a five-plus-two passenger sedan, the Model S, with a stamped aluminum body rather than composites. Neither manufacturer is seeking a middle class market, but both do intend to produce “family sized” vehicles for performance oriented higher income consumers.

The early mass market success of the gasoline engine occurred when the technology reached an acceptable plateau of capability that could be made available to middle income consumers via the cost reducing benefits of mass production. The De Dion-Bouton and Model T engines were produced in very large volumes, enabling cost reductions that in turn enabled vehicle pricing resulting in high volume sales. Nevertheless, these engines initially had to appeal to small markets, before mass production was achieved.

For its hybrid vehicle design, the long-term *possibility* of profits at high volume (realized after several years) with reasonable cost was seen by Toyota in the early 1990s. Electric drive has today obtained a foothold in the heart of the automotive market because of this long-term vision. The NiMH battery may not have been adequate for EV success, but it did allow the technology innovation of packaging of electric and conventional mechanical drive together in hybrids that has created the current general confidence in electric drive. In retrospect, no manufacturer in the 1990s was willing to gamble that the Nickel Metal Hydride battery chemistry would lead to levels of EV cost and performance that could result in mass market success.

Lesson: mass market success of an alternative powertrain requires a technological leap in capability, initially supporting low volume sales to innovators and early adopters (most of them reasonably affluent), leading to mass production and cost reductions for its most critical components, making the technology affordable.

Judgments of participants interviewed for the IEA HEV&EV Implementing Agreement's *Lessons Learned in Market Deployments of Hybrid and Electric Vehicles* study was that

production in many tens of thousands — perhaps triple digits — is necessary for batteries to be cheap enough to allow EVs to be mass marketed. Predictions of cost reductions as a function of production volume by Kromer and Heywood (2007) and by Santini, Gallagher, and Nelson (2010) for lithium ion based battery chemistries are quantitatively consistent with these opinions. Nissan is taking the gamble that high volume production of lithium ion based battery packs will reduce costs adequately. In contrast to the choices of Tesla and BMW regarding lightweight body materials, Nissan is relying on a conventional steel body to keep costs low. The gamble is “Ford” like in the sense that Nissan is the only manufacturer committed to production and sale of one model of electric vehicle within the leading sales size class in the world. Nissan follows Toyota’s example, adopting significant corporate ownership of production of battery packs for the vehicle. Both the powertrain/storage system and vehicle body are to be produced in much higher volume than any other manufacturer has presently committed to.

One question for the gasoline vehicle of the early 1900s is what might have happened had the specific power of engines not increased to the levels that made the four-plus-passenger Model T and numerous French body alternatives on standardized De Dion-Bouton engines possible? Would steam or electric powertrains have succeeded, or would the horse have held its large share of the market? It can be argued that attributes such as specific power and specific energy of the powertrain and fuel storage device(s) dictate the approach that must be taken with the rest of the vehicle body. Looking back *at the start* of the gasoline vehicle from 1885-1900, the EV-related efforts of Swiss manufacturers in the 1990s look similar, but success did not follow. Swiss EVs were small, lightweight, low speed, low acceleration vehicles to enable adequate range and performance. An emphasis was placed on light weight. Many experiments, with multiple battery chemistries, were tried. No successful standard model emerged. The Mendrisio experiment found that the majority of consumers chose a single vehicle type (Peugeot 106) from the established vehicle manufacturer that provided the best service. Among vehicle manufacturers interviewed in the IEA HEV & EV Implementing Agreement’s “Lessons Learned” study, Peugeot had made the biggest commitment to volume production in the 1990s, building a factory capable of producing 20,000 vehicles. Yet this commitment, seen to lead to the most success among Mendrisio participants, was not adequate, given consumer response to the vehicle capabilities and costs. Only thousands of Peugeot electrics were sold in the best year.

Multiple participants in the “Lessons Learned” study have said that changes in consumer behavior are necessary if EVs are to succeed. Mom shows that such thinking by electric vehicle proponents was also common in the early 1900s — the EV advocates attempting to convince potential customers that lower performance was a desirable attribute. Toyota participants expressed the opinion that consumer preferences would have to change, and a Swiss consultant argued that a change to a “future oriented attitude” was necessary. It is clear that over a century’s time households (and entire economies) did adapt their behavior to the features of the gasoline vehicle. However, the question is one of cause. Did the vehicle entice a change in behavior, or did consumer behavior shifts enable the vehicle to succeed? The former direction of cause seems more plausible. Mom saw the gasoline automobile “culture” as one that was imposed on all other modes of travel, pushing them aside in favor of the needs of the gasoline automobile. “The building of an automobile only highway network was *forced* on the users ... the highly *functional* flexibility ... led to the collapse of one of the densest regional tramway systems in the world.” (Mom, p. 296).

Lessons: Batteries — even lithium ion — are inadequate to allow consumers to purchase EVs without adapting their behavior. Since large changes in behavior are unlikely in a short period of time, EV designs must provide a large fraction of the mobility provided by the competing means of travel. If an EV design competes with a small volume gasoline vehicle type (such as a two seat passenger car), it will not gain a large share of the national market even if it is successful against its competition.

A fundamental question is whether the powertrain/storage system dictates the vehicle body, or does the vehicle body dictate the powertrain/storage system? For the Nickel Metal Hydride (NiMH) chemistry, the Toyota Prius, quite conventional in many respects, adapted the vehicle body a bit, and the powertrain/storage system a lot, and captured half of the market for hybrid powertrains in the U.S. The Prius designers did choose to avoid too much weight and cost in the sense that the battery was made as small as possible and no plug-in feature was attempted. In this case, the relatively advanced battery design was adapted to rigid short term consumer expectations and behavior, assuming that only slight changes in the vehicle body would be accepted. Mom saw the success of the gasoline powertrain as one of successful adaptation first, using existing coachwork, roadways and fueling infrastructure. This led to the lowest cost among the competing powertrains during the take-off phase, only later leading to establishment of redesigned coachwork, roads and fueling infrastructure.

To allow batteries available to succeed in an electric vehicle in the 1990s, GM chose to develop an entirely new 2 seat body design that would hopefully provide an enticing combination of performance attributes — even with lead acid batteries. Here the attempt was to spend money on the body in order to make the initially inexpensive, proven battery chemistry workable. This body and battery package was very popular with very few consumers. The limitations of the batteries required plastic and aluminum rather than the steel used in the Prius body, and a body shape achieving a coefficient of drag of 0.19, well below the 0.26 value for a Prius. With far less financial resources, multiple Swiss innovators also attempted to develop an entirely new vehicle body configuration, emphasizing very light weight to enable lead acid, nickel cadmium, and sodium sulfur batteries to provide adequate performance to meet relatively inflexible consumer expectations. Neither GM nor the Swiss were able to achieve sales rates that promised reaching production volumes necessary to succeed. They had in common an initial attempt to succeed in a very small market niche — a smaller than average utilitarian vehicle with conventional (or worse) range and top speed in comparison competing gasoline vehicles. Recognizable power fade as the battery depleted was an issue.

Attempting to take advantage of the greater specific energy and power of li-ion more than a decade later, the \$100,000+ Tesla roadster EV designers sought a different two-seat vehicle niche market — the high cost, high performance segment. Tesla engineers recognized there was still a need for a very lightweight body. Aluminum and carbon fiber are used for light weight, with a few parts common to the Lotus Elise, a lightweight sports car that uses a similar aluminum frame, but does not use carbon fiber body panels (Siry, 2008). Performance and range well beyond that of an EV1 were demonstrated in a two seat vehicle. The much less expensive (than the Roadster) base version of the coming Tesla Model S sedan will use a less expensive aluminum body. Though slower and with less range than the Roadster, it will accelerate faster and achieve greater range than an EV1, and be capable of seating 5 adults and two children, but its price is to be more than \$20,000 more than the EV1's nominal \$33,000 price (EV1's were leased, not sold).

A study of the design of the EV1 and the Chevrolet Volt demonstrates a lot of commonality in component placement and configuration. Acceleration capability is no longer the primary selling point, and the vehicle has four seats, more suitable for the middle class market. Nevertheless, a gasoline engine is included because of concerns over charging infrastructure. While prices of Prius HEVs are within the reach of the U.S. middle class, the Volt, produced in tens of thousands, at a base list price double that of the Prius, is not. The Nissan Leaf, to be produced in hundreds of thousands uses a conventional steel body. It is priced below the level of the Volt, but still expensive relative to a conventional gasoline vehicle of the same size, and compared to the Prius. U.S. subsidies of \$7500 per vehicle will help, but battery costs must come down (or oil and gasoline prices rise) for high volume cost competitiveness in the U.S. market.

Estimates of 2020 costs of an electric vehicle similar to the Leaf, produced at volumes of 100,000 per year, are for a “generic” advanced lithium ion battery pack cost of \$9340, 27% of the estimated \$34845 first cost of the vehicle and its supporting infrastructure (derived from estimates based on simulations supporting Santini et al, 2011 [vehicle] and Santini, Gallagher and Nelson, 2010 [li-ion battery pack]). La Schum quoted cost of an electric truck in his 1924 book as \$3030 without the battery, and \$970 on average for the battery (Mom, p. 245). The share of battery cost then was 24%, less than the above estimate for 2020. Thus, the generic issue of high capital cost for batteries remains a problem nearly a century later. Limited range and limited top speed relative to the competitive gasoline vehicle also remain a potential problem, though top speed appears to be much closer to that for gasoline now, than was the case in the early 1900s.

4. Waves of History II: Motivations for Re-introduction, 1965-2011

In a recent presentation, Mitsubishi dates three “waves” of modern interest in EVs (Wing, 2010). The first wave was in the 1970s, in response to the U.S. “Muskie Act of 1970”, which dealt with tailpipe emission reductions. The second started in 1990 as a response to emerging concerns over global warming, and to California’s Zero Emissions Vehicle (ZEV) regulation. The third was dated as starting in 2002 as a response to oil dependency. This section discusses these motivations for re-introduction of electric vehicles, along with the evolution of the technologies attempted.

In the 1890s the electric passenger car did not prove to be a viable competitor for personal transportation – even in urban areas. However, it is not true that electrified transportation failed. Quite the contrary – electrified subways and street railways were built in significant numbers in major urban areas in the 1890s and early 1900s (Middleton, 1974), sharply reducing the urban waste problem from both the horse and the iron horse. Horse manure and decaying horse carcasses were both significantly reduced. Smoke from steam powered street railways was not eliminated, but it was removed to more distant central generation stations. In later decades, gasoline buses and cars first helped in finally eliminating the horse, and eventually eliminated electrified urban transportation, in many cases contributing positively to reducing particulate emissions from power plants. Particulate emissions reduction efforts came first because this was an obvious pollutant, dirtying clothes and building facades. Only after the automobile became dominant and scientific discoveries about the deleterious effects of tetraethyl lead and ozone accumulated, did this less obvious pollution from the tailpipe of the passenger car become evident.

A new reason for considering EVs is their absence of dependence on oil, now an import concern in both the U.S. and Europe. Fuel imports were not a concern in the U.S. in the early 1900s. In fact, oil discoveries in the U.S. clearly played a positive role in the adoption of the gasoline vehicle at that time. Soon after WWII, automakers in two nations without domestic oil resources produced EVs for a short while. Nissan mentions that its founding company offered an EV for a few years after WWII (Nissan, 2011). PSA also mentioned to this Annex that it had developed an EV in 1945. Otherwise, it appears that no post-WWII EVs were *commercialized* by major automakers until the 1990s, after several noteworthy developments in the late 1980s. However, EV research began earlier. Due to air pollution concerns that first became evident in California, EVs began to be investigated by automakers again in the 1960s.

In fact, the very success of the gasoline-fueled internal combustion ICE in the U.S., in one of the leading oil producing states at the time, contributed to the emergence of the second most populous city, Los Angeles, on the West Coast, facing Asia. That location later played strongly into interactions with Japan. Where New York – a state without oil resources – had been developed at high density with considerable use of electricity for transport via a sophisticated subway and electrified commuter rail network, the early electric commuter system in Los Angeles was abandoned for the bus. Los Angeles thrived and grew rapidly, but the emissions of gasoline vehicles, trapped within a basin surrounded by mountains, led to unacceptable air pollution, in the form of ozone.

In the 1960s, California began studying the effect of gasoline vehicle related emissions of hydrocarbons and nitrogen oxides on ozone, finding that both were important contributors. Regulatory institutions were put into place and regulations were adopted, first to reduce hydrocarbon emissions from tanks that stored gasoline and other hydrocarbons, then from gasoline vehicles themselves. The emerging research and success in developing emissions reducing technology in California led to recognition nationwide that gasoline vehicle emissions would have to be reduced sharply if the nation was to continue to rely on the automobile as the foundation for its transportation. In 1970, the “Muskie Act”, the Clean Air Act Amendments of 1970, was passed. Amending an original 1963 law, this law has recently been cited by both Toyota and Mitsubishi as a watershed event affecting their work on future powertrain technology for the automobile. Both Takehisa Yaegashi (revered within Toyota as ‘the father of the hybrid’) and Masatami Takimoto (Fairley, 2009) said that this Act was instrumental in causing Toyota’s engineering department to begin reevaluating the powertrain for automobiles. Electric vehicles and hybrids were among the powertrains evaluated at the time. Takimoto dates Toyota’s evaluation of “all kinds of hybrid systems” – series, parallel, mild, full – from 1969. Since 1969 precedes the passage of the Muskie act, we presume that Toyota was tracking the events in California and Los Angeles and regarded these as potentially important for its long-term market development.

Mitsubishi also cited the Muskie Act of 1970, and mentioned their Delica EV (a passenger van) and Minica EV (a two door sedan) at that time (Wing, 2010). General Motors’ recent placement of its “first” EV, in a historical timeline, was the 1966 Electrován (Mathe, 2010). This date also precedes the Muskie act, suggesting that emerging air pollution concerns in CA were having an effect on GM as well. The date also opens the possibility that Toyota and Mitsubishi were partially responding to GM and California initiatives and the Muskie Act only reinforced the desire to investigate alternative methods for tailpipe emissions reduction. A recent timeline on the history of the electric car by America’s Public Broadcasting system says that in 1966

Congress introduces the earliest bills recommending use of electric vehicles as a means of reducing air pollution. A Gallup poll indicates that 33 million Americans are interested in electric vehicles.

The 1966 co-dating of GM's Electrovan and introduction of bills in Congress (introduction does not mean that the bill became law) and the Gallup poll suggests that tailpipe emissions concerns were already a significant U.S. national issue before 1970.

GM's timeline also shows one of the most successful low volume EVs ever, the 1972 Lunar Rover (Matthe, 2010). PSA reported to the IEA Annex that it had prototype electrified versions of the 17 and 104 models in 1972. These vehicles used lead acid batteries. BMW (Schamer, Lamp and Hockinger, 2010) dates its first EV at 1972, using lead acid and attaining a range of 30 miles. Their next BMW citation was 1987, based on the sodium sulfur battery chemistry, which had taken 20 years of development before being put into an automobile. These actions clearly predate the 1973-74 world oil price shock, subsequent 1974-75 collapse in automotive sales, and recession.

In May, preceding the October 1973 attacks on Israel by Egypt and Syria, and the subsequent Arab Oil Embargo that precipitated the oil price shock, Lee Iacocca of Ford had solicited a long-term assessment of automotive powerplant options. The study solicitation award was made in Dec. of 1973. This study – "Should we have a new engine?" – was completed in August of 1975 by the solicitation winner, the Jet Propulsion Laboratory (Stephenson, 1975). The study concluded that it was clear that Brayton and Stirling engines should receive research funding as improvements were made to the internal combustion engine until these technologies could succeed. Electric vehicles and hybrids were regarded as undesirable (Lindsley, 2006). As the study progressed, Electric Vehicle Symposium Number 3 was held in 1974 in Washington DC. The Electric Auto Association (2005) considers the introduction of the two seat Sebring-Vanguard CityCar in Feb. (five months after the initiation of the Arab Oil Embargo) at the Symposium as a noteworthy event. The CitiCar had a top speed of 64 kph.

Despite the Jet Propulsion Laboratory's recommendation that research not be pursued on electric vehicles, the U.S. Public Broadcast System (PBS) (2009) indicated that, a year later, in 1976

Congress passes the Electric and Hybrid Vehicle Research, Development, and Demonstration Act. The law is intended to spur the development of new technologies including improved batteries, motors and other hybrid electric components.

Several electric vehicles – generally small and low volume – were produced worldwide in the 1970s (Anderson and Anderson, 2010), though none by large OEMs. These appear to have been supported and perhaps inspired by the high oil prices of the period. None are mentioned after 1983 (About.com, 2011, Public Broadcast System, 2009, Anderson and Anderson, 2010, Electric Auto Association, 2005). Variants of the CitiCar were produced until 1982, with total production about 4000 vehicles. Oil prices peaked in 1981, declined steadily until 1985, then dropped precipitously.

In 1985 the Swiss initiated the "Tour de Sol", a Swiss solar car race that was held every year until 1993, promoting development of solar technology. This was the first solar car race. Mercedes Benz sponsored the winning entry (Muntwyler, 2011). In 1987 the first World Solar Challenge race in Australia was run, over a distance of 1877 miles. General Motors sponsored the winning car in this race, the Sunraycer. Also in 1987, after a period of 15 years, BMW developed its second EV conversion vehicle, a 325 model with a sodium sulfur battery (Schamer, Lamp and Hockinger, 2010).

In the United States, an unusually hot summer in 1988 was accompanied by a jump in average national ozone levels, after several consecutive years of decline. In 1988 Roger Smith of General Motors “agrees to fund research efforts to build a practical consumer electric car” (Public Broadcasting System, 2010). From 1988-1990, oil and gasoline prices once again rise significantly, though not as severely as in 1973-74 or 1978-81. Nevertheless, a U.S. recession follows. The Aerovironment company prototype arising from the 1988 agreement, the two seat lightweight aerodynamic electric sports car, the “Impact” is introduced at the Los Angeles auto show in 1990 and the California Air Resources Board passes its Zero Emissions Mandate, requiring 2% of the state’s sales of vehicles to consist of vehicles with zero tailpipe emissions in 1998, rising to 10% by 2003.

Another influence was also emerging. In 1988 the United Nations established the Intergovernmental Panel on Climate Change (IPCC), and in 1990 the first Assessment Report of the Panel was released (IPCC.org). This report served as the basis for negotiating the 1992 United Nations Framework Convention on Climate Change (UNFCCC) in Brazil. In Europe and Japan, the significant emerging concern over global warming being codified by the United Nations also promised significant change to come in the those markets.

BMW developed an “E1” EV in 1991 using the sodium sulfur battery, and another EV based on the 325 model in 1992, now using the high temperature sodium nickel chloride (Zebra) battery. By 1993, Germany had set up field tests of 60 electric vehicles on Reugen Island. In 1992, Ford placed into service a fleet of 80 small vans – the ECOSTAR – in Europe and the U.S., using the Zebra battery.

Based on interviews conducted by the IEA HEV&EV Implementing Agreement’s “Lessons Learned” study, Japan and its automakers – who held a significant share of the California market – reacted strongly to the announcement of the GM Impact and the ZEV mandate. Throughout the 1990s, worldwide concern over GHGs began to emerge, along with agreements to develop greenhouse gas reduction strategies. In mid-decade, domestic pressure on automakers in Japan to meet previously agreed national fuel efficiency goals and to show significant progress before the 1997 Kyoto Japan meeting on climate change led to acceleration of Toyota efforts to implement electric drive technology to improve fuel efficiency.

Early in his administration, Al Gore, U.S. Vice President, began promoting research on very high efficiency vehicles. Congress funded this multi-agency, multi-manufacturer “Partnership for a New Generation of Vehicles (PNGV)” research in 1993, but would not support U.S. participation in international agreements to reduce GHGs. Hybrid powertrains were among the technologies chosen to enable very significant improvements in fuel efficiency, but significant research on electric vehicles was not a part of the program due to probable functional limitations including range, speed of “re-fueling”, package space and infrastructure concerns. Battery research was supported, but not vehicle research.

Toyota responded to pressures from its government, California’s government, and the U.S. research program supporting three of its competitors with an aggressive effort to develop a much more fuel efficient mass market vehicle that would allow Japanese consumers to move up to a larger, but considerably more fuel efficient vehicle than their leading world seller, the Toyota Corolla. This vehicle was named the Prius, which in Latin means “to go before”. The first generation of the Prius was only sold in Japan. After a degree of reliability was assured, the Prius was sold in the U.S. In each generation it became larger, faster, and more fuel efficient. It moved from an initial U.S. size classification of compact car up into the midsize category in 2004.

In the late 1990s electric vehicles were produced and evaluated by Toyota in both Japan and California, but were abandoned — for reasons similar to those given by PNGV for not focusing on electric vehicles.

After the oil price shock of 1988-90, oil prices had been relatively stable for nearly a decade. Concerns over availability of oil had subsided. Test fleets of EVs were placed in service in California in the late 1990s. Volumes produced by each manufacturer were generally less than 1000. Automakers decided to oppose the introduction of EVs in other states and legally opposed any expansion of California's ZEV mandate to other states in the U.S. At the turn of the century, production was halted and cars were reclaimed by some manufacturers. All but Nissan used Nickel Metal Hydride or lead acid batteries. Nissan produced a few EVs using lithium ion batteries, now regarded as very promising. Among the participating manufacturers, Nissan was under the greatest financial stress. It too halted EV production. Gasoline vehicles had become far more efficient and far cleaner. Once again, improvements in the gasoline vehicle held the electric vehicle back.

Even an oil price increase from 1998 to 2000 did not revive interest in EVs by automakers and Congress. The PNGV project had led to production of a fuel cell hybrid by GM. This was also a zero tailpipe emissions vehicle which did not have the range limitations of an EV. California, major world automakers and oil companies agreed to a Fuel Cell Partnership to develop hydrogen fuel cell vehicles. The ZEV regulations were restructured. For several years, attention turned to fuel cell vehicles.

During this period, the lithium ion battery chemistry was completely supplanting NiMH in consumer electronic applications. The price and performance of cells with this chemistry were rapidly improving. Theory said that this chemistry could realize greater energy and power density than NiMH (Kalheimer et al, 2007). This was being proven in practice.

In 2003, four years after California and major automakers had shifted attention to fuel cells, Tesla motors was formed with the intention of producing a high performance two seat electric sports car. In a 2006 presentation to the California Air Resources Board, Tesla compared its coming roadster to high performance sports cars selling for prices of \$100,000 to half a million and more (Eberhard, 2005). A key point of the presentation focused on delivery of miles of service per unit of original feedstock by the roadster in comparison to conventional high performance vehicles powered by internal combustion engines. Perhaps the key slide was the one comparing miles of service from wind, solar, hydroelectric and geothermal power via electricity vs. hydrogen. Although it must be remembered that the vehicles compared differed significantly in terms of range, the Tesla comparison dramatically favored the electric pathway.

Another slide highlighted the side effect of greater efficiency – less use of land resources. It may not be obvious, but this point is one that goes beyond computation of oil saving, tailpipe emissions reduction, and GHG reduction. For both an electricity-to-electric-vehicle pathway and an electricity-to-hydrogen fuel cell vehicle pathway, the oil savings, tailpipe emissions reductions, and GHG reductions will be about equal per mile. For tailpipe emissions and GHG reductions, since the pathways have nearly zero emissions, comparisons of pathways with different numbers of miles of operation will look the same if expressed on a percentage basis – about 100% reduction. However, the pathways may differ considerably in another respect, even when compared on the basis of percentage change. The fourth respect is “sustainability” – the more miles of service from a given feedstock, the more sustainable the resource base.

Distilled, what Tesla was arguing is that if the vision is a sustainable future for transportation based on use of renewable fuels, Tesla had identified a market niche where

that transportation can be provided at lower cost with greater levels of service than hydrogen (or gasoline or biomass). Looked at another way, the argument was that, for any single renewable fuel examined, more miles of service can be provided by electric drive in modest range electric vehicles than if fuel cell hydrogen vehicles were used for the same purpose. Although it may be true that an electric vehicle cannot be anticipated to be a universal replacement for gasoline, due to its range and refueling time limitations, it does now have a widespread refueling infrastructure available and it can be started in market niches at much lower cost than fuel cell vehicles.

In the following year at the 23rd Electric Vehicle Symposium in Anaheim CA, a paper was presented that showed that this general argument also holds true for fossil fuels competing with oil, most notably for natural gas used to generate electricity in combined cycle power plants (Gaines et al, 2008). It appears that a proper generalization is that once a fossil or biomass fuel feedstock is gasified, it is more efficient to use the gas to generate electricity and provide electric drive than to turn that gas into a liquid for use in internal combustion engines, or to convert it into clean hydrogen for use in a fuel cell vehicle. For wind, solar, hydro and geothermal, the lesson is to never produce a gas (hydrogen), use the electricity directly. The critical caveat remains that this applies to probable niche vehicles with modest amounts of electric range compared to typical gasoline and fuel cell vehicles.

Lesson: for any single fuel/feedstock pathway, with technologies plausible in the near term, more miles of service can be provided via that feedstock by electric drive in modest range electric vehicles than if fuel cell hydrogen vehicles (or liquid fuels from that feedstock in ICEs) were used for the same purpose.

Tesla, selling its high performance roadster at a cost that undercuts many exotic sports cars, has since sold over 1200 of the roadsters. GM produced less EV1s and did not sell any. It only leased them. Though Tesla has yet to sell as many roadsters as 1970s CitiCars sold, it undoubtedly sold far more kWh of battery pack capacity and far more dollars of value of EVs by early 2011, then being the U.S. leader in these terms. Tesla production took advantage of a degree of pre-existing volume production for components. The roadster was produced by re-engineering a Lotus Elise body and frame. As of 2003, the Elise had been in production since 1995. 17000 had been produced (Conceptcars.com., 2003). Lithium ion cells used in the battery pack of the Tesla were standard commercial cells that had been perfected via several years of production for consumer electronic applications.

Price remains an issue. The Lotus Elise sells at a price of about \$50,000, while the Tesla Roadster sells at a price of over \$100,000. The Tesla Roadster accelerates to 60 mph faster than the Elise [3.7 (Tesla, 2011) vs. 4.4 (Zero to Sixty Times, 2011)], but has a lower top speed (125 mph vs. 150 mph). Its “acceleration feel” to an owner may be superior to the Elise because of the high initial torque available for start-up acceleration.

As Tesla developed their roadster for the performance market niche, oil prices continued a steady rise, reaching levels in 2008 that caused a widespread international collapse in automobile sales. Due to the encouraging long-run environmental and sustainability arguments on behalf of electric drive relative to hydrogen fuel cells, governments began to shift funds and commitments toward electric drive in plug-in hybrids and electric vehicles.

Thanks in part to subsidies and to oil prices through 2008, the world market share of hybrids rose steadily through 2009. First the U.S. adopted subsidies, then Japan.

The technical possibility to convert a 2004 generation Prius to a plug in hybrid was demonstrated by the organization CalCars, using lead acid batteries. Multiple companies then produced prototypes making use of lithium ion battery packs. In 2008 the battery

manufacturer A123 purchased the company Hymotion, then safety certified and produced a 5 kWh lithium iron phosphate battery pack Prius plug-in conversion for \$10,000. U.S. Government testing of a fleet of plug-in Prius vehicles is demonstrating some of their strengths and weaknesses.

For European high performance vehicle manufacturers, electric drive offers the opportunity to meet ever tightening carbon dioxide emissions regulations while still selling vehicles with the historical level of performance customers expect. Several European OEM's that focus on high performance are now developing extended range electric vehicles conceptually similar to the Chevrolet Volt, but with considerably higher power.

To overcome the battery pack cost problems of the Tesla, assuming middle class customers, the Leaf uses a battery pack whose much larger, next generation "prismatic" cells are designed for automotive use. The new battery cell and pack redesign requires very high volume production to allow moderately competitive costs. Battery research is progressing steadily, with promise of favorable lifetime cost reductions for selected customers of plug-in vehicles using coming generations of lithium-ion-based automotive batteries. Few OEMs expect plug-in vehicles to become dominant technologies in the next decade or two. However, many now expect them to succeed in large enough numbers, at low enough costs, that the risks of not producing them are greater than the risks of producing them. Many are choosing to pursue a portfolio of electric drive technologies, including hybrids, plug-in hybrids, and electric vehicles.

The desire by both existing and new automakers to develop and produce vehicles that will sharply reduce oil use has become powerful. Due to the emergence of concerns over greenhouse gases, the desire for minimum emissions – close to zero – has shifted from just the tailpipe to the entire fuel delivery pathway. To the detriment of the hydrogen fuel cell option, this shift in thinking has changed the perspective on use of both renewable and fossil feedstocks for the provision of vehicle miles of service. Electricity – properly implemented – appears to be the best technically feasible near term alternative for enhancement of sustainability of transportation in personal light duty vehicles. Unfortunately, due to the cost of electric drive, less sustainable alternatives will continue to hold the majority of the market for the foreseeable future.

5. What is different this time, what is not?

At this time the automobile industry is well established, with very large manufacturers. One, Nissan is planning for very high volume EV production in a short period of time. Based on the one comparison made here, the additional initial cost of electric vehicles, on a percentage basis, does not appear likely to be much different than in the 1920s. Thus, the need to heavily utilize the vehicle in order to pay back the added costs of purchase remains very important (Kley, Dallinger and Weitschel, 2010; Santini et al, 2011). Accordingly, the kinds of financially attractive market niches for electric vehicles today are probably very similar to those in the early 1900s. However, the extent of these markets is now considerably greater. The competition now is only with the internal combustion engine using refined petroleum products, not the horse. The share of population in suburbs in the U.S. is also far greater, as is the general affluence of the population.

The performance of the Nissan Leaf electric remains to be evaluated by auto magazines and the U.S. Department of Energy, but initial information indicates that it will be competitive or better than gasoline vehicles of the same size with base engines (My Nissan Leaf, 2011;

Autoblog, 2011). It is clear that this generation of electric vehicles using lithium ion battery packs (Nissan Leaf, BMW Mini-E, Tesla Roadster) has *significantly* better acceleration performance than comparably sized vehicles using nickel metal hydride battery packs in the 1990s (Idaho National Laboratory, 1996a&b, 1999a&b, 2009, My Nissan Leaf, 2011), and higher top speed. A Nissan auto show presentation indicates that the Leaf has the fastest 0-48 km/h time of any Nissan vehicle sold (Nissan, 2011). Thus, the response of consumers in everyday urban and suburban driving, on neighborhood, feeder, and arterial roads with stop signs and stop lights, and speed limits of 88 kph and less may be very favorable.

Based on interviews of those who tested the BMW Mini-E, the range of today's electric vehicle using lithium ion batteries is adequate for most needs, but consumers want a charging infrastructure, apparently to be able to use the electric on days when driving distance exceeds the range (Presse Box, 2011). Unless consumers have a strong preference for the EV for its rapid initial acceleration capabilities, financial calculations imply that driving less kilometers per day than the range of the electric vehicle will not be financially desirable in the United States at current and somewhat higher gasoline prices (Santini et al, 2011). Recent evaluations for Europe indicate that fuel taxes (much higher than in the U.S.) will cause EVs and PHEVs to be financially attractive there. However, with "untaxed numbers no PHEV or EV was selected for any battery price." (Kley, Dallinger and Weitschel, 2010). As has been discussed, Europeans drive less kilometers per day on average than in the U.S., and at lower average speed, which tends to offset the EV favoring effects of higher fuel prices there. Further, expectations for top speed in some nations with limited access highways allowing much higher speed than in the U.S. may work against these EVs, which continue to have somewhat limited top speed relative to competing gasoline vehicles. For metropolitan area driving on limited access highways, it appears that coming EVs will have adequate top speed (135-145 kph). In most U.S. urban areas speed limits on such highways are 88 kph, though actual speed often significantly exceeds the limit. For inter-city travel on U.S. Interstates, speed limits vary, but consistently range from 104 to 120 kph, with higher speeds not unusual. Modern full function EVs using lithium ion battery packs will be capable of going fast enough on U.S. Interstates, but the effects on range will be a significant issue.

Many households now own a fleet of vehicles, so it is now possible for many middle income households to mix a gasoline and electric vehicle in a two car fleet, optimizing the use of the pair of vehicles. Electric service is available in almost every dwelling, though garage and carport space is not. The proportion of households living in urban and suburban areas is far greater than it was in the early 1900s. While the capability of driving off-road and on dirt roads remains a selling point for some consumers today, it is no longer a need of the majority of customers for motor vehicles, as it was in the U.S. in the early 1900s.

Culturally, the car is less an "adventure machine" than in the early 1900s. Aircraft are often used for trips out of town, rather than the highway vehicle. Those who are very affluent are likely to use air travel to a significant degree. From a financial viability perspective this will actually hurt the EV for this customer base, because the EV will be used less days per year than by less affluent consumers who do not fly as often.

An adequate road network exists today, with very great functional flexibility in choice of destinations. As in the 1900s, there remains a need for reliable low rolling resistance tires particularly for EVs. EVs and "extended range electric vehicles" (EREVs) are consistently using lower rolling resistance tires than are gasoline vehicles.

For the U.S., the establishment of a petroleum products delivery infrastructure before the advent of the gasoline car was an advantage, which was reinforced by the discovery of abundant oil supplies. Today, the U.S. has built a considerable number of efficient combined cycle natural gas powerplants to serve air conditioning demands, creating a high summertime peak and a deep and wide summertime overnight trough. In their recent assessment of the use of electric power by plausible, but optimistic numbers of plug-in hybrids, Argonne National Laboratory scientists (Elgowainy et al, 2010) estimated that the vast majority of power would be provided by *already existing* combined cycle natural gas powerplants. In the meantime, significant new resources of shale gas have become available in the U.S. (and probably elsewhere in the world) as a result of developments in drilling technology (Energy Information Administration, 2011). Thus, today the plug-in electric vehicle also has the benefit of a widely available existing electric delivery infrastructure whose electricity can be generated by an abundant resource, natural gas. The petroleum delivery infrastructure today appears to be at risk of dependence on expensive oil resources whose production may be reaching a worldwide plateau, while worldwide demand continues to rise.

Environmental motivations by the affluent today are far different than in the early 1900s. Due to dramatic improvements in the gasoline vehicle, reduction of local noise and smell are much less a concern today, though they remain a factor. Nitrogen oxides and particulate emissions of the diesel have become a concern in Europe, where diesel emissions regulation had been more lax than for gasoline. However, the leading new environmental concern for many affluent vehicle consumers and many national governments is global warming. The perception of the environment has changed. Escape from this environmental problem by moving to a different location (such as suburbanization in the U.S. in part to escape dirty industrial core cities) is no longer a possibility. Thus, changing the choice of technology to one with less global warming effect – rather than moving away from pollution – is a higher priority for those affluent consumers who wish to contribute to mitigating this problem. Plug-in electric vehicles are seen as enabling technology that can enhance the technical and economic feasibility of electrical generation with wind and solar power, two ultimate clean sources of such power. Combined cycle natural gas powerplants, relatively clean among fossil fueled power plants, have technical flexibility to vary load rapidly, creating the possibility of synergism with fluctuating wind and solar.

Thus, as in the early 1900s, the perception of the electric vehicle as a clean environmentally friendly vehicle remains important, though with a significant change in perspective.

Neither the U.S., nor Europe is growing as rapidly as in the early 1900s. New single family dwelling units, which can most inexpensively be designed to allow for plug-in vehicle charging – retrofit costs for existing units being much higher – are certainly not being built at a rate proportional to the growth in the early 1900s, so neighborhood and dwelling unit charging infrastructure costs will be relatively higher.

Since solar and wind resources are consistently exploited locally, these ultimately clean resources also have the benefit of reducing oil imports for the U.S. and Europe, which is a much greater concern than it was in the early 1900s. Similarly, shale gas also appears to offer many nations an enhanced opportunity to substitute another domestically produced transportation energy source for imported oil (Energy Information Agency, 2011).

The final key difference is that the hybrid electric vehicle has established a relatively steadily increasing market niche since the 1990s, while this technology was unsuccessful relative to the electric vehicle in the early 1900s. For the Kreiger hybrid of a few years after 1900, the

battery pack accounted for 25% of the vehicle mass (Mom, p. 126); for the 2004 Prius, the pack accounted for 3.5% of vehicle mass. Obviously, there are many other critical developments that have enabled hybrids to succeed, but minimizing pack size needed is certainly an important one.

It is being demonstrated that a plug-in adaptation of a hybrid can be developed, and that “electric vehicles” can be modified to include an engine and generator and use gasoline to extend the range. Engineering and cost evaluations of several different configurations of plug-in hybrid and range extender electric vehicles have been conducted (Kromer and Heywood, 2007; Passier et al, 2007; Moawad et al, 2009; Shiau et al, 2009; Aksen, Kurani and Burke, 2010, Kley Dallinger, and Weitschel 2010; Propfe and de Tena, 2010; Santini et al, 2011). The conclusions of those studies that have examined cost is that the plug-in hybrid with 4-8 kWh of battery pack storage will be more cost effective than the extended range electric vehicle with 12-16 kWh of battery pack, which in turn will be more cost effective than the electric vehicle with 160-320 km of range and 24 kWh or more of battery pack. As battery costs drop, the financial viability of the vehicles with more and more battery pack capacity increases (Shiau et al, 2009; Kley, Dallinger and Weitschel, 2010; Propfe and de Tena, 2010). However, the decline in battery pack costs does not eliminate the desirability of plug-in hybrids and make electric vehicles win; it makes a more diverse mix of plug-in vehicles desirable. At anticipated 2020 battery pack costs, and historical oil prices, unsubsidized 4-5 passenger personal light duty electric vehicles are not estimated to be financially attractive for the vast majority of consumers.

Thus, the engineering cost evaluations imply that the first step in the next wave of electrification of the motor vehicle is adaptation of the hybrid — further gradual electrification of the conventional powertrain, not a jump to an emphasis on pure electric drive. If electric cars are to be implemented, it can be expected that choice of the best market niches will be critical — as it was in the early 1900s — and initial market shares will be small.

6. Acknowledgments

The author would like to gratefully acknowledge the sponsorship of David Howell, Team Leader, Hybrid and Electric Systems, Office of Vehicle Technology, U.S. Department of Energy. This paper is the author’s extension of an assignment by the International Energy Agency Hybrid and Electric Vehicle Implementing Agreement’s Annex XIV multi-country study “Market Deployment of Hybrid & Electric Vehicles: Lessons Learned” to examine the historical determinants of the multiple waves of effort to develop and deploy personal use highway vehicles with electric drive since WWII. The author was inspired to extend this assignment back to 1895 due to the rich amount of technical detail and extremely insightful interpretation in Gijs Mom’s book “The Electric Vehicle: Technology Expectations in the Automobile Age”, originally published in Dutch, and translated into English in 2004. The interpretations in this analysis are those of the author and not the sponsoring organizations. Special thanks are due to the “Operating Agent” and members of the Annex XV study team, Tom Turrentine (OA, U.S.), Sigrid Kleindienst Muntwyler (Switzerland), Kanehira Maruo (Sweden) and Bjoern Budde (Austria), though none are to be held responsible for my interpretations. Thanks are also due to the many participants in the workshops of the Annex, too numerous to list here. Information on the progress of Annex XIV over its operations period can be found in the Annual Reports of the Hybrid and Electric Vehicle Implementing Agreement (<http://www.ieahev.org/publications/index.html>).

7. References

- About.com. *The History of Electric Vehicles*.
<http://inventors.about.com/library/weekly/aacarselectric1a.htm>. Accessed April 7, 2011.
- Anderson, C.D. and J. Anderson (2010) *Electric and Hybrid Cars: A History* 2nd Ed. MacFarland and Company. NC
- Autoblog (2011). <http://www.autoblog.com/2010/10/22/unofficial-nissan-leaf-does-0-60-mpg-in-7-seconds-tops-out-at/>. Accessed April 7.
- Axsen, J. K. Kurani and A. Burke. (2011). *Are batteries ready for plug-in hybrid buyers?* Paper 10-0732, presented at the 89th Annual Meeting of the Transportation Research Board, Washington, DC. (Jan. 9-13)
- Berretta, R. (2009). *Daimler AG Fuel Cell Vehicle Technology for Passenger Vehicles*. California Air Resources Board ZEV Symposium, Sacramento CA. Sept. 21.
- Conceptcars.com. (2003). *Lotus Announce Elise for USA*.
<http://www.conceptcarz.com/vehicle/z6643/Lotus-Elise.aspx> accessed Oct. 10, 2010.
- Eberhard, M. (2006). *Tesla Motors*. Presented at the California Air Resources Board ZEV Symposium, Sacramento, CA. Sept. 26.
- Electric Auto Association (2005). *Electric Vehicle History* (May).
<http://www.eaaev.org/Flyers/eaaflyer-evhistory.pdf>
- Electrification Coalition (2009). *Electrification Roadmap*
<http://www.electrificationcoalition.org/electrification-roadmap.php>. Nov.
- Elgowainy et al, (2010). *Well-to-Wheels Analysis of Energy Use and Greenhouse Gas Emissions of Plug-in Hybrid Electric Vehicles*. Argonne National Laboratory Report ANL/ESD/10-1. Argonne, IL. June.
- Energy Information Agency (2011). *World Shale Gas Resources: An Initial Assessment of 14 Regions Outside the United States*.
<http://www.eia.doe.gov/analysis/studies/worldshalegas/>. April 5.
- Fairley, P. (2009). *Toyota's Secret: The Clean Air Act of 1970*
http://spectrum.ieee.org/energywise/energy/renewables/toyotas_secret_the_clean_air_act.html. accessed March 16.
- Gaines, L., et al. (2008). *Sorting Through the Many Total-Energy-Cycle Pathways Possible with Early Plug-In Hybrids*. *World Electric Vehicle Journal*, 2 (1): 1 74-96.
- Generations of GM History: Heritage Center (2011).
http://history.gmheritagecenter.com/wiki/index.php/1904_Curved_Dash_Owner%E2%80%99s_Manual. accessed April 7, 2011.
- Idaho National Laboratory (1996a). *Toyota RAV4EV*.
<http://avt.inel.gov/pdf/fsev/eva/toyrav96.pdf>. accessed April 7.
- Idaho National Laboratory (1996b). *Toyota RAV4EV w/NiMH*.
<http://avt.inel.gov/pdf/fsev/eva/toyrav98.pdf>. accessed April 7.
- Idaho National Laboratory (1999a). *1999 General Motors EV1 w/NiMH*.
http://www1.eere.energy.gov/vehiclesandfuels/avta/pdfs/fsev/eva_results/ev1_eva.pdf. accessed April 7.
- Idaho National Laboratory (1999b). *1999 Ford Think Urban Electric Vehicle*.
<http://avt.inel.gov/pdf/uev/thinkcityueva.pdf>. accessed April 7.

- Idaho National Laboratory (2009). *BMW Motors 2009 Mini E*.
<http://avt.inel.gov/pdf/uev/fact2009bmwmini.pdf>. accessed April 7.
- Kalheimer F. et al (2007). *Status and Prospects for Zero Emissions Vehicle Technology: Report of the ARB Independent Expert Panel 2007*. Prepared for the State of California Air Resources Board.
- Kley, F., D. Dallinger, and M. Weitschel (2010). *Optimizing the charge profile – considering user’s driving profiles*. Working Paper Sustainability and Innovation No. S. 6/2010. Fraunhofer ISI, Germany.
- Kromer, M. A. and J. B. Heywood (2007). *Electric Powertrains: Opportunities and Challenges in the U.S. Light-Duty Vehicle Fleet*, Laboratory for energy and the environment publication No. LFEE 2007-03 RP. Massachusetts Institute of Technology, Cambridge MA. May.
- Lindsley, E.F. (2006) *Lifting the Hood on Future Car Engines*. Popular Science, 208 (4) pp. 82-86; 153. April.
- Loeb, A.P. (1995). *The Birth of the Kettering Doctrine: Fordism, Sloanism and the Discovery of Tetraethyl Lead*. Business and Economic History 24 (1) pp. 72-87.
- Mahajan, V. and R.A. Peterson (1985). *Models for innovation diffusion*. Sage Publications. Beverly Hills CA.
- Matthe, R. (2010). *Vehicle integration of the Chevrolet Volt Battery*. Advanced Automotive Battery Conference, Orlando, FL. May 17-21.
- Melaina, M.W. (2007). *Turn of the century refueling: A review of innovations in early gasoline refueling methods and analogies for hydrogen*. Energy Policy 35 pp. 4919-4934
- Middleton, W.D. (1974). *When the Steam Railroads Electrified*, Kalmbach Publishing Co. Milwaukee WI.
- Mom, G. (2004). *The Electric Vehicle: Technology and Expectations in the Automobile Age*. The Johns Hopkins University Press, Baltimore.
- Moawad et al (2009). *Impact of Real World Drive Cycles on PHEV Fuel Efficiency and Cost for Different Powertrain and Battery Characteristics*. The 24th World Battery, Hybrid and Fuel Cell Electric Vehicle Symposium and Exhibition (EVS-25). Stavenger, Norway May 13-16.
- Muntwyler, U. (2011). *EV and PV: a winning combination has its 25 years anniversary*. International Advanced Mobility Forum, Geneva. March 8-9.
- Naul, G.M., ed. (1978). *The Specification Book for U.S. Cars, 1920-29*. Motorbooks International, Osceola, Wis.
- Naul, G.M., ed. (1980). *The Specification Book for U.S. Cars, 1930-69*, Motorbooks International, Osceola, Wis.
- Nissan Official U.S. Media Newsroom (2011). *Nissan’s pursuit for zero emissions mobility: the unplugged story*.
<http://www.nissannews.com/pressrelease/790/1/nissan’s-pursuit-zero-emission-mobility-unplugged-story>. accessed April 7.
- Passier, G. et al. (2007). *Status Overview of Hybrid and Electric Vehicle Technology (2007): Final Report Phase III, Annex VII, IA-HEV*, International Energy Agency, Paris, France Dec.
- Presse Box (2011). *Mini E UK Field Trial Switches Off*.
<http://www.pressebox.com/pressreleases/bmw-ag-0/boxid/412690>. accessed April 7.

- Pressnell, J. (1992). *Great Cars of the World*. PRION – Multimedia Books Ltd.
- Propfe, B. and D. L. de Tena (2010). *Perspectives of electric vehicles: customer suitability and renewable energy integration*. Proceedings of the 25th World Battery, Hybrid and Fuel Cell Electric Vehicle Symposium and Exhibition (EVS-25)., Shenzhen, China. Nov. 5-9.
- Public Broadcast System (PBS) (2009). *Timeline: History of the Electric Car*. Oct. 30. <http://www.pbs.org/now/shows/223/electric-car-timeline.html>
- Santini, D.J., K.G. Gallagher, and A.P. Nelson (2010). *Modeling of Manufacturing Costs of Lithium-Ion Batteries for HEVs, PHEVs, and EVs*. The 25th World Battery, Hybrid and Fuel Cell Electric Vehicle Symposium and Exhibition (EVS-25). Shenzhen China. Nov. 5-9.
- Santini, D.J. (2010). *Highway Vehicle Electric Drive in the United States: 2009 Status and Issues*. Argonne National Laboratory Report ANL/ESD 10-9. Argonne, IL.
- Santini, D.J. et al (2011). *Where Are the Market Niches for Electric Drive Passenger Cars?* Paper no. 11-3733, 90th Annual Meeting of the Transportation Research Board Washington, D.C. January 23-27.
- Satyapal, S. and Aceves, S (2009). *Overview of Hydrogen and Fuel Cell Activities*. California Air Resources Board ZEV Symposium, Sacramento CA. Sept. 21.
- Schamer, S., P. Lamp, and E. Hockinger (2010). *Development of Hybrid Vehicles at BMW and their Energy Storage Solutions*. Advanced Automotive Battery Conference, Orlando, FL. May 17-21.
- Schiau et al (2009). *Impact of battery weight and charging patterns on the economic and environmental benefits of plug-in hybrid electric vehicles*. Energy Policy 37. pp. 2653-2663.
- Siry, D. (2008). *Mythbusters Part 2: The Tesla Roadster is not a Converted Lotus Elise* <http://www.teslamotors.com/blog/mythbusters-part-2-tesla-roadster-not-converted-lotus-elise>. accessed March 3.
- Stephenson, R.R. (1975). *Should We Have a New Engine? An Automobile Power Systems Evaluation. Vols. 1 and 2*. Jet Propulsion Laboratory Report JPL SP43-17, V I&II. Pasadena, CA.
- Suckow, T. (2009). *Hyundai Fuel Cell Vehicles*. California Air Resources Board ZEV Symposium, Sacramento CA. Sept. 21.
- Sulzberger, C. (2004). *An Early Road Warrior: Electric Vehicles in the Early Years of the Automobile*. IEEE Power Engineering Society. May. <http://www.ieee.org/organizations/pes/public/2004/may/peshistory.html>
- Tesla (2011). <http://www.teslamotors.com/roadster>. accessed May 19.
- U.S. Department of Commerce. 1975. *Historical Statistics of the United States: Colonial Times to 1970*. Washington DC: GPO.
- Vivian, D. (1994). *Encyclopedia of American Cars*. Brampton Books.
- Vyas, A., D. Santini, and L. Johnson (2009). *Plug-In Hybrid Electric Vehicles' Potential for Petroleum Use Reduction: Issues Involved in Developing Reliable Estimates*. Transportation Research Record: Journal of the Transportation Research Board No. 2139. Transportation Research Board of the National Academies, Washington, DC, pp. 55-63.
- Wikipedia (2011). *War of Currents*. http://en.wikipedia.org/wiki/War_of_Currents. accessed April 7, 2011.

- Wing, G. (2010). *Mitsubishi Motors i-MiEV Fleet Test Experience*. Presentation at the 10th International Advanced Automotive Battery Conference, Orlando, FL. May 19-21.
- Yokoyama, T. (2009). Progress and Challenges for Toyota's Fuel Cell Vehicle Development. California Air Resources Board ZEV Symposium, Sacramento CA. Sept. 21.
- Zero to Sixty Times (2011). <http://www.zeroto60times.com/>. accessed April 7.

What is the Role of Electric Vehicles in a Low Carbon Transport in China?

Jing Yang, Wei Shen and Aling Zhang
*Institute of Nuclear and New Energy Technology, Tsinghua University
China*

1. Introduction

In December 2009, China government has officially announced, for the first time, a voluntary quantitative target of controlling its carbon dioxide emissions, which is to cut the carbon dioxide intensity (kg CO₂ per GDP) by 40%~45% by the year 2020 (relative to the level of 2005). Transportation is one of the major sources of carbon dioxide emissions resulting from fossil fuel utilizations all over the world. In 2008 carbon dioxide emissions caused by transportation fuel combustion accounted for about 8% of the national total in China (Yang, 2011). This percentage is far behind some advanced economies, such as 33% in United States in 2004, 26% in Europe in 2004 (Wallington, 2008), and so forth. In either developing countries or developed countries road sector is responsible for approximate 80% of total carbon dioxide emissions resulting from transportation (Yang, 2011; Wallington, 2008), which indicates that road transportation has been playing a significant role in reducing transportation carbon dioxide emissions now and in the future. Compared with 824 vehicles per 1,000 people in United States in 2008 and 608 vehicles per 1,000 people in Japan in 2009, there were only about 68 vehicles per 1,000 people in China in 2010. It is clear that China's vehicle population will be twice as many as present level when the vehicle ownership is doubled and meanwhile the national population is sustained. As an emerging economy, this situation will probably happen in next 5~10 years. Without revolutionary change of transportation system, the consequent carbon dioxide emissions from road transportation will possibly be doubled as well. It can be predicted that transportation sector would become one of the fastest growing sources of carbon dioxide emissions in China in next several decades. Thus, a low carbon transport system is expected to be proposed soon as a potential solution to addressing the conflict between the development of transportation and economy and the mitigation of climate change.

In response to concerns over establishing the low carbon transport system and meeting the increasing domestic petroleum demand, interest in developing advanced vehicle technologies and alternative vehicle fuels has risen considerably in past ten years. Many research and demonstration programs of various technologies were supported by Chinese government, including light-duty vehicles (LDVs) using methanol (M85) and ethanol (E10), buses and taxis using liquefied petroleum gas (LPG), compressed natural gas (CNG), and liquefied natural gas (LNG), passenger cars and buses using dimethylether (DME), passenger cars using diesel, and so forth. Ethanol gasoline (E10) has been put into mandatory use since 2003 in five Chinese provinces (Jilin, Hei Longjiang, Henan, Anhui,

and Liaoning) and a number of large cities (in provinces of Hubei, Shandong, Hebei, and Jiangsu).

In recent years, China's strategy of new technology development of vehicle and alternative fuel has been gradually shifted from multiply pathways to a few significant pathways – especially electric vehicles, i.e. battery electric vehicles (BEVs), regular hybrid electric vehicles (HEVs), plug-in hybrid electric vehicles (PHEVs), and fuel cell vehicles (FCVs). Research and development (R&D) of electric vehicles were incorporated in the National High Technology Research and Development Program (863 Program) by the Ministry of Science and Technology. According to the latest application guideline of this program issued in October 2010, a total of 738 million RMB (about 113 million U.S. dollars) funding will be used to support the laboratory study on key technology and system integration of electric vehicles (National High Technology Research and Development Program, 2010).

Meanwhile the demonstration of all sorts of electric vehicles has been started. In 2008, 370 battery electric vehicles (50 buses and 320 shuttles), 100 hybrid electric vehicles (25 buses and 75 passenger cars), and 23 fuel cell vehicles (3 buses and 20 passenger cars) provided service at the Beijing Olympics Games. Two years later 1,017 electric vehicles showed up in the 2010 World Expo in Shanghai, including 321 battery electric vehicles (181 buses and 140 shuttles), 500 hybrid electric vehicles (150 buses and 350 passenger cars), and 196 fuel cell vehicles (6 buses, 90 passenger cars, and 100 shuttles).

Central government have also launched policies to promote the popularization of electric vehicles. In response to the severe global economic recession triggered by the financial crisis in the United States in late 2008, Chinese Automotive Industry Revitalization Plan, as an important part of the national industry revitalization program, was published in March 2009. According to this three-year plan, China aim to create a capacity to produce 500,000 "New Energy Vehicles" by 2011, including battery electric vehicles, plug-in hybrid electric vehicles, and regular hybrid electric vehicles. The plan also set a goal for the year 2011 that is to increase the sales fraction of such new energy cars to 5% of total passenger cars. To achieve the above target, at the beginning of 2009 a pilot project of energy conservation and new energy vehicles was officially launched in 13 cities including Beijing and Shanghai, according to a circular issued by the Ministry of Finance and the Ministry of Science and Technology. New energy vehicles were encouraged to be used in area of public transportation, taxi, postal, sanitation, and other public services. The central government announced to provide a subsidy to vehicle purchase, and the local government was required to be responsible for the infrastructure construction, such as building charge station for electric vehicles. It was reported that there were 12,000 new energy vehicles had been sold since the project started (Ministry of Science and Technology, 2010).

June 2010 the Ministry of Science and Technology and the Ministry of Finance launched a subsidy policy for the private purchase of battery electric vehicles and plug-in hybrid electric vehicles in 5 cities (Shanghai, Changchun, Shenzhen, Hangzhou, and Hefei) through 2012. The subsidy is calculated as 3,000 RMB (about 460 U.S. dollars) per kWh, with the caps of 60,000 RMB (about 9,190 U.S. dollars) per vehicle and 50,000 RMB (about 7,659 U.S. dollars) per vehicle for battery electric vehicles and plug-in hybrid electric vehicles, respectively. Now several vehicle models in domestic auto market are expected to benefit from the policy. One example is BYD E6 model (battery electric vehicle) with a rated price of 270,000 RMB (about 41,000 U.S. dollars), in which 60,000 RMB will be paid by the central government. Another example is BYD F3DM model (dual modes, i.e. battery electric mode

and regular hybrid electric mode) with a rated price of 150,000 RMB (about 23,000 U.S. dollars), in which 50,000 RMB will be paid by the central government. Moreover, some large cities subsequently launched their own policies which offered an even better deal to customers with an additional subsidy of 50,000 RMB (about 7,659 U.S. dollars) or more. Private customers, however, have hardly been attracted by the subsidies due to plenty of uncertainties of the new technology utilization, and therefore the sales of new energy vehicles were not very well. For instance, BYD Auto Company, as a pioneer and the largest domestic producers of electric vehicles, has merely sold 480 vehicles (417 BYD F3DM and 63 BYD E6) until the end of 2010.

China's Twelfth Five-Year Plan for National Economic and Social Development (2011~2015) was newly approved by the legislature, the National People's Congress (NPC), in March 2011. The new energy vehicle industry, as one of the seven strategic industries, was enclosed in the state scheme. The large-scale demonstration and subsequent commercialization of plug-in hybrid electric vehicles and battery electric vehicles were underlined in the national plan, indicating that electric vehicles would experience a prime period of development in recent years.

In this chapter, the title question was addressed by quantitatively analyzing the climate change impacts of electric vehicles in China. The circular life cycle energy consumption and greenhouse gas emissions (GHGs) of battery electric vehicles, fuel cell vehicles and conventional internal combustion engine vehicles (ICEVs) were calculated via well-to-wheel (WTW) method. An improved GREET (Greenhouse, Regulated Emissions and Energy use of Transportation) model was used in this study, inside which over 640 of total 730 parameters were updated with localized Chinese data by Shen (Shen, 2007; Shen & Zhang, 2008). Modelling results showed that battery electric vehicles had the great advantages over both traditional gasoline vehicles and fuel cell vehicles in either well-to-wheel fossil fuel consumption and petroleum consumption or greenhouse gas emissions. And fuel cell vehicles were anticipated to play a more important role after the breakthrough of hydrogen production technology. We further concluded that electric vehicles would greatly contribute to the future low carbon transport system. Besides, market penetration of electric vehicles was able to largely reduce the dependency of traditional gasoline.

Electric vehicles provide a promising solution to the transportation energy problem and climate change concern. However, in China electric vehicles presently have to face several urgent problems, such as the high cost of purchase, the absence of infrastructure network, the disposal and recovery issues of batteries, and so forth. Hence, special follow-up policies should be addressed to promote commercialization progress of electric vehicles in China.

2. Methodology

Well-to-wheel method is a specific life cycle assessment (LCA) used for transportation fuels and vehicles. Energy consumption and greenhouse gas emissions of the fuel cycle accounts for over 70% of the whole life cycle (composed of fuel production, vehicle production, and vehicle operation). Therefore, in this study we focus on energy consumption and climate change impact of the fuel cycle rather than the vehicle cycle. In general the fuel cycle well-to-wheel study is divided into two stages - well-to-tank (WTT) and tank-to-wheel (TTW). The former indicates upstream stage, including mining, processing, and transportation of feedstock, and production, delivery, and storage of vehicle fuels. The latter is also called downstream stage, which means vehicle operation in particular.

An improved GREET 1.7 model was used in this study, inside which the America-based database was ultimately replaced by China-based one. It can be also called ChinaGREET because 367 of 394 parameters of feedstock and fuel production stage and 282 of 336 parameters of transportation and distribution stage have been updated according to Chinese real conditions.

2.1 Assumption

This study incorporated 12 pathways for production and application of vehicle fuels, including a conventional gasoline vehicle pathway, a battery electric vehicle pathway, and ten fuel cell vehicle pathways (Table 1).

Coal, natural gas, and water were considered as sources of hydrogen used for fuel cell vehicles. Electricity for vehicle use was assumed to come from national electrical grid. Passenger cars were studied due to their larger potential of growth in the future compared with other vehicle types.

Pathway name	Feedstock	In-process product (site)	Fuel	Vehicle
SI: 93# Gasoline	Petroleum	-	Gasoline 93#	Gasoline vehicle (spark injection)
FCV: MeOH-NG	Natural gas	Natural gas -> methonal -> hydrogen (on-board)	Gaseous hydrogen	Fuel cell vehicle
FCV: MeOH-Coal	Coal	Coal -> methonal -> hydrogen (on-board)	Gaseous hydrogen	Fuel cell vehicle
FCV: GH ₂ ,RS,MeOH-NG	Natural gas	Natural gas -> methonal -> hydrogen (refill station)	Gaseous hydrogen	Fuel cell vehicle
FCV: GH ₂ ,RS,MeOH-Coal	Coal	Natural gas -> methonal -> hydrogen (refill station)	Gaseous hydrogen	Fuel cell vehicle
FCV: GH ₂ ,RS,Electrolysis	Water	Water -> hydrogen (refill station)	Gaseous hydrogen	Fuel cell vehicle
FCV: GH ₂ ,CP,NG	Natural gas	Natural gas -> hydrogen (central plant)	Gaseous hydrogen	Fuel cell vehicle
FCV: LH ₂ ,RS,MeOH-NG	Natural gas	Natural gas-> methonal-> hydrogen (refill station)	Liquid hydrogen	Fuel cell vehicle
FCV: LH ₂ ,RS,MeOH-Coal	Coal	Coal -> methonal -> hydrogen (refill station)	Liquid hydrogen	Fuel cell vehicle
FCV: LH ₂ ,RS,Electrolysis	Water	Water -> hydrogen (refill station)	Liquid hydrogen	Fuel cell vehicle
FCV: LH ₂ ,CP,NG	Natural gas	Natural gas -> hydrogen (central plant)	Liquid hydrogen	Fuel cell vehicle
EV	Various primary energy	Grid electricity	Electricity	Battery electric vehicle

Table 1. Feedstock, in-process product, fuel, and vehicle type of each pathway

2.2 Data

Data of coal-based, natural gas-based, and grid electricity pathways and data of vehicle stage were described below.

2.2.1 Coal-based pathways

Energy consumption of coal mining was mostly caused by mining equipments and boilers. The former mainly consumed electricity, and the latter basically used coal. Chinese raw coal was mostly provided by domestic coal mines since the country was rich in coal resources and the price was much lower than import coal. Therefore in this study we assumed that the coal used to generate hydrogen and electricity was produced in the country. According to the investigation of large national and local mines and the data of China Energy Statistical Yearbook, there were 34.4 kWh power and 26.7 kg raw coal would be used when 1 tonne coal was excavated in domestic coal mines. Coal chemical industry in China usually took washed coals as feedstock although they were only about 30% of raw coal output would be further washed. According to our investigation, 0.92 tonne coal equivalent (tce) raw coal, 3.0 kWh power, and 0.1 tonne water was consumed when 1 tonne coal was washed. Another issue that should draw our attention to was the release of absorbed gases from coal bed, such as methane and carbon dioxide. On considering current mining technology, we estimated that there were approximately 7~8 cubic meters methane, 6 cubic meters carbon dioxide, and a small quantity of sulphur dioxide and nitrous oxide that would be emitted when 1 tonne coal was excavated (Alternative Energy Program by National Development and Reform Commission, 2006).

It was known that coal resources were mainly located in the east and the north of China. Over 60%~70% of state coal reserves were found in Shanxi, Shaanxi, Inner Mongolia, and Xinjiang provinces. But end users of the energy were concentrated in north-eastern regions. So coal transportation from producing areas to consuming regions became a necessary and complicated work. Coal was usually delivered by rail, road, and water. The volume of coal transported and the average transferring distance by each means come from Year Book of China Transportation & Communications and China Energy Statistical Yearbook (Table 2). It can be found that sum of the share was over 100% because some coal was transported by more than one means which resulted in repeated calculation in statistics. Coal losses during transportation were assumed to be 0.5%~1.0% (Xiao, 2005).

	Data source	Rail	Road	Water
Share of coal volume (%)	China Coal Research Institute (CCRI)	60%	30%	20%
	Ministry of Transport of China (MOT)	60%	10%	40%
	Assumption in this study	50%	30%	20%
Average transport distance (km)	Investigation	550~595	-	650
	Assumption in this study	600	80	650

Table 2. Share of coal volume and average transferring distance by each means

Coal was first gasified to produce syngas (mixture of carbon monoxide and hydrogen gas). Next, syngas was converted into high purity hydrogen gas via decarbonisation and

desulfurization processes, i.e. carbon monoxide conversion, low-temperature methanol washing, and solvent adsorption. Overall efficiency of producing hydrogen gas from coal by Chinese chemical industry was around 50%, lower than that of international companies using advanced technology. Large central plant of coal-based hydrogen production had great advantage over small-scale on-site plant. And the resulting hydrogen product was needed to be further transported to refill station. Hydrogen gas could be directly transported by vehicle or after liquefaction. But in this study gaseous hydrogen and liquid hydrogen were assumed to be delivered by pipeline and tanker, respectively, due to economical concerns. Average transport distance of gaseous hydrogen by pipeline was assumed to be 50 km on considering cost and energy efficiency. Average transferring distance of liquid hydrogen by tanker was calculated as 110 km.

2.2.2 Natural gas-based pathways

During natural gas exploitation, 10% natural gas output was used as fuel by purification and separation processes, and about 0.4% output was missing. Natural gas product was transported by pipeline to nearby chemical industry plant to produce methanol which were located 50 km~100 km away. Then methanol was delivered by rail, road, and water to downstream plant or refill station to generate hydrogen gas or liquid. Average distance from hydrogen plant to local storage was assumed to be 1000 km, and that from local storage to refill station was about 50 km. Natural gas-based hydrogen was transported by the same means as coal-based hydrogen (Chapter 2.2.1).

2.2.3 Grid electricity pathways

Grid electricity was consumed at refill station by electrolysis reaction to generate gaseous or liquid hydrogen. Electricity used for powering electric vehicles was also provided by grid. Various sources of primary energy were combusted in power plant to produce grid electricity. On average, about 80.4% grid electricity was from coal, 1.0% from natural gas, 1.1% from oil, 1.9% from nuclear, 0.5% from biomass, 14.2% from hydro, 0.8% from wind, and 0.1% from solar. Energy efficiency of thermal power plant was estimated to be 360 gram coal equivalent (gce) per kWh electricity generation. Approximately 7% of power became losses during grid transmission.

2.2.4 Vehicle stage

The FOX 1.8MT passenger car made by Ford Motor Company was used to calculate the downstream energy consumption and greenhouse gas emissions. This model employed port injected spark ignition (PISI) technology and combusted gasoline that was labelled 93 (Research Octane Number, RON). Fuel efficiency of the car under urban condition was estimated to be 8.5L/100km (equal to 27.7mpg). For fuel cell vehicle, the fuel efficiency was assumed 80% higher than the above conventional gasoline vehicle. Electricity consumption of electric vehicles was assumed to be 22 kWh/100km.

3. Results

Well-to-wheel fossil energy consumption, petroleum consumption, and greenhouse gas emissions of coal-based pathways, natural gas-based pathways, and grid electricity pathways were presented and compared with those of the conventional gasoline pathway in this section.

3.1 Well-to-tank results

WTT fossil fuel consumption of each pathway was shown expect the 2 on-board hydrogen generation pathways (Figure 1). No pathway consumed less WTT fossil fuel than the conventional gasoline pathway when 1 MJ vehicle fuel was generated. The reason was that present overall energy efficiencies of hydrogen production or electricity generation from either coal or natural gas were between 40%~60%, which was much lower than the energy efficiency of petroleum refining process (over 90%). Large central plant of hydrogen production using natural gas as feedstock had the advantage of energy consumption by 350%~540% over other methods, indicating that this kind of central plant was likely a better choice to make hydrogen than refill station production or on-board generation ways. Fossil fuel required to produce grid electricity was about 6.3 times more than that required by the conventional gasoline due to numerous coal utilization in power plant.

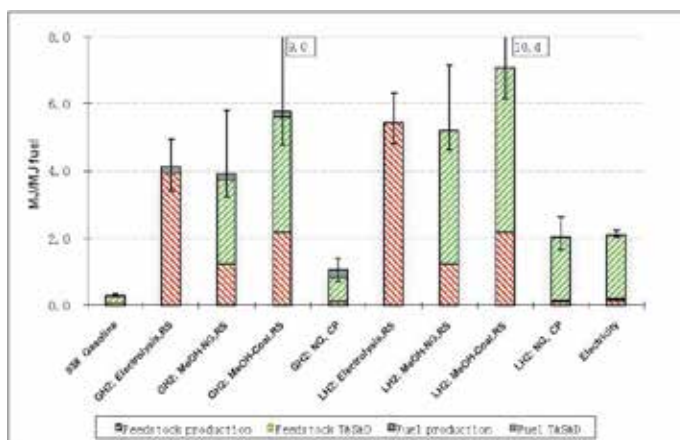


Fig. 1. Comparison of WTT fossil fuel consumptions

WTT greenhouse gas emissions resulting from fossil fuel consumption of each pathway was presented expect 2 on-board hydrogen generation pathways (Figure 2). Greenhouse gas emitted during hydrogen and electricity generation was 5~35 times higher than gasoline production.

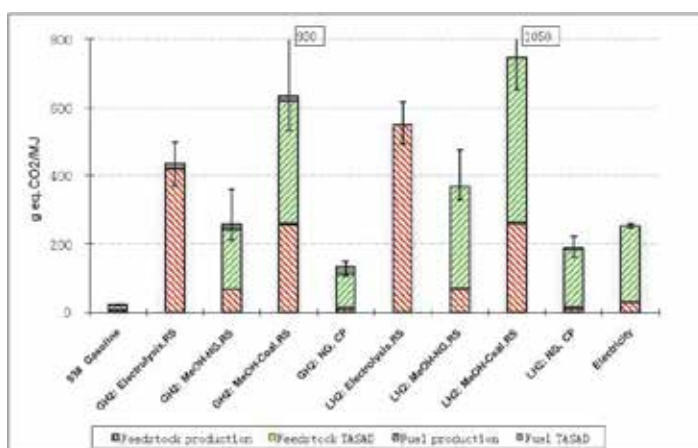


Fig. 2. Comparison of WTT greenhouse gas emissions

3.2 Well-to-wheel results

WTW fossil fuel consumption (Figure 3) and petroleum consumption (Figure 4) of total 12 pathways were described as how much MJ energy was required for the car to travel 1 km. WTW energy consumptions of fuel cell vehicle pathways were very different due to feedstock and process variety. The pathway of fuel cell vehicle using gaseous hydrogen generated either from natural gas in large central plant or by on-board generator had a comparable WTW fossil fuel consumption to the gasoline pathway, because the fuel efficiency of fuel cell vehicles was higher than the conventional gasoline vehicles. Electric vehicle pathway using grid power consumed 10% less WTW fossil fuel than gasoline pathway, because electric vehicles were more efficient than the conventional gasoline vehicles which made great contributions to decrease WTW energy consumption.

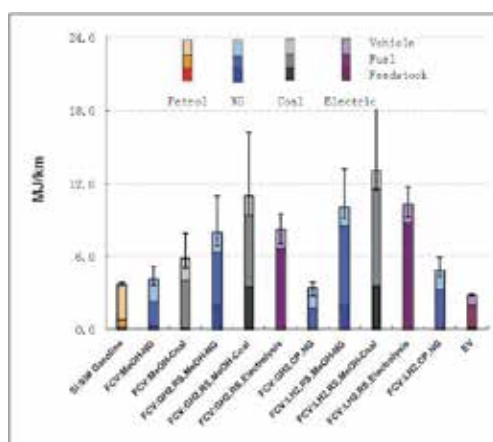


Fig. 3. Comparison of WTW fossil fuel consumptions

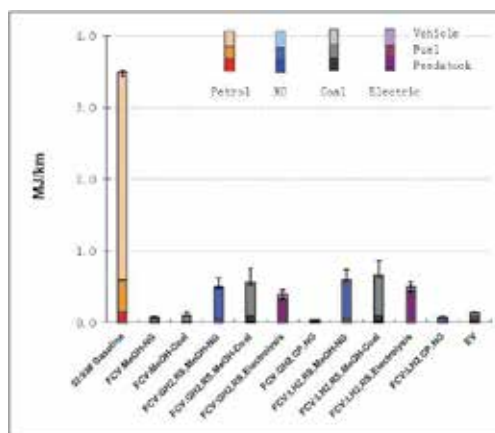


Fig. 4. Comparison of WTW petroleum consumptions

Alternative fuels were able to largely substitute petroleum, and therefore import volume of petroleum would be reduced and energy security of the country would be strengthened. WTW petroleum consumption of fuel cell vehicle and electric vehicle pathways proved the above theory (Figure 4). All 11 alternative fuel pathways used less than 1/3 petroleum of the conventional gasoline pathway.

WTW greenhouse gas emissions of different pathways were described as how much grams of equivalent carbon dioxide (g eq. CO₂) emission was emitted when the car travelled 1 km (Figure 5). There were 2 fuel cell vehicle pathways that had lower WTW greenhouse gas emissions than the conventional gasoline pathway. One was fuel cell vehicle with hydrogen generated from natural gas by on-board generator (9% lower); the other one was fuel cell vehicle with gaseous hydrogen produced from natural gas in large central plant (23% lower). Besides, greenhouse gas emitted from electric vehicles using grid power was 12% less than that from the conventional gasoline vehicle.

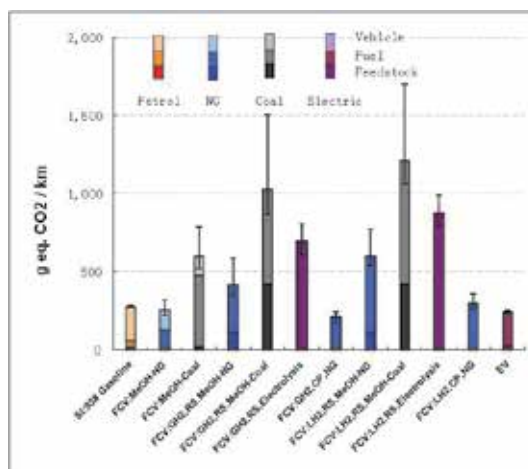


Fig. 5. Comparison of WTW greenhouse gas emissions

4. Conclusion

From the well-to-wheel study, we found that 1) the pathway of battery electric vehicle using grid electricity had some advantage of both fossil fuel and petroleum consumptions and greenhouse gas emissions. It could be concluded that plug-in hybrid electric vehicle that was the combination of conventional gasoline vehicle and battery electric vehicle probably held the same advantage; 2) for fuel cell vehicle, there were few pathways whose WTW energy consumption and greenhouse gas emissions were comparable to the conventional gasoline. So fuel cell vehicle pathways now had little advantage over both the conventional gasoline vehicle and the battery electric vehicle.

Battery electric vehicle and plug-in electric vehicle should be given high priority when China builds the low carbon transport system. Fuel cell vehicle would probably become a promising way in the future. However, electric vehicles in China presently have to face several key problems, such as the high cost of purchase, the absence of infrastructure network, the disposal and recovery issues of batteries, and so forth. Hence, special follow-up policies should be addressed to push the commercialization of electric vehicles in China.

5. Acknowledgment

This work was supported by Ford Motor Company and BP Company.

6. References

- Alternative Energy Program by National Development and Reform Commission. (November 2006). *Chinese Alternative Energy Research Report*, National Energy Administration, Beijing, China
- Ministry of Science and Technology. (December 2010). *12000 New Energy Vehicles Been Put into Operation in 13 Demonstrating Chinese Cities*, January 2011, Available from: http://www.gov.cn/jrzg/2010-12/20/content_1769913.htm
- National High Technology Research and Development Program (863 Program). (October 2010). *Application Guideline for Key Technology and System Integration of Electric Vehicle Program (Phase 1) in Modern Transportation Technology Field*, March 2011, Available from: <http://www.863.gov.cn/news/1010/28/1010283763.htm>
- Shen, W. (April 2007). *Well-to-Wheel Analysis on Energy Use, GHG Emissions and Cost of Vehicle Fuels in Future China* [Doctoral dissertation], Tsinghua University, Beijing, China
- Shen, W.; Zhang, A.; Han, W. & Chai, Q. (October 2008). *Life Cycle Assessment of Vehicle Fuels*, Tsinghua University Press, ISBN 978-7-302-18281-8, Beijing, China
- Wallington, T.; Sullivan, J. & Hurley, M. (2008). Emissions of CO₂, CO, NO_x, HC, PM, HFC-134a, N₂O and CH₄ from the global light duty vehicle fleet. *Meteorologische Zeitschrift*, vol. 17, No.2, (April 2008), pp. 109-116, ISBN 0941-2948
- Xiao, B.; Chen, G. & Zhang, A. (2005). *Life cycle assessment report of clean coal power technology*, Tsinghua University & China Coal Industry Clean Coal Technology Engineering Research Center, Beijing, China
- Yang, J. (April 2011). *CO₂ reduction pathways of China transportation sectors under global stabilization target* [Doctoral dissertation], Tsinghua University, Beijing, China

Plug-in Hybrid Vehicles

Vít Bršlica
University of Defence in Brno
Czech Republic

1. Introduction

The plug-in hybrid vehicle (PHEV) represents the reaction of automotive industry on the green policy, to reduce the pollutions and the fossil fuels consumption in transport. The oil price is permanently rising and the oil import makes unpleasant dependence of the national economy on the non-stable countries, because the road transport is nowadays completely dependent on the oil fuels. The electric drive is ready for use in the vehicles many years, it is optimal for control and it offers the maximal efficiency, but there is no suitable battery available in this time for all the day vehicle energy supply. But most of cars in household are typically used in common commutation cycle, with average daily portion under 50km and they are only occasionally used for longer trips in weekends or holidays. For such range is the battery available with acceptable weight and price. If users do not like to hold and care two cars, the electric one for commutation and the second one with petrol engine for longer trips, the PHEV is an optimal solution, combining both drives and the suitable cooperation between both power sources can give additional profit; also many materials and components for the second car - body, wheels and suspension - are saved. However it must be said that having better battery (or similar electrical energy storage device), the presence of generator and internal combustion engine (ICE) is not necessary and the PHEV would be reduced to the much simpler battery operated vehicle (BEV), although the running engine produces some "free" heat which can be with advantage used for air-conditioning. The green energy production from renewable power sources or from nuclear power plants grows up and the night charging can solve the oil fuels reduction in the road transport.

2. History of EV and HEV

In the beginning of auto-mobility the electric drive was more successful, than engines with internal combustion. The previous steam engines, very famous from railway locomotives, were also not suitable for mobile lightweight applications, due to their big mass and the need of water, which was permanently wasted in open system without condensation.

In the road passenger transport for very limited distance (due to low speed on roads for horses) and for the sport activities was electric motor (EM) with a cheap lead acid battery and simple speed control very reliable and easy operable. Looking in the historical records, the first vehicle over 100km/h speed limit was electric vehicle and also the number of registered vehicles with EM was equal to other kinds of drive. Only after the Ford's mass production of cheap vehicles with engine the ratio of electric vehicles decreases. Then with

better roads, growing speed and operating range consequently, the low battery capacity and the slow long-lasting charging process beat in competition the electric vehicle in the road transport. Only the cable supply was suitable to compete in the city transport (trolleybus) and the battery supply remained only in low speed local transport, like door to door milk and mail delivery, shipping in the production halls or in the railway stations, and in the last decade also some golf carts and neighbourhood electric cars can be find in the market offer.

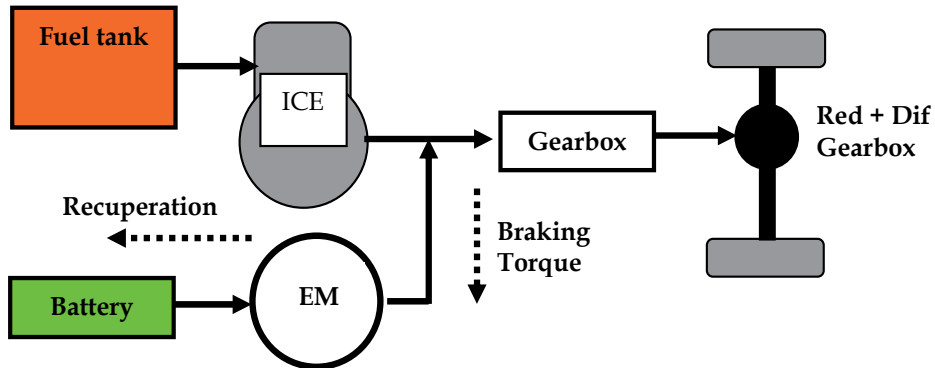


Fig. 1. Typical configuration of common hybrid vehicle with parallel power flow

Hybrid vehicles (HEV) with combination of engine and EM bring back the electric drive into vehicle traction. They are on the market over ten years and their second generation is offered now. First HEV were only from the Japanese production, but in last few years every automotive production group presents at least one car with electric hybrid drive. Such vehicle is certainly more expensive in manufacturing, but the advantage of HEV is its reduced fuel consumption, primarily in the city cycle with low average speed, in which the standard ICE vehicle has higher consumption (lower mileage), comparing with land transport at much higher speed. Out of city the fuel savings are not detectable.

3. Hybrid vehicles

The typical HEV (Fig.1) has only low power EM, which assists in the phase of vehicle acceleration and again in the braking, when it can recuperate the part of kinetic energy into battery for the next acceleration. The efficiency of this cycle (braking – acceleration) is not very good and about 50% of energy is lost, but in often repeating of this cycle at each traffic lights, the fuel saving is important. The energy in one cycle is not big; therefore only small battery can be used. The battery life in the number of cycles is very important, because it is not acceptable to change this battery each month. Fortunately, the reduced depth of discharge (DOD) extends the length of lifetime very much and this low ratio between the energy of one cycle and the energy of the battery is the way, how to use one battery pack up to five years with total number of cycles over 100 000.

The HEV principal scheme can be followed in Fig.1, where it can be observed the parallel power ways from both torque sources to the wheel. The EM can work not only in motor run, when it produces the torque and mechanical power from electric energy, but it can be easily switched into generator run, when the mechanical power from kinetic energy of vehicle is

changed into electric energy, recuperated back to battery. The advantage of EM presence is not only the energy recuperation, but also the torque production at any speed, like it was at old steam engines. No kind of ICE is able to produce the torque at zero speed and moreover there is some minimal value of crankshaft speed, called idle run, under which the ICE stops. To keep the ICE in the idle run needs also some fuel and in city transport the standing at the crossroads is very often and very long lasting. The engine stopping at any occasion and its automatic starting connected with touch of clutch pedal, known as STOP-START system is also effective, but it does not eliminate the energy wasting in brakes and the fuel consumption for acceleration. Also the clutch wear is much higher than in the case of vehicle accelerating by EM torque.

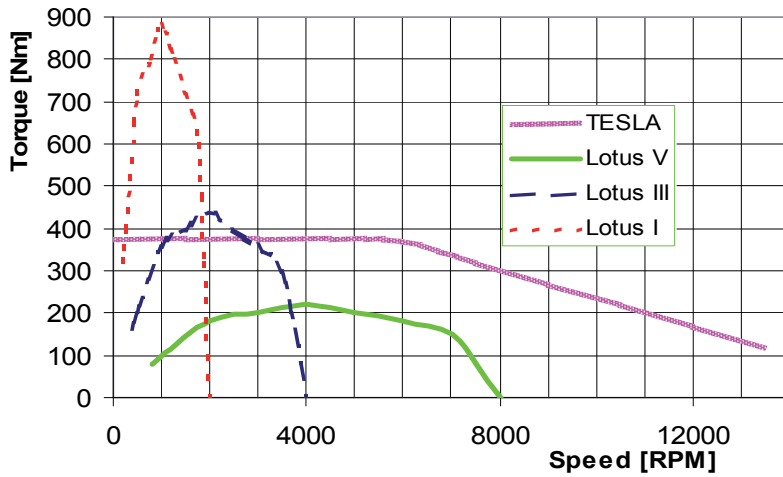


Fig. 2. Mechanical characteristics of EM vs. ICE with gearbox ($r_{III}=2, r_V=4$)

3.1 EM advantages

The comparison of EM and ICE mechanical characteristics is in Fig.2 and it can be said here, that any EM can have the same characteristic if it is supplied from suitable inverter. Each EM can be for short time overloaded, when increased current gives increased torque and the torque is to disposal from zero speed. Also each kind of EM can recuperate the energy working in generating mode, the negative (braking) torque reverses the current back to the source. The speed gap between the zero and idle run speed of ICE can be reduced using the variable-ratio gearbox. In the gearbox, when the speed is reduced, the torque grows up inversely. The higher is the gear ratio, the lower is the speed and the higher is the torque keeping the same power (neglecting losses). The mechanical power is given by:

$$P = T \omega \tag{1}$$

where T is the torque in Newton-meters and ω is angular speed in radians per second. The common technical unit of speed n is revolve per minute, the transformation formula is:

$$\omega = (2 \pi / 60) n \approx n/10 \tag{2}$$

The gear ratio, according to (1) gives:

$$r = n_2/n_1 = T_1/T_2 \quad (3)$$

From this mathematics and from Fig.2 there is evident, that at high speed the ICE has always enough power, therefore it needs the help from EM2 primarily in the area of low speeds, where the power is also small as results from (1). Low power EM and low power battery are not able to drive the vehicle at speed over 10km/h. For fully electric drive the concept must be modified.

4. Why plug-in hybrid?

Many car owner do not use the car for business travel, and they do not drive daily more than 50km. for such distance it is not necessary to spend any petrol, because this distance can be easily realized by energy from battery, but great disadvantage of electric drive is, that the “empty” battery cannot be recharged in minutes and in the case of longer trip, the safety return is not sure. Also in some rare trips during holidays etc. cannot be realized by electric vehicle that means you must have or purchase another car. All these problems are solved by serial hybrid with greater battery, which can be driven first 50km from battery only and in the case of longer trip; the engine is started and operated in the optimal efficiency work point with constant power and speed. The generated electricity is either used for motors supply or in case of low load is simultaneously stored in empty battery.

The PHEV must be able to work in electric mode only at any speed, during the short trips under the daily limit. Therefore it must have strong enough electric motor EM and this condition results in serial concept hybrid, when the ICE is not mechanically connected with wheels, because its help is not necessary (Fig.3).

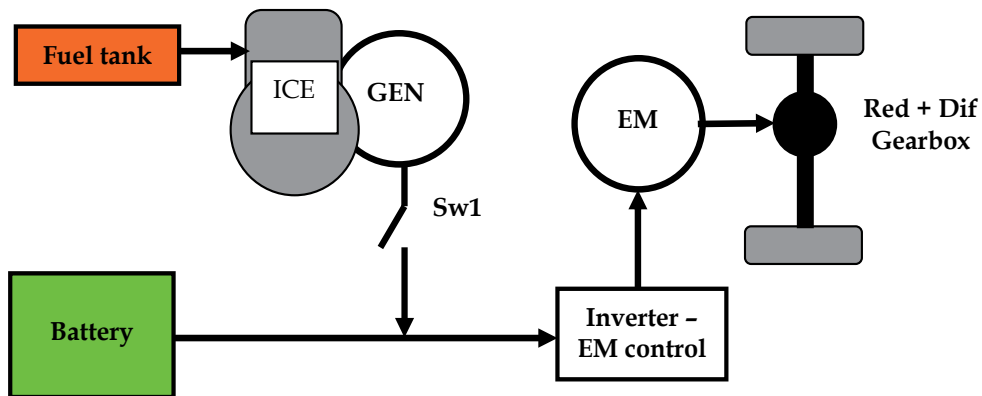


Fig. 3. Typical configuration of PHEV with serial power flow

Omitting the generating unit in Fig.3, the PHEV is reduced into the simple BEV and only the parameters of battery determine the operating range of this vehicle. The idea of hybrid concept wants to eliminate the danger of empty battery in case of some complication in traffic like detour, lost way, waiting, etc. Because the battery charging is supposed from home plug during many hours and there are no charging stations in streets, the best way how to be mobile permanently is to have the energy source for charging on the board. The

power of the charger does not have to be as big as is the EM power, because in the periods with full power both sources, generator and battery, work together.

All the mechanical energy output from ICE is converted by generator into electricity, which is typically divided between EM and battery, when EM does not work with full power. If the EM is loaded more than is the maximal power from the generator can be, then the battery must deliver the difference. It is typical in acceleration and in uphill slope, both lasts only very short time in second or minutes. The ICE has not to be so strong (maximal power) as it is in a petrol car and it can work here always near the optimal operating point (Fig.11) with maximal efficiency and minimal emissions.

It is not the new idea to have the Engine-Generator unit on board, but to develop and realise the mass production of PHEV it is a merit of American company Chevrolet (Fig.4). However their vehicle is about three or four years in prototype and they solve intensively the problem of optimal battery. The development and new inventions in this area are very fast and it is a problem to start the production of any battery, if tomorrow some principally better technology would appear.

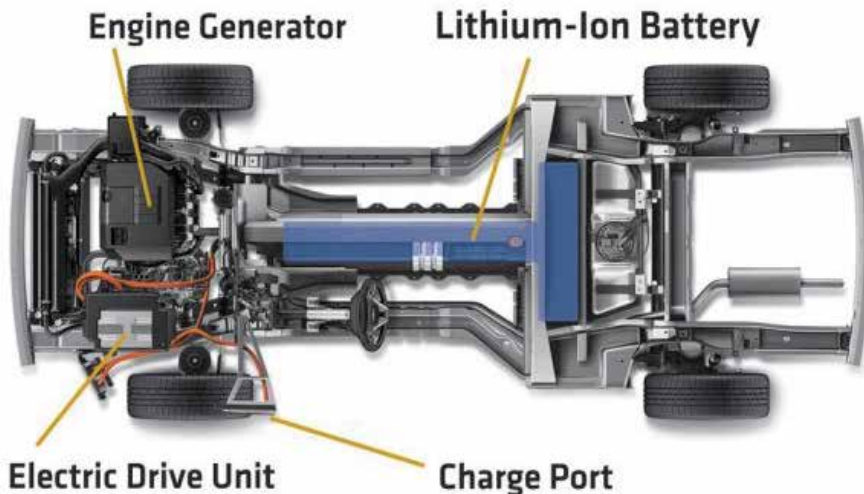


Fig. 4. Chevrolet Volt Chassis Version 2008

But it is not only the batteries production technology, also the electric motor for traction manufacturing needs new knowhow in the automotive industry. Also the manufacturers of auxiliary components must prepare new products and some problem can create the dangerous voltage in the vehicle, because the battery voltage can reach up to 300V and the motor supply voltage AC up to 400V phase to phase or DC up to 600V. It is not the same situation as is in traditional 12 or 24V and the isolation check in metallic body must be perfect. But such systems are already developed and verified in trolleybuses e.g.

5. How to dimension the PHEV components

The problem of this PHEV concept (Fig. 3) is how to reach high efficiency of all the drive train (ICE, Generator, Battery, Inverter, EM, Gear) for low power light vehicle with total

mass about 1500kg. Its average power out of highway at 80 or 90km/h limit is only 5 - 10kW and the peaks are up to 100kW for dynamic drive in modern traffic. The situation in ICE cars is more dependent on the engine volume. The same model can be sold with three or more engines and each of them offers other dynamics. The power and the torque peaks are in case of ICE fix and they can only decrease due the wear, not optimal intake parameters or control, the EM is oppositely easily overload capable, of course for short time only, because the overload brings higher losses and the temperature rise consequently. Big traction machines have on their labels not only rated power but also one-hour power, which is 20 - 30% higher depending on the EM size. For vehicle acceleration in seconds the overload can be easily 100% or more, because after this period the torque and current falls down and the winding temperature also decreases back fast (with effective ventilation). From simulation in Fig.5 it can be seen, the differences between the power in acceleration and in constant speed drive for flat surface.

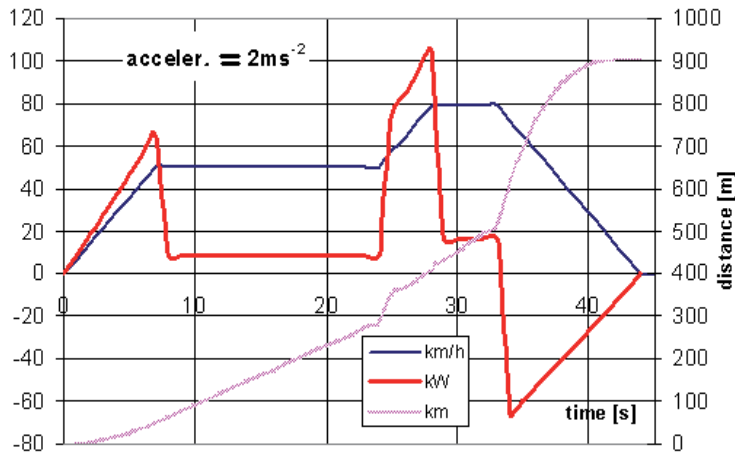


Fig. 5. Time dependence of Power, Speed and Distance for exemplar cycle

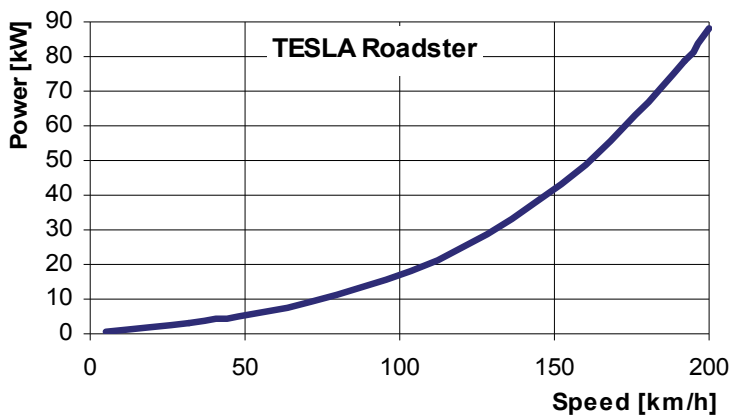


Fig. 6. Power vs. speed for EV Tesla Roadster on the plane

The dependence of the power on the vehicle speed in steady state is in the Fig. 6 for strong sport car Lotus, which is professionally remade by TESLA Cars Company for the electric drive. Because at higher speed the aerodynamic drag represent the highest force, the power grow with the speed is nearly quadratic.-Tesla Roadster has no generator, but it can be interesting to compare it with two PHEV. The selected data of two typical PHEV are in Table 1 briefly compared with top power BEV Tesla.

Mark	Tesla	Chevrolet	Mitsubishi
Model	Roadster	Volt	iMiEV
AC Motor	185kW	120kW	47kW
Maximal torque	375Nm	320Nm	180Nm
	Asynchronous	Asynchronous	Permanent Magnets
Maximal speed	14.000rpm		7500rpm
Voltage	370V	320V	330V
Battery	56kWh	16kWh	16kWh
Mass		180kg	
Generator	NO	53kW	---
Maximal speed	200km/h	80/140km/h	130km/h
Maximal cruise	450km	64+960km	160 km
Vehicle mass			1080kg
80% SOC			30min

Table 1. BEV and PHEV parameters comparison

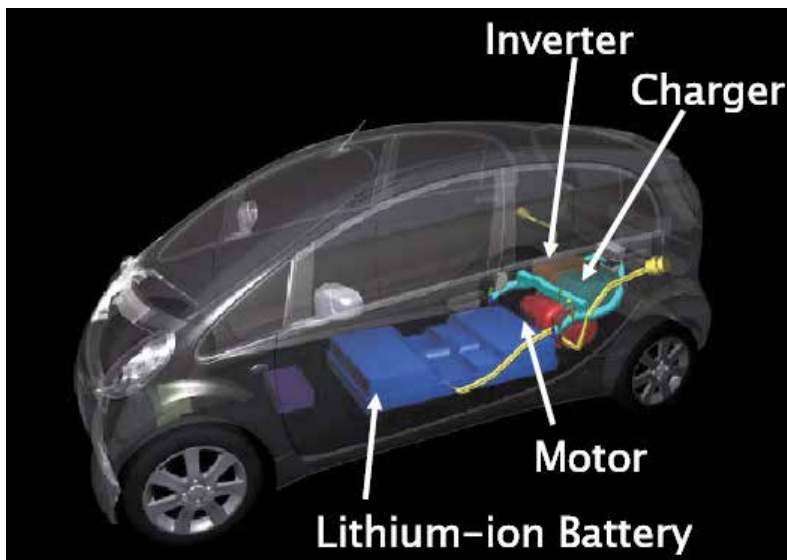


Fig. 7. Mitsubishi iMiEV through view

Chevrolet's Volt is the first series hybrid concept car shown by a major manufacturer. Its 1,0-liter (1000ccm), 3-cylinder turbocharged engine runs an on-board 53kW generator that recharges a 16kWh lithium-ion battery made of 80 four-volt cells. Main components distribution on the chassis is in Fig.4. The engine-generator has typical handwrite of car engineers and not only its size, but also its location under front hood with long exhaust pipe. Guessingly 200kg mass can be replaced by another battery with more than twice longer range. The small generator for occasional long trips could be situated in backside trunk, or in tender, which could be hired. The fix mounting of ICE needs all the servicing as standard ICE vehicle, oppositely to BEV, which needs no regular service. Because of rapid evolution in battery technology GM newly opened advanced battery laboratories (3 000 square meters).

Opel Ampera is a Twin sister car to the Chevy Volt for European market. The other leading European producers are preparing their program in EV. New producers like Fiskers, Aptera, Th!nk and many other are only the small companies involved in EV development and they can bring some revolutionary solutions, because there are strong restrictions, in big companies, based on tradition.

Mitsubishi is leading Japan Company in preparing EV with lithium batteries. Its small car iMi with ICE has its twin with electric drive, which is presently (2010) long-term tested over all Japan. The main parts arrangement can be seen on Fig.7.

5.1 Motors

The EM choice is the most important part of PHEV design. As was mentioned above the EM is easily overloadable, its power P depends on the voltage U and current I from the battery:

$$P = \eta U I \quad (4)$$

where η describes the motor efficiency. This power is equal to that one from (1). Very simplified, it can be said, that the torque is given by the EM current and the EM speed is given by voltage:

$$T = K \Phi I_a \quad (5)$$

$$U_i = K \Phi \omega \quad (6)$$

These equation are exact for DC motor, where Φ is magnetic flux and I_a is the armature (or rotor) current and U_i is induced voltage in the armature, which is slightly different from the terminal voltage because of the voltage drop on the internal resistances. The AC motors are more complicated, they have more phases, in case of induction (or asynchronous) motor (AM) there is no separation of field circuit and armature circuit, but it is not the main goal of this book and more can be find in any electric machines textbook. The important for motor control is how to change the voltage, and in the case of AC motors the frequency must be also changed (together with voltage), because instead of mechanical current commutation in DC rotor, the switching technology must be used to create the three phase system in converter. The output frequency f gives the speed of AC rotor:

$$n_s = 2 \pi f / p \quad (7)$$

where p is the number of pole pairs. The rotor of AM is slightly slower, that difference between the speed of the rotating field n_s and the real rotor speed n is called slip and its value is typically 3 - 5%, changing with the load.

DC motors are the first kind of traction motors, and in the period before power electronics their control was only by resistance controllers and serial-parallel switching. DC/DC inverters improved the efficiency of DC motor in controlled drive, it is cheaper than the DC/AC converter, but DC motor is not so robust and it needs often maintenance due to carbon brushes.

Brushless DC is in principle the DC with permanent magnets (PM) for field creation on the rotor and static electronic inverter, instead of collector with 3 segments on the rotor; it has 3 winding terminals on the stator, supplied from the 3-legs bridge, working as a commutator. Because the rare earth PM (REPM) are very expensive and very sensitive, namely to temperature and corrosion, they find place mostly in low power (0,2 - 2kW) EM for bikes, where they are in low volume only.

In the power range 20 - 200kW for passenger cars the **induction machine** offers its perfect robustness at low price and also the standard inverter supply, which widely used in industry and also in new trams.

The switched reluctance machine (SRM) has also very robust and simple construction with no rotor winding and it can be very prospective, but it is not yet widely used. It needs special inverter, which supposes some larger volume production for a good price.

	DC Brush Type	Brushless DC (Permanent Magnet)	AC (Induction)
Peak efficiency	85 - 89	95 - 97	94 - 95
Efficiency at 10% Load	80 - 87	73 - 82	93 - 94
Max. RPM	4 000 - 6 000	4 000 - 10 000	9 000 - 15 000
Cost per shaft kW	\$120 - 200	\$120 - 180	\$60 - 100
Relative Cost of Controller	1	3 - 5	6 - 8

Table 2. Typical Electric Motors 20 - 200kW Parameters

The survey of EM basic properties is in Table 2. It must be said here, that all parameters in this Table are valid for power range from 20 to 200kW and with growing power grows up also the efficiency and oppositely the maximal speed falls down.

AC Motor	DC Motor
Single-speed transmission	Multi-speed transmission
Light weight	Heavier at equivalent power
Less expensive	More expensive
95% Efficiency at full load	85-95% Efficiency at full load
More expensive controller	Simple controller
Motor/controller/inverter more expensive	Motor/controller less expensive

Table 3. Electric Motors Properties Comparison

Another EM properties comparison can be read in Table 3 from the drivetrain design point of view.

5.1.1 Motor volume

The volume and mass of EM is given by its torque and not by the power. Because the vehicle mass should be minimized, the EM must be designed on maximal possible speed and minimal torque consequently (1), of course with respect to efficiency and cooling ability. Therefore no direct drive without gear is optimal and there is in Fig.3 the reduction and differential gearbox between EM and wheel. Increasing the speed increases the frequency, which should not exceed 400Hz. It is better to keep the frequency under 200Hz and for two pole AM it can give the speed from (7) $n_s = 12\,000\text{rpm}$. For the vehicle speed $144\text{km/h} = 40\text{m/s}$ and the wheel circumference 2m its rotation speed n_w is:

$$n_w = 60 * 40 / 2 = 120\text{rpm} \quad (8)$$

Then the total ratio between the AM and the wheel must be from (3):

$$r_{\text{Total}} = 120 / 12\,000 = 1/100 \quad (9)$$

which can be realised by 3 pairs of cogwheels minimally.

5.1.2 Motor losses

Beside of typical mechanical losses due to friction and ventilation losses, which both are speed dependent, there are in the EM specific electrical losses and these can be divided into two groups. The current depend losses, or Joule losses grow up with the square of current:

$$\Delta P_J = R_a I_a^2 \quad (10)$$

and looking in (5), they grow up with square of torque.

The other group of losses has origin in the magnetic circuit (iron) due its alternating flux. These losses can be described by formula:

$$\Delta P_{Fe} = k m_{Fe} \Phi^2 f^{1.6} \quad (11)$$

where m_{Fe} is the AC iron mass. The grow up with speed is more than linear, but if the EM has not PM field, the flux can be reduced when there is no need of full torque (5) to reduce the iron losses, but increased current results in the Joule losses grow up. The optimal flux at any speed and power can be estimated. The greatest advantage of controlled flux is at high speed and no torque run (by inertia or downhill), when the PM machine has high iron losses and they are supplied from kinetic energy of vehicle, which means they are braking the vehicle undesirably.

5.2 Battery and electrical energy storage

First EV has been built in the 1835 and 1836 respectively; the speed record 105km/h was also reached with EV in 1899 with lead acid battery. Edison tried to build EV with his Ni-Fe batteries, but without commercial success. From the year 1903 when Ford established 146km/h speed record, the petrol ruled the vehicles power supply, because of its very high energy density, which is about $36\text{MJ/L} = 10\text{kWh/L}$, because the petrol density is only 0.72kg/L the mass density value is over 14kWh/kg . Also the charging power is

enormous, if filling the tank by speed 2L/s the 60L tank can be full in 30s and “supplying power” is 72MW.

Comparing with liquid hydrocarbons, the best available batteries have only 0,2kWh in one kilogram. There are some projects of better electric storage devices based on electrostatic principle, but they are only in patents and no sample has been presented. In the electrochemical batteries, the most promising are lithium-air, which can change completely the electric vehicles during next ten years. Special problem of batteries with numerous cells is their cooling (and heating) system keeping optimal temperature in all the battery pack and the voltage distribution control (charge management) for in series cells avoiding overcharging which can damage the cells with danger of explosion and fire.

Two parameters must be watched if looking for optimal battery, the energy density and the power density. Survey of suitable batteries for EV is in Table 4.

Nearly all the 20th century there was no new chemistry in secondary cells (rechargeable) introduced and only the technologies were improved in two basic batteries.

Lead-acid is wide spread battery for engines starting and for emergency power supply, the Edison alkaline battery nickel - iron Ni-Fe was slightly improved by cadmium Ni-Cd. This kind of batteries was mostly used for railway vehicles and communication technologies. The silver based chemistry Ag-Zn was able to supply electric vehicle, but the silver is not widely available (precious metal) and such batteries can be used only in very special purposes for military or space technologies.

	Lead-Acid	(Ni-MH)	Lithium-Ion
First Use (Commercial)	1859	1989	1991
Current Use (Automotive)	Traditional 12-volt batteries	For today's generation of HEV	Under development for PHEV and BEV
Strengths	Long proven in automotive use; Price	Twice the energy/weight as lead-acid	About twice the energy content of Ni-MH
Weaknesses	Heavy; low energy/weight ratio for EV	High cost (four times the cost of lead-acid)	Expensive until production volume
Energy density	30 - 40Wh/kg	65 - 70Wh/kg	100 - 150Wh/kg
Recyclability	Excellent	Good	Very Good

Table 4. Electrochemical Batteries Evaluation

Only the last decade of the 20th century and the new electronics devices, connected with communication and information technologies, bring the progress in the cell chemistry. The lithium ion and lithium polymer batteries replaced in few years the Ni-Mh in cellular mobile phones, notebooks and other audio and video portable players. The Ni-Cd has been also replaced in its last important area of use, which was hand-tools supply. This new batteries generation has, up to three times, higher energy density, then old chemistries, which give new possibilities for electric vehicle construction. Lithium is very promising and many new prospective chemistries with lithium are invented and developed, the survey is in Table 5.

Chemistry	Company
Doped Lithium Nanophosphate	A123
Manganese Spinel	LG / NEC
Lithium Nickel Cobalt Aluminium Oxide	Panasonic
Lithium Manganese Oxide	Hitachi
Lithium Cobalt Oxide	Commercial offer
Lithium Titanate Spinel	Altair Nano
Lithium Iron Phosphate	Lishen
Lithium Manganese Titanate	EnerDel

Table 5. Lithium Battery Chemistry Survey

The greatest problem of any battery for electric vehicle is beside its lifetime in cycles, but also its low internal electric resistance, thermal stability between -40 to +60°C, shock resistance, non toxicity, fire safety, but mostly its charging properties and its price, which can create important part of the vehicle price. For the car construction there is important also the volume and mass energy density. The cheapest chemistry is the lead acid, which his used in all cars for engine starting, but in electric vehicles only in old neighbourhood vehicles and golf cars. The modern hybrids use Nickel – Metal Hydride chemistry or Lithium, which is in strong development connected with communications and information technology produced therefore only in small cells about 2Wh. Tesla Car Company started the production of their BEV, which was designed few years ago with old technology lithium battery consisting from 6 831 small cells a little bigger than AA size (8Wh each).

5.2.1 Charging

The big problem for EV is the long time for charging the battery, which is not comfortable for permanent transport in business, comparing this time with gasoline filling, where the entire tank can be filled in the time under one minute. The calculation of the power of such filling results in megawatts. The fast charging brings not only the problems with battery cooling, but also problem with power peaks in grid, because there are no reservoirs for electrical energy (EE) similar to tanks for petrol and rapid charging results in high power peaks:

$$P_{\text{Charge}} [\text{kW}] = 60 E_k [\text{kWh}] / t [\text{min}] \quad (12)$$

To charge 10kWh (which is equivalent energy of one litre petrol) in one minute, from this formula, gives the charger power 600kW (!). Because the charging is not very efficient, and more than 100kW are the losses – the heat, such rapid charging connected with energy conversion is impossible. The only hope is here the storage of EE in electrostatic field, which is not connected with energy conversion.

The rapid charging can be more effective if there is not required full charging. The partial charging is described by SOC (state of charge) in percent of full capacity. Similarly is defined the DOD (depth of discharge), which define the percent of full charge, which was taken from battery and partial discharging extends the lifetime significantly.

The energy for charging is due to chemical processes much higher, than is the energy received during discharge. It can be demonstrated on the lead acid cell, which is discharged at 2V and for each 1Ah must be recharged 1,2Ah at voltage 2,4V. From this can be easily calculated the efficiency:

$$\eta = 2 * 1 / (2,4 * 1,2) = 0,70 = 70\% \tag{12}$$

and similar value is valid also for the other chemistries.

5.2.2 Electrochemistry

Lead acid: The first in history secondary battery (1859), mass produced for ICE starting in all vehicles, for emergency power supply and UPS (uninterruptible power supply), it is very cheap, with number of full cycles about 400, but special construction for traction has increased number of cycles to 2000. The sulphuric acid electrolyte is very corrosive and the lead is only metal, which resists in this medium. The sealed construction and gel electrolyte allow using this battery in any position without danger of stain or effusion. Its energy density is up to 40Wh/kg, due its price it is very popular for EV drives, but the operating range is very limited and the lifetime less than 5 or 10 years respectively. Another disadvantage is the danger of sulphatizing, which can be prevented by immediate charging after run that means the battery cannot be left discharged.

Nickel or Alkaline battery: The alkalic electrolyte with NaOH or KOH is less aggressive and Edison realized the first alkaline secondary cell with Nickel and Iron electrodes so called Ni-Fe battery. Nickel cadmium Ni-Cd is an improved chemistry with higher power density. The voltage of cell is only 1.2V, but the lifetime of such battery with minimal maintenance is about 20 years. It is mostly used in railway wagons and in hand tools. The toxic cadmium was about 20 years ago (1989) successfully substituted by metal hydrides in so-called Ni-MH cells, with better energy density. This chemistry is used in Japan HEV.

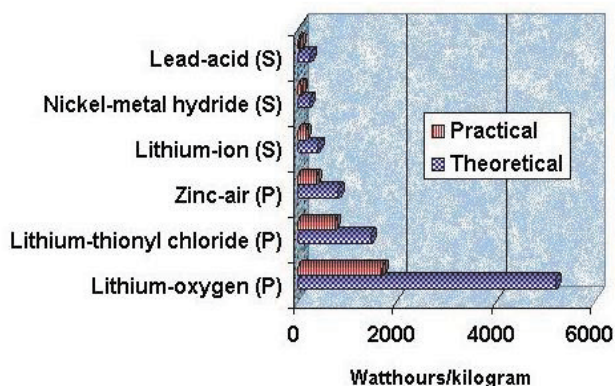


Fig. 8. Energy density in various battery chemistries

Na-MCl₂ chemistry has similar parameters with Ni-MH and also Ni-Zn is from the same family with similar gravimetric density but weaker volumetric density.

Lithium battery: Very reactive lithium has highest potential, but the technology was mastered only in 1991 (by Sony). The lithium ion cells LiCoO₂ with rated voltage 3.75V are widely used in cellular phones and notebooks; the battery with serial connected cells must

have electronic balancing system to avoid the overcharge at any cell. In last few years the big cells for traction are produced, with capacity up to 2 000Ah and new chemistry LiFePO₄ (lithium iron phosphate) Table 5. Comparing to lead acid the fast discharge of lithium battery does not decrease the capacity, but the energy is lower due to joule losses in internal resistance.

The theoretical specific energy of lithium thionyl battery is 1 420Wh/L (explosive TNT has 1 920Wh/L) and the theoretical specific energy of lithium-oxygen is over 5 000Wh/kg, which gives more traction energy than the petrol of the same volume or weight, if the ICE efficiency is taken into account (Fig.8).

A lithium-titanate battery is a modified lithium-ion battery that uses lithium-titanate nanocrystals on the surface of its anode instead of carbon. This applied nanotechnology gives the anode a surface area of about 100 square meters per gram, compared with 3 square meters per gram for carbon, allowing electrons to enter and leave the anode quickly. This makes fast recharging possible and provides high currents when needed

Other chemistries: In last forty years after the renaissance of EV many new electrochemical batteries have been studied, but they did not convince. High temperature NaS has good parameters, but bad maintenance, Zn-Br needs two tanks for pumping electrolyte, which stores the energy similarly as the vanadium battery, suitable more for stationary applications. Special category is Ag-Zn chemistry with super performance, but due to limited silver cannot be widespread system and it is used only in the very special military or space applications.

5.2.3 Electrostatic storage

The super-capacitors (SC) are the first revolutionary technology, which can be compared to electrochemical batteries in energy density and have much better power density, suitable for the power peaks in short time.

Quantum Battery (QB) promises the surprising energy density, it is based on the discovery of quantum effect on TiO₂ sample, measured by Swiss inventor and described in patent application. The rutile crystals, 15nm long, absorb at 180V the energy with density 8 – 12MJ/kg. It is very optimistic, but without working prototype and with the theory of photon resonance only. Author describes cheap technology with possible market price 15USD/kWh. The predicted low self-discharge (about 6,3 % per month) and long durability would be optimal for EV.

EEStore from Cedar Park, TX, also announces the promising technology of high voltage solid dielectrics super-capacitor based on thin layer (nanometers) with high permittivity barium titanate composite. In the last period the power density 1200kJ/kg is referred, which is four times more than electrochemical battery, moreover without losses and with short recharging time less than one minute. But nanotechnologies in batteries with lithium chemistry can be also competitive, as is mentioned above.

5.3 PHEV auxiliary components

As it is mentioned above, the absence of running ICE in PHEV means, there is no source of thermal energy suitable for cabin heating. The heating as well as cooling, simply all the cabin air condition can be realised by heat pump with electric drive, which must be developed for next PHEV. The heat pump usage can save significantly the spending of limited battery energy for non traction purposes.

There is also no mechanical drive of powered steering pump, powered braking without running ICE and the modern car is supposed to have all these facilities, which must be realised by local electric drives.

The lighting, dashboard and cabin electronics need low voltage supply, which must be also realized by power electronics DC/DC inverter, instead of rotating generator.

All here listed components that must be developed for PHEV can later serve also for BEV, when better battery will be available, but these components design, technology and manufacturing must be realized and tested before starting the PHEV mass production.

6. Efficiency

The liquid hydrocarbons are optimal for transport due their extremely high energy density when in 50kg tank can be stored 500kWh, it is of course the thermal energy, but if the total efficiency (of all the energy conversion from fuel to heat, mechanical force on piston, torque from crankshaft, via gearbox and axis to the wheels) is only 16 - 24%, as is calculated in Table 6. Taking the middle value 20% there is the traction energy 100kWh to disposal. The common passenger car with such petrol can run between 500 and 1000km. It is about 0,2kWh/km and for 60km must be in the battery more than 12kWh.

In the Table 6 is the survey of all components of drive train with typical efficiencies and for more vehicles and operating modes is the total efficiency calculated. From first two rows is evident, that the classical petrol car in city transport has 50% increased fuel consumption, because its engine works with lower efficiency at low power (Fig.11). The new symbols in Table 6 are MGB for manual gearbox, REC for AC/DC inverter (rectifier), INV for DC/AC inverter and RDG for reduction and differential gearbox.

The PHEV without ICE has efficiency 77% if calculated from the battery energy, but only 54% if calculated from the plug. If the PHEV charges its battery from running ICE, its total efficiency can fall under the classic vehicle in the city traffic and if its ICE will be used only for EM supply its efficiency is still under the classic vehicle. Last example in the table is for Diesel - electric drive on big locomotive (Fig.9), where due better efficiencies of big power components is also the total efficiency satisfactory.

	ICE	GEN	MGB	REC	BAT	INV	EM	RDG	TOTAL
Classic Car	0,30	---	0,85	1,00	---	---	---	0,95	0,24
Classic Car - City	0,20	---	0,85	1,00	---	---	---	0,95	0,16
PHEV - Electric						0,95	0,85	0,95	0,77
PHEV - Electric					0,70	0,95	0,85	0,95	0,54
PHEV - Charging BAT	0,30	0,85	---	0,95	0,70	0,95	0,85	0,95	0,13
PHEV - No Charging	0,30	0,85	---	0,95	1,00	0,95	0,85	0,95	0,19
Loco D-E - 1MW	0,38	0,90	---	0,95	1,00	0,95	0,90	0,95	0,26

Table 8. Efficiency of Drive Train for Various Vehicles

6.1 Diesel-electric transmission

Diesel electric transmission is effectively used in locomotives for rail transport, but there is no energy accumulator in the power train and the generator - inverter - motor (Fig.9) works

here as an alternative to mechanical shafts and gearboxes, with better flexibility and high efficiency. It is also the rated power of components, which gives the nice efficiency, because the motors are in the power 100 – 1000kW. The greater rated power the higher efficiency is standard property of every machine.

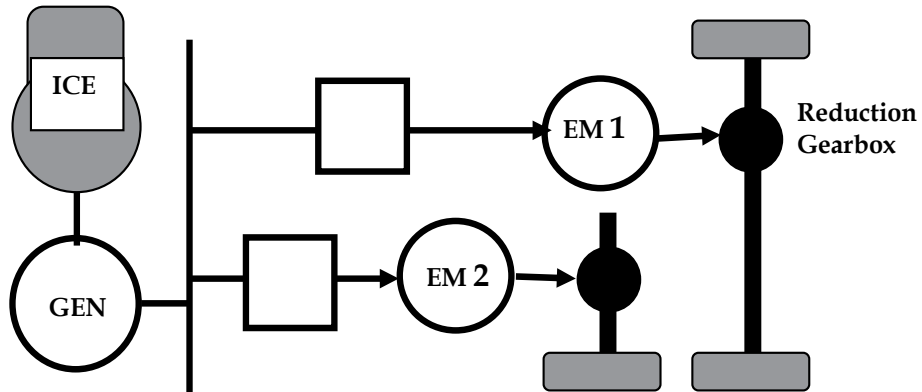


Fig. 9. Typical configuration of Diesel – Electric Locomotive (serial power flow)

If the PHEV would be, after spending the energy accumulated in battery from the grid, operated similar way as this diesel – electric loco without charging the battery from engine and the battery would be used only in the same mode as is in actual HEV, that means for accumulating of kinetic energy during recuperative braking, the electric power train efficiency has not be so bad.

From this locomotive can be also copied the multi-motor scheme when each axis has one EM. For road vehicle it can be the advantage if any wheel has its motor, but small motors are again less efficient. Possible solution can be the drive management with switching-off the motors at constant speed, when the individual EM for each wheel allows the optimal regenerative braking with ABS control, preventing the wheel blocking, because every wheel torque and speed can be controlled separately. The storage system can return the energy from braking into next acceleration and reduce the energy consumption, but it is similar as in standard hybrid, when greater battery capacity allows to store not only the energy from one acceleration - deceleration cycle, but also (in mountainous countries) to exploit the potential energy from downhill drive for next uphill climb.

6.2 HEV efficiency

What is the fuel savings composition in HEV is briefly explained in Fig.10, where the negative influence of increased vehicle mass (battery + EM) represents the first column. The next three columns are contributions from HEV technology given by no ICE idle run, ICE speed control and EE recuperation by electric braking.

The standard HEV as is in Fig.1 saves the fuel only in the city traffic. The ICE specific fuel consumption is in Fig.11 and it is evident, that for the torque under 15% of rated value, the fuel consumption grows more than twice.

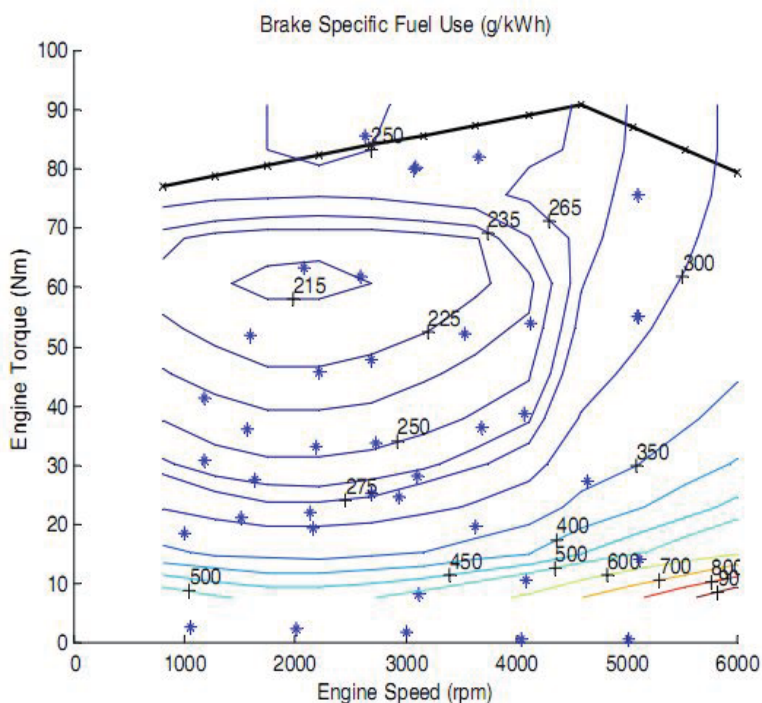


Fig. 11. Specific Fuel Use for ICE in Honda Insight

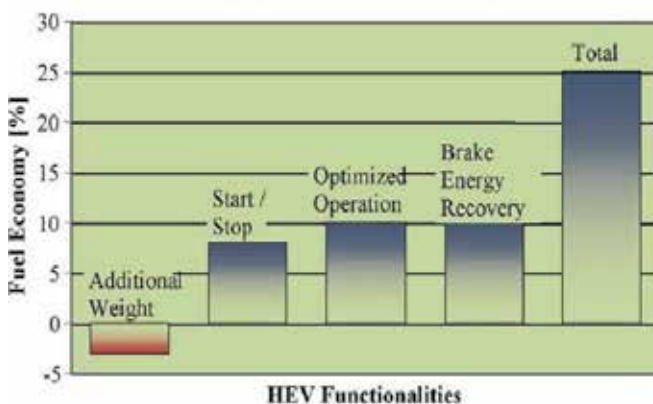


Fig. 10. Fuel saving components of HEV in city transport

7. Options

The serial PHEV is also good alternative for military vehicles and other vehicles for operation out of civilization and out of grid, where the battery can be charged only from Diesel-generator. Here is not the advantage of night charging from the plug, but the generator with battery can serve as an independent power source for local DC or AC grid

from inverter. So it can be said, that such vehicle is more plug-out than plug-in, but its composition is similar, maybe with higher ICE and generator power.

7.1 PHEV without generator

The last time concepts of PHEV suppose also solutions with mechanical connection of ICE to wheels in highway traffic mode, when the EM and generator can be smaller and thanks “shorter” drive chain the fuel consumption can be reduced comparing with electric chain. Such concept can separate also the wheels driven by ICE and by EM and the typical front-wheel drive vehicle can be equipped with electric rear-wheel drive.

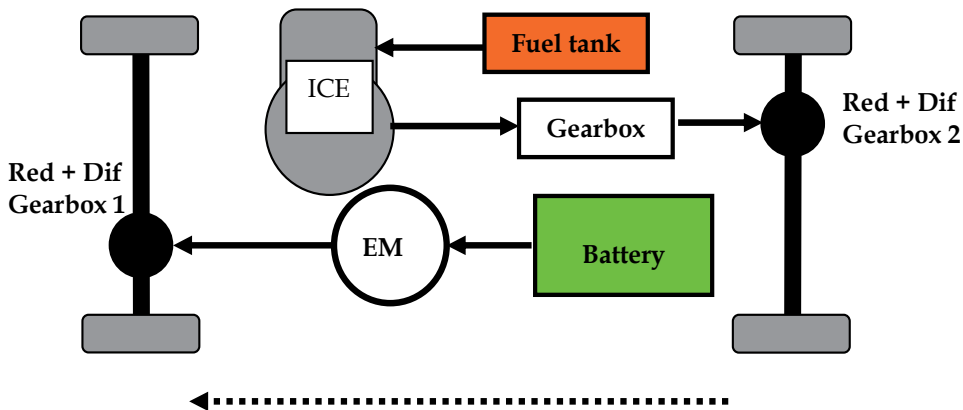


Fig. 12. PHEV without Generator

Because the charging from ICE is not very efficient and does not save the fuel, it is possible to realize the vehicle, where each axis is driven by one motor (Fig.12). For short distance trips the axis 1 is driven by EM supplied from battery and here can be also the energy recuperated from braking or downhill rides. For the long distance trips on highways the ICE drives the axis 2, which is connected to the first axis only by road surface, EM does not help in drive, but it can again recuperate and in low speed drive, when the ICE does not work with high enough efficiency, the driving torque from ICE can be bigger than is necessary and EM can in generator run the surplus energy change into EE and charge the battery. Instead of generator in Fig.3 here is the gearbox (manual or automatic) and the second reduction and differential gearbox, both are from standard production. It is perfect union of two independent drives available in emergency.

8. Conclusions

The reasons for PHEV are

- Ecology, because the energy from renewable power sources reduces the carbon emissions
- Independence on oil import, because practically all suitable fuels for the ICE are produced from oil. Coal hydrogenation was also developed in the war years and in some tropical countries (like Brasilia) there are produced the alcohol fuels from plants

with sugar. For Diesel engines there is produced the oil from plants in the last years, to replace the mineral oils.

- Efficiency, especially in the city transport with low average speed and often stops and traffic jam, where the combustion engine works with very low efficiency and also much of fuel is spent in idle run.
- Safety, due more automatic drive control in electric transmission drive train

The greatest advantage of the PHEV mass production is important oil consumption decrease and increase of electricity production in the night hours when the price is minimal. The distributors are also planning the smart grids in near future based on numerous batteries in PHEV (or battery only vehicles) which can help to control the electrical energy balance in grid for keeping the high quality parameters without voltage dips and sags.

9. Acknowledgment

The Czech Ministry of Education, Youth and Sport Financial Support, Program No. OC169 for COST Action 542, is acknowledged.

The financial support of the Czech Ministry of Defence Program for the Organization Development (University of Defence in Brno) is acknowledged.

10. References

- Bršlica, V. (2008) Super-capacitor integration into hybrid vehicle power source, In *Proceeding of International Conference on Renewable Energies and Power Quality (ICREPQ'08)*, pp. 6, ISBN 978-84-611-9290-8, Santander, Spain
- Bršlica, V. (Sept. 2005), Co-generative Power Source for Electric Car, *Proceeding of VPPC 2005*, IEEE Cat. No.: 05EX1117C, (CD-ROM) ISBN 0-7803-9281-7, Chicago IL USA
- Altairnano, NanoSafe Battery Technology, ALTI 070404, pp. 4, In web *Altairnano.com*
- Buchmann, I., How to prolong lithium-based batteries, BatteryUniversity.Com
<http://www.batteryuniversity.com/>
- Stober, D. (2007), Nanowire battery can hold 10 times the charge of existing lithium-ion battery, *Stanford News service*,
- Fehrenbacher, K. (2009), Reva to Boost Range with Lithium-Ion Battery, *Earth2tech*,
<http://earth2tech.com/2009/01/05/>
- Total Lithium-Ion Battery Sales Forecast to Double By 2012 to US\$13.1B In *Green car congress*,
<http://www.greencarcongress.com/28.11.2008>
- Candace, K. et al., (2007), High-performance lithium battery anodes using silicon nanowires, *Nature Nanotechnology* 3, 31 – 35 pp., December 16, 2007,
- Soinoff, N. Lithium Battery Power Delivers Electric Vehicles to Market, *Scientific & Technical Information*, http://www.sti.nasa.gov/tto/Spinoff2008/t_1.html
- Deguzman, D. (2009), The race for car lithium battery is on, *Green Chemicals*,
<http://www.icis.com/blogs/green-chemicals/> January 7, 2009
- Miller, C. (2008), Electric-Car Battery Makers Seek Federal Funds, December 26, 2008,
<http://bits.blogs.nytimes.com/2008/12/26/electric-car-battery-makers-seek-federal-funds/>
- Parker, R. (April 2009), Chevy Volt Battery Over-engineered Due To Unknowns,
http://www.futurepundit.com/archives/cat_energy_batteries.html

- Byoungwoo Kang & Gerbrand Ceder, Battery materials for ultrafast charging and discharging, *Nature* 458, pp. 190-193, March 12, 2009
- Weir, R. D. et al., (2008), Utilization of poly(ethylene terephthalate) plastic and composition-modified barium titanate powders in a matrix that allows polarization and the use of integrated-circuit technologies for the production of lightweight ultrahigh electrical energy storage units (EESU), *United States Patent 7,466,536*, December 16, 2008
- Weir, R. D. et al., (2006) Electrical-energy-storage unit (EESU) utilizing ceramic and integrated circuit technologies for replacement of electrochemical batteries, *United States Patent 7,033,406*, April 25, 2006
- Ehrenber, G., Scott G. et al., (2008), Nanoparticle ultracapacitor, *United States Patent Application 20080316678 Kind Code A1*, December 25, 2008
- Ilyanok, M. A. (2007), Quantum Supercapacitor," *United States Patent 7,193,261 B2*, March 20, 2007
- Eisenring, R. (2008), Method of storing electricity in quantum batteries, *United States Patent Application 20080016681 Kind Code A1*, January 24, 2008
- 2009 Tesla Roadster Technical Specifications,
http://www.teslamotors.com/performance/tech_specs.php
- Chevy Volt: Reasons for Use and Cost of Operation <http://gm-volt.com/chevy-volt-reasons-for-use-and-cost-of-operation/> EESore Energy storage unit,
<http://bariumtitanate.blogspot.com/http://www.toyota.com/prius/>
<http://automobiles.honda.com/civic-hybrid/>
<http://www.chevrolet.com/electriccar/http://www.gm-volt.com/>
http://www.ecom.cz/katalog_pdf/maxwell.pdf
- Hund, T. (2004) Comparison Testing of Supercaps, Sandia National Laboratories, Albuquerque, NM, November 2004
- United States Patent 7 033 406, <http://www.freepatentsonline.com/7033406.html>
http://www.toshiba.co.jp/about/press/2007_12/1102/SCiB.pdf
- Schindall, J. (2007), The Charge of the Ultra - Capacitors (Nanotechnology takes energy storage beyond batteries) <http://www.spectrum.ieee.org/nov07/5636>
- Lockheed Martin Signs Agreement with EESore, Inc. for Energy Storage Solutions, 10th January 2008, <http://www.gm-volt.com/2008/01/10/lockheed-martin-signs-agreement-with-eestor/>
- Edgar, J. Brake Specific Fuel Consumption http://autospeed.com/cms/title_Brake-Specific-Fuel-Consumption/A_110216/article.html
http://en.wikipedia.org/wiki/Brake_specific_fuel_consumption

Fuel Cell Hybrid Electric Vehicles

Nicola Briguglio, Laura Andaloro, Marco Ferraro and Vincenzo Antonucci
 CNR-ITAE, Via Salita S. Lucia sopra Contesse, Messina,
 Italy

1. Introduction

Direct combustion of fuel for transportation accounts for over half of greenhouse gas emissions and a significant fraction of air pollutant emissions. Because of growing demand, especially in developing countries, emissions of greenhouse and air pollutants from fuels will grow over the next century even with improving of technology efficiency. Most issues are associated with the conventional engines, ICEs (internal-combustion engines), which primarily depend on hydrocarbon fuels. In this contest, different low-polluting vehicles and fuels have been proposed to improve environmental situation. Some vehicle technologies include advanced internal combustion engine (ICE), spark-ignition (SI) or compression ignition (CI) engines, hybrid electric vehicles (ICE/HEVs), battery powered electric vehicles and fuel cell vehicles (FCVs). Fuel cell vehicles, using hydrogen, can potentially offer lower emissions than other alternative and possibility to use different primary fuel option (Ogden, 2005) (Fig. 1.).

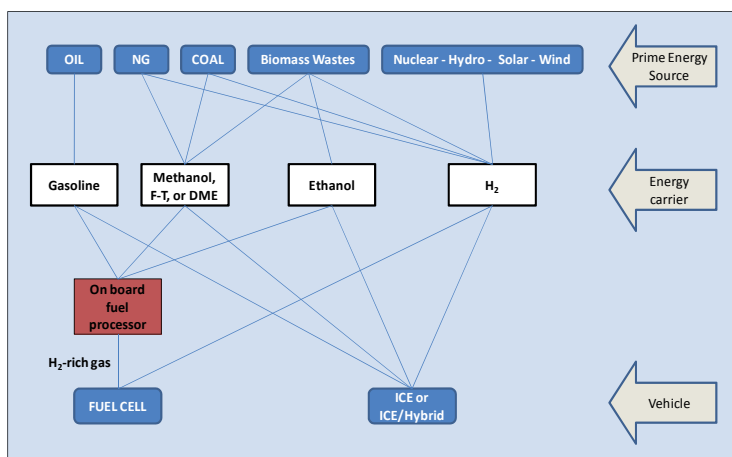


Fig. 1. Alternative fuel vehicle pathways.

A fuel cell vehicles fed by pure hydrogen are a “zero emission vehicle”, in fact the only local emission are water vapour. But in this case it is important to consider the full fuel cycle or “well-to wheels” emissions (fuel production, transport and delivery emissions). Primary source for hydrogen production is crucial for the environmental performance of vehicles. Hydrogen produced from renewable energy (i.e. wind or solar power connected with electrolysis process) and used in fuel cells can reduce significantly emissions. Recent studies

concerning alternative fuels have been identified the fuel cell vehicles, using hydrogen, as the most promising technology with reference to fuel cycle emissions. An analysis for reductions in emissions and petroleum use is reported in following figure for different hydrogen FCVs pathways.

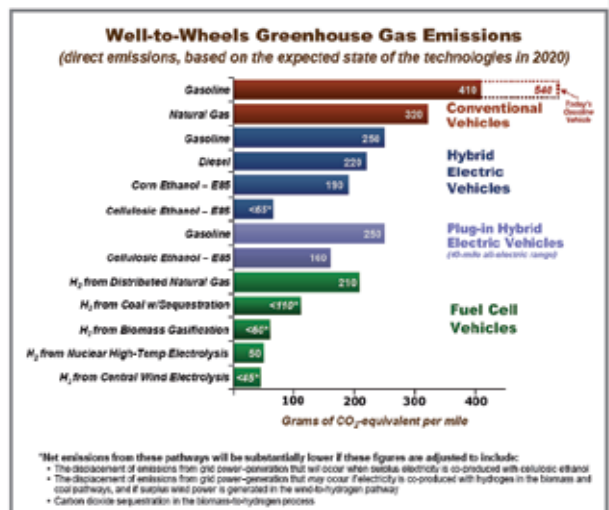


Fig. 2. Well to wheels analysis of potential reduction in greenhouse gas emissions through the hydrogen from different sources. (DOE 2009, 2010)

In order to develop technologies in ultra-low-carbon vehicles, European Commission considers three principal power train:

- alternative fuels to burn in combustion engines to substitute gasoline or diesel fuel include liquid biofuels and gaseous fuels (including LPG, CNG and biogas);
- Electric vehicles;
- Hydrogen fuel cell vehicles.

Advanced vehicles with internal combustion engines may not achieve full decarbonisation alone (McKinsey & Company 2010). It is therefore important to develop different technologies to ensure the long-term sustainability of mobility in Europe.

According to this strategy, hydrogen fuel cell vehicles and battery electric vehicles have similar environmental benefits (European Commission COM(2010)186).

Today, in the light of numerous tests in a customer environment (500 passenger cars – both large and small – covering over 15 million kilometres and undergoing 90,000 refuellings, McKinsey & Company, 2010) FCVs may be considered technologically ready. Moreover, they are still expensive and further research is needed to bring costs down. To become competitive with today's engine technologies, FCVs must reach large enough markets to reduce the cost via mass production. The figure 3 reports the most important technological challenges of FCVs for commercialization.

Despite great improvements in automotive fuel cell systems of last years, significant issues must be still resolved. These challenges include:

- Development and cost of hydrogen refuelling infrastructures for direct-hydrogen FCVs;
- Storage systems for hydrogen simultaneously safe, compact and inexpensive;
- Cost reduction in fuel cell stack and durability;

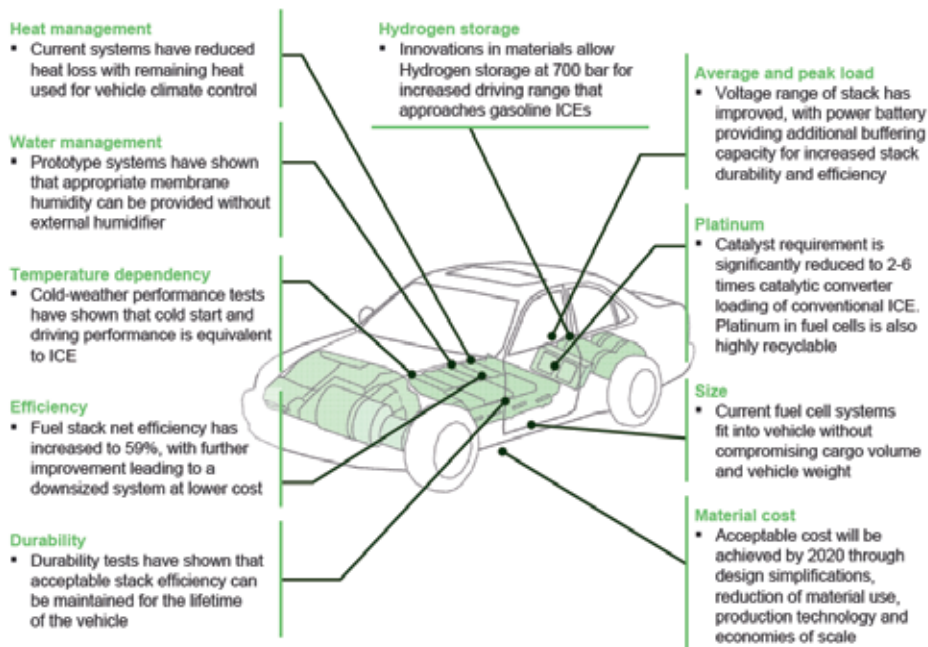


Fig. 3. FCVs: from demonstration to commercial deployment (McKinsey & Company, 2010).

The U.S. Department of Energy (DOE) is working towards activities that address the full range of technological and non-technological barriers facing the development and deployment of hydrogen and fuel cell technologies. The following figure shows the program’s activities conducted to overcome the entire range of barriers to the commercialization of hydrogen and fuel cells.

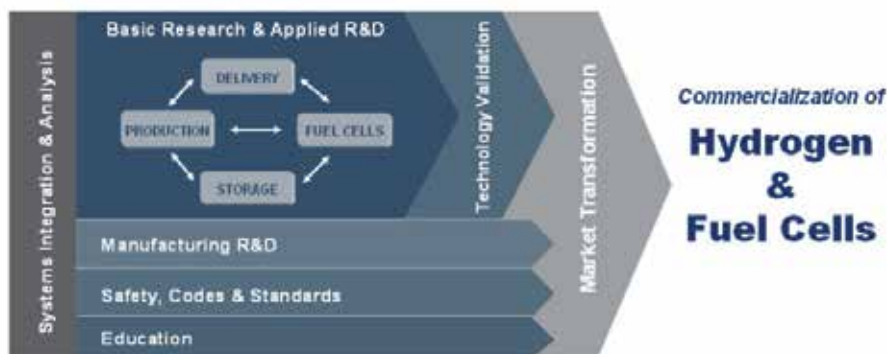


Fig. 4. The DOE program’s activities for fuel cell commercialization.

Regarding the stacks, the targets are to develop a fuel cell system with a 60 percent of efficiency and able to reach a 5000-hours lifespan, corresponding to 240000 km at a cost of \$30/kW (at large manufacturing volumes) by 2015 (fig. 4.). The Program is also conducting RD&D efforts on small solid-oxide fuel cell (SOFC) systems in the 1-to 10-kW range, with possible applications in the markets for auxiliary propulsion units (APUs).

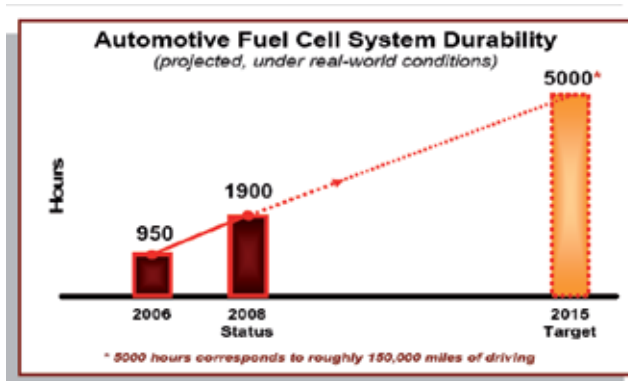


Fig. 5. Target of durability of FCVs in order to reach 240000 km (150000 miles). (DOE 2009).

DOE targets for transportation applications were derived with information from FreedomCAR and Partnership, a collaborative technology organization of Chrysler Group LLC, Ford Motor Company and General Motors Company. In table 1 are showed the targets of direct hydrogen fuel cell power systems.

Characteristic	Units	Target 2015 ^a
Energy efficiency @ 25% of rated power ^b	%	60
Energy efficiency @ rated power	%	50
Power density	W/L	650
Specific power	W/kg	650
Cost ^c	\$/We	30
Transient response (time from 10% to 90% of rated power)	s	1
Cold start up time to 50% of rated power @-20°C ambient temperature @+20°C ambient temperature	s	30
	s	5
Start up and shut down energy ^d from -20°C ambient temperature from +20°C ambient temperature	MJ	5
	MJ	1
Durability with cycling	hours	5,000 ^e
Unassisted start from low temperatures ^f	°C	-40

^aTargets exclude hydrogen storage, power electronics and electric drive.

^b Ratio of DC output energy to the lower heating value (LHV) of the input fuel (hydrogen). Peak efficiency occurs at about 25% rated power.

^c Based on 2002 dollars and cost projected to high-volume production (500,000 systems per year).

^d Includes electrical energy and the hydrogen used during the start-up and shut-down procedures.

^e Based on test protocols in Appendix D.

^f 8-hour soak at stated temperature must not impact subsequent achievement of targets.

Table 1. DOE targets for automotive application of direct hydrogen fuel cell power systems (DOE, 2010).

An other important issue in fuel cell vehicles commercialization is hydrogen storage. Currently, compressed hydrogen is the principal technology used on board but the research

is addressed towards a advanced materials able to store hydrogen at lower pressures and near ambient temperature, in compact and light weight systems (metal hydrides, chemical hydrogen storage and hydrogen sorption).

In this chapter the prospects of fuel cell in transport application will be discussed and particular attention will be paid to the CNR ITAE experiences. CNR ITAE is the National Council Research of Italy that studies advanced technologies for energy. The Institute is involved in different demonstration projects regarding the development of fuel cell hybrid electric vehicles (FCHEVs) and in particular minibus, citycar, bicycle and tractor. Some kind of projects are addressed to different markets, in particular the so-called "early markets" are deal with. In this case the powertrain is electric and hybrid because it is composed by known technologies, like batteries, but also by supercaps and fuel cells that are innovative technologies. Fuel cells have a small size because are used like on board batteries recharge, "range extender" configuration, allowing to increase the range of traditional electric vehicles. The lower fuel cell power means a reduction in terms of stack size then a less cost of it as well as hydrogen storage amount.

Other one kind of projects is instead addressed to a future market. The configuration used is the "full power fuel cell", in which FCVs have a big size of power close the electric motor power. The full power fuel cell vehicles are provided with innovative components such as radio systems (information technology systems - ITS) able to broadcast with other similar vehicles and fleet managing station. They represent a new concept of vehicle because they are a high-tech products, equipped with hardware and chassis made with new light materials and with a platform having interchangeable upper bodies.

2. Fuel cell technology for transport applications

Proton Exchange Membrane Fuel Cells (PEMFC) are the most used technology in FCVs. In part, this dominance is due to large number of companies interested in PEMFC development. In technical terms, PEM fuel cells have high power density, required to meet the space constraints in vehicles, and a working temperature of about 70 °C allowing a rapid start-up. The electric efficiency is usually 40-60% and the output power can be changed in order to meet quickly demanded load. Other characteristics of PEMFC systems are compactness and lightness. As a result of these characteristics, PEMFC are considered the best candidates for mobile applications. The disadvantages of this technology are sensitive to fuel CO impurities and expensive catalyst, higher CO levels result in loss of fuel cell performance. Furthermore, the electrolyte must be saturated with water and the control of the anode and cathode streams therefore becomes an important issue. In transport applications this technology is used in hybrid configuration with electricity storage devices, such as batteries or super capacitors.

Today real competitors in transport market are SOFC (Solid Oxide Fuel Cell) systems, particularly suited for auxiliary power unit (APU) such as heating, air conditioning, etc (heating, air-condition etc..). SOFCs are characterised by their high working temperature of 800-1000°C. There are two configuration of stack, tubular and planar. The tubular concept is suitable for large-scale stationary applications while the planar concept is preferred for transport application tanks to the higher power density. The SOFC applications in vehicles are limited to APU rule due to long start-up time and slow dynamic behaviour caused by high temperature operation. However, it is also considered an important option for auxiliary power units on board of vehicles in the 5 kW range. The power density of the SOFC is in the range of 0.15-0.7 W/cm² but high temperature corrosion is a problem that

requires the use of expensive materials. Delphi automotive and BMW companies have already been examined this technology in prototype vehicles.

Other different typologies of fuel cells used in transport are the AFC (Alkaline Fuel Cell). The use of this kind of FC is, today, limited if compared with other FC technologies. Several units are installed in niche transport sectors such as motorbikes, forklift trucks, marine and space applications. Several installations (80%) were introduced before 1990 and used in space applications especially. The rest were installed in transportation development and demonstration vehicles. After 1990 some units were installed in light duty, portable and small stationary end-use. When PEM units were introduced in the 1980s, the interest was shifted to this fuel cell alternative, particularly for the transport sector. Recently, some companies have been considered AFC technology for operation in stationary and portable application. The main problem of this technology is the carbon dioxide poisoning: small amounts of CO₂ reduce the conductivity of electrolyte. As consequence of this, pure hydrogen must be used. Besides, air needs to be cleaned from CO₂, which limits the application for terrestrial applications considerably.

Finally, DMFC (Direct Methanol Fuel Cell) technology is used to power portable applications and in some niche transport sector such as marine, motorbikes and APU. In the year 2000, Ballard and Daimler Chrysler installed a DMFC system on a light duty but after no other vehicles have been developed. Some years ago DMFC had been considered a promising technology because methanol, that is a liquid fuel, allows to maintain all refuelling infrastructures. However if compared with PEMFC, the DMFC power density is lower but the high energy density of fuel (methanol) has potential to replace batteries with micro fuel cell systems.

FC technology	Working temperature	Efficiency	Automotive applications	Advantages	Disadvantages
PEM	70-90°C	50-60%	Buses, Niche transport, light duty vehicles, APU (niche transport vehicles)	high power density rapid start-up capacity to meet quickly demand load Solid electrolyte	sensitive to fuel CO impurities expensive catalysts
SOFC	700-1000 °C	50-60%	APU ((niche transport vehicles)	Tolerance to fuel CO impurities Fuel flexibility Solid electrolyte	Long start-up Slow dynamic load behaviour High temperature corrosion of components
DMFC	60-130°C	40%	APU (niche transport vehicles)	Storage of liquid fuel (methanol)	Low power density high noble metal loadings
AFC	90-100 °C	50-60%	APU (niche transport vehicles)	Low cost components	Sensitive to CO ₂ in fuel and air

Table 2. Fuel Cell technologies for transport applications.

Table 2 summarizes fuel cell technologies for transport sector by application. The used technologies are PEM, SOFC, AFC and DMFC while PAFC (Phosphoric Acid Fuel Cell) and MCFC (Molten Carbonate Fuel Cell) systems are generally suitable to provide stationary power and generation of heat for residential and industrial applications.

3. The current market of FCVs

Fuel cell vehicles are still in development and demonstration phase. All automakers have substantial development programs underway. Most attention is focused on the use of PEMFCs for transportation applications. Actually, PEM technology is used in different application as shown in figure 5. The majority of units installed globally are used for portable applications. Niche transportation, light duty vehicles and buses are only around 15% of total installed units because the request is low compared to the other markets.

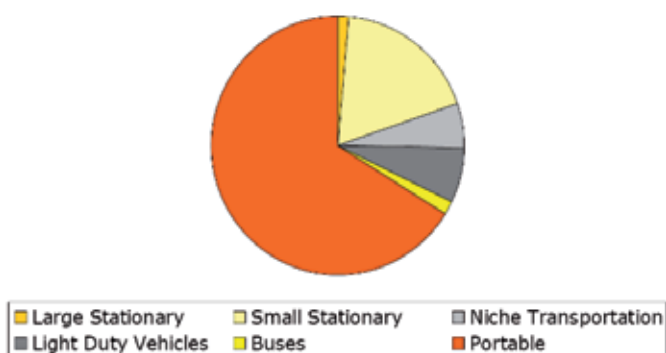


Fig. 6. Percentage of PEM units installed by application (Gemma Crawley, 2006).

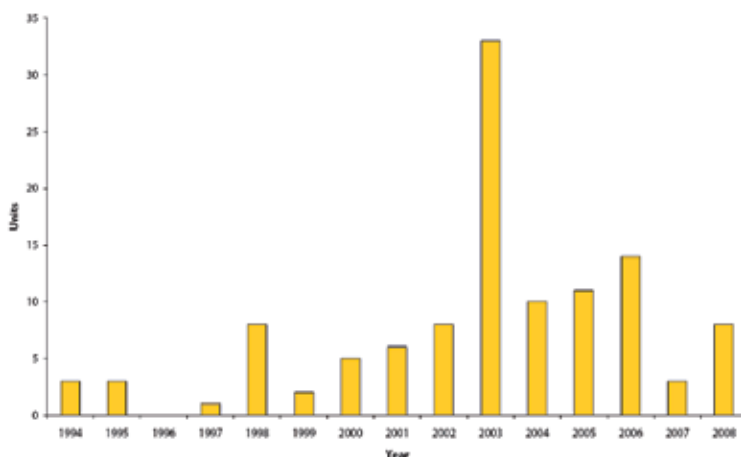


Fig. 7. Buses fuel cells units produced from 1994 to 2008 (Lisa Callaghan Jerram, 2008).

The PEFC systems was chosen for providing primary power train for buses involved in the clean urban transport for Europe (CUTE) (2003-2006). A total of 27 Mercedes-Benz Citaro buses, equipped with fuel cell power train, were used on three continents. Figure 7 shows

the buses units number produced per years, the peak number is in 2003 when started the CUTE project. In term of fuel cell bus deployment, Europe is leader with 53% of total deployments and 17 cities involved in demonstration projects. Asia’s projects are focused in Japan, China and South Korea, in USA several activities are presented in California (fig. 8). With regard to the regions of manufacture the situation mirrors the deployments with Europe 67% of total. The reason of that is the CUTE project, supported by Mercedes Benz fuel cell Citaros, and a Belgian fuel cell buses company, Van Hool.

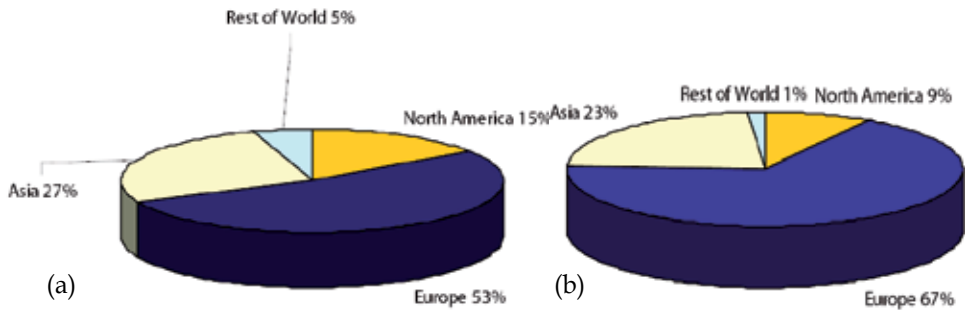


Fig. 8. Fuel Cell bus deployment (a) and region of manufacture (b) from 2003 to 2008 (Lisa Callaghan Jerram, 2008).

Such as in buses market, in duty vehicles the technology choice is PEM. The annual distribution of units is not constant and reflects the pre-commercial nature of this market (fig. 9). Besides, the targets of past are shifted into next years. The main automaker involved in this sector are Honda, General Motors, Nissan, Hyundai-Kia and Toyota.

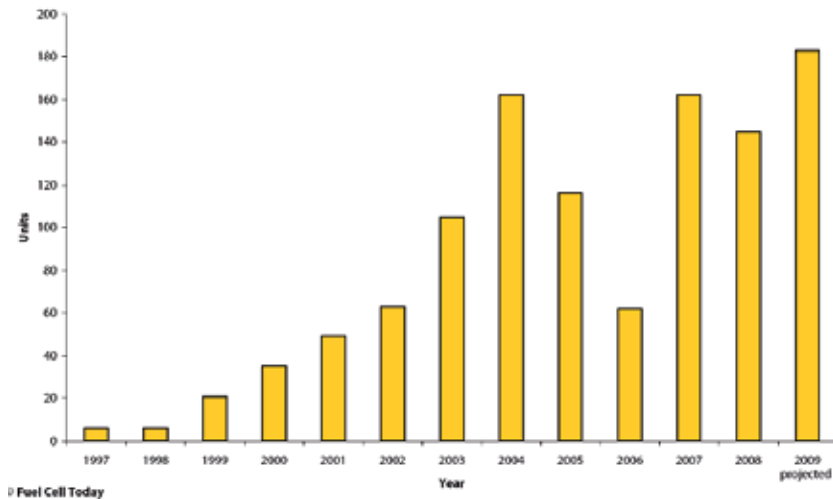


Fig. 9. Annual New Light Duty Vehicle (Lisa Callaghan Jerram, May 2009).

Figure 10 reports the manufacture and deployment percentage by region. For 2007-2009 (projected) Asia and North America have become the major areas of manufacture. California, with the presence of infrastructures and the ZEV mandate, is a leading market for fuel cell vehicles. Germany, due to government programs, is a promising country for fuel

cell market. With regard to Asia, fuel cell vehicles are used as small fleets leased to government officials.

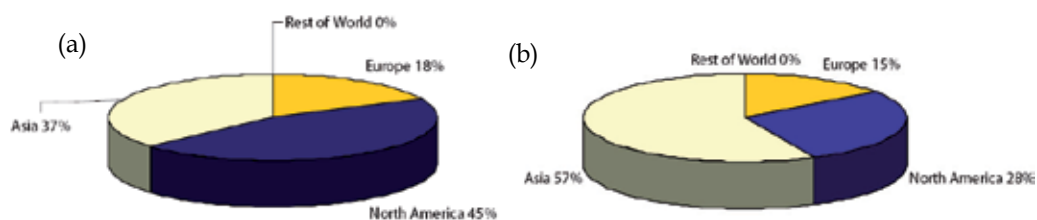


Fig. 10. Light Duty Vehicle deployment (a) and region of manufacture (b) 2007-2009 (Lisa Callaghan Jerram, May 2009).

The Honda fuel cell concept car is shown in figure 11 which illustrates how modern fuel cell systems can be packaged into a small light-duty vehicles. Like most FC cars, the vehicle is equipped with a compressed hydrogen storage system.

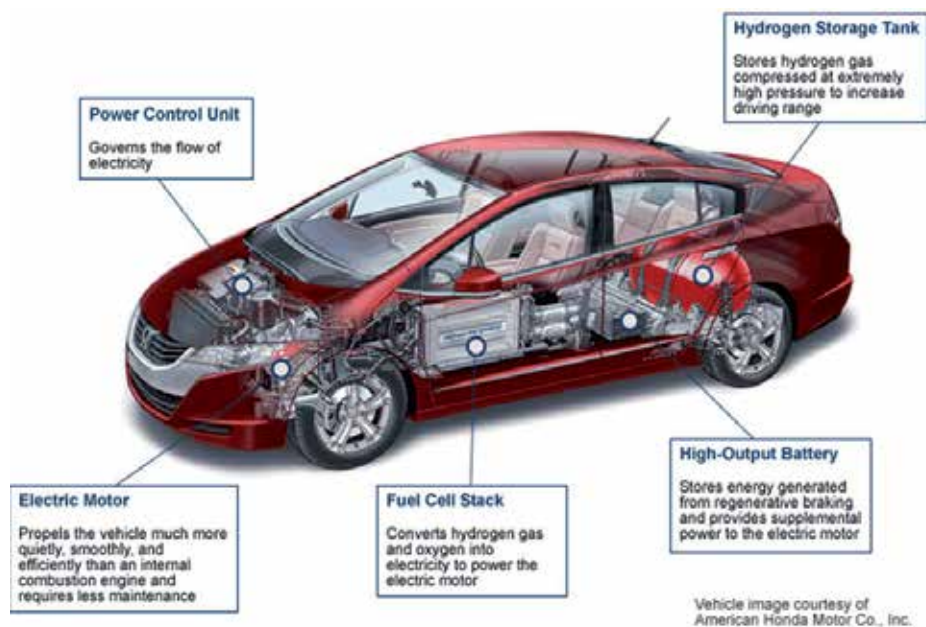


Fig. 11. Fuel cell concept car (manufacturer Honda, type FCX Clarity).

In table 3 the last fuel cell vehicles produced by some carmakers are listed. FC manufacture, range and fuel type are reported.

Transport sector comprises applications as aircraft and aerospace, scooters, motorbikes and other two- and three-wheeled vehicles, materials handling vehicles such as forklift trucks, trains and the 'other' category, including such applications as wheelchairs and mobility assistance vehicles. Annual growth from 2005 through 2008 is showed in figure 12. The units installed in 2008 regard principally materials handling vehicles, scooters and motorbikes and the 'other' category including mobility assistance vehicles, each of which saw tens to hundreds of units deployed.

Automaker	Vehicle type	Year	Engine type	FC manufacturer	FC size/type	Range (mi/km)	Fuel type
Audi	Q5 HFC	2010	FC/battery hybrid	N/a	131 bhp	N/a	Compress. hydrogen
AVL list GmbH	AVL FCC: 4-5	2010	EV with FC range extender	N/a	3 kW PEM	150 km	34L CGH @ 200 bar
BMW	FC/hybrid electric 1-Series	2009	FC/battery hybrid	UTC Power	N/a	N/a	N/a
Daimler	Mercedes-Benz F 800	2010	FC/battery hybrid	N/a	N/a	18 mi battery/plus 375 mi hydrogen	Compress. hydrogen
Fiat/Alfa Romeo	MiTo	2010	N/a	N/a	N/a	N/a	N/a
Fiat	Panda	2007	Fuel Cell	Nuvera	60 kW PEM	200 kW	Compress. hydrogen
Ford Motor Company	HySeries Edge	2007	Fuel Cell plug-in hybrid	Ballard	HySeries Drive	491 km	N/a
GM	Provoq	2008	FC/battery hybrid	GM	88 kW PEM	483 km	Compress. hydrogen
Honda	Fc Sport	2008	Fuel Cell	Honda	PEM	N/a	Compress. hydrogen
Honda	FCX Clarity	2007	Fuel Cell	Honda	100 kW/PEM	570 km	Compress. hydrogen
Hyundai	Tucson ix35 FCEV	2010	FC/supercap hybrid	N/a	100 kW/PEM	650 km	Compress. hydrogen
Kia	Borrego/Majoave FCEV	2008	FC/battery hybrid	Ballard	115 kW/PEM	685 km	Compress. hydrogen
Microcab Industries Limited	Microcab	2008	Fuel Cell	N/a	N/a	160 km	Compress. hydrogen
Morgan	LIFECar	2008	Fuel Cell	QinetQ	22 kW/PEM	402 km	N/a
Pininfarina	Sintesi	2008	FC/battery hybrid	Nuvera	Four 20 kW PEM	N/a	N/a
PSA Peugeot Citroen	FiSyPAC	2009	FC range extender	N/a	N/a	496 km	N/a
Renault	Scenic FCV H2	2008	FC/battery hybrid	Nissan	90 kW	240 km	N/a
Shanghai Automoti-ve Industry Corp.	Shangha	2007	Fuel Cell	ShenLi	60 kW/PEM	N/a	N/a
Suzuki	SX4-FCV	2008	Fuel cell	GM	80kW/ PEM	250km	Compress. hydrogen
Tecnia	H2CAR	2008	Fuel cell/battery hybrid	N/a	5kW/ PEM	N/a	Compress. hydrogen
Toyota	FCHV-adv	2008	Fuel cell/battery hybrid	Toyota FC stack	N/a	830km	N/a
Volvo	C30	2010	Fuel cell/battery hybrid	Powercell Sweden	N/a	400 km	Hydrogen (reformed onboard from gasoline)
VW	Passat Lingyu	2008	Fuel cell/battery	SAIC (Shanghai VW parent co.)	55kW/ PEM	300km	N/a

Table 3. Some recent fuel cell Vehicles prototype by automaker (Fuel cell 2000, 2011).

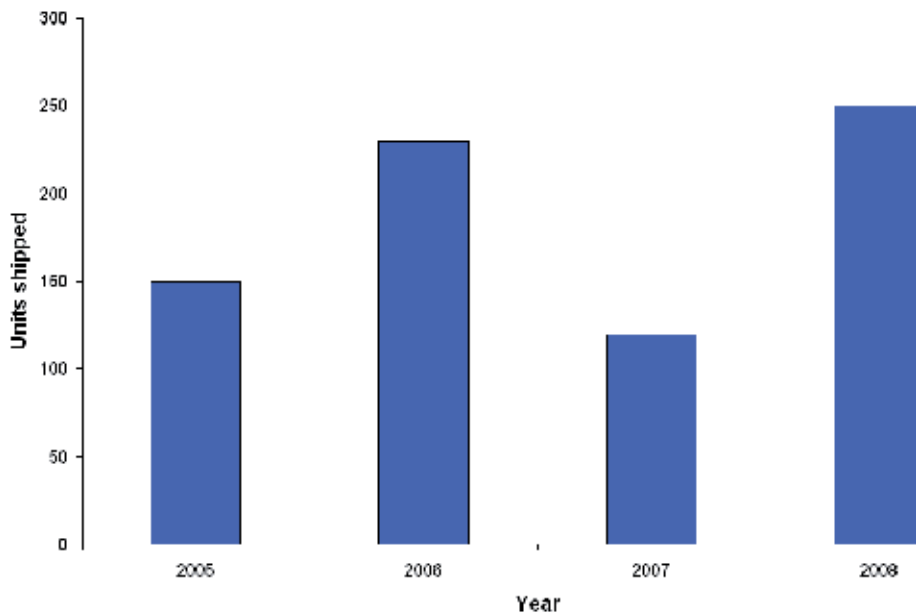


Fig. 12. Niche transportation: annual growth (Jonathan Butler, July 2008).

The technologies used for this application are PEM and DMFC, very little units installed are SOFC (fig. 13). In particular, there is most units PEM in aerospace and aircraft sector, a two thirds to one third split between PEM and DMFC in the scooters and motorbike market. In the materials handling market, almost exclusively PEM units are used. In the 'other' category, there are roughly six times the number of DMFC units compared with PEM units.

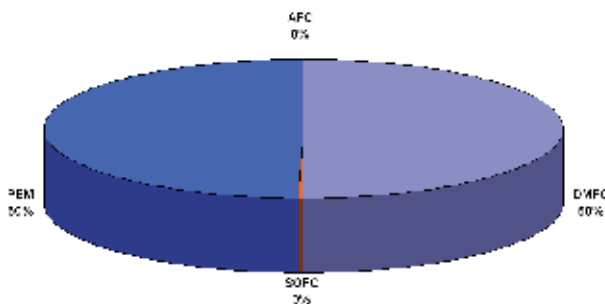


Fig. 13. Percentage of units shipment by technologies (Jonathan Butler, July 2008).

Marine and APU market is another interesting application where fuel cells have about 7000 units installed into 2008. Starting with very low units installed in 2005 the numbers increased during 2007/2008.

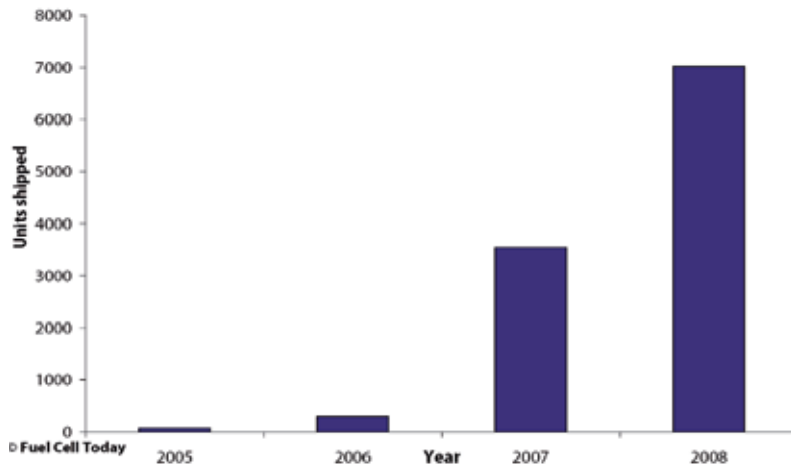


Fig. 14. Fuel cells units installed in niche transportation sector (APU and marine) from 2005 through 2008 (Dr. Jonathan Butler, 2008).

In terms of technology, DMFC is the principal chosen thanks to the liquid fuel and flexibility of refilling. The following figure shows the percentage by technology. Number of PEM units are limited to APU applications for on board yachts due to their silent operation.

Very interesting is the SOFC technology used mainly for APU demonstration units for road vehicles and marine vessels. In fact, units installed in this transport sector are higher than in large stationary applications (Gemma Crawley, 2007). In this sector SOFC units are used as APUs to supply auxiliary power to selected vehicles. Companies involved in development of automotive system for fuel cell, as Delphi Automotive Systems, believe in SOFC technology for the high efficiency, simply reforming technology and less stringent fuel requirements. The majority fuel cell manufacturer in transportation sector are indicated in table 4.

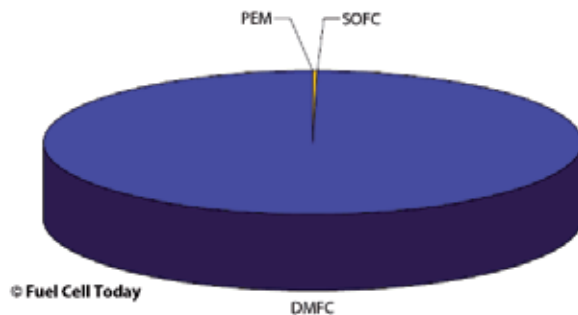


Fig. 15. APU and Marine sectors: percentage by technology 2007/2008 (Dr. Jonathan Butler, 2008).

Manufacturer	Application	size	Technology
Ballard	Transportation/bus/light mobility	4 - 85 kW	PEM
General Hydrogen	Small/medium/large trucks	/	PEM
SFC Smart Fuel Cell	Mobile/niche transport	600 - 1600 Wh/day	DMFC
UTC Power	Transportation	120 kW	PEM
Hydrogenics	Mobility application	4 - 65 kW	PEM
Nuvera FC	APU, transportation	5 - 82 kW	PEM
Delphi Automotive System	APU	1-5 kW	SOFC

Table 4. Fuel cell manufacturers for transport applications.

4. Vehicles configuration

Fuel cell vehicles are electric vehicles powered by batteries and fuel cell. There are different configurations for fuel cell hybrid electric vehicles (FCHEVs). In particular the configuration depends on the desired hybridization level and on the fuel cell and batteries rules.

In conventional electric vehicles batteries provide power to the electric motor, in the FCHEVs batteries and fuel cell are connected in a parallel system and together provide power.

Figure 16 shows a fuel cell stack connected with a DC/DC converter needed to provide a regulated voltage at the output. Battery pack is connected with auxiliary devices and with fuel cell. The DC/AC inverter converts the direct current (DC) in alternate current (AC) in order to fed electric motor. The motor is able to recover part of energy that would normally be lost due to braking (regenerative braking). This recovered energy is used to recharge batteries.

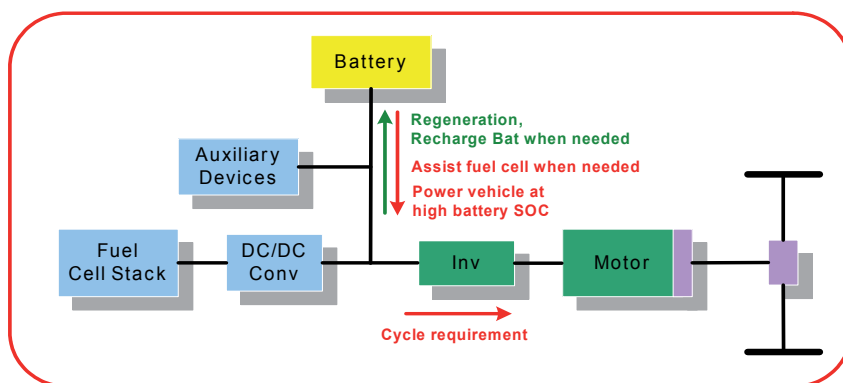


Fig. 16. Fuel Cell Hybrid Electric Vehicle configuration

The sizes of batteries and fuel cell define the hybridization level and the configuration.

A conventional electric vehicle (full battery) presents intrinsic limits like the range (that is function of batteries capacity) and recharge time (about 6-8 hours), that can reduce their use. FCHEVs allow to increase the range, in terms of working hours or distance, because it is a function of the on board stored hydrogen and the hydrogen refuelling time isn't comparable to the batteries recharging time.

In the first configuration, called "*total fuel cell*" or "*full power fuel cell*", the electric drive motor is totally fed by fuel cell and a small battery can be installed just for the vehicle start up or for peak power. In this case the fuel cell power is close the electric motor power. A similar architecture, having a big size of fuel cell, means a great quantity of stored hydrogen (also depending on the required range) and high costs.

Another configuration consists of an architecture in which the fuel cell is used as APU (auxiliary power unit) and provides the electrical power required by the auxiliary devices. In this case the fuel cell size is very small and its function is essentially addressed to cover small loads like air conditioning, electric windows, lights, etc.

Finally, the "*range extender*" configuration is characterized by a small size fuel cell used like on board batteries recharge. This solution, depending on the on board stored hydrogen, allows to increase the range of traditional electric vehicles. Using this configuration it is possible to define a specific batteries recharge strategy; in particular the batteries can be recharged when the electric motor doesn't require load, i.e. during the stops and at the terminus. In some case the fuel cell can contribute to the electric traction providing energy when the vehicle runs also. In this way the fuel cell works in optimal operation conditions at a fixed power, avoiding the load following operation that could cause thermal and mechanical stress of materials.

Moreover, the lower fuel cell power means a reduction in terms of stack size then a less cost of it as well as hydrogen storage amount.

5. CNR ITAE challenges and activities

The automotive strategy of CNR-ITAE is to investigate the fuel cell technology in order to evaluate the stack behavior and its integration in a system, addressing the research towards an efficient system interface and architecture trade off. This includes hydrogen stack modules as well as reformat stack modules. The principal issues regard efficiency, cost, durability and manufacturing. The research activities is focused on SOFC and PEM technologies for applications with hydrogen and Reformed hydrocarbon (NG, GPL). In fact, although the long term target is to implement hydrogen as fuel, since the current limited hydrogen infrastructures, other fuel (such as Reformed NG) can be a short term solution (figure 17).

The projects in which CNR ITAE is involved concern electric vehicles realization, having an electric motor like driving force. This kind of projects are addressed to different markets, in particular the so-called "early markets" are deal with. In this case the powertrain is electric and hybrid because it is composed by known technologies, like batteries, but also by supercaps and fuel cells that are innovative technologies. Fuel cells have a small size because are used like on board batteries recharge, "range extender" configuration, allowing to increase the range of traditional electric vehicles. This approach is a way to introduce the FC technology gradually thanks to the lower power and costs.

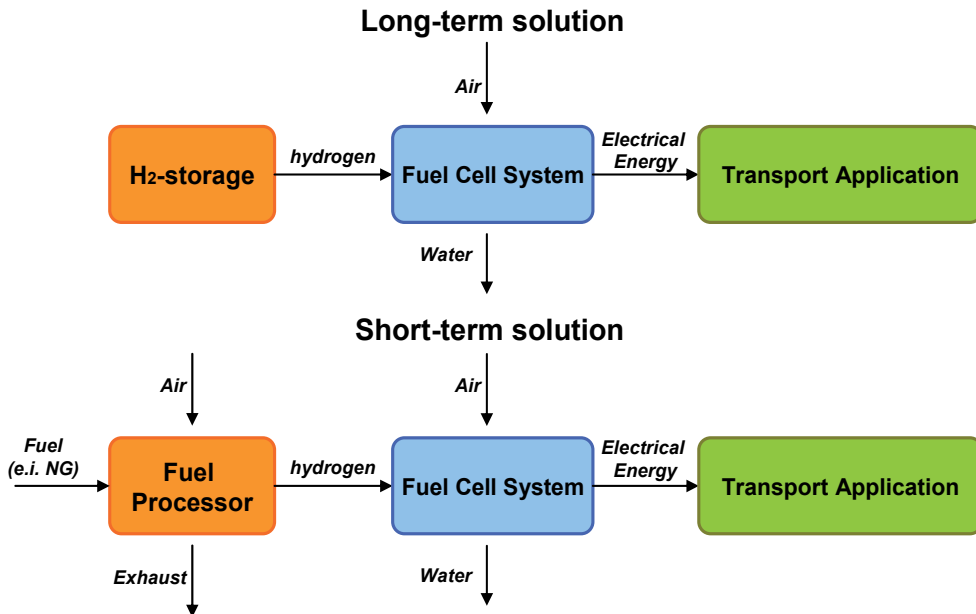


Fig. 17. Fuel options for fuel cell power generation.

The other one kind of projects is instead addressed to a future market. The configuration used is the "full power fuel cell", in which FCs have a big size of power close the electric motor power. The full power fuel cell vehicles are provided with innovative components such as radio systems (information technology systems - ITS) able to broadcast with other similar vehicles and fleet managing station. They represent a new concept of vehicle because they are a high-tech products, equipped with hardware and chassis made with new light materials and with a platform having interchangeable upper bodies.

Demonstration projects regarding the development of fuel cell hybrid electric vehicles (FCHEVs) and in particular minibus, citycar, bicycle, tractor and airplane. The tractor projects intends to demonstrate that the fuel cell can be applied in the farm context because hydrogen could be produced on site using different methods (biomass, wind energy, photovoltaic). In this case the hurdle of hydrogen distribution is avoided.

The research activities of CNR ITAE are supported by numerous partners involved in fuel cell development. This includes collaborations and with fuel cell developers like Nuvera Fuel Cell, SOFCPower and with industrial partners.

The most of important projects in automotive sector which CNR ITAE is involved are "Meccano", "BHYKE", "HY-TRACTOR" and "H-BUS".

The project, called "MECCANO", is to develop a highly evolved concept vehicle which offers competitive advantages in terms of optimized ergonomics, low running costs, high levels of safety, modularity and low environmental impact. This new product wants to meet societies demand for reduced congestions, low road-space occupation and improved intermodality with public transportation systems. In this context, the vehicle is characterized by the following features (fig. 18):

- Very highly efficient propulsion system: the powertrain configurations include full-power fuel cell, plug-in battery electric, battery electric with auxiliary motor-generator (series hybrid), and parallel hybrid with methane fuelled internal combustion engine.
- Compact body and short vehicle length (approx. 3m) with high vehicle habitability.
- Advanced technologies for integrated preventive, active and passive safety, in order to attain the highest levels of Euro-NCAP consumer ratings.
- Latest solutions for human-machine and machine-infrastructure interactions and communication personalized depending on the user and on the specific application.
- This economic and ecological urban vehicle aspires to become an ideal mode of transport for environment-aware individuals and municipal authorities. This dual-use concept (ie. individuals as conventional cars or as a means of personalised public transport) introduces radically new opportunities for vehicle design: a) the development of a platform: chassis and low part of the vehicle can be configured in a highly flexible manner in order to accommodate the different propulsions listed above; b) the design of two vehicle bodies and their relative interiors offering different styles and appropriate technologies.

In MECCANO project several automotive companies are directly involved (FIAT, Michelin, Magneti Marelli, Marangoni, ecc.) in conjunction with research institutes.

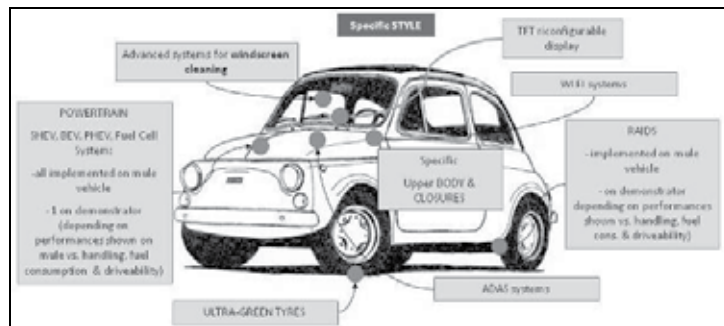


Fig. 18. Meccano project.

The bicycle project “BHYKE” is the study of an innovative electric bicycle in joint venture with an Italian company, called TRE S.p.A. (Tozzi Renewable Energy). The bike, having pedal assistance, is provided with a 250 W fuel cell and a hydrogen solid state storage cylinder of 900 Sl at 12 bar. The targets for this project are: a range of 130-150 km, a maximum speed of 35 km/h and total weight of 30 kg (fig. 13). The aim of the project is to realize, through a new concept of bike sharing service, a representative sample of field test of hydrogen refuelling station from renewable energy (photovoltaic and wind).



Bike	Technical Characteristic
Max. Power Output	250 W
Max. torque	15 Nm@66 rpm
Motor Voltage range	24V Regulated DC
Hydrogen Storage	Solid State
Hydrogen capacity	900 Sl@12bar
maximum range	150 km@pedal assist
Total Weight	26 Kg

Fig. 19. Hydrogen bicycle and technical characteristics.

In order to demonstrate that fuel cell technology can be used also in farm sector “Hy-Tractor” project wants to develop a fuel cell tractor fed by hydrogen. In farm sector the hydrogen distribution is not a problem because hydrogen can be produced on site using the available renewable energies: wind, photovoltaic, biomass. The main activities are:

- Development of a hydrogen production and storage system based on: 1) photovoltaic and electrolyzer (fig. 14), 2) biomass, 3) low temperature thermolysis, 4) high temperature pyrolysis;
- Design and development of tractor equipped with fuel cell powertrain, on board hydrogen storage system and other needed auxiliary subsystems.
- Development of energy saving systems for efficiency increase. Some of these are: photovoltaic roof, high efficiency air-conditioning and external lights, hydraulic systems and power take-off (PTO) with electric drive.
- Replacement of hydraulic drive with electric drive, avoiding oil (that is a polluting substances) and increasing the check.
- Design of a *Multi-Power Testing-Trailer* able to carry out simultaneous tests on the traction, hydraulic system and electric devices.
- Field test of the FC tractor during operation both in external sites and inside places (hayloft).

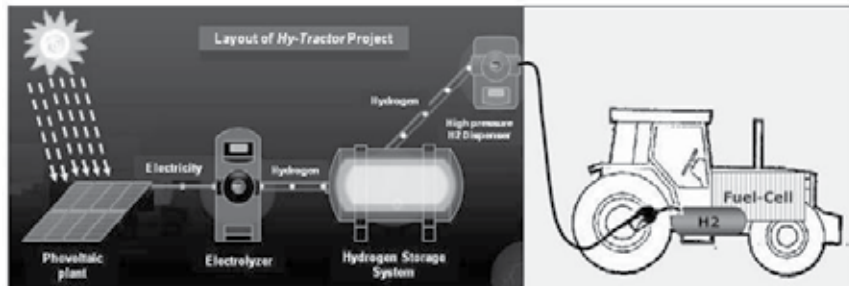


Fig. 20. “Hy-Tractor”: Project layout with photovoltaic plant.

The H-BUS is a joint project of National research Council of Italy and two supplier companies to develop a range extender Fuel Cell/Battery Hybrid Electric city bus. The aim of H-BUS project is to realize a pre-commercial Fuel Cell/Battery HEV able to increase the range (at least 30%) with respect to same bus in a standard electric configuration, using a small size of fuel cell that works as batteries recharge on board. Within the project, CNR TAE Institute is involved in determining the optimal level of hybridization assessing all boundary conditions (mission, performances, hydrogen consumption, range, etc...). The bus selected for the prototype realization is an electric vehicle having an 85 kW rated power of electric drive motor and a capacity of 44 passengers (Fig.21).



Fig. 21. The selected bus for the H-BUS project

5.1 Fuel cell systems development

The CNR ITAE collaborations with fuel cell developers are focused on improving durability, architecture and cost reduction of fuel cell systems and stacks. As above said, in automotive sector, PEMFC and SOFC are the principal technologies studied. The development of PEM fuel cell systems is summarized in table 5, all devices are fed by pure hydrogen. Gen 3 is a hybrid system composed by a stack of 5 kWe and a battery pack with a power output of 4 kW. Besides, this system is equipped with a new kind of hydrogen recirculation system which increases stack durability up to 10000 hr.

A fuel cell system is composed by fuel cell stack and the linked ancillaries: a blower for the air, a pump for the water and a fan for the cooling circuit (Fig 22). Dedicated micro-computer and software are used for the management of the entire system in terms of operation and safety

The stack is the core component of a fuel cell system but, for the electrical energy production, hydrogen and air have to be fed into the stack. Excess heat must be removed through a cooling system. The operational characteristic curve of a stack (polarization curve) illustrates the device's performance unambiguously. The experimental curve of the fuel cell PEM system is shown in Fig. 23a. It demonstrates that the stack works in a defined range of voltage of 0.65-1V_{cell}. In this range of voltage it is possible to obtain high performance in terms of efficiency and to limit the materials stress in order to assure a long durability. The figure also reports cell voltage of stack (average voltage of two contiguous cells) at different power levels (fig.23b). The stack is composed by 40 cells.

An important issue in automotive sector is the response time of system. For this reason start-up/warm-up times have been evaluated at different temperatures in order to determine system limitations and the best operative conditions. The aim was to minimize the battery pack that supply the load and the FC system ancillaries at the same time. The first remark is that batteries cannot be completely eliminated, due to start-up operations. In fact, during the



Rated Power (kW)	5	5	5 kW FC + 4 kW batteries
Number of cells	40	40	40
Temperature (°C)	80	80	80
Active area (cm ²)	500	500	500
Efficiency (%)	52	54	54
Durability (hr)	1500	3000	10000

Table 5. PEM Fuel Cell Systems development.

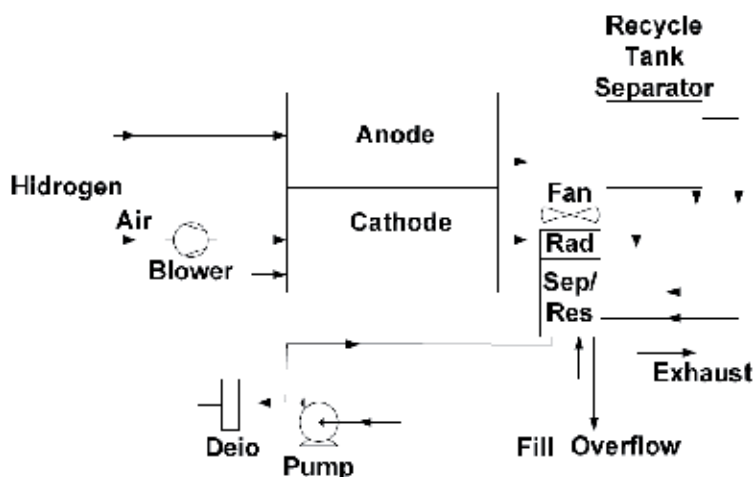


Fig. 22. Schematic diagram of the Fuel Cells System.

start-up, system drains an average current of 13.5 A ($P = 648W$), from an external power supply (Fig. 18). The minimum time needed by the FC system to generate power is ever 7 seconds (FC system software setting), but its value never reaches the maximum value (5 kW) before the warm-up.

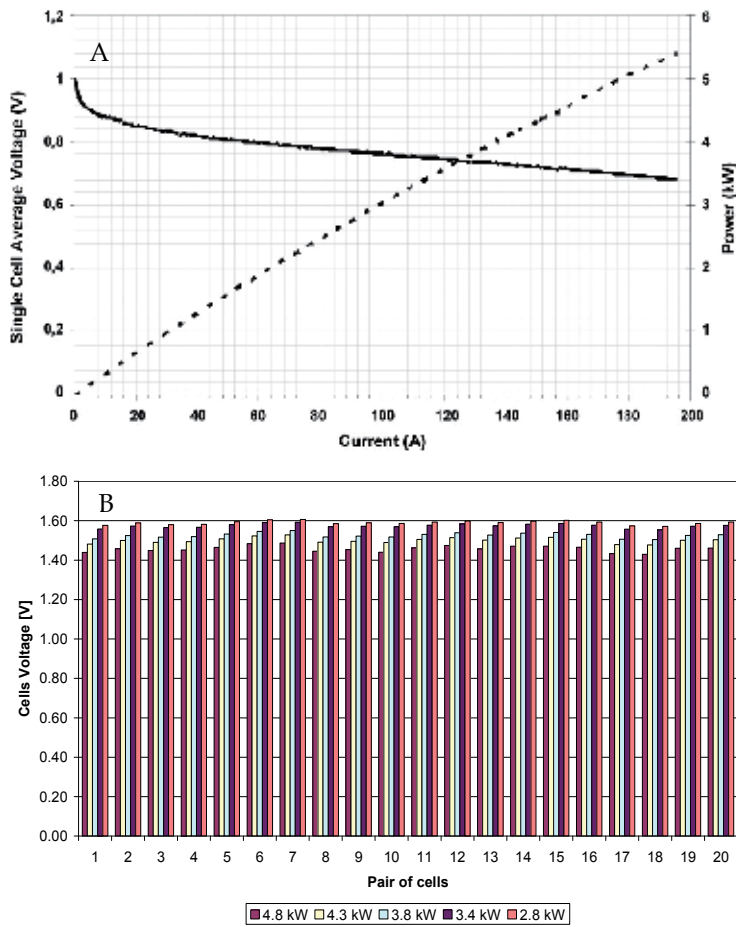


Fig. 23. Polarization curve (A) and voltage distribution (B) for a stack of 40 cells PEM.

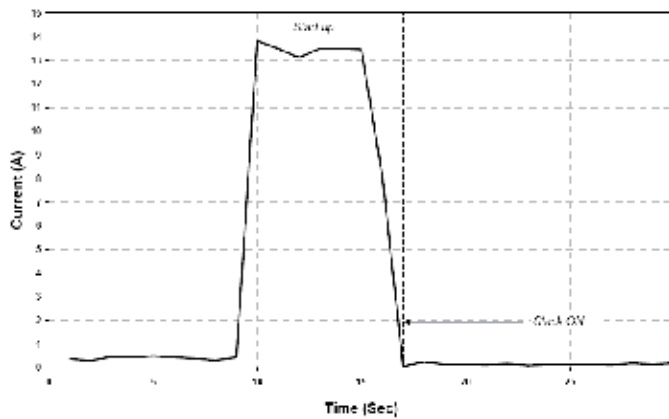


Fig. 24. Current demand from external 48V power supply by FC system during then start-up.

The minimum time needed by the FC system to generate power is ever 7 seconds (FC system software setting), but its value never reaches the maximum value (5 kW) before the warm-up. FC system produces the best response when it starts to run at the nominal temperature as shown in the following figure 19, where is reported the start-up/warm-up time depending on the different initial FC system temperature. At the nominal temperature, FC system generates maximum power after 76 seconds during start-up routine runs (7 seconds) and FC stack is warmed-up (69 seconds) at the nominal temperature.

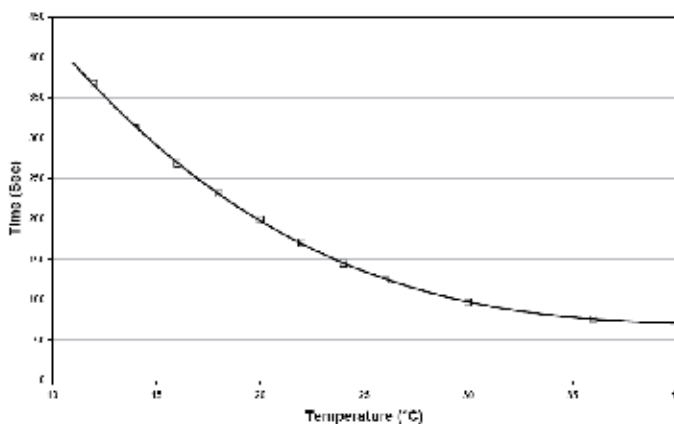


Fig. 25. Start-up times at different initial FC system temperatures.



Rated Power (kW)	1.248	1.811	1.096
Number of cells	75	10	32
Temperature (°C)	650	500	750
Active area (cm ²)	92	360	50
NG reforming	Internal with pre-reforming	Internal	Internal

Table 6. Features of the three SOFC stacks.

Among Fuel Cells, SOFCs show the great advantage of working with more flexible gas than than polymer electrolyte fuel cells. The table 6 reports the performance of three intermediate

temperature SOFC stacks. The aim is to build a complete SOFC power generation system around the stack. All these three stacks have planar bipolar plate, but they are arranged with different technical solutions: active areas, volumes, dimensions, ect.

A polarization curve of a SOFC system tested is showed in figure 26. The stack power output is 500 W and 55% of electric efficiency is expected. The working temperature is about 750 °C.

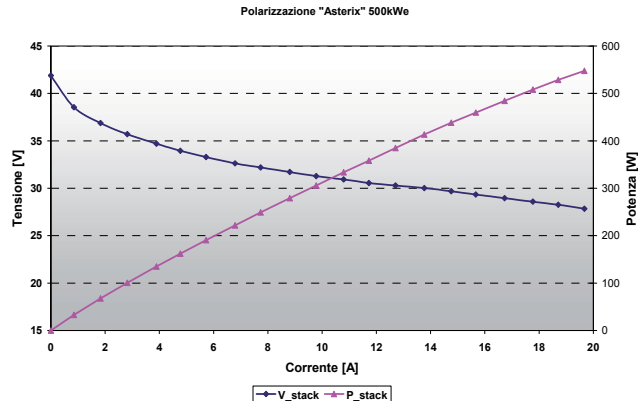


Fig. 26. Polarization curve of a SOFC system with a power of 500 W.

These systems are suitable for small recreation vehicles (i.e. motor cycles, golf car), utility vehicles (i.e. fork-lift trucks) and hybrid vehicles in range extended configuration.

5.2 Hybrid powertrain studies

Over the years, CNR ITAE has evaluated different powertrain configurations in terms of the energy flows and system components size. Here are reported some architectures chosen for hybrid powertrains used in small vehicles and buses.

The structure of a hybrid powertrain for a golf car is the same showed in figure 16. The hybrid powertrain is composed by the following main devices: fuel cell power source, battery pack, static power converter (inserted between FC and load diode between the static power converter and load). The fuel cell system is a compact power module with a nominal power of 5kWe, developed with Nuvera Fuel Cells. The lightweight vehicle was adequately instrumented for data acquisition by applying speed transducer, voltage and current sensors (fig. 27); it was subjected to a work cycle with heavy load conditions, both on road and in laboratory simulated by electric load.

In this latter configuration, the fuel cell is used as main power source for the powertrain, also providing battery charge. The battery has the role to provide peak power during the start up of the vehicle and to supply the necessary energy to the fuel cell system during the start up. The hybrid powertrain has shown a fast response even at extreme and impulsive loads and a wider range compared to a battery vehicle, without compromising the weight limitations on the vehicles.

The figure 28 shows the response of the battery and the fuel cell system during a rising transient. The behaviour of starting batteries is characterized by a short delay in the load response when rising transient begins. This phenomenon is due to a small power inlet from

fuel cell to batteries. The batteries package is connected directly to the electronic load and, in correspondence of the power demand, voltage decreases. As a consequence the recharging current of the batteries increases, since the voltage difference between PowerFlow and batteries is higher than the pre-fixed control value. During this very short time (0.1 s) the fuel cell tries to recharge the batteries even if the demand is higher than its rated power. This delay occurs every time the load changes. Moreover, the load response is slightly lower than the electronic load demand.



Fig. 27. Golf car Hybrid Powertrain.

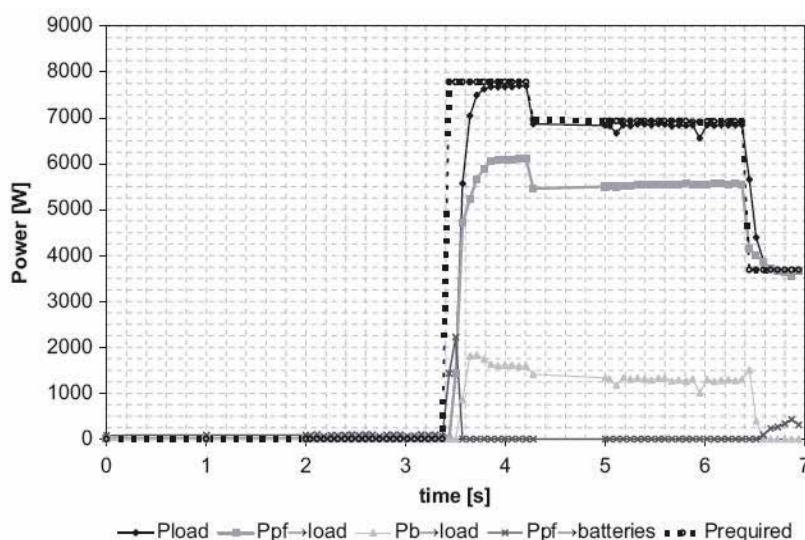


Fig. 28. Response of the battery and the fuel cell system during a rising transient.

An important instrument to identify the most favourable vehicle configuration in specified operating conditions is the computer simulations. Figure 29 shows a power train simulation for a bus in range extended configuration. A range-extender HEV is essentially an EV with an on-board charging system (Suppes GJ et al., 2004). Simulation studies have been performed to evaluate the potential SoC saving and autonomy increase with respect of pure battery EV bus. The simulation models have been developed in the Matlab® Simulink® environment utilizing the SimPowerSystems tool.

In the proposed configuration FC system works as batteries recharge that provides, following an identified strategy, the necessary power to the driving cycle to increase the autonomy of the vehicle. The storage system (traction batteries) provides, however, the energy required to satisfy the peak power demand. PEM Fuel Cell and ZEBRA® (Zero Emission Battery Research Activities) technologies have been selected for the fuel cell system and batteries, respectively.

The study has demonstrated that a power train with 6 ZEBRA® batteries connected with 5 kW FC system appears as the best solution. This configuration allows to increase the range of about 40% as shown Figure 30.

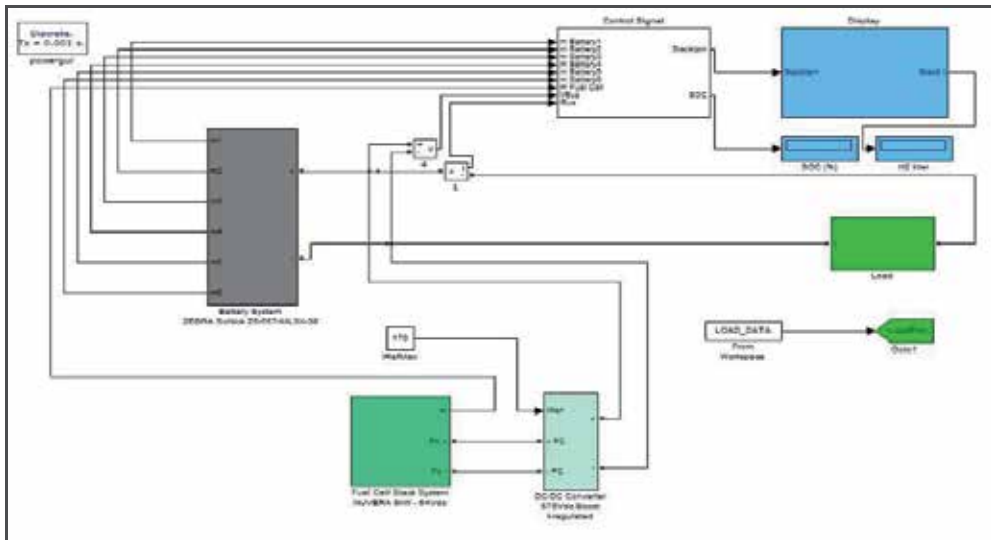


Fig. 29. Simulink® model of the powertrain for bus application.

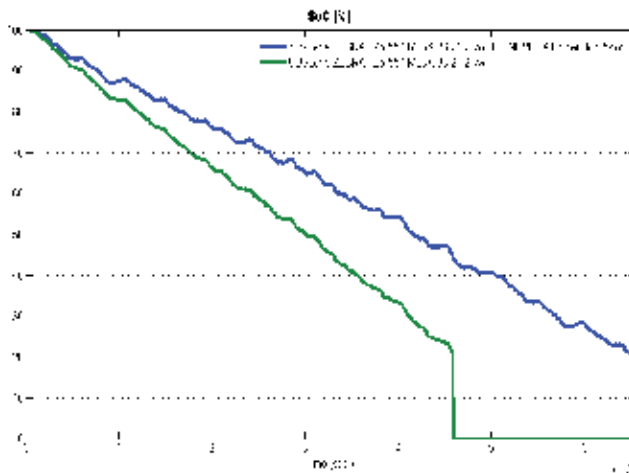


Fig. 30. SoC (%) analysis: Comparison of proposed HEV (blue) and pure battery EV (green).

The obtained results show that Fuel Cells and Batteries achieve an optimal synergy because their combination provides better performance and lower costs than batteries or total fuel cells vehicles.

With regard to the integration of fuel cell in the vehicles, the figure 31 shows the layout bus for the project "H-Bus". The fuel cell system and hydrogen storage are assembled on the top of the vehicle in substitution of N°1 batteries box. In order to reduce costs and improve the fuel cell system technological development the exiting vehicle structure and electric drive train technology have been used.

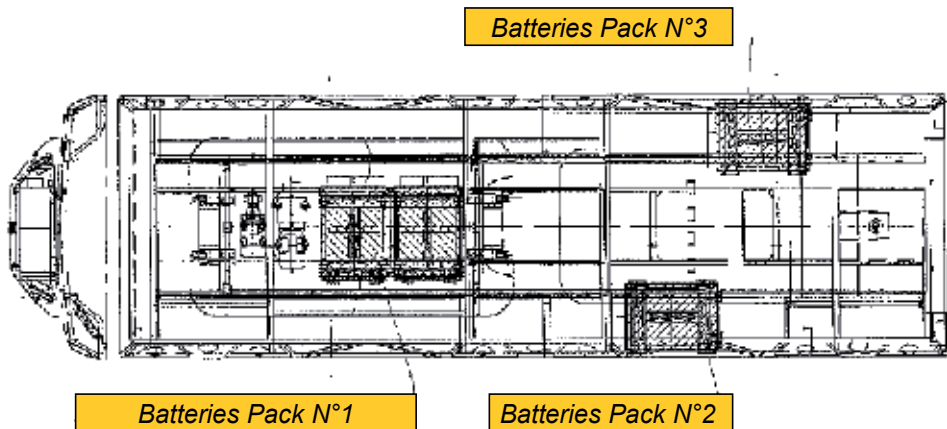


Fig. 31. Position of batteries packs on the top of the electric Bus version (only battery electric vehicle).

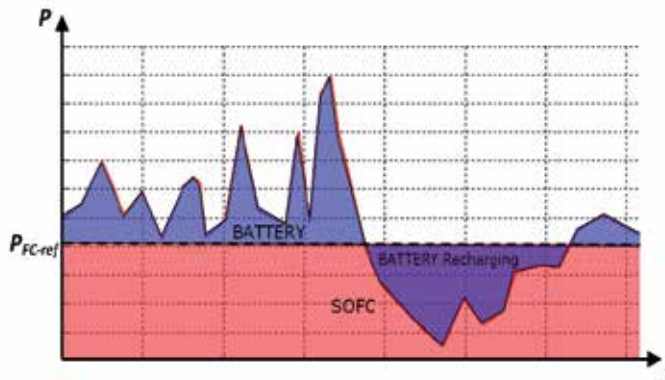


Fig. 32. Example of distribution of the power between SOFC and battery.

Some studies are focused on SOFC technology used mainly for APU demonstration units for road vehicles having a hybrid configuration (Battery and FC). The work here reported regards the integration of a little SOFC system of 500 W with a battery. In particular, a specific control algorithm was developed for utilizing the SOFC system as a *base* power source and battery as a *complementary* source (Fig.32). In fact, on the contrary of PEM technology, SOFC device is not able to follow fast and wide changes of the load because its

high working temperature. The aim is to develop an efficient hybrid system able to deliver the power requirement, to combine energy storage and to ensure durable operation.

To obtain benefits from the operation of a hybrid system, the flows of power within the system must be carefully planned and regulated in accordance with an appropriate energetic strategy to optimize the total efficiency and to preserve the devices from stress that may reduce their lifecycle. This research with a power of 500 W can be scaled-up and optimized for specific conditions.

6. References

- World Resources Institute, Sustainable Development Information Service, *The global commons: Proceed with caution: Growth in the global motor vehicle fleet*.
- Ogden, J. M. (2005). Alternative fuels and prospects-Overview, In: *Handbook of Fuel Cell*. Wolf Vielstich Arnold Lamm Hubert A. Gasteiger, 3-24, Wiley, England.
- European Commission COM(2010)186 April 2010. *A European strategy on clean and energy efficient vehicles*. Available from: < <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=COM:2010:0186:FIN:EN:PDF>>.
- McKinsey & Company on behalf of a consortium of 31 public and private companies. (November 2010). *A Portfolio of Powertrains for Europe: A Fact Based Analysis: The role of Battery Electric Vehicles, Plug-in Hybrids and Fuel Cell Electric Vehicles*. Available from :< www.zeroemissionvehicles.eu >
- DOE, (January 2009). *Hydrogen and Fuel Cell Activities, Progress, and Plans. Report to Congress*. Available from:
< http://www.hydrogen.energy.gov/pdfs/epact_report_sec811.pdf >
- DOE, (2010). *Well-to-Wheels Greenhouse Gas Emissions and Petroleum Use for Mid-Size Light-Duty Vehicles*. Available from:
< www.hydrogen.energy.gov/program_records.html >.
- Lisa Callaghan Jerram. 2008. *2008 Bus Survey*, Available from
< <http://www.fuelcelltoday.com/> >.
- Gemma Crawley. (March, 2006). *Proton Exchange Membrane (PEM) Fuel Cells*, Available from
< <http://www.fuelcelltoday.com/> >.
- Gemma Crawley. (August, 2007). *Direct Methanol Fuel Cells (DMFC)*. Available from
< <http://www.fuelcelltoday.com/> >.
- DOE (2010). *Research and Development of Fuel Cells for Stationary and Transportation*. Available from: < www.energy.gov/>.
- Lisa Callaghan Jerram (May, 2009). *2009 Light Duty Vehicle Survey*. Available from
< <http://www.fuelcelltoday.com/> >.
- Dr. Jonathan Butler (2008). *2008 Niche Transport Volume 2*. Available from
< <http://www.fuelcelltoday.com/> >.
- Gemma Crawley (2007). *Solid Oxide Fuel Cells (SOFC)*. Available from
< <http://www.fuelcelltoday.com/> >.
- Fuel Cell 2000 (2011). Available from
< <http://www.fuelcells.org/info/charts/carchart.pdf>>.
- Dr. Jonathan Butler (July 2008). *2008 Niche Transport Survey Vol.1*. Available from
< <http://www.fuelcelltoday.com/> >
- Suppes GJ, Lopes S, Chiu CW (2004). "Plug-in fuel cell , hybrids as transition technology to hydrogen infrastructure". *Int. J Hydrogen Energy* Vol. 29, pp. (369-374).

Supercapacitors as a Power Source in Electrical Vehicles

Zoran Stević and Mirjana Rajčić-Vujasinović
*University of Belgrade, Technical faculty in Bor
Serbia*

1. Introduction

Accelerated science and technology advances leads to improvement of human life, but also creating of new crisis situation. Mankind is confronted with risks not seen earlier in human history. Global warming is one of the typical examples. Although majority of the experts studying climate changes claim global warming and fact that it is caused by human, there are also scientists that doubt those statements. One of the main problems related to critical situations is - mater of responsibility.

World Governments have to consult with experts and to estimate well when to announce risk situation. Strong political initiative is needed to start dealing with serious ecological problems as it is global warming. Political agreements at the world level which are achieved so far under Kyoto protocol are not substantial enough to stop this phenomenon. According to this protocol, gas emission that creates greenhouse effect should be reduced by eight percent in first years of 20th century in European Union countries, seven percent in USA and six percent in Japan. Even under assumption that all of signers of protocol follow the agreement, global warming will continue till the moment of substantial reduction of gas emission.

On the other hand, industrial giants as „General Electric“, „Toyota“ and „Sharp“ and investment companies as „Goldman Sach“ are investing billions of dollars in clean technologies. A clean technology development is not just social problem governed by people dealing with environment protection, but it is also possible business that brings money and slowly flows into business streams. In fact, economy is confronted with new challenges due to very high energy prices, resource limits, global environment and security treats. That is why clean technologies - technologies designed to provide superior performance at lower price at same time creating less loses compared to conventional offerings - have great chance to become future motor force providing economic growth.

Science, certainly, before all spots problems of planet survival and life on it. It also tries to solve them and succeeds as much as it is possible in reality, having political, social, economical and technological factors.

Electric drive vehicles present one of the most important technological advances having in mind spread of this kind of nature pollution. Lately there is increased world interest for so called hybrid vehicles that have reduced fuel consumption and much less pollutants emission than regular vehicles. Hybrid vehicles can in broadest sense be described as vehicles utilizing combination of production and storage of energy (Van Voorden at al.,

2007). Good properties of conventional vehicles are combined (long range and acceleration, very good supply network) and electrical vehicles (zero emission, quiet operation, regenerative use of braking energy).

Two kinds of these vehicles are in consideration - so called parallel and series hybrids. In parallel hybrids there is a connection between power generator and driving wheels, while in series that relation is not present. Series hybrids have substantial advantages compared to parallels due to their mechanical simplicity, flexibility in terms of design and ability of simple new technologies incorporation (Stević at al., 2002).

In next five years electrical and hybrid vehicles may become real alternative to classical vehicles in big cities, as shown by research done by consultant company „Mc Kinsey & Company“. New York plans about 70.000 electrical vehicles in 2015 their number in new registered vehicles of 16 percent. Paris is planning for 60.000 and Sanghai 25.000 such vehicles.

Research showed that it is not required to build network of charging stations to increase sale of electrical vehicles, since users are ready to charge its vehicles batteries at home. As a next step could be a possibility of supermarkets, parking stalls and restaurants to offer their clients charging stations. Very good solution is exchange empty for charged accumulator batteries at the specialized stations.

Important factor to bring political decisions is a public opinion as well. So it is very important to raise global ecological awareness and wider public education in that sense. Goal of this chapter is to bring closer to reader new drive technologies that are intended to environment and nature protection in all.

2. Supercapacitors vs. accumulator batteries and fuel cells

Supercapacitors are relatively new type of capacitors distinguished by phenomenon of electrochemical double-layer, diffusion and large effective area, which leads to extremely large capacitance per unit of geometrical area (in order of multiple times compared to conventional capacitors). They are taking place in the area in-between lead batteries and conventional capacitors. In terms of specific energy (accumulated energy per mass unity or volume) and in terms of specific power (power per mass unity or volume) they take place in the area that covers the order of several magnitudes. Supercapacitors fulfill a very wide area between accumulator batteries and conventional capacitors taking into account specific energy and specific power (Conway, 1999). Batteries and fuel cells are typical devices of small specific power, while conventional capacitors can have specific power higher than $1\text{MW}/\text{dm}^3$, but at a very low specific energy. Electrochemical capacitors improve batteries characteristics considering specific power or improve capacitors characteristics considering specific energy in combination with them. In relation to other capacitor types, supercapacitors offer much higher capacitance and specific energies, as illustrated in Figure 1.

Accumulator batteries and low temperature fuel cells are typical devices with low specific power, where conventional capacitors may have specific power over $1\text{MW}/\text{dm}^3$, but at very low specific energy. Electrochemical capacitor can improve characteristics of batteries in terms of specific power and improve properties of capacitors in terms of specific energy when they are combined with them (Stević, 2001).

Supercapacitors, ultracapacitors (commercial denominations given originally by its manufactures Nippon Electric Company, NEC, in Japan, and by Pinnacle Research Institute,

PRI, in USA) or electrochemical double-layer capacitor (EDLC, technical name) are devices that can be used as energy storage systems, that have high energy and power densities, a high efficiency, nearly 95% and a large life expectancy (Guerrero et al. 2009).

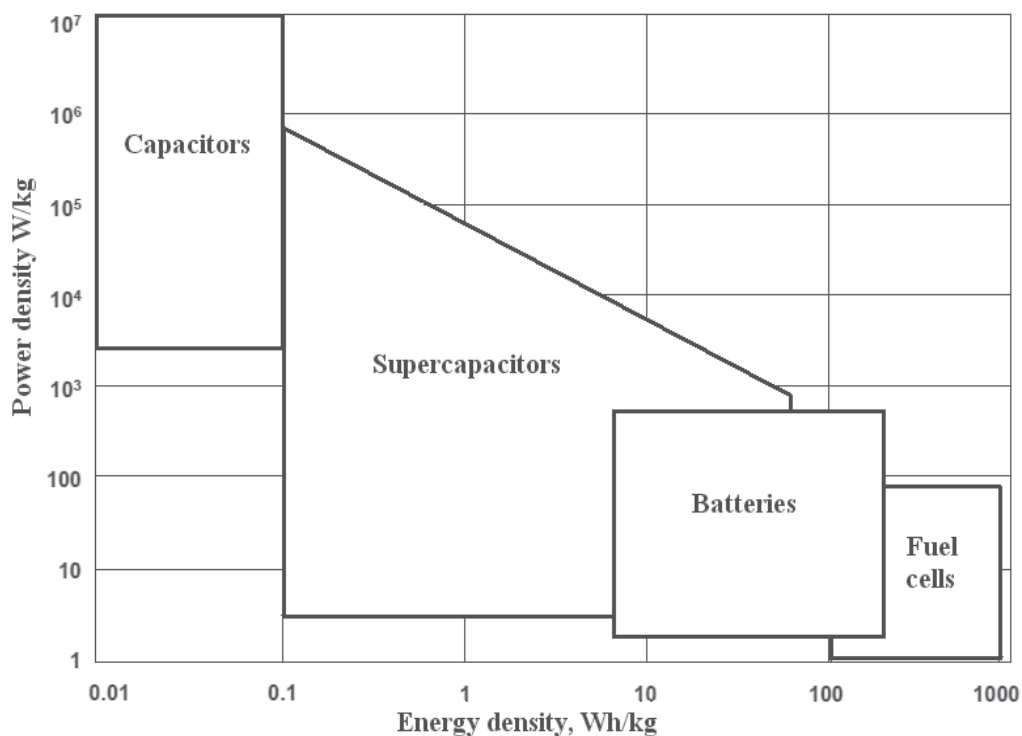


Fig. 1. Area diagram for various energy storage systems

Supercapacitors store charge in a similar way to conventional capacitors, but the charge does not accumulate in two conductors, but in the interface between the surface of a conductor and an electrolytic solution. Devices consist of two electrodes which allow a potential to be applied across the cell, therefore they present two double-layers, one at each electrode/electrolyte interface (Bugarinović et al., 2007). An ion-permeable separator is placed between the electrodes in order to prevent electrical contact, but still allows ions from the electrolyte to pass through. The electrodes are made with high effective surface materials, such as porous carbon or carbon aerogel (Bugarinović et al., 2008). Two principal technologies are used (Stević et al., 2010): aqueous (maximum voltage of 1.2 V and work voltage of 0.9 V) and organic (voltage near 3 V but with a much higher series resistance).

The principal supercapacitor characteristic that makes it suitable for using in energy storage systems (ESS), is the possibility of fast charge and discharge without loss of efficiency, for thousands of cycles. This is because they store electrical energy directly. Supercapacitors can recharge in a very short time having a great facility to supply high and frequent power demand peaks (Kotz & Carlen, 2000).

Supercapacitor can be manufactured in any size because they do not need a dielectric, form high capacitance supercondensators for hybrid vehicles, to small capacitance ones to be used in low power applications such as wireless systems.

Data given in Table 1 clearly show supercapacitor characteristics that make those devices adequate for purposes requiring great specific energy and great specific power combination or long lifetime denoted by charging and discharging number of cycles. In other words, capacitors have retained classical capacitors positive property to achieve almost unlimited charging and discharging number of cycles.

Characteristic	Classical capacitor	Supercapacitor	Accumulator
Discharging time	$\mu\text{s} - \text{ms}$	$\text{ms} - \text{weeks}$	$\text{min} - \text{months}$
Charging time	$\mu\text{s} - \text{ms}$	$\text{ms} - \text{minutes}$	hours
Specific energy	$< 0,01 \text{ Wh/dm}^3$	$0,5 - 5 \text{ Wh/dm}^3$	$< 500 \text{ Wh/dm}^3$
Specific power	$> 10^4 \text{ W/dm}^3$	$(1-3) 10^3 \text{ W/dm}^3$	$< 500 \text{ W/dm}^3$
Cycles number	$10^6 - 10^8$ (unlimited)	$10^6 - 10^8$	200 - 1000


Table 1. Capacitor, supercapacitor and accumulator basic characteristics

Literature offers data on two basic kinds of supercapacitors with different ways for energy storing (Arbizzani et al., 2001). New trends in electrochemical supercapacitors. *Journal of Power Sources*, Vol.100, No1-2, (November 2001):


- a. double layer capacitors
- b. redox supercapacitors.

Capacitance of the first kind is electrostatic by its nature, taking into account that distance between quasi electrodes is extremely short, and electrode material has highly developed surface. Typical examples are Faraday inactive coal powders including both assumptions. The name electrochemical double layer capacitor describes the elementary principle of energy storing at those devices. Principally, energy storing at double layer capacitor is a result of electrical charge separation at the interface between electrode as electronic conductor and electrolyte as ionic conductor. Capacitance created at that interface is the double layer capacitance. Owing to the large specific area, coal is one of the best examples of materials for double layer capacitors (Stević & Rajčić-Vujasinović, 2006). Electrochemical processes taking place on double layer capacitors can be described in the following way (Zheng et al. 1997):


Positive electrode:

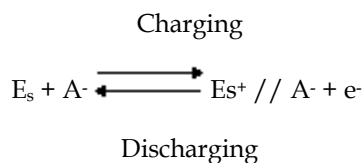

Negative electrode:



Overall reaction:

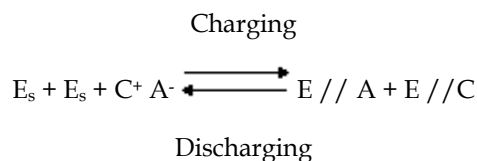

where E_s represents carbon electrode surface, // presents the double layer in where charges are accumulated on the two sides of the double layer, while C^+ and A^- represent the cation and the anion of the electrolyte. From above given equations it can be concluded that during the charge electrons are forward from the positive electrode to the negative electrode through an external power source, while positive and negative ions are separated from the bulk electrolyte and moved to the electrode surfaces. During the discharge, electrons move from the negative electrode to the positive electrode through the load, and ions are released from the electrode surface and moved back into the bulk of the electrolyte. As it can be seen from overall reaction, the salt (C^+A^-) in the electrolyte is consumed during charge, so the electrolyte could be considered as an active material. During the charge and discharge, the charge density at the interface electrode- electrolyte changes as well as concentration and electrolyte conductivity (Stević at al., 2002).

Figure 2 presents the scheme of a symmetrical double layer elemental cell as well as illustration of interface on which electrochemical double layer and potential drop appear (Rajčić-Vujasinović at al., 1999).

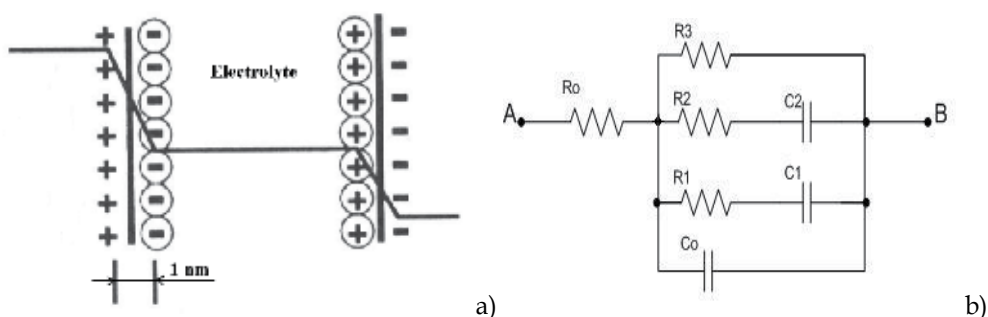


Fig. 2. (a) Cross section through a practical electrochemical double layer capacitor and profiles of the potential across an electrochemical capacitor; (b) Simplified equivalent electric circuit for an electrode - electrolyte interface

In the case of redox capacitors, in the course of electricity pass, Faraday processes are occurring as at batteries and a new phenomenon, called pseudocapacitance is appearing (Ardizzone at al., 1990). That is the reason why this kind of supercapacitors has got the name pseudocapacitors. Typical representatives of the supercapacitors type are RuO_2 , Co_3O_4 , NiO_2 and IrO_2 in acid water solutions. Investigation of materials by cyclic voltammetry method showed extremely capacitance behavior that can be explained only by double layer capacitance. The latest researches in this field are focused to the development of supercapacitors based at fast reversible Faraday reactions. Specific capacitances realized at those supercapacitors are from 50 to 64 F/g, specific energy from 25 to 40 kJ/kg and specific power 4 to 17 kW/kg.

Pseudocapacitors have rather greater values of specific energy comparing to carbon double layer capacitors. Besides, electrical conductivity of metal oxide (RuO_2) is extremely higher

than at carbons and all together lead to greater specific power or, in other words, to less RC (resistance – capacitance) value of time constant. These pseudocapacitors advantages are decreased by their high price compared to carbon. However, advantages realized with carbon materials can be combined with advantages achieved with transient metals oxides, so it led to the new class of electrochemical capacitors. Development of combined double layer Faraday pseudocapacitors as a result may have the use of the advantages of metal oxide Faraday capacitance and carbon material double layer capacitance (Miller et al. 1997). Investigations of behavior of copper sulphide minerals during their anodic polarization and modeling of these reactions were performed at Bor Technical faculty. On this occasion, it was established that equivalent electrical circuit must contain very high capacitances, indicating possibility of copper sulphide mineral use as potential material for electrochemical supercapacitor electrodes (Stević et al., 2003).

3. Supercapacitor characterization

Electrochemical investigation methods are widely used for characterization of different kinds of materials, as well as of the processes in systems where the electrochemical reactions take part. There is a series of well known methods, but some new methods from electrochemical area have been introduced (Stević et al., 2008). So, first of all it was given an overview of the standard electrochemical methods and parameters, beginning with potential measurement and simple methods such as chronopotentiometry and chronoamperometry, till electrochemical impedance spectroscopy (Stević et al., 2010). The last named method is adapted for systems containing large capacitances that became actually with appearance of electrochemical supercapacitors. New methods are Dirac voltage excitation and Dirac current excitation. Measurement system described here allows application of electrochemical methods, as follows: measuring open circuit potential, chronopotentiometry, chronoamperometry, galvanostatic method, potentiostatic method, Dirac voltage excitation, galvanodynamic method, cyclic voltammetry and electrochemical impedance spectroscopy.

For signal generation and data acquisition it was developed a measuring and control system based on PC Pentium 4. Beside PC, hardware consists of ADDA converter and external interface for analog signals conditioning. ADDA conversion is performed using commercially available converter NI 6251 from National Instruments, M series high-speed multifunction data acquisition. They have an onboard NI-PGIA2 amplifier designed for fast settling times and high scanning rates, ensuring 16-bit accuracy even when measuring all channels at maximum speeds.

Measurement interface has been designed for the needs of the electrochemical investigations by controlled current or voltage excitation and response registration.

The software platform for predicted measurement methods was National Instruments Lab VIEW package, which is regarded as a high standard in the area of modern virtual instruments. In Lab VIEW, one builds a user interface by using a set of tools and objects. The user interface is known as the front panel. As an example, the description, as well as Front Panel has been showed for the Electrochemical Impedance Spectroscopy (Stević et al., 2004).

3.1 Electrochemical impedance spectroscopy

In this method differs, before any measurement has been done, on the outlet there has been put the direct (DC) voltage to last long enough in order to achieve a stationary regime, and

then the current measurement can be started as a response to a complex excitation (superimposed alternating voltage of an order of magnitude millivolts on DC level up to 10V). The assigned parameters are: open circuit potential, E_{oc} , direct voltage, E_{DC} , and time of the regime duration, t_0 (Stević et al., 2009).

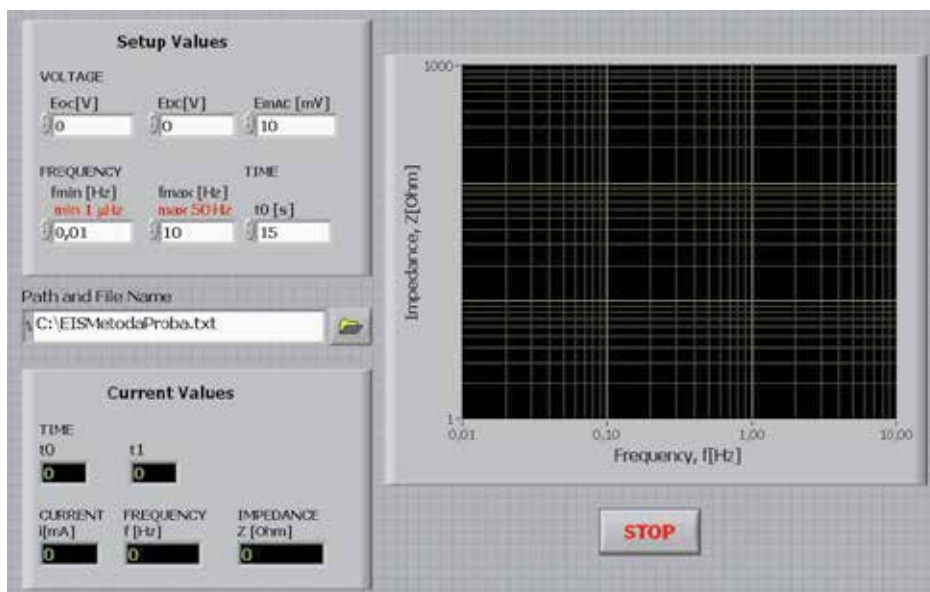


Fig. 3. Front panel of the measuring system for electrochemical impedance spectroscopy

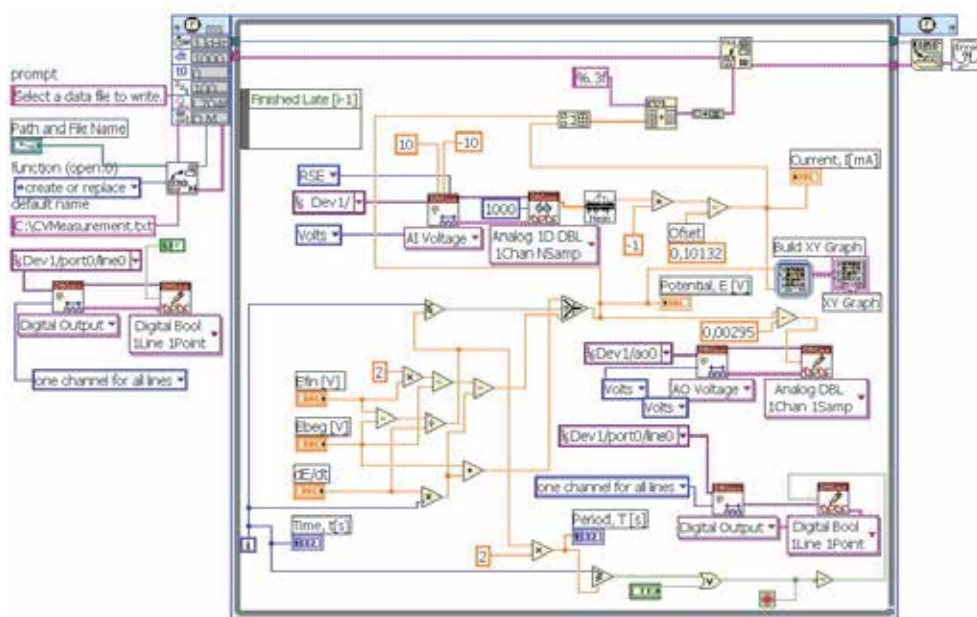


Fig. 4. Electrochemical impedance spectroscopy diagram

After the DC regime expires, the initial WHILE loop starts, in which the current value of the alternate voltage of the assigned amplitude E_{mAC} and the calculated frequencies (block DAQmx Write), the channel (AOCH1) have been generated. The frequency is calculated in the external loop according to octaves, in relation to the assigned values starting from f_{min} to f_{max} . The lowest frequency can be 1 μ Hz necessary for systems with high capacitances.

The generated alternating voltage is being superimposed with already installed DC voltage and they both make together the excitement of the electrochemical system.

The current response, which in the pseudo stationary regime has also got the sinusoidal shape with a DC component, is measured on the analog input channel, being averaged, converted into an array and led in a block Array Max&Min. On the base of this block it is possible to calculate the average maximal value of the superimposed component of the voltage excitation so that the outcome is the module of system impedance which is memorized and graphically displayed as a function of the logarithm of the frequency – Bode diagram of an impedance (Fig.3 and 4).

4. Supercapacitor applications

Considering applying, there are four groups of supercapacitors. Depending on applying place, different characteristics of supercapacitors can be more or less taken into account. Some of them are of crucial importance for capacitor choice, and some of them can be of no importance at all. The most important catalogue data for different commercial supercapacitor types are given in Table 2.

First group includes capacitors for supplying electronic consumers of small power and very low voltage (CMOS memories, watches, micro controllers, intelligent sensors etc.). They are most frequently produced as a miniature cell of great capacitance. Crucial role at choice have cell voltage, capacitance and self-discharging current. Inner (linear) resistance is resistance of less importance.

Second group includes filter capacitors for obtaining “ideally” filtered one-way voltages. Apart from great capacitance, cell voltage is of great importance for them, and for achieving working voltage, it most frequently requires linear connection of several cells. Self-discharging current and linear resistance are practically of no importance.

Third group of supercapacitors in future will have great application in energetic electronics complexes of medium power, using for electrical energy reservoirs in transient regime. There is an actual possibility to replace soon massive inductivities, which are at the same time great sources of electromagnetic disturbances. Used for those purposes, supercapacitor must have great capacitance and relatively great working voltage (implicating linear cell connection and all problems related to that). Inner resistance has to be rather small, and leakage current is not of greater importance.

Most strict requirements are related to capacitors of fourth group applying in electric haulage, i.e. for vehicles of the future. Nowadays, batteries of several hundreds farad capacitance are with working voltage of several hundred volts have been produced. Beside great capacitance and relatively high working voltage, these capacitors must have great specific energy and power (because of limited space in vehicle). Considering their specific power, they have great advantage in relation to accumulator batteries, but, on the other side, they are incomparably weaker considering specific energy. Hence, ideal combination is parallel connection of accumulator and condenser batteries. In an established regime

(normal drawing) vehicle engine is supplied from accu-battery, and in the case of rapidly speeding, from supercapacitor. Very important is the fact that in the case of abrupt breaking, complete mechanical energy could be taken back to system by converting into electrical energy only in presence of supercapacitor with great specific power. Because of mentioned reasons, inner resistance of these supercapacitors has to be extremely small. Leakage current is not of essential importance. Vehicles with such drive are not still in wide use, and the reasons for that are for sure economic.

Parameter / Model	Pulse fast supercapacitors		Supercapacitors for applying: Continually Reserve			
	55 x 35 x 4	27 x 17 x 2,0	φ24 / h5		φ21 / h15	
Nominal voltage, V	4,5	4,5	3,6	5,5	3,6	5,5
Nominal capacitance, mF	200 - 400	50 -80	1000	400	2400	1000
Leakage current, μA	< 50	< 20	< 3 - 25 do + 70			
Working/storage temperature, °C	- 20 do + 60	- 20 do + 60				

Table 2. Some of the most important characteristics of different supercapacitor types

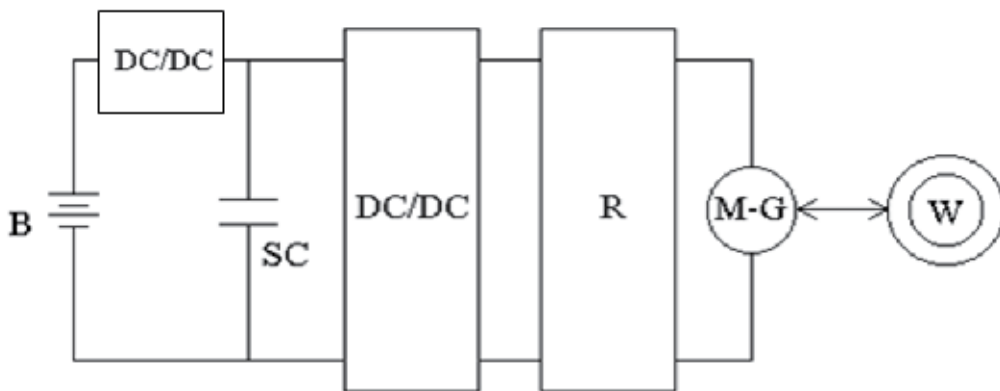


Fig. 5. Scheme of electrical drive vehicle with supercapacitor with possibility for using breaking energy; B - one-way voltage source, SC - supercapacitor; DC/DC - direct voltage converter; R - regulator; M-G - engine - generator (depending on working regime; W - drive wheels

Vehicles with electrical drive would present one of the most significant ecological advantages taking into account diffusion of this kind of nature pollution. There is an increased interesting for so-called hybrid vehicles in the world lately, with less fuel consumption and relatively less harmful product emission. Generally, hybrid vehicles could be described as vehicles using combination of technologies for energy production and

storage. Two types of the vehicles are in consideration – so called parallel and linear hybrids. Parallel type possesses mechanical connection between power generator and drive wheels, while in linear one such connection does not exist. Serial hybrids have significant advantages in relation to parallel ones because of their mechanical simplicity, design flexibility and possibility for simple incorporation of new technologies.

In Figure 5 the scheme of an electrical drive vehicle in which supercapacitor is used for energy storage and so-called regenerative braking is presented.

Critical component at each hybrid or pure electrical vehicle presents electrical storage. Supercapacitors are nowadays the only available technology, which can provide great specific power (over 1 kW/kg) and great number of cycles at reasonable price and save and reliable work. Supercapacitors have other characteristics that make them attractive in hybrid vehicles such as possibility of complete energy using (so called regenerative braking) for increasing energy efficiency, with no additional maintenance, great recovery of electrical energy, little toxicity and easy disposal after usage.

The greatest advance is expected at hybrid vehicles in city traffic. More variants of vehicle prototypes are tested in real conditions in heavy traffic of the largest world cities. Data on installed supercapacitors in a vehicle are given in Table 3.

Characteristic	Value
Voltage maximum, V	400
Current maximum, A	1400
Average current, A	178
Capacitance, F	4
ESR, W	0.143
Mass, kg	44.6
Average power, kW	51
Power maximum, kW	286
Average efficiency, %	86
Total energy, kJ	300
Useable energy, kJ	226
Energy density, Wh/kg	1.4
Power density, kW/kg	6.4

Table 3. Data on installed supercapacitors in a vehicle

5. Supercapacitors in regulated electrical drives

Regulated electrical drives are nowadays 20-25% of all electric drives. They are developing quickly and present to constructors stricter and stricter speed regulation (and position) and torque. From energy point of view it is desirable their more participation, since optimal speed setting or required can lead to reduction of used energy.

Typical regulated speed electrical drive is comprised of:

- converter located between source and motor that adjusts typical source values: frequency, voltage, current, number of phases to required by motor. Dosing this energy also achieves motor governing.

- Mechanical transmission between motor and load that adjusts motor speed and torque to torque of the working mechanism (load)
- Data from all elements (source, converter, motor, transmission, load) are collected by regulator (controller), which based on given (required) parameters performs automatic drive control.

DC source voltage is performed by means of DC-DC converter (chopper) combined with non regulated rectifier. Figure 6 shows principal scheme of such a system.

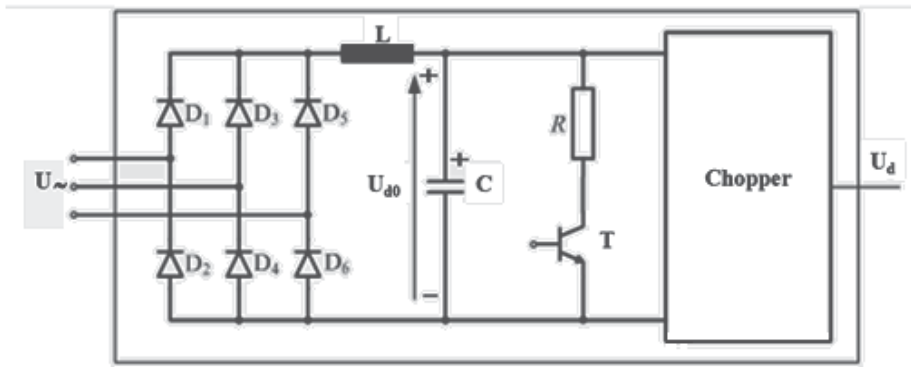


Fig. 6. Principal scheme of chopper supply

To provide braking, or to dissipate braking energy that cannot be returned to the network through diode rectifier, it is required to have braking device with transistor T and resistor R. Rectified voltage from rectifier ($D_1 - D_6$) is filtered by simple LC filter and brought to the chopper input that regulates mean value of output voltage U_d .

For motor supply there are mostly used chopper voltage reducers, so they will be considered here. Figure 7 shows simplified presentation of the chopper supply of a DC motor. Chopper is shown as ideal breaker controlled by voltage (U_{up}), so it can control switching on (T_{ON}) and switch-off (T_{off}) exiting voltage (U_{do}).

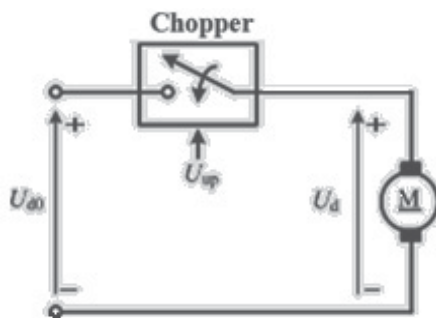


Fig. 7. Simplified presentation of the chopper supply of a DC motor

Chopping frequency is by the definition:

$$f_c = \frac{1}{T_{on} + T_{off}} = \frac{1}{T}$$

Also, compliance factor is defined:

$$d = \frac{T_{on}}{T}$$

So, output voltage is:

$$U_d = d U_{do}$$

So, by changing T_{on}/T_{off} ratio, the output voltage U_d can be adjusted between 0 and U_{do} . Simplified chopper shown can provide only first quadrant operation. For all four quadrant operation transistor bridge as shown in figure 8 can be used:

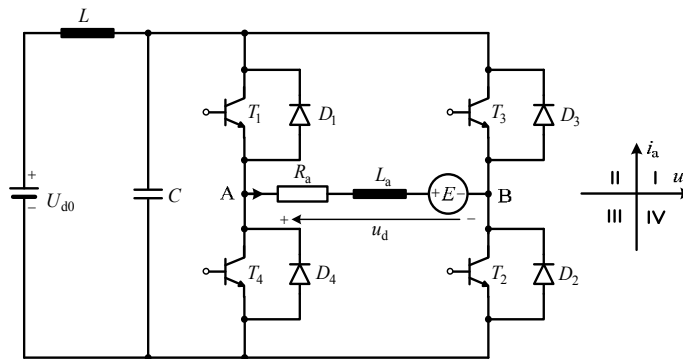


Fig. 8. Transistor bridge

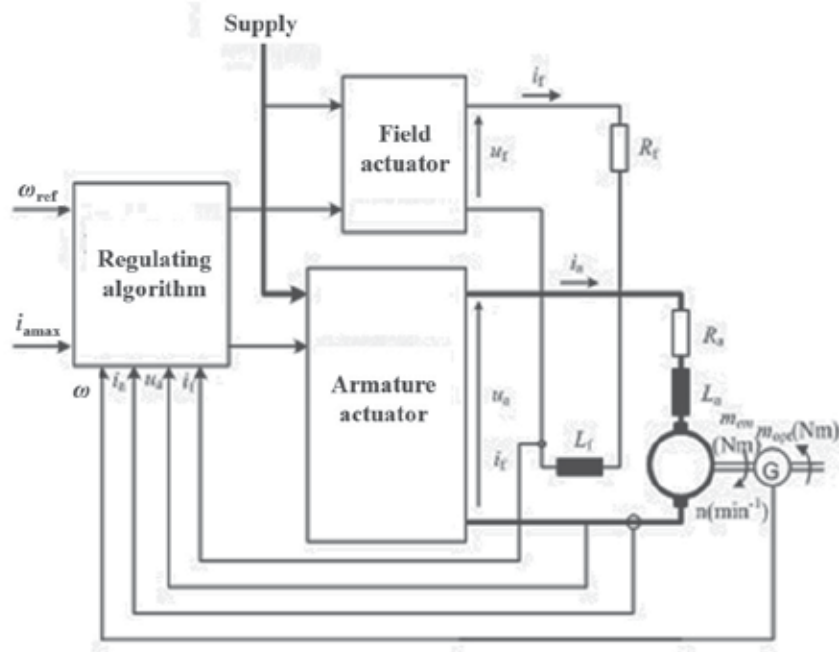


Fig. 9. Circuit for speed regulation of DC motor with independent field

By switching on transistor pairs T_1 - T_2 or T_3 - T_4 positive or negative polarity of motor voltage u_d is provided. To close motor current at null or reverse polarization, diodes D_1 to D_4 are provided.

General modern circuit for speed regulation of DC motor is shown in figure 9. Reference rotary speed W_{ref} is set and also maximum armature current I_{amax} and their actual values are monitored and also brought into regulator which outputs present command values for excitation actuators and inductor.

Out of base range (for speeds above nominal) method of reduced field is used so among basic values excitation current, i_f , is monitored.

Apart from classic PID action, regulating algorithm comprises other tasks (actuator command input adaptation, change of regulating method in accordance with the given speed, alarms etc.). Standard way of regulating DC drives, cascade regulation, consists of two feedbacks: internal – current and external – speed.

Asynchronous motor at constant frequency and amplitude of supply voltage rotor speed depends of load torque, which requires complicated governing algorithms in case when precise speed control and/or position. This phenomenon is a consequence of principle of asynchronous motor, and it is electromagnetic induction, which requires difference in between rotor speed and rotary magnetic field generated by stator to create electromagnetic torque. Electronics that creates algorithms mentioned was expensive earlier and such a use of asynchronous motors was difficult, but today with cheaper electronics components and use of microprocessors for regulating algorithms they are more often used.

Figure 2.15 represents block-diagram of regulated drive for AC motor. Depending on use and requirements, some of feedbacks and regulators can be left out. Power block (converter + motor) has two input and five output values. Input (command) parameters are effective polyphase supply voltage U_d and frequency W_s . Output (regulated) values are motor current I_s , flux w , position O , rotary frequency w and torque m_e . Each of those has proper regulator in negative feedback, in order as shown in figure 10.

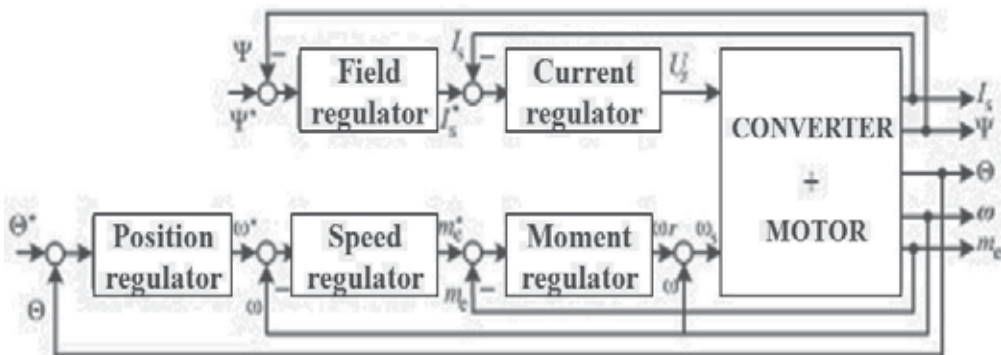


Fig. 10. Block diagram of AC motor regulator

Regulation (close-loop control) comprises control with negative feedback, or feedbacks, by means of which, by means of measuring regulated parameters and comparing with required (reference) parameters those values, is acted upon command parameters, so it is automatically achieved ahead defined values of controlled values. That way more complex dynamic system is achieved which inputs no longer present control, but reference values,

5. Conclusion

Electric drive vehicles are one of the most advanced taking in account contamination of environment. Lately there is an increased interest in the world for hybrid vehicles that have smaller fuel consumption and substantially less contamination emission footprint. Hybrid vehicles in most general terms can be described as vehicles comprising combination of energy producing and storing. Two types of vehicles are considered – so called parallel and serial hybrids. With parallel hybrids there is a mechanical connection between power generator and driving wheels, and with serial hybrids there is no such a connection. Serial hybrids have common advantages over parallel due to mechanical simplicity, flexibility in terms of design and ability for simple new technology incorporation.

Critical component in every hybrid or purely electrical vehicle is energy storing. Possible solutions are accumulators, supercapacitors, flying wheels, hydraulic devices and new special materials for hydrogen storing. It was already mentioned that accumulators have specific power problem. Flying wheels are still in development same as energy storing using hydrogen, so substantial technological improvements are needed before they can be put in use. Supercapacitors are only available technology today that can provide high power (over 1kW/kg) and great cycle numbers at acceptable price. Supercapacitors have other properties that makes them interesting in hybrid vehicles, and it's ability of complete regeneration of energy of braking (so called regenerative braking), which increases energy efficiency, no special maintenance needed, great utilization of electric energy, small toxicity and easy storage after use.

Most demanding requirements are set for capacitors that are used in electric drives, or in the vehicles of the future. Batteries with large capacitance of several hundred Farads and few hundred volts of working voltages are already produced. Apart from large capacitance and relatively high working voltage those capacitors also must have high specific energy and power (for reason of limited vehicle space). They have huge advantage in terms of specific power compared to accumulator batteries, but they are incomparably worse in terms of specific energy. That's why the ideal combination becomes parallel connection of accumulator and capacitor batteries. In steady state (normal drive) vehicle motor is supplied from accu-battery and at sudden accelerating it is fed from supercapacitor. Very important fact is that at sudden breaking all mechanical energy can be returned to a system by transforming to electric energy only with presence of supercapacitors with high specific power. For the reasons mentioned internal resistance of supercapacitors used has to be significantly low. Leakage current is of no importance. Vehicles with this kind of drive are still not highly implemented in use, mainly for economical reasons.

In this chapter theoretical base is presented, practical realization and use feasibility of supercapacitors in block of electrical vehicle power supply in combination with accumulator batteries or with fuel cells. It also presents regulator solutions and other essential power solid state assemblies in optimized electrical vehicles.

6. Acknowledgment

This work was financially supported by the Ministry of Science and Technological Development of Serbia (Project No. 172060).

7. References

- Arbizzani, C.; Mastragostino, M. & Soavi, F. (2001). New trends in electrochemical supercapacitors. *Journal of Power Sources*, Vol.100, No1-2, (November 2001), pp. 164-170 ISSN 0378-7753
- Ardizzone, S.; Fregonara, G. & Trasatti, S. (1990). »Inner« and »outer« active surface of RuO₂ electrodes. *Electrochimica Acta*, Vol.35, No1, (January 1990), pp. 263-267, ISSN 0013-4686.
- Bugarinović, S.; Rajčić-Vujasinović, M. & Stević, Z. Construction of double layer capacitors, *Proceedings of 39th International October Conference on Mining and Metallurgy*, pp. 470-476, ISBN 987-86-80987-52-1, Sokobanja, Serbia, October 7-10, 2007.
- Bugarinović, S.; Rajčić Vujasinović, M. & Stević, Z. (2008). Supercapacitors based on activated carbon, *Proceedings on 40th International October Conference on Mining and Metallurgy*, pp. 417-422, ISBN 978-86-80978-60-6, Sokobanja, Serbia, October 5-8, 2008.
- Conway, B.E. (1999). *Fundamentals of Electrochemical Capacitor Design and Operation*. In: *Electrochemical Supercapacitors: Scientific Fundamentals and Technological Applications*, Kluwer Academic/Plenum Publishers, ISBN 0-306-45736-9, New York, USA.
- Guerrero, M.A.; Romero, E.; Barrero, F.; Milanés, M. I. & González E. Supercapacitors: Alternative Energy Storage Systems. *Power Electronics & Electric Systems (PE&ES)*, School of Industrial Engineering (University of Extremadura). Available from: andes.unex.es/archives%5CP126.pdf
- Hadartz, M. & Julander M. (June 6, 2008). *Battery-Supercapacitor Energy Storage*, Master of Science Thesis in Electrical Engineering, Chalmers University of Technology, Göteborg, Sweden.
- Kotz, R. & Carlen, M. (2000). Principles and applications of electrochemical capacitors. *Electrochimica Acta*, Vol.45, No15-16, (May 2000), pp. 2483-2498, ISSN 0013-4686.
- Miller, J.M.; Dunn, B.; Tran, T.D. & Pekala, R.W. (1997). Deposition of ruthenium nanoparticles on Carbon Aerogels for High Energy Density Supercapacitor Electrodes. *J. Electrochem. Soc.*, Vol.144, No12, (December 1997), L309-311, ISSN 0013-4651.
- Park, J. & Mackay, S. (2003). *Practical Data Acquisition for Instrumentation and Control Systems* (1st edition), Newnes, Oxford, Burlington, ISBN 07506 57960, Mumbai, India.
- Stević, Z.; Andjelković, Z. & Antić, D. (2008). A New PC and LabVIEW Package Based System for Electrochemical Investigations. *Sensors*, Vol.8, No3, (March 2008), pp. 1819-1831, ISSN 1424-8220.
- Rajčić-Vujasinović, M.; Stanković, Z. & Stević, Z. Consideration of the electrical circuit analogous to the copper or coppersulfide/electrolyte interfaces based on the time transient analysis. *Russian Journal of Electrochemistry*, Vol.35, No3, (March 1999), pp. 320- 327, ISSN 1023-1935.
- Stević, Z. Supercapacitors based on copper sulfides, Ph.D. Thesis, University of Belgrade, 2001
- Stević, Z. & Rajčić-Vujasinović, M. (2006). Chalcocite as a potential material for supercapacitors. *Journal of Power Sources*, Vol.160, No2, (October 2006), pp. 1511-1517, ISSN 0378-7753.

- Stević, Z.; Rajčić-Vujasinović, M.; Bugarinović, S. & Dekanski, A. (2010). Construction and Characterisation of Double Layer Capacitors. *Acta Physica Polonica A*, Vol.117, No1, (January, 2010), pp. 228-233, ISSN 0587-4246.
- Stević, Z.; Rajčić-Vujasinović, M. & Dekanski, A. (2009). Estimation of Parameters Obtained by Electrochemical Impedance Spectroscopy on Systems Containing High Capacities. *Sensors*, Vol.9, No9, (September 2009), pp. 7365-7373, ISSN 1424-8220.
- Stević, Z.; Rajčić-Vujasinović, M.; Nikolovski, D. & Antić, D. (2010). Hardware and software of a system for electrochemical and bioelectrochemical investigations, *Book of abstracts on CD ISIRR 2010, 11th International Symposium on Interdisciplinary Regional Research*, pp. 139, Szeged, Hungary, October 13-15, 2010.
- Stević, Z.; Rajčić-Vujasinović, M. & Stanković Z. (2002). Achievements and perspectives in supercapacitors development and applying, *Proceedings of 34th International October Conference on Mining and Metallurgy*, pp. 435-440, ISBN 86-80987-17-4, Bor Lake, Serbia, September 30 – October 3, 2002.
- Stević, Z.; Rajčić-Vujasinović, M. & Stanković, Z. (2002). Galvanostatic investigations of copper sulfides as a potential electrode material for supercapacitors, PO 320, *Book of Abstracts 3rd International Conference of the Chemical Societies of the South-Eastern European Countries on Chemistry in the New Millennium – an Endless Frontier*, Vol.II, pp. 97, Bucharest, Romania, September 22-25, 2002.
- Stević, Z.; Rajčić-Vujasinović, M. & Stanković, Z. (2003) Modelling of copper sulphide/electrolyte systems as a potential material for supercapacitors *Proceedings of XXII International Mineral Processing Congress*, pp.463, ISBN 0-9584663-4-3, Cape Town, South Africa, September 28 – October 3, 2003.
- Stević, Z.; Rajčić-Vujasinović, M. & Stojiljković, Z. (2004). Testing of system for electrochemical impedance spectroscopy developed at Technical faculty in Bor, *Proceedings of 36th International October Conference on Mining and Metallurgy*, pp. 415-418, ISBN 86-80987-27-1 Bor Lake, Serbia, September 29 – October 2, 2004.
- Van Voorden, A.M.; Ramirez Elizondo, L.M.; Paap, G.C.; Verboomen, J. & Van der Sluis, L. (2007). The Application of Super Capacitors to relieve Battery-storage systems in Autonomous Renewable Energy Systems. *Power Tech*, pp. 290-295.
- Zheng, J.P.; Huang, J. & Jow, T.R. (1997). The limitations of energy density fro electrochemical capacitors. *J. Electrochem Soc.*, Vol.144, No6, (June 1997) pp. 2026-2031, ISSN 0013-4651.

Integration of Electric Vehicles in the Electric Utility Systems

Cristina Camus, Jorge Esteves and Tiago Farias
*Instituto Superior de Engenharia de Lisboa, Instituto Superior Técnico
Portugal*

1. Introduction

In the last decades, the energy use for electricity production and for the transportation sector have more than duplicated (IEA - WEO, 2007) and today face a number of challenges related to reliability, security and environmental sustainability. The scientific evidence on climate change (IPCC, 2007) has been calling for urgent cross-sector emission cutting and electrified transportation is in the portfolio of the technology options that may help to solve the problem (IEA - ETP, 2008). In most of OCDE countries the transportation and electric power systems contribute to the majority of CO₂ emissions (IEA - WEO, 2008) and most of the fossil fuels (coal, natural gas and oil) used to produce electricity and for transportation are, in many of these countries, imported. Oil accounts to the majority of this primary energy imports and more than 60% of it, is used for transportation (mainly road transportation) and so is responsible for the majority of emissions associated to the transport sector. All these facts are pressing decision makers/manufacturers to act on the road transportation sector, introducing more efficient vehicles on the market and diversifying the energy sources.

The technological evolution of the Electric Drive Vehicles (EDV) of different types: Hybrid Vehicles (HEV), Battery Electric Vehicles (BEV) and Fuel Cell Vehicles (FCV), will lead to a progressive penetration of EDV's in the transportation sector taking the place of Internal Combustion Engine Vehicles (ICEV). The next step in EDV technological development, already announced by some of the main automakers, (EV World, 2009) is the possibility of plugging into a standard electric power outlet so that they can charge batteries with electric energy from the grid. A lot of companies including many key and niche players worldwide are reported to have been developing models for the coming years in the segments of battery powered electric vehicles, Plug-In Hybrid Electric Vehicles (PHEVs), and fuel cell electric vehicles (EV ReportLinker, 2007).

By shifting currently non-electric loads to the grid, electric vehicles might play a crucial role in the integration of these two critical elements of the whole energy system: power generation and transportation. In a scenario where a commitment is made to reduce emissions from power generation, the build-up of new intermittent power capacity is problematic for the electric systems operation (Skea, J, et al., 2008) and usually needs large investments in energy storage. The addition of extra load from electric vehicles in the electricity system can be challenging, if together both systems are more efficient and able to reduce overall emissions. Furthermore, for future energy systems, with a high electrification of transportation, Vehicle to Grid (V2G) concepts can offer a potential storage capacity and use stored energy in

batteries to support the grid in periods of shortage. By itself, each vehicle is small in its impact on the power system, but a large number of vehicles could have a significant impact either as an additional charge or a source of distributed generating capacity (Kempton and Tomic, 2005a; Kempton and Tomic, 2005b).

This chapter is concerned with studying the potential impacts of the electric vehicles on the electricity systems, with a focus on the additional power demand, power generation emissions associated with EVs and the role of demand side management (DSM) strategies in supporting their penetration as well as the economic impacts of EVs on electric utilities.

The analysis of the impact on the electric utilities of large-scale adoption of plug-in electric vehicles from the perspective of electricity demand, CO₂ and other green house gas emissions and energy costs can be studied for two different electric utility's environments: A big electric system synchronized with similar systems within the same Continent, and a small Island, a lower electric isolated system. Each case has very different characteristics the most important ones are the robustness of the systems, the isolated system needs more backup power installed and usually has less variety in the production technologies. Other major difference is that in a small Island, due to its dimension and apartness, there is no room to run an electricity market, so that the whole service of electricity supply is provided by a regulated monopoly. These differences have influence on the final electricity price formation.

Many studies regarding battery electric vehicles and Plug in hybrids are being performed in different countries. In the US, for instance, the capacity of the electric power infrastructure in different regions was studied for the supply of the additional load due to PHEV penetration (Kintner-Meyer et al., 2007) and the economic assessment of the impacts of PHEV adoption on vehicles owners and on electric utilities (Scott et al., 2007). Other studies (Hadley, 2006) considered the scenario of one million PHEVs added to a US sub-region and analyzed the potential changes in demand, impacts on generation adequacy, transmission and distribution and later the same analysis was extended to 13 US regions with the inclusion of GHG estimation for each of the seven scenarios performed for each region (Hadley, 2008). The ability to schedule both charging and very limited discharging of PHEVs could significantly increase power system utilization. The evaluation of the effects of optimal PHEV charging, under the assumption that utilities will indirectly or directly control when charging takes place, providing consumers with the absolute lowest cost of driving energy by using low-cost off-peak electricity, was also studied (Denholm and Short, 2006). This study was based on existing electricity demand and driving patterns, six geographic regions in the United States were evaluated and found that when PHEVs derive 40% of their miles from electricity, no new electric generation capacity was required under optimal dispatch rules for a 50% PHEV penetration. A similar study was made also by NREL (National Renewable Energy Laboratory) but here the analysis focused only one specific region and four scenarios for charging were evaluated in terms of grid impact and also in terms of GHG emissions (Parks et al., 2007). The results showed that off-peak charging would be more efficient in terms of grid stress and energy costs and a significant reduction on CO₂ emissions was expected though an increase in SO₂ emissions was also expected due to the off peak charging being composed of a large amount of coal generation. The results obtained in one place on earth cannot be used in other regions only the methodologies. Apart from reasons that are related to car use habits and roads' topology, there is the electricity production source mix that is different from place to place, more expensive in some places and with more use of renewable sources in others. These

differences will also be focused on this chapter and the way they contribute to the EVs' fuel/energy costs and the emissions balance between the power generation and the road transportation sectors with electric mobility.

2. Electric utility systems

In this section, a description of the electric power systems demand is done emphasizing its evolution along a day and the contribution that electric vehicles may have for leveling the power consumption diagram. Examples of the typical load profiles filled with the different technologies available (renewable sources, big hydro and thermal units) are presented, as well as the possible percentage of renewable in the electricity production. Then, the emissions associated with the electric vehicles' recharging are accounted.

To study the economic impacts for the two case studies, the different rules for technology dispatch are described in a market environment and in the case of a traditional integrated electric system. In this section an explanation of how the price for end consumers (where electric cars are included) is formed will be done with examples taken from a market environment and from a vertically integrated company in an isolated Island.

2.1 Electricity demand

Nowadays, electric power systems are designed to respond to instantaneous consumer demand. One of the main features of power consumption is the difference in demand along the day hours, the week days and seasons. Fig. 1 shows, as an example, the hourly demand profiles of the Portuguese electric system. Each curve represents a week of worth data from four different seasons in 2008 and illustrates the variation in electricity demand. It can be observed that, in this country, the annual peak demand occurs during winter months (December or January), in the evening.

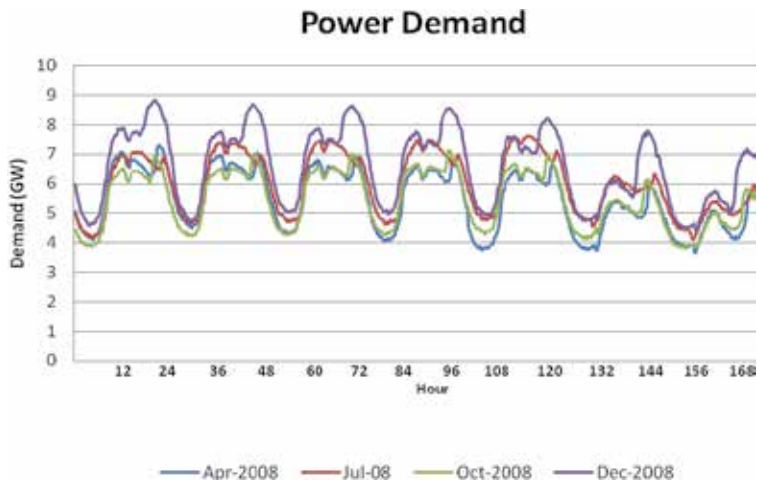


Fig. 1. Power demand profiles in Portugal for different seasons

This variation in daily and seasonal demand could mean that there is always some underutilized capacity that could be used during off peak hours. Looking at average values,

Fig. 2 presents the evolution of the hourly average power consumption in Portugal over the 24 hours of the day during the whole year 2008. This evolution along the day has nevertheless a valley during the night that represents about 60% of the peak consumption and so has great financial consequences with the need of having several power plants that are useless and an underutilized network during the night. This situation gives the opportunity for electric vehicles contribution for levelling the power consumption diagram.

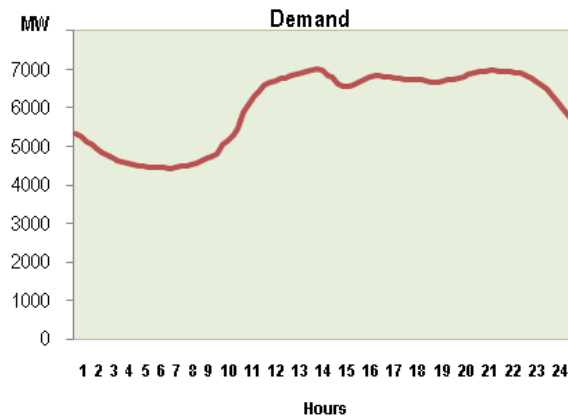


Fig. 2. Example hourly average power consumption during (weekdays in Portugal mainland year 2008)

As an example, Fig. 3 shows the estimated contribution for the power consumption diagram levelling when considering different levels of the electric vehicles penetration. Portugal mainland was used as an example and it was considered that 85% of the electric vehicle charging happens uniformly during the valley hours (from 11pm to 8am) with the rest charge happening uniformly during the other 14 hours of the day. The extra energy that each electric vehicle should charge from the grid in average was considered about 2.5MWh per year, more or less 7kWh per day plus a 10% in transmission losses.

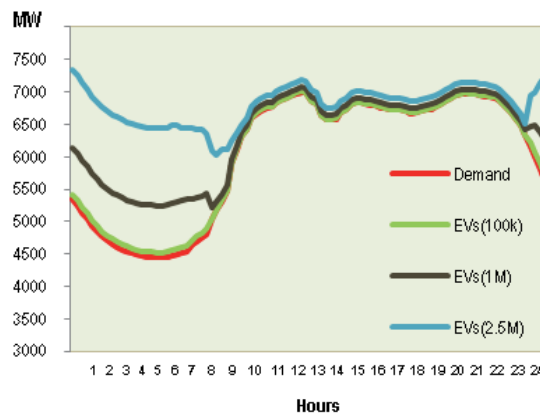


Fig. 3. Electric vehicles contribution to the consumption diagram leveling

As can be observed in Fig.3 only with a high penetration of vehicles like ca. 1million units (almost $\frac{1}{4}$ of the country's light duty fleet), the impacts are visible in the consumption profile. The main question is how to incentivise off-peak charging?

It is easy to foresee major congestion problems in already heavily loaded grids and voltage profile problems in predominantly radial networks, particularly if the peak load periods coincide with EV charging periods. Hence, if no load management strategies are defined, significant technical problems will occur and their drawbacks might even be larger than the economic/environmental benefits arising from electric vehicles usage (Fig.4).

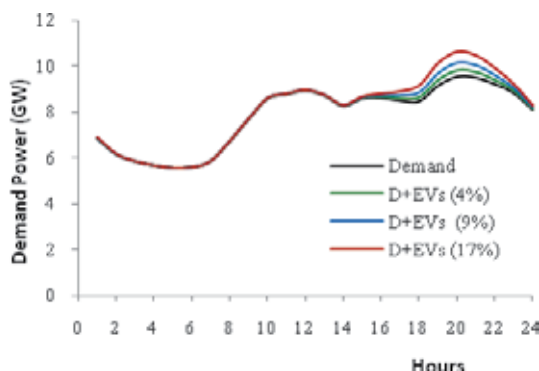


Fig. 4. Load profile simulation of the peak demand weak for year 2015 with 4, 9 and 17% light duty fleet replacement with EV's that recharge at peak hours in Portugal mainland.

The management strategies to prevent peak recharge can be adopted in two ways:

- By developing a dynamic price signal approach such that EV will charge predominantly during low energy price/demand moments or
- By developing a technical management system such that charging can be distributed during valley hour periods and at times when there is large renewable power generation.

In a scenario of mass EVs penetration, the recharging profiles are important for the electric utility system's sake and their effects on peak consumption, electricity prices and grid congestion should be carefully foreseen and studied.

2.2 Electric power consumption and power plants technologies

The hourly average power consumption during a day presented in Fig. 2 has an equivalent diagram when analyzing the distribution during the 24 hours of the day of the annual energy consumed. Fig. 5 presents this distribution and also the different power technologies that generated this energy demand.

The great difference between the consumption at valley and at off-valley hours represents a barrier to the penetration of generation technologies that need to work more hours per year in order to become economically viable (usually with low unit variable costs but with large fixed costs) or non dispatchable units (renewable energies).

The effective use of the country's power plant fleet can be illustrated by the load duration curve (LDC), where the hourly average power over the whole year is sorted by decreasing order constituting a curve that begins with the year peak at hour 1 and the smallest demand at hour 8760 as illustrated in Fig. 6. In this example, the unutilized capacity could be

annually 4000 GWh. Nowadays some of this capacity is used in pumping during off-peak hours. In 2008, about 700GWh were used for pumping to provide energy storage in reservoirs available for the peak hours. Without increasing capacity it would be possible to account with around 3000 GWh a year for extra off-peak loads that could be used in plug-in electric vehicles' recharging. Considering a 3MWh/year of extra energy needed to charge an EV, it is possible to have one million EVs charging their batteries during valley hours, without any more investments in power installed and transmission lines.

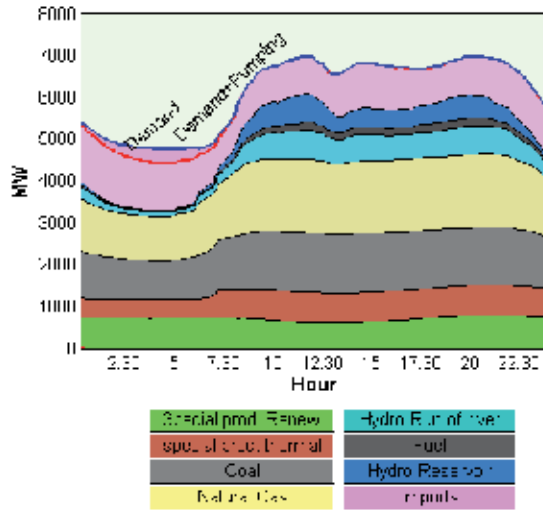


Fig. 5. Example of hourly energy consumption with used power plants technologies

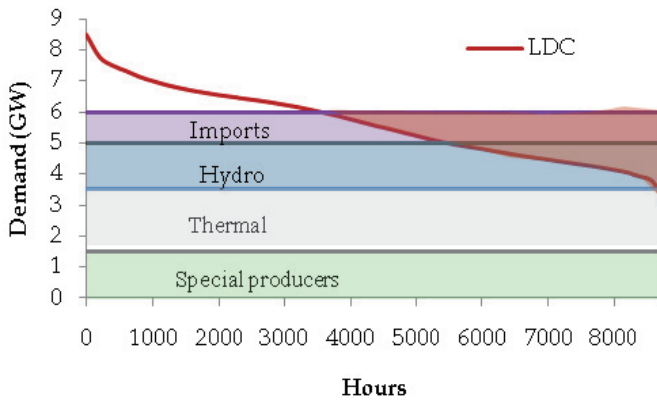


Fig. 6. Load duration curve for Portugal in year 2007

In addition to the fixed costs associated with underutilized capacity, the significant cycling that occurs on a daily basis creates additional costs for plants due to the constantly varying loads that could require generators to operate well below the “design point” of optimum efficiency. Power plant cycling also increases operation and maintenance requirements.

This last situation is more visible for instance at St. Miguel Island in Azores, where the geothermal energy production (renewable energy without CO₂ emissions that should be used as base load due to its impossibility of production variation) penetration is limited by the valley consumption. If base load electricity generation is much higher than actual demand, excess electricity will be wasted unless it is coupled to a storage system. This is an example, where the use of EVs, charged during off-peak hours, allow the development of a production technology from a renewable, endogenous source, with no CO₂ emissions, against the systematic fuel imports (for vehicles and for electricity production).

S. Miguel has 27MW of existing geothermal capacity and the government wants to expand this capacity to meet future demand. Expanding existing capacity would mean that geothermal production will meet 40MW (EDA 2009). Current base load electricity demand is nowadays less than 40MW (Fig.7).

There is the possibility of increasing the geothermal capacity in 3MW by 2011 and 10MW in 2013, but these investments are limited by the off-peak demand. Even considering a demand increase of 4% for years 2010 to 2013, there is not enough off-peak demand to fill the valley and at the same time assure at least a 10% of fuel power to prevent any shortage of the renewable energy sources.

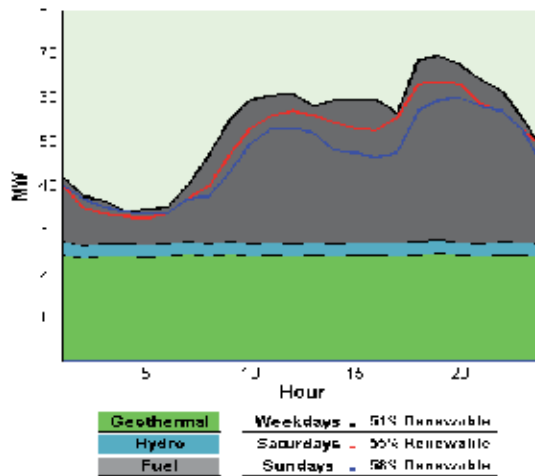


Fig. 7. Typical Winter Power consumption diagram at the S. Miguel Island, Azores, Portugal

As stated in last section, the fact that the valley demand, in this case, is about half the value of peak demand, gives the opportunity for electric vehicles contribution for levelling the power consumption diagram. The extra demand for charging the vehicles at each hour of the day is computed using equation 1.

$$P_i = \frac{E_{V_{avg}} (1 + p_{loss}) p_{charge}}{h_{charge}} N \quad (1)$$

Where $E_{V_{avg}}$ is the daily average energy needed for charging a vehicle, p_{loss} is the percentage of energy lost in the transmission lines, p_{charge} and h_{charge} are respectively the percentage that is charged in each period (valley and off-valley) and the length of the considered period (in hours) and N the number of vehicles.

Considering that 85% of the vehicles will uniformly recharge at night, the introduction of these vehicles will create an additional electricity demand that, in the context of today's electricity generation mix, will be fulfilled by the running fuel oil power plants (Fig. 8).

As expected, the percentage of renewable energy decreases and in terms of marginal emissions, they are simply being transferred from the tail pipes to the fuel power plants chimneys.

Considering an emissions rate of 830gCO₂/kWh for the fuel power plants, the additional CO₂ emissions to daily charge EVs (an extra energy of 86MWh), should be 71.4 tons of CO₂. The TTW daily emissions avoided if these same vehicles were conventional was about 120 tons.

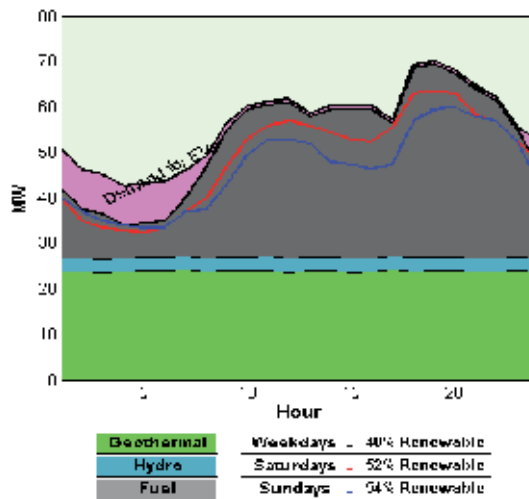


Fig. 8. Load profile in S. Miguel for Winter season with EVs extra demand (30% of Light Duty fleet replaced for EVs)

However, if additional renewable electricity installed capacity is deployed, then the vehicles will also be running on renewable electricity. It can be considered that these EVs charged during off-peak hours are charged 100% with renewable energy. In fact there are three possible approaches:

1. It is considered the EVs as marginal load and as stated in Fig. 8, the energy and emissions associated with EVs charging would be mainly on fuel.
2. It is considered the EVs as a base load because they justify the increase in renewable base load generation and the energy and emissions associated with EVs are from renewable sources (zero emissions).
3. It is considered the EVs equal to the other load and the energy and emissions associated to EVs charging would be an average of the production mix. In this case the emissions associated with EVs recharging is as stated by equation 2

$$Emissions_{EV} = \frac{Demand_{EV}}{Demand_{TOTAL}} Emissions_{TOTAL} \quad (2)$$

These different approaches will lead to different CO₂ emissions associated to EVs' recharge (in this example, 8% of total daily electricity consumption).

In the first case, a daily 71.4 tons of CO₂ emissions for EVs recharge under the considered scenario of EV penetration, in the second case, a daily zero emissions for EVs recharge and in the third case a 37 tons.

It is possible to see in Fig. 9, for instance for the typical Spring load profile that the new geothermal plus wind power penetration are not possible unless they increase valley consumption.

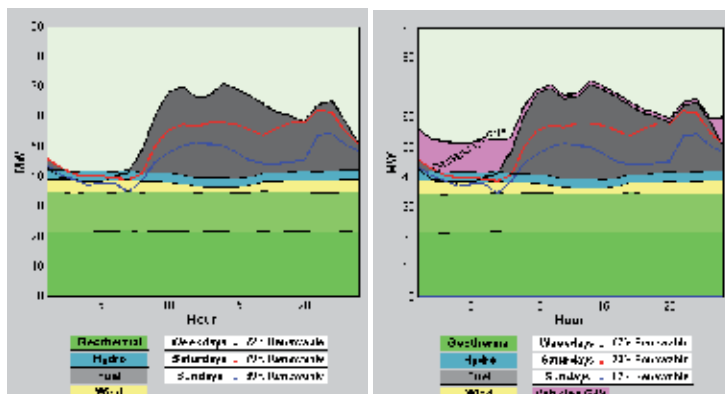


Fig. 9. Expected load profile in S. Miguel for Spring (2013), 4% demand increase, 9 MW of wind, 13MW of new geothermal power and 30% LD fleet replacement by EVs.

The CO₂ emissions factors, unit consumption and daily usage of vehicles considered in this analysis are resumed in Table 1.

	CO ₂ Emissions		Unit Consumption			Daily km
	kg/litre	kg/kWh	litres/100km	kWh/100km	kg/kWh	
ICEV Gasoline	2.31		7			32
ICEV Diesel	2.68		6			32
Fuel Plants		0.83			0.25	
EV				123		32

Table 1. Emission factors considered for the LD fleet and fuel power plants and average unit energy consumption.

It is easy to see that even considering that EVs are recharged by fuel, there are advantages in the CO₂ emissions balance, as the daily 120 tons from the car tail pipes, are replaced by 72 tons in the fuel power plants chimneys. Although the correct mode is to attribute emissions for the percentage of electricity consumption to EVs' recharge, and that is only 37 tons.

2.3 Electricity costs

Electricity supply is considered a service of general economic interest. In the past, the electricity industry was organized as vertically integrated state-owned monopolies and consequently not subjected to the normal rules of competition. The liberalization process was put into force in many countries including in the European community (EC) in 1996 by Directive 96/92/EC, and led to the unbundling of activities. This directive defined common rules for the gradual liberalization of the electricity industry with the objective of

establishing one common European market. Vertically integrated utilities have been vertically separated or unbundled and barriers to entry in generation and retailing were being removed to create competition.

In the two case studies presented in this chapter, two situations are analyzed: In the case of a small isolated system, a vertically integrated company is considered and the average unit production costs are used to define the merit order for technology dispatch. In the case of a continental European country, the marginal production costs are used to provide a supply curve and schedule the technology dispatch and find the wholesale price by market simulation.

2.3.1 Average unit production costs and rules for technology dispatch

The unit average cost for each technology is an average value that contains many simplifications. The cost functions are not linear and the average costs depend highly on the performance points in which the plants usually work. There are also the start-up costs (higher if there is a cold start) that should increase unit average cost if the plants don't work in a continuous state. In a monopoly context, the unit commitment service is centrally provided by the system operator as all the units belonged to the same company. In a market context this decisions are private and individual companies will predict the price of energy for the time under consideration and will then incur the cost of starting up if they expect to make a profit.

In this case, simple empirical rules are applied to distribute the energy source technologies to provide for the different scenarios of daily load profile. The rules used to order the power technologies that support expected demand plus EVs consider:

1. The special producers either renewable or thermal (special producers like cogeneration) are the first in order;
2. The cheaper technologies follow afterwards. For each case, the cheaper technologies enter in increasing cost order until a certain percentage of the power installed is used and only then follows the next technology;
3. Production from reservoirs are used only in peak hours;

In any case the technical limits of each group committed to electricity production should be taken into account. In this case the imposed limitation is made by the power installed in each technology.

In the S. Miguel (Azores) case study, as a volcanic Island, the renewable source is mainly geothermal. Geothermal power plants are characterized by high capital investments for exploration, drilling wells and plant installation but low cost for operation and maintenance, so that they should be considered base load plants.

The unit costs per technology, considered in this example are described in Table 2 and the unit average production cost depends on the electricity mix. In table 2 there are two examples of electricity production mix and the associated average production costs. It is easy to see that the use of more fuel power plants instead of geothermal ones makes the unit variable costs higher due to fuel cost. Fuel prices tend to increase because of world oil demand increase and it must also not be forgotten that, associated to fuel plants use, there are the CO₂ emission costs that also tend to increase due to increasing environmental concerns.

It is also easy to see that the available technologies for electricity production make electricity costs expensive in S. Miguel Island. This has to be added to the fact that, an isolated system

needs more redundancy and power installed in thermal plants to assure a high level of security of supply. This also increases fixed costs (the cost of power assurance).

Production Technology	Unit costs €/MWh	Production scenario 1	Production scenario 2
Geothermal	33	37%	51%
Wind	82	4%	4%
Hydro	80	3%	3%
Fuel	100	56%	42%
Average unit prod. cost (€/MWh)		74	65

Table 2. Unit average costs per technology, percentage of production scenarios and unit average production costs.

Added to the production costs there are also the costs associated to transmission lines use. Customers have to pay for the net's investments and maintenance and at the end for the service of distribution, accounting and billing. As all these services are supplied for the same vertically integrated company in a monopoly context, the final prices that end customers have to pay for electricity supply are regulated.

The impact EVs have on overall costs, depend on the additional variable cost associated with generating more electricity to serve the Plug-in vehicles' charging. Average variable costs may rise with increased electricity sales because higher cost generation plants are brought to service. Assuming though, no new infrastructure investment, average fixed costs will decrease, because the existing debt-service obligation is spread over more energy sold.

The time of vehicles charging is crucial for this analysis. An off-peak recharge can, in this example increase the penetration of geothermal power, decrease variable unit costs and fixed unit costs while at the same time reduces emissions and fuel oil consumption and imports.

2.3.2 Marginal production costs and rules for technology dispatch

To use the marginal production costs to schedule technologies to the expected load, a market simulation can be done with the demand and supply curves interception. A supply curve per technology should be generated. These curves should be added to generate a whole supply curve. Supply curves per technology are generated based on the expected power installed per technology and the supply curves verified in the past. As an example it can be observed the supply curves for the Portuguese units for the different technologies that play in the Iberian Electricity (MIBEL) spot market. In Fig.10 is an example of the supply curves per technology that occurred in two winter days, (2009/01/12) at 12h and (2010/01/19) at 22h.

The supply curves in 2010 (the right hand side graphic in Fig. 10) show very low priced bids in hydro due to climate influence and also some low priced bids in natural gas due to more available supply (860MW were installed in the production system during the year 2009).

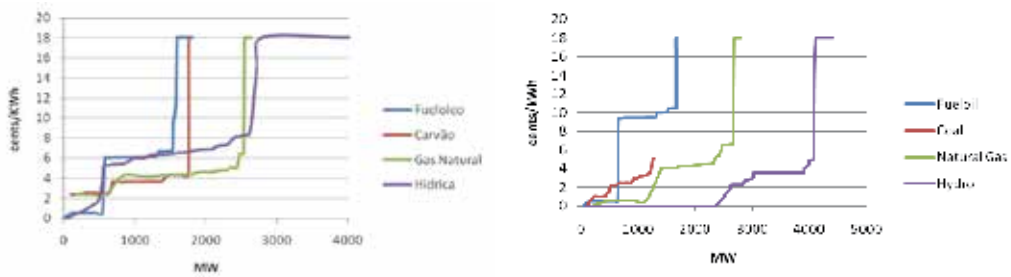


Fig. 10. Supply curves per technology for day 22 Jan 2009 at 12h and 19 Jan 2010 at 22h in the Portuguese market

The supply curves to be generated would represent different scenarios according to the expected power installed per technology, a dry or wet year scenario and the season. There are in the majority of the cases, 2 steps in the supply curves for each technology. The amplitude of the slopes depends on the hydrologic conditions of the hydro resources and the natural gas availability. If there is too much of these resources, low priced platforms are expected at the beginning of the supply curves as observed for year 2010 in Fig. 10. The power where the steps occur and its amplitude depends on the power installed in the technology, the climate conditions scenarios, season and hour of the day. The rules for supply curves generation are the following:

1. There are four cases of supply curves per technology associated with each season (Spring, Summer, Autumn or Winter);
2. The expected power installed in each technology in the year in study is an input that limits power generation;
3. The scenarios to be studied (a dry year with high priced hydro resources or a wet year with low priced hydro and natural gas offers) are inputs that lead to different supply curves shape;
4. Two or three slopes are generated for each technology with more or less the same shape of the past supply curves observed as seen in Fig. 10.
5. According to the scenario studied, the season and power installed, the slopes of the supply curves are generated with the same shapes of past technology's supply curves observed in similar conditions. A small randomness that represents the observed variations is also programmed.
6. The supply curves generated for each technology are added in ascending order of price to form a global supply curve that will intersect demand.

An example of supply curves for year 2020 in Portugal mainland can be seen in Fig. 11.

In this case, the rules for technologies dispatch are:

1. The special producers either renewable or thermal (special producers like cogeneration) are the first in order;
2. The technologies with lower marginal costs follow afterwards. For each hour, according to demand level, the intersection gives market price and quantity per technology that will fulfill the daily load profile.

In this case, the wholesale electricity price is formed by supply and demand curves intersection. An increase in demand makes demand curve shift to the right and so electricity prices rise as the curves intersection occurs at a higher point in the slop. As an example, it is

possible to see price formation for instance in hour 5, in the Portuguese sub-market, for the 23th Jan 2008 with the real data available at Market operator (OMEL 2009) site. It is possible to see the effects of an increase in off-peak load to plug-in vehicles recharging, in the market prices. As an example, considering that a huge amount of EVs were charging at this hour (5 a.m.) with an extra 800 kW power demand. The demand curve shifts to the right (Fig. 12). The price rises for almost three cents and some of the previous low cost clients (the pumping charges) were not supplied because they had lower priced buying bids.

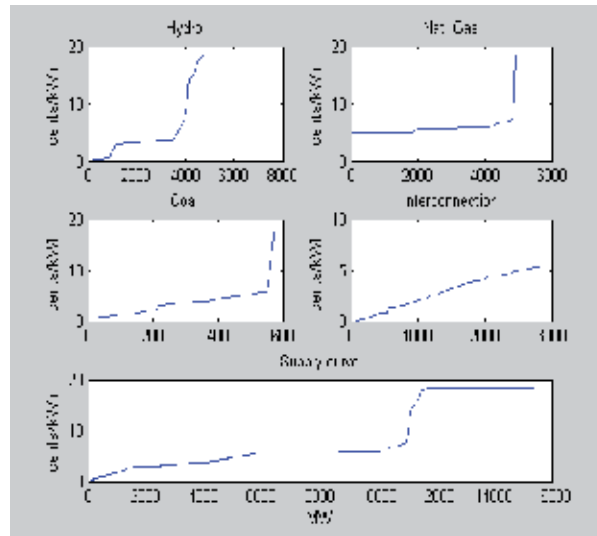


Fig. 11. Scenario of supply curves per technology for year 2020 in the Portuguese market

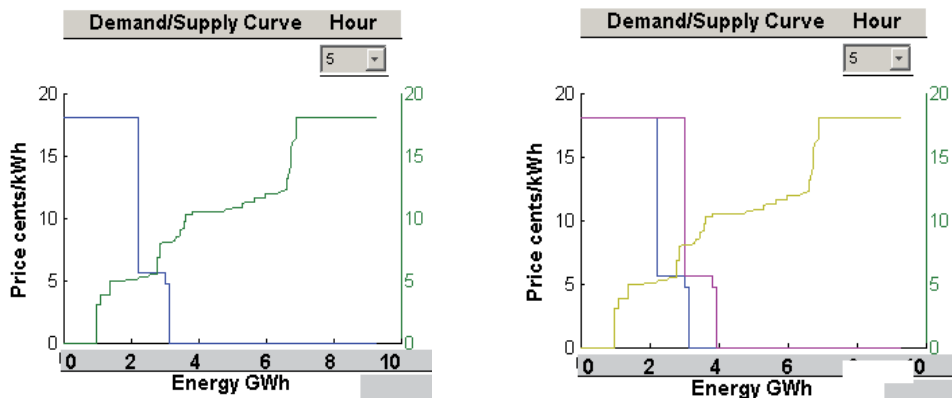


Fig. 12. Price formation in the Portuguese sub-market at hour 5 (economic simulation) and the effect of an extra 800MW of power for EV off peak recharge has in the market price.

The leveling of load profile may have the consequences of making the hydro-pumping less profitable. In fact, the reversible hydro plants' profits come from the discharging and selling at peak prices revenues less the costs from pumping with energy bought with off-peak prices. The following relation must occur:

$$\pi_{\text{peak}} E_{\text{peak}} > \pi_{\text{off-peak}} E_{\text{off-peak}} / \eta_p \quad (3)$$

Where π_{peak} , $\pi_{\text{off-peak}}$ represent the peak and off-peak prices, E_{peak} , $E_{\text{off-peak}}$ the peak energy sold when discharging and the off-peak energy bought for pumping and η_p the total performance of the hydro reversible system.

2.3.3 Electricity costs for end consumers

Over the wholesale prices, there come the net access prices. The national regulator establishes the access and pricing rules of the transmission and distribution activities. The revenues for transmission and distribution network's operators are assured by the payment of a use tariff. The transmission and distribution network use tariffs are established by the regulator. In Table 3 there is the peak and off peak low voltage net access tariffs imposed in Portugal in the last years.

Low voltage net access tariffs	2008	2009	2010	2011
Peak [cents/kWh]	7.45	5.39	9.09	8.92
Off peak [cents/kWh]	3.28	0.68	3.76	3.86

Table 3. Evolution of low voltage net access regulated tariffs in Portugal

Apart from the networks access regulated tariffs and wholesale prices, consumers should have to pay also retailing electricity costs. These activities work in competition as the established model imposed the existence of electricity wholesale and retail markets and the possibility for any customer to choose between different retailers. Depending on the retailer that each end consumer chooses, the cost of electricity to be paid by consumers should include the cost that the retailer paid for the energy at the wholesale electricity market plus the value of the regulated net access tariffs plus the revenue for the retailer. Considering a 4% on the wholesale electricity cost for the retailer revenue and the values presented in Table 3, Fig. 13 depicts the evolution of the final cost of energy that a low voltage domestic consumer should pay along the day.

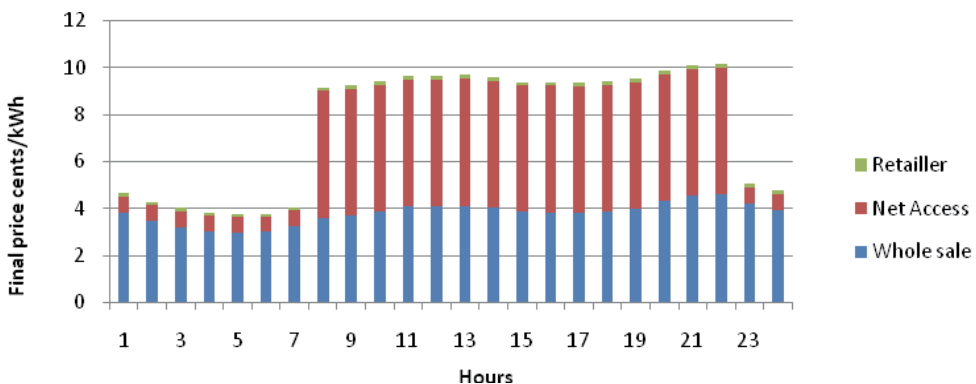


Fig. 13. Average daily evolution for final costs of energy for a domestic consumer in 2009

This difference in costs that is reflected more or less in the regulated prices between peak and off-peak consumption should influence EVs' recharging profiles.

3. Electric vehicle modelling

Electric drive vehicles with the plug-in capability are only beginning to be commercially available. It would be necessary to have an idea of the capability of mass production and market penetration of these vehicles depending on their critical components development phases (namely the most critical element – the battery). The type of mobility provided by the plug in vehicles will be an important aspect because it influences vehicle's charging needs. The demand side of the transportation sector needs to be studied and it is inevitable that the consumer/passenger behavior will deeply affect future mobility. Each country's fleet profile is largely dependent on economical and political/taxation aspects, for instance, Portugal has a relatively new fleet, but it is very difficult to access the fleet's renovation rate because there are few incentives to disposal. However, these will be crucial aspects, as they will be relevant to the new vehicle technologies market penetration.

The EV's energy requirements and the expected power capacity in terms of the charging circuit and the capacity of the batteries are important requisites that define the time needed for charging and the all-electric autonomy of the vehicle.

The expected evolution of the grid capacity to support recharge at any time and the energy production technologies are important to compute EVs energy use and emissions associated. In isolated regions, such as Islands the introduction of intermittent renewable has more problems because it is not connected to a robust large Continental grid. How to benefit from using off-peak capacity and the possibility of the charging coincides with renewable energy sources?

3.1 Energy needs

How much power can be provided to an EV or a PHEV and during how much time?

The power demand on the grid will be a function of the voltage and current of the connection point to the grid. The capacity of the battery will then determine the length of time it will take to recharge the battery, given the connection strength. EPRI has conducted several studies on PHEV capabilities (EPRI, 2002), (Duvall, 2006) and several options are possible. Adapting to the European mainland reality, it is possible to charge the vehicles at 230 volts AC with 2,5 mm² wire's section (16 A circuit current) that would be about 3,5kW or with 4 mm² wire's section (25 A circuit current) and that would be about 5kW.

It is also possible to charge fast in stations, and this at a higher power level that may go till 50kW. While a slow charge can last 6-8 hours at 100% state of charge (SOC), a fast charge can last 15-30 minutes but only allows 80% SOC and with less battery efficiency (while a slow charge can have an efficiency of 80% a fast charge's is reduced to 55%).

The average daily energy needs to charge an EV depends on the daily mileage expected for the vehicle. The time and power of the recharge will define the EV's charging profile and the aggregation of all EVs, the extra load the electric system has to supply. A few EVs have no effect in the power grids but a mass penetration of plug-in vehicles should be simulated so that the electric utilities are prepared with the best strategies for a synergetic combination of the transportation and electricity production systems.

3.2 EVs market penetration

There are many factors regarding user preference for electric vehicle technology. The most pragmatic and objective causes that may a rational potential vehicle buyer decide not to choose this technology are:

- Fuel availability (the availability of charging infrastructures)
- Range limitations for the BEV configurations
- Acquisition costs

3.2.1 Fuel availability/charging network

PHEVs and BEVs are designed such that they can be plugged into a home garage at night for fuelling. Garages are most frequently lacking in dense urban areas, the very places where an electric vehicle is an ideal solution for personal transportation. For example, in Lisbon only one in six cars are parked in private garages and these include apartment and condominiums with a parking place with need to plug-in (CML 2002).

In addition to the lack of garage access, the limited electricity-only range of plug-in vehicles will prompt the desire for drivers to “top off” their batteries when away from their normal overnight charging location. Electric vehicles must be plugged into the grid to refuel, but a public infrastructure to provide this service does not yet exist. Prospective plug-in car owners want the assurance that they can charge their vehicles at home, while at work, or parked anywhere for extended periods. There is a need for parking/charging points for slow charge and fast charging stations.

On average, cars are parked roughly 23 hours per day in home garages, apartments, condominiums and hotel garages, employee parking locations, public lots and curbside. To meet driver demand for convenient charging, these are the locations in which charging points should be installed.

3.2.2 Range limitations for BEV configurations

The limited driving range of pure EVs creates what is known as “range anxiety”, which affect drivers as soon as the battery charge falls below 50%. Fast charging could alleviate “range anxiety” by supplementing home slow charging with convenient on-road charging at opportunistic charging points. In one 10-minute charge cycle, fast charge technology can provide enough energy to allow an EV to operate for another 60 km (Szczepanek A., Botsford C., 2009). With a network of fast chargers, consumers could charge anytime, anywhere – practical infrastructure akin to the gasoline fill-up model. This fast charge capability can help to enable rapid growth of the EV market by minimizing vehicle downtime. Fleets can fast charge during opportunistic breaks to maximize productive drive. Battery manufacturers believe that they could develop a battery that could cope with fast charging although the priority is to mass produce batteries at low costs, while maintaining high quality standards, safety requirements and guaranteeing a life time of more than ten years rather than introducing batteries with super fast charging capabilities.

The successful launch of Li-Ion batteries for electronic goods such as laptops and mobile phones opened the door to further developments and it may be assumed that Li-Ion batteries will be the key technology for PHEVs and EVs in the coming decade. Regardless of the future development in the area of battery based energy storage it can be concluded that the current level of performance is now so good that the automotive industry has decided to include partly or fully electrical drivelines and traction batteries in many of their near future products.

When fast charge with safe batteries become available with increased capacity at competitive prices, the pure BEV can cover a wide range of the transport needs, especially in urban areas, and be a strong alternative to conventional transport powered by liquid fuels.

The challenge lies in setting up a commercially viable, convenient system for end customers. The difficulty is how to change drivers' mobility behavior, so that instead of going to a gas station just before the tank is empty, drivers need to charge their cars every other time they park.

There is also a third alternative for recharging EVs, the battery swapping service. This can be done in recharging stations and the change can be done in about 10 minutes for a full charged battery. This would relieve "range anxiety" giving the customer three different modes for recharge:

- Slow charge (7/8 hours for 100%);
- Fast charge (30 minutes for 80%);
- Batteries change (5 minutes for 100%).

The recharge service price should increase as time decreases. A fair price for each of these recharging models should be established, and this would both be high enough to infrastructure's investment recovery and low enough to be advantage to customer. This service should increase the cost of electricity to recharge.

3.2.3 Acquisition costs

Despite growing environmental awareness in society, studies have repeatedly shown that customers are only willing to pay a limited price for being "green". This means that EVs and PHEVs must be attractively priced, not only in terms of initial purchase price, but also the ongoing costs each month. The costs of EVs are still much higher than for conventional cars due to a low production volume and expensive battery packs. This reflects directly the manufacturing costs. On the other hand, the expenses per travelled km are quite attractive comparatively to gasoline use, for EV technological solution it is around 1/4. With present prices pure electric vehicles pay off in terms of cost only if long distances are driven (higher than 200 000 km) (Baptista, 2009). This fact is important when calculating eventual tax incentives to purchase these kinds of technologies, having in mind that the final consumer is extremely sensitive to the "km for breakthrough". These limitations force Governments incentives to push the penetration of electric vehicles. There are predictions on the evolution of EVs' batteries capacity, density and price for the coming years. According to some consultancy analysis (Roland Berger, 2008) battery costs are expected to decrease to half the price from 2010 to 2020.

3.3 EVs recharging profiles

There are many possibilities of vehicles charging profiles. Some could be more likely to happen but the uncertainty is high as it depends on vehicles charging requirements and drivers mobility patterns. Many studies performed included different charging scenarios.

3.3.1 Uncontrolled charging

Under this charging profile it is considered that each EV begins charging as soon as it is plugged in, and stops when the battery is fully charged in case of normal time charge or 80% SOC in case of fast charge. This can be considered a reference case without any intelligent control of how and when charging occurs, or incentives (such as time-of-use

rates) to influence individual consumer behavior. The majority of charging is home charging though a little services charging is also considered. The uncontrollable charge could be as depicted in Fig. 14.

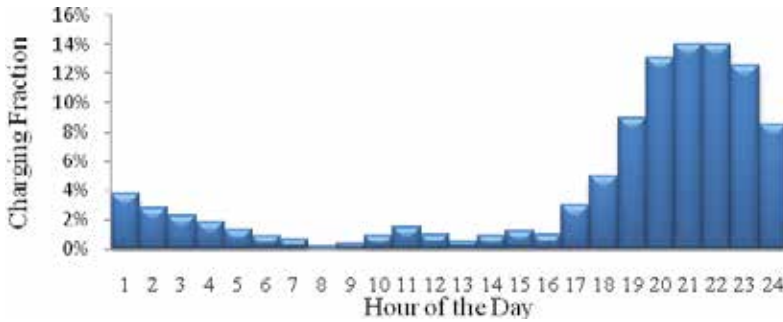


Fig. 14. Expected charging profile for uncontrolled charging scenario

3.3.2 Off-peak charging

This charging scenario assumes that almost all charging occurs at home in the overnight hours. Given existing incentives for off-peak energy use it attempts to better optimize the use of low cost off peak energy by delaying initiation of household charging until 10 pm (Fig. 15) or 11pm according to the utility policy to promote off-peak demand.

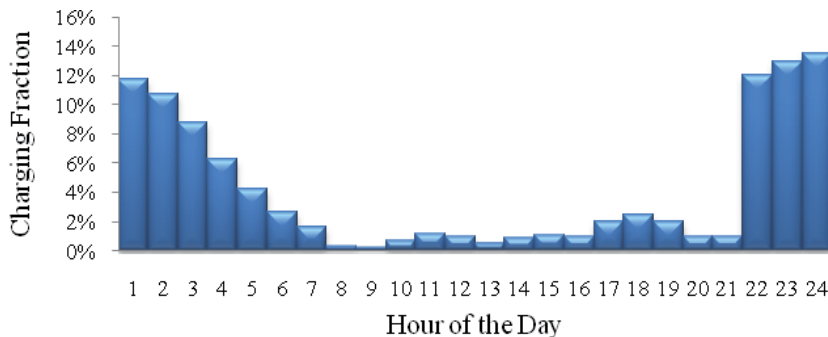


Fig. 15. Expected charging profile for off-peak charging scenario

Under this recharging profile, a peak at 10 pm should be expected in a high EV penetration scenario. This peak could be smoothed with scheduled strategies for off-peak recharge (Fig. 16).

3.3.3 Optimal charging

This charging scenario also assumes that almost all charging occurs at home during the off-peak hours, however it attempts to provide the most optimal low cost charging electricity by assuming that the vehicle charging can be controlled directly by the local utility. This allows the utility to precisely match the vehicle charging to periods of minimum demand, allowing the use of lowest cost electricity, and improving overall utility system performance.

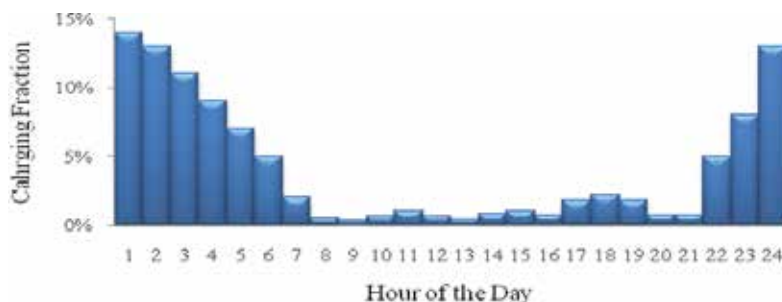


Fig. 16. Expected charging profile for a smoothing off-peak charging scenario

4. Impacts on primary energy consumption, fossil fuels use, GHG emissions and electricity costs

The impacts of EVs and PHEVs charge on the electric utilities depend on the first place of the combination of vehicles' penetration and charging profile scenarios. The case studies considered in this chapter arise from the combination of different scenarios of electric vehicle penetration and recharging operation. For each scenario, the following variables should be analyzed:

- Primary energy needs for the electric and transportation sector working as separate systems (BAU) and working together (EVs scenarios);
- Effects in electricity load profiles.
- Impacts on overall energy and CO₂ emissions
- Impacts on electricity costs.
- Impacts on fossil fuels use and imports.

4.1 Primary energy consumption and fossil fuels use and GHG emissions

Energy consumption, fossil fuels use and CO₂ emissions from electricity production and transportation (the light duty fleet segment) can suffer great reductions with the integration of these two sectors by transport electrification. The replacement of a great amount of ICEVs by EVs in a country in which power generation accounts with more than 50% of renewable sources has great impacts in fossil fuels use and CO₂ emissions reductions.

In terms of electricity production mix, with plenty renewable sources for generation, two extreme cases can be considered:

1. A dry year, with high prices offers for hydro and natural gas production, the supply curves per technology could have the following forms considered a certain power installed per technology (Fig. 17a).
2. A wet year, with low prices offers for hydro and also natural gas production, the supply curves per technology could have the forms depicted in Fig. 17b.

The expected load profiles for 2020 in a dry year hypothesis for a 2 million EVs scenario (about 1/3 of LD fleet replacement) should be as depicted in Fig. 18. A peak effect in load diagram in an uncontrollable recharge profile can be observed. By transport electrification, even in the worst situation of uncontrollable recharge, a 2% decrease in primary energy use, 9% in fossil fuels use (due to great reductions in the transportation sector) and 8% in CO₂ emissions can be achieved by transport electrification when compared with the case without

EVs. An off-peak recharge profile with mass EVs penetration has more effects in energy, fossil fuels use and emissions reductions. In fact it was verified a 4%, 10% and 9% reduction respectively.

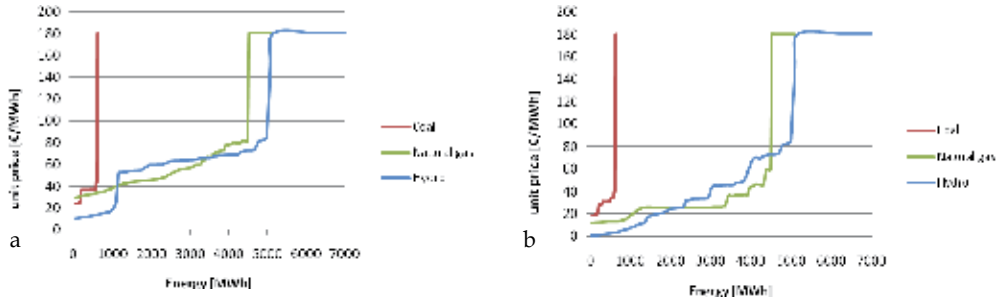


Fig. 17. Example of supply curves per technology with a) high prices for hydro and natural gas production; b) low prices for hydro and natural gas production

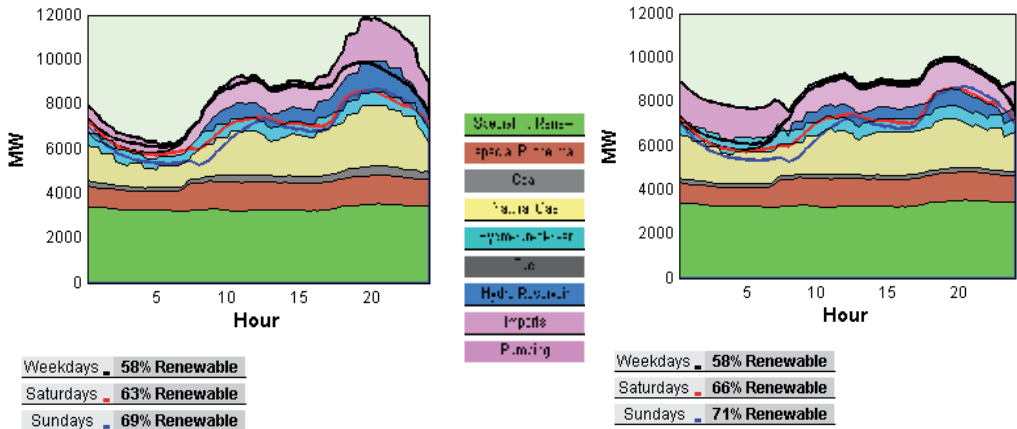


Fig. 18. Example of the expected Winter demand profile for a dry year 2020 in an EVs' peak and off-peak recharge scenario

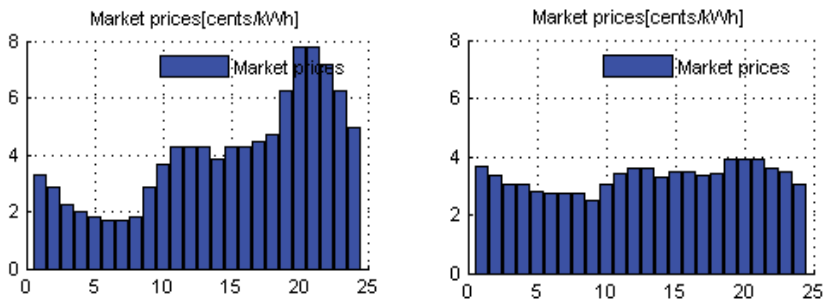


Fig. 19. Expected Winter spot prices in a peak and off-peak recharge scenarios for 2M EVs in Portugal mainland

In any situation the integration of the electricity generation and transportation sectors has energy and environmental advantages. The decrease of fossil fuel use brings also economic advantages in the trading balance as all fossil fuels are imported in this example country.

In terms of the electricity wholesale prices, in a high EV penetration scenario, the leveling of the spot prices follow the leveling of the load profile (Fig. 19).

It is expectable that the peak effect of uncontrollable charging would cause price sparks at the peak hours. A time of use price for EVs recharge must be done to avoid this situation.

In the Island example as stated in sections 2.2 and 2.3.1, uncontrollable EVs recharge has worse consequences in renewable penetration and production prices.

4.2 Electricity costs, the fuel costs for EVs

As stated in section 2.3., electricity costs for EVs' recharge, either in a market context or as a vertically owned company is a sum of different costs related to production, net use and retailing of the product to the final client. To illustrate the differences, we have two case studies, the mainland, where there is competition in the production and retailing markets and S. Miguel Island where the same company monopolises all activities.

Adding all the costs associated to electricity supply service, for the mainland case, in a scenario of low hydro production the price could reach 17 cents/kWh, for 2 Million EVs charging mainly at peak hours, this includes the whole sale price (8c€/kWh) plus the net access tariff (the 2010 regulated tariff was used in this example, 9.09c€/kWh) plus the retailer revenue (a 4% of the wholesale, 0.32c€/kWh). In a high hydro production and low wholesale prices, an off peak recharge could reach the 5.6 cents/kWh. In these extreme conditions EV energy prices could be between 0.9€ to 2.8€ per 100 km. Compared with the most efficient ICEV cars and the present gasoline and Diesel prices in Portugal that can spend between 4.5€ and 8.2€ per 100 km, there are great advantages in charging EVs during off-peak hours. These simulations were made considering for the vehicles a slow recharge at low voltage at home or at service and no extra charge is considered to pay for the parking/charging service.

For the Island case study, an uncontrollable recharge must be forbidden, as the final electricity costs would reach the 20 cents/kWh, with all the environmental consequences as EVs would be recharged mainly with fuel oil. An off-peak recharge could cost only 8 cents/kWh, considered the regulated tariffs imposed (ERSE, 2011). In the Island EVs energy costs can be between 1.3€ and 3€ per 100 km.

5. Conclusion

Electric vehicles (EVs) and plug-in hybrid electric vehicles (PHEVs), which obtain their fuel from the grid by charging a battery, are set to be introduced into the mass market and expected to contribute to oil consumption reduction. PHEVs and EVs can also provide a good opportunity to reduce CO₂ emissions from transport activities if the electricity they use to charge their batteries is generated through low carbon technologies. In addition to the environmental issue, EVs bring techno-economical challenges for utilities as well, because EVs will have great load flexibility as they are parked 93% of their lifetime, making it easy for them to charge either at home, at work, or at parking facilities, hence implying that the time of day in which they charge, can easily vary.

The replacement of a great amount of ICEVs by EVs in a country in which power generation accounts with more than 50% of renewable sources has great impacts in fossil fuels use and CO₂ emissions. The results obtained from the simulations show that, a mass penetration of electric vehicles in Portugal, contributes to decrease energy consumption, fossil fuels' use (mainly oil) and CO₂ emissions from the two sectors (electricity production and transportation) that nowadays most contribute to the emissions from fossil fuels burning.

The pressure to generate electricity from endogenous low carbon resources in the majority of the countries makes naturally transport electrification a solution to lower emissions and fossil energy use from the transportation sector also. The cost and range of the vehicle remain the main bottlenecks for EVs penetration.

The cost of the energy to charge the EV is highly dependent on the electricity generation technologies in the first place, the electricity market structure (whether there is concurrence or not) and the time of recharge (peak or valley recharge) makes the rest influence on final costs.

In the examples used in this chapter, scenarios of EV penetration (energy needed) and recharge profile (hourly power demand) combined with the extreme cases of expected electricity production lead to different wholesale prices and hourly price profile, as well as fossil fuels use and emissions associated to charge the EVs, leading to different costs of the EV fuel per km.

Facing the increasing oil prices, the cost of energy per km of the EVs became even more advantageous when compared to ICEVs fuel costs and enough to overcome the initial purchase costs difference.

6. Acknowledgment

Thanks are due to the MIT Portugal Program and Fundação para a Ciência e Tecnologia for the PhD financial support (SFRH/BD/35191/2007) POS_Conhecimento. The authors would like to acknowledge FCT- Fundação para a Ciência e Tecnologia through the national project MMSAFU - Microsimulation Model to Simulate Alternative Fuel Usage (POCI/ENR/57450/2004), and national project Power demand estimation and power system impacts resulting of fleet penetration of electric/plug-in vehicles (MIT-Pt/SES-GI/0008/2008).

7. References

- Baptista, P., Camus, C., Silva, C., Farias, T. (2009) Impact Of The Introduction Of Electric Based Vehicles In São Miguel Island, *10th Conference on Energy for a Clean Environment*, July 2009
- CML Lisbon City Hall, Lisbon (2002): The mobility challenge, 2002, available at <http://ulisses.cm-lisboa.pt/data/002/002/pdf/mobilidade.pdf> (last accessed 09/05/25)
- Denholm, P. and Short, W. (2006), An Evaluation of Utility System Impacts and Benefits of Optimally Dispatched Plug-In Hybrid Electric Vehicles, *Technical Report NREL/TP-620-40293*, October 2006.

- Duvall, Dr. Mark S. (2006), *“Plug-in hybrid electric Vehicles Technology Challenges”*, EPRI Sep 2006
- EDA - Electricity of Azores, available at www.eda.pt
- EPRI (2006), Comparing the Benefits and Impacts of Hybrid Electric Vehicle Options for compact sedan and sport utility vehicles, EPRI,1006892. July 2002
- ERSE (2011), <http://www.erse.pt/pt/electricidade/tarifaseprecos/Paginas/default.aspx>. (last accessed 11/01/15)
- Hadley, Stanton W. (2006), Impact of Plug-in Hybrid Vehicles on the Electric Grid, October 2006
- Hadley, Stanton W. (2008), Potential Impacts of Plug-in Hybrid Vehicles on Regional Power Generation, ORNL/TM-2008/150, January 2008.
- IEA (2007) International energy agency - World Energy Outlook 2007, (pp. 93 assessed at 09/05/19) at http://www.iea.org/textbase/nppdf/free/2007/weo_2007.pdf
- IEA (2008) International energy agency - World Energy Outlook 2008. (pp. 508 assessed at 10/10/19) available online at <http://www.iea.org/Textbase/about/copyright.asp>
- IEA (2008), Energy Tecnology Perspectives 2008, Chapter 15 *Transport*
- IPCC (2007), *“Fourth Assessment Report. Climate Change 2007: Synthesis Report. Summary for Policy Makers”*, 2007.
- EVWorld (2009), <http://www.evworld.com/index.cfm> (last assessed at 20/05/09)
- EVreportlinker (2009), <http://www.reportlinker.com/p059605/Electric-Vehicles.html> (last assessed 20/05/09)
- Kempton,W., Tomic,J., (2005a) Vehicle-to-grid power fundamentals: calculating capacity and net revenue, *J. Power Sources* 144 2005 268-279.
- Kempton, W., Tomic, J.,(2005b) Vehicle-to-grid power implementations: from stabilizing the grid to supporting large-scale renewable energy, *J. Power Sources* 144 2005 280-294.
- Kintner-Meyer Michael, Kevin Schneider, Robert Pratt, (2007) Impacts assessment of plug-in hybrid vehicles on electric utilities and regional u.s. power grids”, Part 1: technical analysis, Pacific Northwest National Laboratory (a), November, 2007.
- OMEL (2009) Electricity Market Operator, available at www.omel.es, assessed at 09/10/10
- Parks, K., Denholm, P., Markel,T. (2007), Costs and Emissions Associated with Plug-in Hybrid Electric Vehicle Charging in the Xcel Energy Colorado Service Territory, *Technical Report NREL/TP-640-41410*, May 2007
- Roland Berger Strategy Consultants (2008), *“Value for EDP in Electric Vehicles*, Lisbon, July 29th , 2008
- Scott, Michael J., Kintner-Meyer, Michael, Elliott, Douglas B., Warwick, William M. (2007), Impacts assessment of plug-in hybrid vehicles on electric utilities and regional u.s. power grids: part 2: economic assessment. Pacific Northwest National Laboratory (a), November, 2007.
- Skea, J.; Anderson, D.; Green, T.; Gross, R.; Heptonstall, P.; Leach, M., (2008) *“Intermittent renewable generation and maintaining power system reliability”*, Generation, Transmission & Distribution, IET Volume 2, Issue 1, January 2008 Page(s):82 - 89

Szczepanek A., Botsford C., (2009), Electric Vehicle Infrastructure Development: An Enabler for Electric Vehicle Adoption, EVS24, Stavanger, Norway, May 13-16, 2009

Communication with and for Electric Vehicles

Jonas Fluhr and Theo Lutz

*Research Institute for Industrial Management (FIR) at the RWTH Aachen University
Germany*

1. Introduction

While electric vehicles (EV) are already widespread in particular applications, e.g. fork lifts or baggage carrying (cf. Rand et al., 1998), their use as individual motor cars is still limited. E.g., only 2,300 EV were registered in Germany on 1st of January 2011 (Federal Motor Transport Authority, 2011). However, many drivers lead towards an electrification of individual motor car traffic all over the world: advancing battery technology, high oil prices in 2008 and 2011, the recent automobile crisis in 2009 and the hope for ecological advantages of EV usage.

Moreover, the combination of two major energy conversion systems, namely the electric utility system and the light vehicle fleet (e.g. individual motor cars), could create considerable synergies (Kempton & Letendre, 1997; Kempton & Tomic, 2005a; Tomic & Kempton, 2007). One proposed concept is Vehicle-to-Grid realized through "... vehicles with an electric drive motor powered by batteries, a fuel cell or a hybrid drive train, [that] can generate or store electricity when parked, and with appropriate connections can feed power to the grid ..." (Kempton & Tomic, 2005b).

EV can be subdivided into hybrid EV (HEV) and battery EV (BEV). The subset of HEV combines the (parallel or serial) electric drive motor with a combustion engine, a fuel cell or human power (e.g. Pedelec). The BEV rely only on a - mainly electro-chemical - energy storage. Although the energy to fulfill an HEV's mobility function could be provided alternatively (e.g. by fuel or a battery exchange), all EV are assumed to be plug-in vehicles in this article. This means they charge from and possibly discharge into the power grid. All in all, the term EV refers from now on to (at least partly) electrically propelled cars used for individual motor traffic which can be conductively or inductively connected to the power grid. A lot of research questions have been raised with respect to EV. Most of them approach the subject from a technical (e.g. battery performance), economic (e.g. total cost of ownership) or a user (e.g. driving behaviour) perspective, others investigate social, political and cultural barriers for broader EV usage (Sovacool & Hirsh, 2009). Information and communication technology (ICT) (definition cf. Krcmar 2006), is affected in all of these perspectives, since it has to ...

- be mastered technically,
- be used economically, and
- increase usability.

Moreover, research questions can be categorized with respect to an EV's life cycle which on a top view corresponds to the serial phases of production, usage and recycling. While questions about production aim at producing EV efficiently for the market demand, the

recycling phase refers to economic and ecologic EV elimination. In the usage phase, questions about the EV in interaction with users and infrastructure are to be answered.

The usage phase will be in focus during the following considerations. The remainder of this chapter is structured as follows. At first, the closer consideration of the fixed and intersection point of energy transmission is motivated (section 2). Afterwards, fundamental dimensions for use cases around the energy transmission are presented and discussed (section 3). The informational dimension is further detailed to an information system in a separate section (section 4). Subsequently, the example of e-mobility roaming illustrates why and how the top view of such an information system is necessary (section 5). Finally, concluding remarks summarize the status quo and give an outlook on future research (section 6).

2. Fixed and intersection point: energy transmission

The usage of EV brings a major problem into focus: energy. Likewise conventional vehicles, comfortable and safe mobility can only be guaranteed by a sufficient amount of energy available in an EV at every point in time. Thereby, “sufficient” depends on the efficiency of the EV as well as the circumstances of its use. While a small city car can be very efficient and rarely requires energy for more than 100 km per day, a SUV of a traveling salesman is rather energy consuming and could need energy for 1000 km or more.

Three fundamental ways of energy transmission are currently discussed for EV: conductive charging, inductive charging and battery exchange. For one EV, a combination of these general transmission types is possible, for example normally recharging conductively at home, but exchanging a battery to realize a rare long trip to visit relatives. Though, such a combination of different energy transmission technologies clearly comes along with higher costs.

Due to high costs and a low energy density of its storage, especially BEV still have the disadvantage of a low energy storage capacity (cf. Figure 1, left). Neglecting the technically more complex battery exchange as well as inductive charging when driving, lifetime considerations of the (most often) electro-chemical storage requires slow charging and leads to a rather time-consuming replenishment. In contrast to these disadvantages in comparison with conventional vehicles, BEV profit from the fact that electricity is already quasi-omnipresent allowing for many potential suppliers. Conventional vehicles and (to a certain extent) fuel-based HEV rely on petrol stations operated by only a few companies at well distributed, but at a limited number of places (compare Figure 1, right).

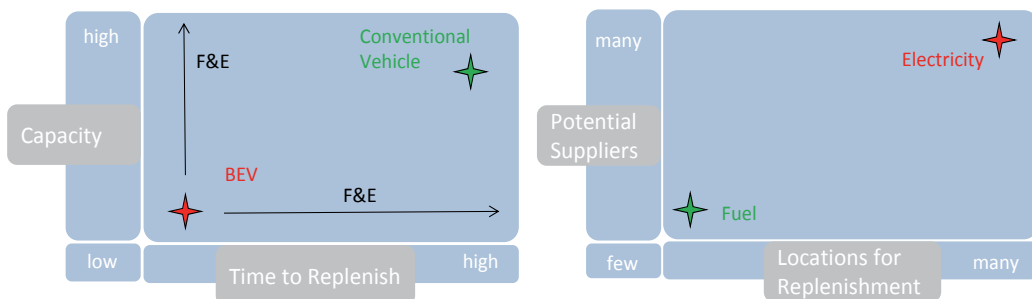


Fig. 1. Qualitative comparison of energy storage and availability between BEV and conventional vehicles

To sum up, the discussion at this point reveals that although BEV are unprivileged with respect to the energy storage, the potential availability of energy is significantly higher. Therefore, the energy transmission between BEV and the power grid is an important factor of all BEV applications. Although HEV are not fully reliant on the power grid, the idea of sustainable mobility by charging renewable energy is realizable only for the charged energy. Henceforth, all EV business models are forced to define how and when the EV are to be served with energy. This is why the energy transmission between the power grid and an EV can be seen as a fixed point of EV usage (cf. Fig. 2), in case of BEV a particular important one.

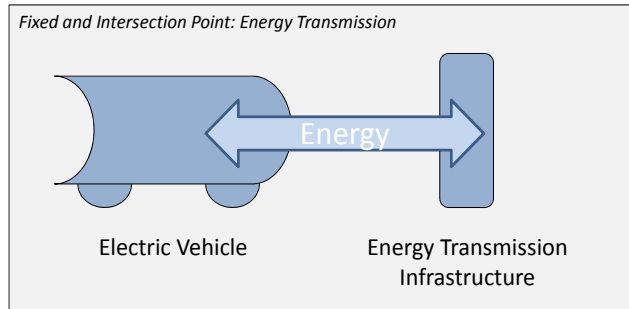


Fig. 2. Fixed and intersection point of EV business models

The energy transmission is not only a fixed point of EV usage, but also a point of intersection of different EV business models. For example, an EV manufacturer could assume the EV buyer to normally charge via a standard power outlet at a standard parking place (e.g. at home). However, mobility of EV implies that the EV could be anywhere else other than this standard parking place when the battery runs out of energy. Henceforth, the EV manufacturer needs to offer the possibility for energy transmission at other than the standard parking places. The same applies for a car sharing or a car rental company as well as taxi or delivery services. In all of these examples, an EV can get energy at the standard parking place most of the time, but occasionally, the EV would rely on foreign energy transmission infrastructure. Consequently, energy transmission is at the same time a fixed as well as intersection point of EV usage.

For conventional vehicles, this point of intersection clearly is the petrol station. Independent of the exact vehicle usage, a conventional vehicle can be refueled through the standardized filler necks. The petrol stations are not available everywhere, but they are well distributed over high frequented places. However, this concept works well only for vehicles with a huge energy storage capacity as well as a fast refueling process. Henceforth, it is improper for all the EV that need to charge regularly, but can not store huge amounts of energy.

3. Fundamental dimensions for energy transmission use cases

By recognizing the energy transmission as a fixed as well as intersection point of business models, it becomes apparent that isolated infrastructure is inefficient and renders all business models unprofitable. Therefore, significant efforts are necessary to standardize the energy transmission – best on an international level to keep production costs low and allow for e-mobility roaming (cf. chapter 5). This standardization is currently undergoing in several working groups of the ISO and IEC in cooperation with national institutes. Fig. 3 gives an

overview of standards that exist or are currently developed for conductive charging of EV. With respect to communication between charging infrastructure and EV, the standards ISO/IEC 15118 (protocol stack for Powerline Communication), IEC 61850-x (adaption of substation protocols for EV) and IEC 61851-24 (direct current charging) are particularly relevant.

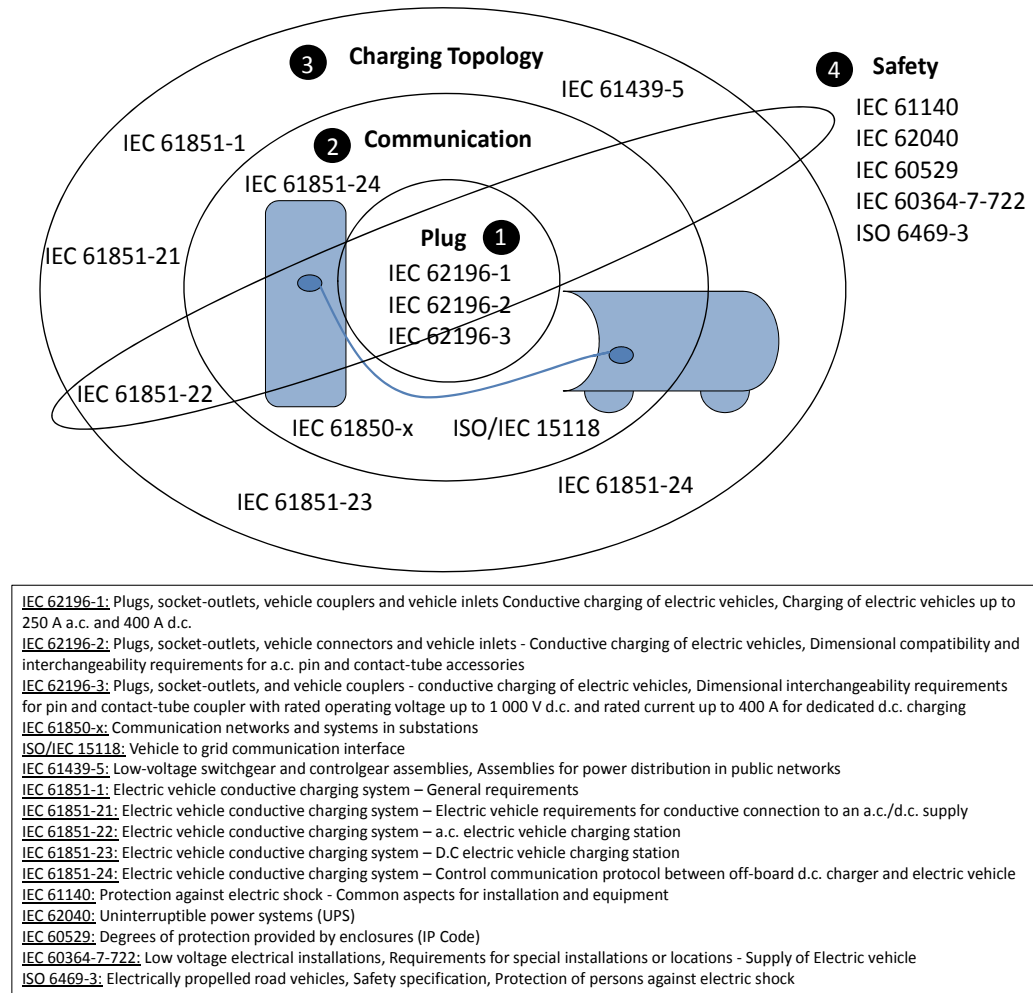


Fig. 3. Standards for conductive charging of EV (German National Platform for E-Mobility, 2010)

The fixed point of energy transmission can be characterized and designed with respect to various dimensions. Three fundamental dimensions shall be distinguished in the following:

- Electrical (e.g. charger or specification of plug)
- Organizational (e.g. parking place type or infrastructure owner)
- Informational (e.g. ICT hardware or authentication protocols)

The electrical dimension is the core of energy transmission. That is why international standardization efforts have focused on this dimension for a long time. Though,

organizational and informational aspects become more and more important. Organizational questions appear with respect to relevant roles and business models (cf. Fig. 4). Informational aspects are to be investigated since ICT is a promising enabler for EV usage due to several reasons:

1. Process efficiency for energy supplier and infrastructure operator could be increased.
2. Consumer protection laws require instant, reliable and verifiable information about transferred energy quantity and corresponding prices for the EV user.
3. The possibility to offer value added services such as the routing to and the reservation of functioning and free places at the energy transmission infrastructure.
4. More sophisticated concepts such as Vehicle-to-Grid rely on sophisticated real-time information.

Role	Example(s)	Organizational Question(s)
User	<ul style="list-style-type: none"> • Social services • Delivery services 	Where, when and how should one's EV be charged? How to ensure that the EV are always charged adequately?
Vehicle Provider	<ul style="list-style-type: none"> • Car sharing company • Car rental company 	How to ensure that customers are able to charge where ever needed in a comfortable manner?
Mobility Provider	<ul style="list-style-type: none"> • Taxi 	What is the charging status of each EV and which EV is therefore should take which customer?
Energy Provider	<ul style="list-style-type: none"> • Energy supplier • Distribution network operator 	How can a customer be provided with energy in transit? How is it possible to avoid overcharge a certain grid string when lots of EV are charging?
Parking Area Operator	<ul style="list-style-type: none"> • Supermarket • Visitor parking area 	How to best comfort customers by providing energy for EV?

Fig. 4. Organizational questions of energy transmission to EV

One could regard the informational dimension linking the electrical and organizational aspects in order to harmonize the process before, during and after the energy transmission.

The organizational dimension does not need to include the commercial (financial, contractual, etc.) aspects, in contrast to the business level identified elsewhere (Bolczek, 2010). Instead, it can be assumed that basic organizational aspects are describable without assuming certain roles or business models. For example, procedures to access infrastructure have to be consistent throughout roles and business models and therefore need to be described independently.

There are abstract use cases that can be characterized around the fixed and intersection point of energy transmission throughout the three fundamental dimensions. The use cases themselves can be part of one or several business models.

In each dimension, a number of attributes can be identified while an attribute can be instantiated by one or several values. This can be seen as a simple morphological box (cf. Zwicky & Wilson, 1967). The combination of values over attributes and dimensions leads to a particular use case. Many and manifold use cases are possible, however, only a few particular types will fit to the requirements of business models in the long run. An excerpt of such a box is given in Fig. 5.

Dimension	Attribute	Value(s)					
Electrical	Energy Transmission	Conductive		Inductive		Battery Exchange	
	Plug Specification	CEE 7/7	CEE 3P+N+PE, 6h	JARI Level 3 DC	IEC 62196-2	SAE J1772	SCAME
		
Organizational	Entitled to dispose of infrastructure	Natural Person (private: individual)		Legal Person (private: company)		Legal Person (public: authority)	
	Access Level	EV parking place		EV supply equipment		Electricity	
	
Informational	Top Level Elements	User		EV	EV Supply Equipment	IT-Backend	
	Authentication Hardware	RFID		SmartCard		Mobile Phone (SimCard)	
	

Fig. 5. Excerpt of attributes in the morphological box in three dimensions

With respect to the communication with and for EV, the informational dimension is pertinent and will be focused on in the following.

4. Information system for electric vehicles

The informational dimension can be described via an information system. An information system is a social and technical system that combines human and mechanical components to achieve the optimal allocation of information and communication (cf. Heinrich, 2005; Krcmar, 2007). The description of such an information system is the base to design an adequate information flow within and throughout the manifold business models. As seen before, the point of energy transmission is a fixed point for all EV. Henceforth, this fixed point is a useful starting point for the description of an information system for EV usage. Top level elements of such an information system are elements that play a prominent role when it comes to using or processing information. Those elements were identified to be the user of the EV, the EV itself, the point of energy transmission, as well as the supporting IT-Backend (cf. Fig. 6). Deliberately, the IT-Backend resembles a cloud, since – with some ups and downs – there is a continuous trend towards the flexible utilisation of IT-Infrastructure and services over (high speed) internet connections.

An information system can be detailed via an information system architecture. Several information system architectures have been proposed (The Open Group Architecture Framework, 2010; Scheer, 2000; Krcmar 2007). However, on the top level the architecture components are very similar and the architectures differ mainly with respect to their illustration. Although, the information system architecture concepts were originally developed for enterprises to describe and design their information system, it can be adapted to fit the needs for an information system around EV usage.

According to Krcmar (2007), an information system architecture consists of six components, namely

- Infrastructure

- Communication architecture
- Data architecture
- Application architecture
- Organizational architecture
- Strategy

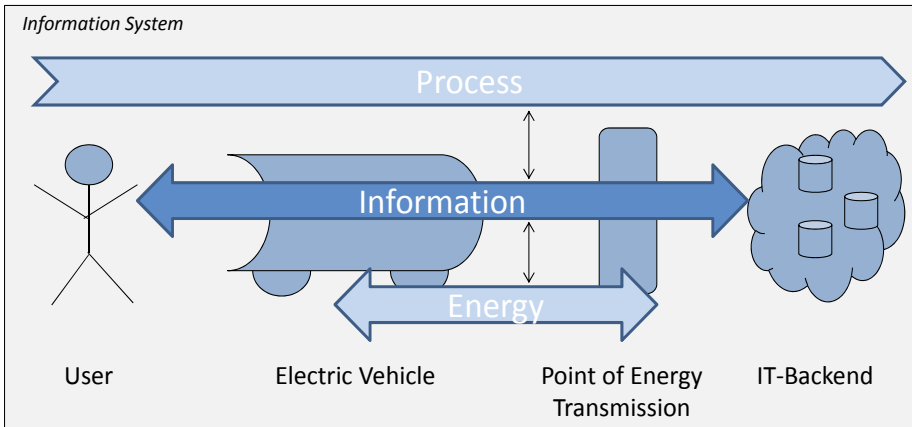


Fig. 6. Top level elements of the information system for EV

The components are structured hierarchically, from rather physical ones (infrastructure) to rather logical ones (strategy). In order to emphasize that these components must be well balanced to achieve efficient information flows, Krcmar used the spinner to illustrate the relations of the components (cf. Fig. 7).

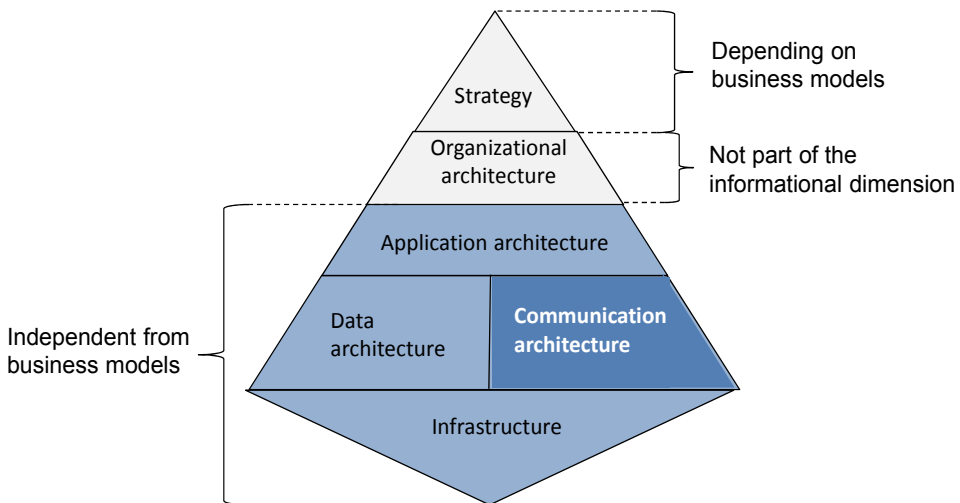


Fig. 7. Information system architecture as spinner (adapted from: Krcmar, 2006)

The architecture originally was designed for enterprises which realize at least one business model. Thus, the creation of use case types independent of business models requires an adaption of the general architecture. At first, due to the close relation to long term profit, the strategy has to be left out. Secondly, the organizational architecture that stands for a

company's process and structural organization is not part of the information dimension (cf. section 3). Well adapted for a base for use case types are the infrastructure, the data architecture, the communication architecture as well as the application architecture. They can be characterized as follows:

- The infrastructure contains all design elements of ICT hardware, for example which kind of microcontroller, CPU, graphics card, etc. are used.
- The data architecture consists of data models and objects that are necessary to provide information to EV users and other stakeholders.
- The communication architecture describes the topology for communication as well as the used protocols.
- The application architecture is built up on the first three components in order to provide defined functions for users and systems.

However, these components of an information system can hardly be interpreted in an isolated manner, but are in close relation and interaction. Thus, despite the focus on the communication architecture, the remainder of this chapter will also contain aspects of infrastructure, data and functions.

With respect to the communication with and for EV, it is useful to adapt the general information system overview (Fig. 6) and explicitly model the most important IT-Systems (Fig. 8). In addition to the EV, a mobile device as well as a fixed device is available for an EV user. A device shall be considered "mobile" in this context when an EV user can handle it comfortably in an upright position. For the following examples, the abstract level of energy transmission is left and conductive charging is assumed:

- An example for a mobile device is a mobile phone that can be used to unlock a charging station via a hotline call or a SMS. Alternatively, the widespread smartphones are able to unlock the charging station via an application ("App") offered by the energy supplier of the EV user.
- An example for a fixed device is a desktop personal computer or a notebook. Via a client application or a website, they allow for an offline check of the individual charging behaviour (e.g. place, energy and cost).

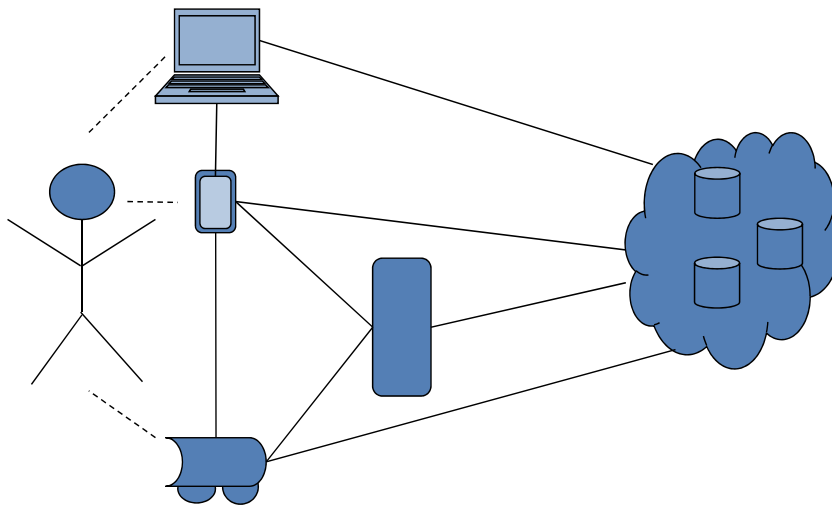


Fig. 8. Communication architecture from an EV user perspective

This adapted view of the information system is the infrastructural base of communication from the EV user perspective. In this chapter, the server landscape in the IT-Backend is not further detailed. Although, design and operation of applications and services in the IT-Backend is challenging, the questions that are to be asked and answered are not necessarily specific for e-mobility. In many cases, the integration of e-mobility in existing software solutions is the core problem. This is done via interfaces of which four already appear in the chosen illustration (Fig. 8).

After this introduction to the information system at the fixed point of energy transmission to and from an EV, an example shall illustrate how this information system view can help to master the current informational challenges of EV usage. Interesting examples would be:

1. Access to own infrastructure under consideration of authentication, authorisation and accounting.
2. Access to foreign infrastructure under consideration of authentication, authorization and accounting.
3. Collection and transmission of metering data with respect to the conflicting goals of usage transparency, data reliability and data privacy.
4. Value added user services such as routing to or reservation of infrastructure.
5. Vehicle-to-Grid services such as frequency regulation.

Since Vehicle-to-Grid services and value added user services are not solving one core problem of e-mobility (“enough energy for mobility”), they might be less interesting at this point. For a discussion of the collection and transmission of metering data, the different national laws play an important role. However, access to infrastructure is a prior subject in all countries, and when using foreign infrastructure an informational interesting one. Therefore, the following chapters use this subject, later defined more precisely as e-mobility roaming, to illustrate the information system in detail. For the sake of convenience, again the conductive charging is assumed. For inductive charging or battery exchange, similar considerations can be made.

5. E-mobility and roaming

5.1 Motivation

Considering private car owners, they can be distinguished by the type of their standard parking place (e.g. at home). Either car owners have a dedicated parking space such as a garage, or they park curbside somewhere nearby. The former can charge the EV by simply plugging it into a fixed socket-outlet in their garage. In this case, no identification and authorization is needed – however possibly useful in the future for providing grid services (Vehicle-to-Grid). While charging at the standard parking space can cover most trips, recharging is necessary from time to time if the trip distance is higher than a typical EV-range or recharging at the standard parking space is not possible. Hence, in such cases, these EV owners rely on foreign charging infrastructure for which physical access, authentication, authorization and accounting (AAAA) is needed. The latter group, i.e. EV owners parking curbside, need foreign charging infrastructure every day.

Carsharing companies can have dedicated parking spaces for their cars. For EV usage, they can upgrade them with electric vehicle supply equipment (EVSE). Thus, whenever an EV is parked there, it can be recharged by using individual methods for AAAA. Since many carsharing offers still restrict the start and end of any rental to these dedicated parking spaces, regular recharging is guaranteed. However, for two reasons this is not enough: First

of all, in some cases, the user might need to additionally recharge somewhere else. Secondly, the product “carsharing” mainly sells easy access to individual mobility. Therefore, the most successful carsharing companies will allow the start and end of a rental anywhere which endangers regular recharging at the dedicated parking spaces. A carsharing company can enable recharging not only at those own dedicated parking spaces, but also at foreign charging infrastructure by guaranteeing AAAA there.

Term	Definition
E-Mobility Provider	Contracts with EV Users in order to offer services (e.g. charging) and can be EVSE Operator at the same time.
EV User	Uses an EV within a contract with an E-Mobility Provider.
EVSE Operator	Operates at least one EVSE as a service for E-Mobility Providers, but has no continuous contractual relation to EV Users.

Fig. 9. Terms to define e-mobility roaming

All in all, these two simple and known business models already show that the usage of foreign charging infrastructure would occur regularly. This is often referred to as e-mobility roaming, in analogy to the mobile communications sector. More precisely, roaming with cellular phones means the uninterrupted availability of all services while moving out of range of the former carrier to another one (Schiller, 2003). On this base as well as with the definitions in Fig. 9, e-mobility roaming (or just roaming) in this paper refers to the situation in which an EV User is using an EVSE within a contract with an E-Mobility Provider that is not the EVSE Operator of the used EVSE (cf. Fig. 10).

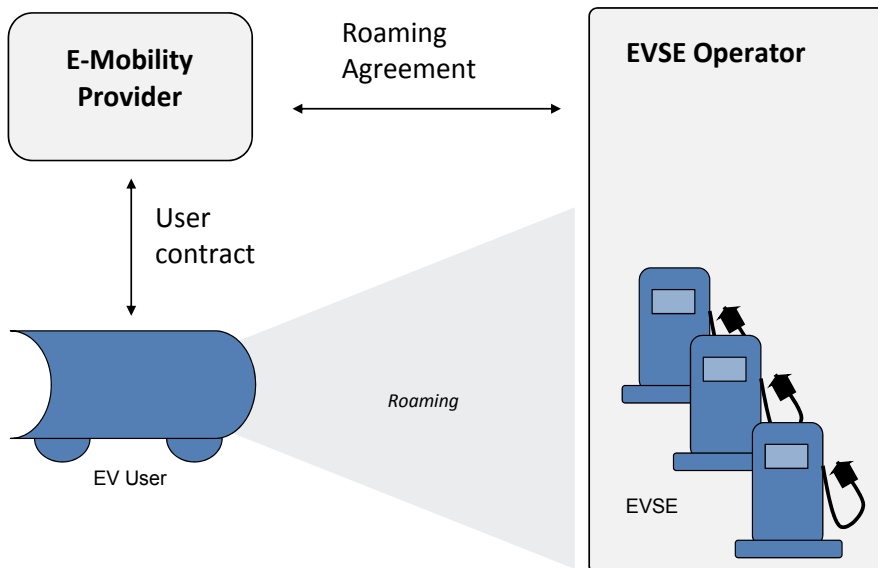


Fig. 10. E-mobility roaming

Due to the still prevailing regional and local character of many power markets (e.g. in Germany), roaming is likely to happen not only international, but even within one town or

street. Having a contract with every single provider is very uncomfortable. Hence, mechanisms to enable AAAA for roaming are inevitable. In order to guarantee a user-friendly e-mobility roaming experience, there are several challenges to cope with. Paying cash or via credit card is uncomfortable and requires more expensive infrastructure than identifying as a user through an adequate contract.

5.2 Challenges of roaming

On the base of the above understanding of e-mobility roaming and its business context, a closer look is taken at the preconditions of roaming. Since roaming involves two or more parties, the preconditions are closely related to questions of interoperability and the use of standards. Preconditions of roaming can be grouped into electrical and commercial issues, each concerning aspects of the underlying medium or its use (Fig. 11).

	electrical	commercial
medium	I	III
use of medium	II	IV

Fig. 11. Categories of requirements for roaming in e-mobility infrastructure

For example, a straight forward requirement for an electrical medium (I) is – assuming conductive charging – a standardized EV plug. Since the usage of adapters is very uncomfortable, an EV plug should fit into the outlet of all EVSE. The International Electrotechnical Commission (IEC) therefore currently revises the international standard IEC 62196. Considering other ways of getting power into an EV, such as induction or battery exchange, different requirements must be fulfilled. For inductive charging, a consistent form and position of the charger and the inductor is vital. For the battery exchange, especially the size and interface of the batteries as well as the security concept must be compatible. Beyond pure physical characteristics of the underlying medium, there is a need for its standardized use (II). For example, successful conductive charging requires voltage, current, frequency and charge mode to be correctly adjusted on both sides as well as to the cable diameter. These basic parameters can be negotiated via a control pilot signal as defined in SAE J1772. From a commercial point of view, the charging of an EV requires a medium for containing or conducting data for authentication, authorization and accounting (AAA) (III). Authentication of a user in front of an EVSE could be done for instance via RFID cards, magnetic or smart cards, key panels or near field communication by cellular phones. Alternatively, authentication data can be transferred via a communication line directly out of the EV. In order to exchange the commercially relevant data, the use of the media must be further specified by standards for protocols and data types (IV). Considering protocol aspects, the standard IEC 15118 is currently developed. It will enable the automatic exchange of information between an EV and an EVSE. Therefore, standard message types for transferring session, status, metering and billing data are defined on different layers of the OSI Model. In addition to protocols using the communication connection, there is a clear commercial need for the definition of basic identifiers (IDs) that can be used throughout the information systems of involved companies. The remainder of this paper focuses on identification issues and discusses possible and necessary IDs for roaming with EV.

5.3 Identifiers for roaming

Every Identifier (ID) has a certain scope in which it is valid. For roaming, the distinction of intra-company and inter-company IDs (henceforth called uniform IDs) is essential. While intra-company IDs such as customer numbers are sufficient for many commercial applications, roaming requires uniform IDs for involved objects to allow for inter-company data exchange. Since uniform IDs require significant standardization efforts, it is worth to investigate which IDs should be uniform in which cases. The cases clearly depend on the underlying business model(s) and technical choices. However, two abstract scenarios can cover many of them. Both scenarios differ from each other only with respect to the sequence of communication steps (Fig. 12).

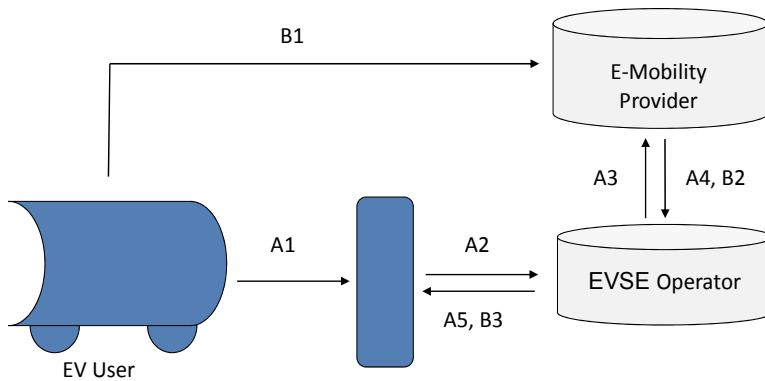


Fig. 12. Two scenarios for the sequence of communication steps

In scenario A, the EV User (or its EV on behalf of him) passes all information needed for authentication through the EVSE (A1) to the EVSE Operator (A2). The EVSE Operator forwards the information to the E-Mobility Provider and requests AAA for the EV User (A3). If the response (A4) is positive, the EVSE Operator unlocks the EVSE for charging (A5). In scenario B, the EV User directly connects to the E-Mobility Provider (B1) for AAA. If authorization is successful, the E-Mobility Provider requests the EVSE Operator (B2) to unlock the particular EVSE for charging (B3).

Identifiers	Scenario A	Scenario B
E-Mobility Provider	Required <i>operator need to know which provider to contact</i>	Optional <i>provider known by operator</i>
EV User	Optional <i>user known by provider</i>	Optional <i>user known by provider</i>
EVSE	Optional <i>EVSE known by operator</i>	Optional <i>EVSE known by operator</i>
EVSE Operator	Optional <i>operator known by provider</i>	Required <i>provider need to know which operator to contact</i>

Fig. 13. Requirement of uniformity depending on scenario

Investigating four roaming relevant IDs reveals that – with respect to the need for uniformity – each scenario requires at least one uniform ID (Fig. 13). However, even where uniform IDs are optional, standardization of such IDs is advantageous. Assuming scenario B with authentication of an EV user by a cellular phone, the EV user needs to transfer the IDs of the EVSE and the EVSE Operator to the E-Mobility provider. If the EV User is required to manually type these numbers in his cellular phone, the usability decreases considerably when all EVSE Operators use very different formats for these IDs. Very comfortable would be an App that allows to take a picture of a code (e.g. bar code, matrix code, or simply number in standardized format) in order to get the EVSE ID on the smartphone.

6. Conclusion

At the beginning of this chapter, it was motivated why the energy transmission to EV is of high relevance. Its character of a fixed and intersection point was explained. For this fixed and intersection point, three fundamental dimensions, namely the electrical, the organizational and the informational dimension, were presented and discussed. Afterwards, the informational dimension was further detailed with the help of an information system. The relevance and usage of the information system finally was illustrated by the example of e-mobility roaming.

All in all, with EV being at the point of broader market penetration, the question of the informational integration of these EV into infrastructure and its interaction with user services becomes more important. Although, information and communication technology has to be seen as a helpful enabling technology of EV usage, it has to be stated that ICT itself needs resources to efficiently serve the requirements of EV stakeholders.

Even though many activities have already started (cf. standardization), a lot of more effort is needed to efficiently and economically use ICT for EV. The proposed overview of an information system that explicitly combines the user perspective with ICT components at an adequate chosen fixed and intersection point (“energy transmission”) can be a good starting point for the integration of on-going research activities and derivation of further research questions.

7. Acknowledgment

This work was supported by the German Federal Ministry of Economics and Technology (Smart Wheels: Grant 01ME09020; Smart Watts: Grant 01ME08015).

8. References

- Bolczek, M. (2010). Business Models for Electric Vehicles. *Proceedings of the 2nd European Conference on Smart Grids and E-Mobility*, p. 34, ISBN 978-394185144. Brussels, Belgium, October 20-21, 2010
- Federal Motor Transport Authority (2011). *Emissionen, Kraftstoffe - Deutschland und seine Länder am 1. Januar 2011*. 17.3.2011. Available from http://www.kba.de/cln_015/nn_269000/DE/Statistik/Fahrzeuge/Bestand/EmissionenKraftstoffe/2011__b__emi__eckdaten__absolut.html
- German National Platform for E-Mobility, NPE (2010). *The German Standardization Roadmap – E-Mobility Version 1*. Figure 12, p. 28. 30.11.2010. Available from:

- http://www.elektromobilitaet.din.de/sixcms_upload/media/3310/Normung-Roadmap_Elektromobilit%E4t.pdf
- Heinrich, L.J. & Lehner, F. (2005). *Informationsmanagement*. Oldenbourg. ISBN 978-3486577723, München, Germany
- Kempton, W. & Letendre, S (1997). Electric vehicles as a new power source for electric utilities, In: *Transportation Research Part D – Transport and Environment 2 (3)*, Elsevier Science Ltd., pp. 157-175, Great Britain
- Kempton, W & Tomic, J. (2005a). Vehicle-to-grid power implementation: From stabilizing the grid to supporting large-scale renewable energy, In: *Journal of Power Sources 144 (1)*, Elsevier Science Ltd., pp. 280-294, Great Britain
- Krcmar, H. (2006). *Information Management*, Springer, ISBN 978-3540206286, Berlin, Germany
- Kempton, W & Tomic, J. (2005b). Vehicle-to-grid power fundamentals: Calculating capacity and net revenue, In: *Journal of Power Sources 144 (1)*, Elsevier Science Ltd., pp. 268-279, Great Britain
- Rand, D.; Woods, R. & Dell, R. (1998). *Batteries for electric vehicles*, Research Studies Press Ltd., John Wiley and Sons Inc., ISBN 978-0863802058, N.E. Bagshaw
- Scheer, A.-W. (2000). *ARIS - Business Process Modeling*, Springer, ISBN 978-3540658351, Berlin, Germany
- Schiller, J. (2003). *Mobile Communications*, Addison Wesley, ISBN 978-0321123817, p.113, München, Germany
- Sovacool, B. & Hirsh, R. (2009). Beyond batteries: An examination of the benefits and barriers to plug-in hybrid electric vehicles (PHEVs) and a vehicle-to-grid (V2G) transition, In: *Energy Policy 37 (3)*, Elsevier Science Ltd., pp. 1095-1103, Great Britain
- The Open Group (2009). *The Open Group Architecture Framework - TOGAF Version 9*. Van Haren Publishing, ISBN 978-9087532307, Great Britain
- Tomic, J. & Kempton, W. (2007). Using fleets of electric-drive vehicles for grid support, In: *Journal of Power Sources 168 (2)*, Elsevier Science Ltd, pp. 459-468, Great Britain
- Zwicky, F. (1967). The morphological approach to discovery, invention, research and construction, pp. 273-297 In: *New Methods of Thought and Procedure. Contributions to the Symposium on Methodologies*, May 22-24, 1967, Pasadena. Springer-Verlag, New York. 17.3.2011. Available from:
<http://www.swemorph.com/pdf/new-methods.pdf>

Applications of SR Drive Systems on Electric Vehicles

Wang Yan, Yin Tianming and Yin Haochun

*Beijing Jiaotong University/Beijing Tongdahuquan Ltd. Company/Tsinghua University
China*

1. Introduction

As the continuous growth of global vehicle production and owned, the problems brought by vehicles are conspicuousness day after day. These problems are much more serious in China. Thus developing zero emission electric vehicles have become the main scientific research projects in many countries around the world in 21st century. Energy-saving motor drive technology has become one of the key points to the EV commercialization.

In the present electric vehicles, there are several main drive systems include the chopping system of DC motor, the variable frequency drive system of induction motor(IM), the drive system of permanent-magnet motor(PM) and switched reluctance drive system(SRM), etc. The DC machine has been faded gradually in the electric vehicle drive system for the reason of high startup current, huge volume, low efficiency and poor reliability. Even worse, the carbon body and the commutator which are not suited for high speed movement need to be changed frequently. The variable frequency drive system of IM has a small torque fluctuation, but with low efficiency especially in the low speed stage. When the electric vehicle is grade climbing, the torque output is small and the current is high. Although the permanent-magnet motor is of high efficiency, the manufacturing technique is very complicated and the machine will lose effectiveness because of the demagnetization in high temperature. So it is not the perfect way. The structure of the SR Motor is firmly and stable. The SRD system has a high reliability, wide range of speed regulation, high efficiency, low startup current and large torque output, all of which are especially suited for the work condition of the electric vehicles. The application of SRD on electric vehicles is affected by the torque fluctuation and strong noise. In a word, performance comparisons of the three motors are indicated in the following table 1.

Because of its own characteristics, electric vehicles motor drive system should meet the following demands:

1. Output a large torque under base speed to meet the requirement of starting, accelerating, climbing and some other complicated working conditions.
2. Output constant power above the base speed in order to adapt max speed, overtaking and so on.
3. Maximize motor efficiency over the whole speed range to extend endurance mileage.

From the table, the SRM has more advantage than the other motors.

Many control different strategies have been proposed for the torque fluctuation task. Full rotor pitched insulating non-magnetic colloid techniques of SRM and SRM fuzzy logic

adaptive torque control system based on instantaneous torque sum are proposed in this chapter.

Motors \ Items	IM	PM	SRM
System efficiency	lower	higher	higher
Starting torque	lower	higher	highest
Power density	lower	highest	higher
Workmanship	simple	complicated	simplest
Reliability	higher	lower	highest
Life	longer	short	longest
Manufacturing cost	lower	highest	lowest

Table 1. Performance comparisons of IM, PM and SRM

2. Design of SR motor on EV

The noise sources can be divided into four broad categories: magnetic, mechanical, aerodynamic and electronic . Therefore, according to the magnetic flux in the machine passing across the air gap in an approximate radial direction producing radial forces on the stator and rotor result in magnetic noise and vibrations, selection of 12/8 construction is used in the SRM design and a new rotor structure is proposed in this section.

2.1 Electric vehicle power demand

The selection of driving motor on electric vehicles mainly depends on rated power and rated speed. The more power grade is choosed the more reserve-power is got and the better vehicle driving feature is. But the volume and weight of the motor will increase rapidly by the same time and lead to the decline of the motor efficiency. So, the motor power should not too large. The calculation of power matching of EV motor is as follows:

A simplified model of the road vehicle dynamics can be used to estimate the tractive requirement of the vehicle drive-train, from which the individual component specifications can be rated with-regard-to their peak and continuous duties. The vehicle model accounts for the resultant forces acting against the vehicle when starting and when in motion, as illustrated in following figure 1. These forces can generally be considered as comprising of four main components, viz.:

$$F_d = F_w + F_r + F_a + F_j \quad (1)$$

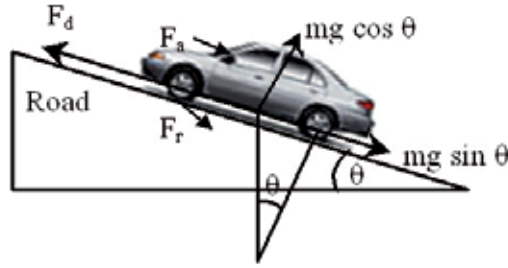


Fig. 1. Vehicles dynamics analysis

Where the force to overcome the tyre to road power loss, or rolling resistance, $F_r = kr \cdot mg \cdot \cos \theta$, a resistive force related to the road gradient, $F_w = mg \cdot \sin \theta$, an aerodynamic resistance or drag force, $F_d = 1/2 \cdot \rho C_d A_f v^2$, and the transient force required to accelerate or retard the vehicle, $F_j = m \cdot dv/dt$. Where:-

kr is the rolling resistance coefficient which includes tyre loss and is approximated to be independent of speed and proportional to the vehicle normal reaction force; m is the vehicle and payload mass; θ is the road gradient; g is the gravitational constant; ρ is the density of air; C_d is the drag force coefficient; A_f is the vehicle frontal area, and v is the vehicle linear velocity. Having determined the forces acting upon the vehicle, the road wheel torque can be calculated from the equation of motion, viz.:

$$T_w = J_w \cdot \frac{d\omega_w}{dt} + d_f r_w F_d \quad (2)$$

Where J_w , ω_w , r_w , are the wheel inertia, angular velocity and mean radius, respectively, and d_f is a factor proportioning torque distribution on the rear axle. By way of example, for a direct rear wheel drive scenario, it is assumed that there is an equal share of the required tractive force between each wheel drive machine (i.e. $d_f = 0.5$). For an on-board drive machine option, a gear stage is included in the drive-train, thus the output torque of the traction machine is related to the road wheel torque by the total transmission gear ratio, n_t , transmission efficiency, η_t , and the machine rotor inertia, J_m . Incorporating these into the equation of motion yields a general expression for traction machine torque:

$$T_m = J_m \cdot \frac{d\omega_m}{dt} + \frac{1}{n_t \eta_t} T_w \quad (3)$$

Expressing the wheel and traction machine angular velocities in terms of the vehicle linear velocity yields:

$$\omega_w = \frac{v}{r_w} \quad (4)$$

$$\omega_m = n_t \frac{v}{r_w} \quad (5)$$

From which the machine torque equation can be expressed in terms of the vehicle linear velocity by substituting eqns.(1), (2), (4) and (5) into eqn.3:

$$T_m = \left(\frac{n_t \cdot J_m}{r_w} + \frac{J_w}{n_t \eta_t r_w} + \frac{d_f r_w m}{n_t \eta_t} \right) \frac{dv}{dt} + \frac{d_f r_w}{n_t \eta_t} \left[(k_r \cos \theta + \sin \theta) mg + \frac{1}{2} \rho C_d A_f v^2 \right] \quad (6)$$

Mechanical power is torque multiplied by mechanical speed:

$$P_m = T_m \omega_m \quad (7)$$

According to the configuration of the PEUGEOT 505 SW8 showed in table 2, the drive motor power can be calculated using above equations. $P_m = 26.36kW$. Considering batteries (weight 650 kg) will be added on the vehicle, the motor should be enlarged to 30kW.

the weight with full load	2000kg
rolling resistance coefficient	0.0267
air resistance coefficient	0.3
windward area	1.75m ²
the average efficiency of motor	0.94
the density of air	1.205Kg/m ³
the road gradient	15°
the max speed of EV	180km/h

Table 2. The parameters involved are listed in table 2.

Assume there are two motors with same rated power, the one with higher rated speed is smaller and lighter. In the view of vehicle performance, there will be less mechanical loss if the rated speed is higher. Meanwhile, it can provide large speed range to the drive system. Although the higher rated speed is favorable, the drive gear will be much more and more complicated. So, the above mentioned factors should be all considered in the selection of motor rated speed.

2.2 Designed SRM for PEUGOT 505 SW8

The parameters design of SR drive motor are contained the preliminary selection of frame size, the number of stator poles N_s and the number of rotor poles N_r , the stator and rotor pole angle selection, the bore diameter and the stack length, the selection of the conductor and the winding design, the calculation of the minimum and maximum inductance according to specifications for the SRM selected above, viz. 30kW, 4000r/min, 300v SRM. Then the motor verification is designed by Finite Element Analysis.

Following are the parameters of SR drive motor (Table.3), we choose 300V lead acid storage battery as power supply system. The motor's performance curves are showed in figure 2, 3,4. The fig.2 gives the profile of flux linkage vs. current of unaligned and aligned stator and rotor tooth. The fig. 3 describes when the rotor's angel changing, the stator's winding current changes. The fig.4 represents the composed torque of the motor changes with the angel. It shows big variety occurs commutation between the winding phase A and B or Band C et. Thus measurement should be taken to avoid the torque ripple.

Rated power (kW)	30	Rated voltage (V)	300	Rated speed (r/min)	4000
Poles and phase	12/8, 3	Maximum value of phase inductance (mH)	3.98401	Minimum value of phase inductance (mH)	0.379135
Effective rated value of phase current(A)	88.6784	Motor average efficiency	0.94	Rotary inertia(kg*m ²)	0.0486939

Table 3. The parameters of SR drive motor

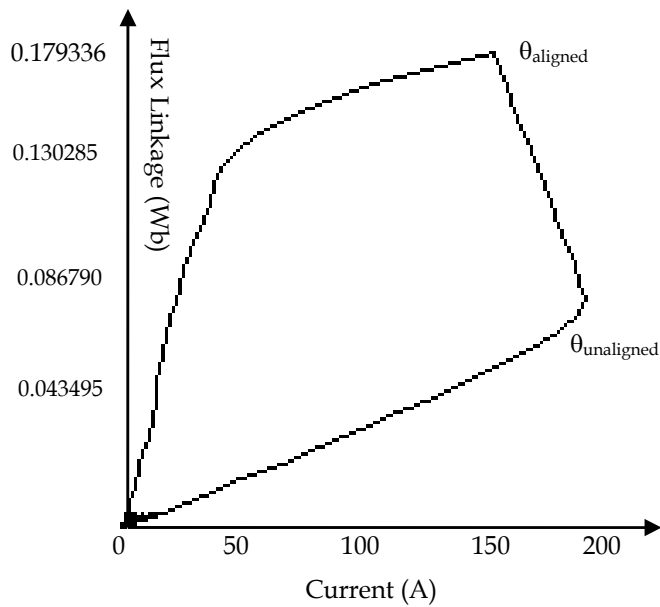


Fig. 2. Profile of designed SRM flux-linkage-current

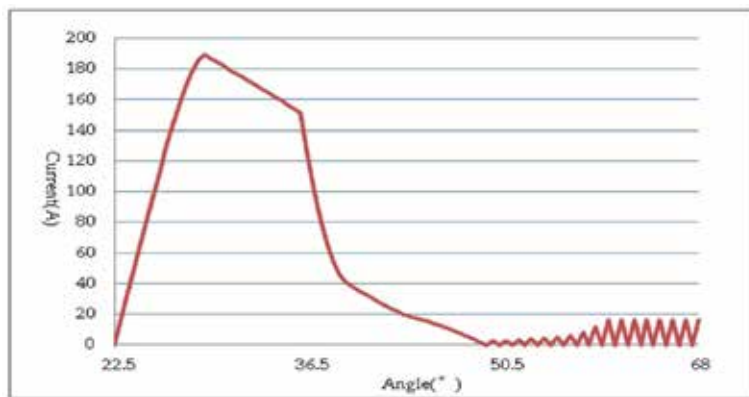


Fig. 3. Profile of designed SRM current vs. angle

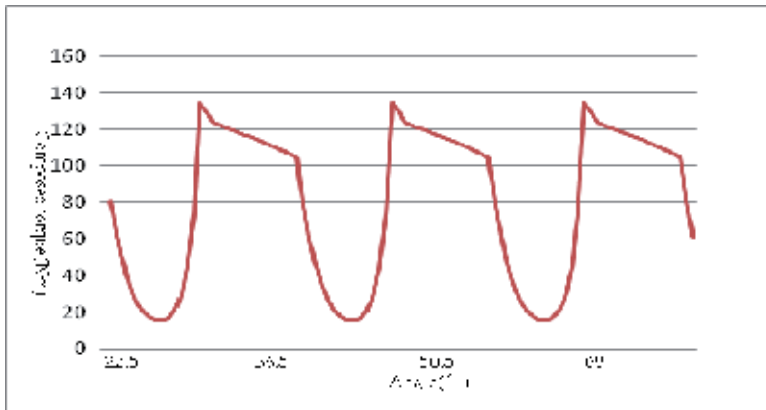


Fig. 4. Profile of designed SRM composed torque vs. angle

2.3 New rotor structure

There are large spaces between the present SRM rotor teeth, which will cause strong noise when the rotor rotating. A new type of rotor structure is proposed in the chapter. Figure 5 (a) shows the originally one, (b) (c) is the new structure diagrammatic sketch. The structure include 1 shaft, 2 rotor tooth, 3 yoke part, 4 screw bolt and nut, 5 insulating non-magnetic colloid, 6 copper collar, 7 steel ring. The insulating non-magnetic colloid is filled in the yoke part between rotor teeth. The two copper collars which are used to fix insulating non-magnetic colloid by screw bolt and nut are connected through the rotor shaft.

The expansion factor of insulating non-magnetic colloid is similar to rotor silicon-steel sheet, which can avoid the fissure between insulating non-magnetic colloid and rotor teeth. There are small amount of heat and noise when the new SRM rotor structure is applied during high speed rotating. It is obvious that the working efficiency is higher than the existing one.

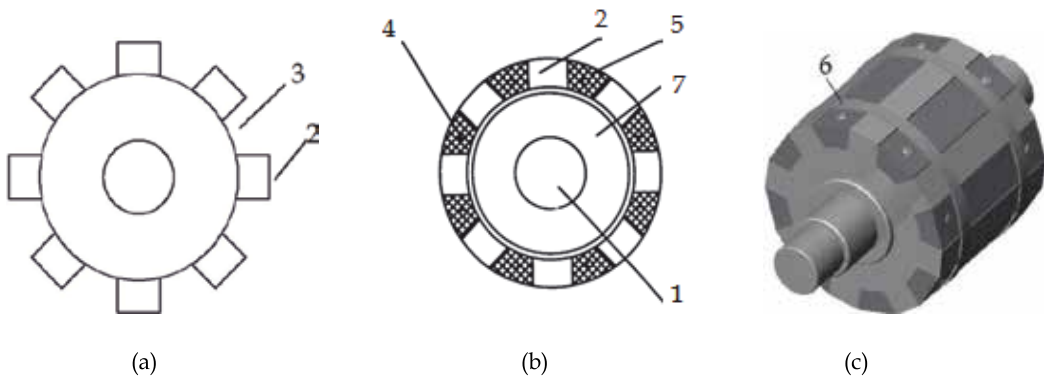


Fig. 5. A novel rotor structure for SRM

2.4 Drive mode for PEUGEOT 505 SW8

At beginning development of electric vehicles, in order to concentrate to develop battery cell and drive motor system, electric vehicles conversion design is usually adopted. The most different between the electric and regular fuel vehicles is energy system. Dynamic

system of the EV is composed of battery system and drive motor system. The battery provides direct current supply. The supply passing through electric apparatus which is made of controller and power main electrical circuit is changed into electrical power which can be used by the motor. Then the motor runs and the wheels are driven. The energy power transmission is showed in following figure 6.

The PEUGEOT 505 SW8 is a kind of wagon which is driven by rear-wheel. So the conversion EV can be designed as the motor connecting to gear-box via clutch, transaxle driving the wheels through transmission shaft. The drive mode is shown in figure 7.





Fig. 6. The power transport process of EV

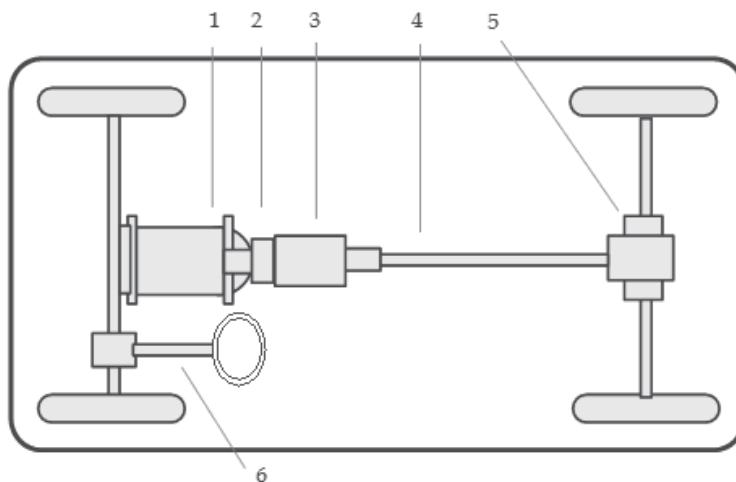

1- motor, 2-clutch, 3-gear-box, 4-transmission shaft, 5-transaxle, 6-steering gear

Fig. 7. Drive mode for PEUGEOT 505 SW8 conversion

3. SR drives power converter

The cost and performance of the SRM drive have been determined by many or converter topologies invented, and unlike the conventional inverts-fed induction machine, the SRM drives are highly dependent on the convert topology used to dive the SRM. An asymmetric half bridge converter topology is adopted in the 3-Phase SRM drive for EV, which is showed in figure 8. The main electrical circuit composes of power electrical lead acid batteries U_s , support capacitor C_s , asymmetric half bridge IGBTs from V11 to V62 and freewheel diodes from VD11 to VD62. It permits control of the individual phases fully independent of each other and thus permits the widest freedom of control. During normal operation, the electromagnetic flux in an SR motor is not constant and must be built for every stroke. In the motoring period, these strokes correspond to the rotor position when the rotor poles are approaching the corresponding stator pole of the excited phase. In the case of Phase A,

shown in figure 8, the stroke can be established by activating the switches V11 and V42. At low-speed operation the Pulse Width Modulation (PWM), applied to the corresponding switches, modulates the voltage level. When the switches V11 and V42 are turned off in the same time, producing transformer electromotive force in Phase A break-over forward freewheel diodes VD11 and VD42, the Phase A current after flows through VD11, VD42 and Cs. Each of V11 with its anti-parallel diode VD11 and V12 with its anti-parallel diode VD12 is the asymmetric half bridge structure in the one IGBT module. KDC is a DC contactor which powers up to the drive system, and is controlled by key of the vehicle which starts the engine originally.

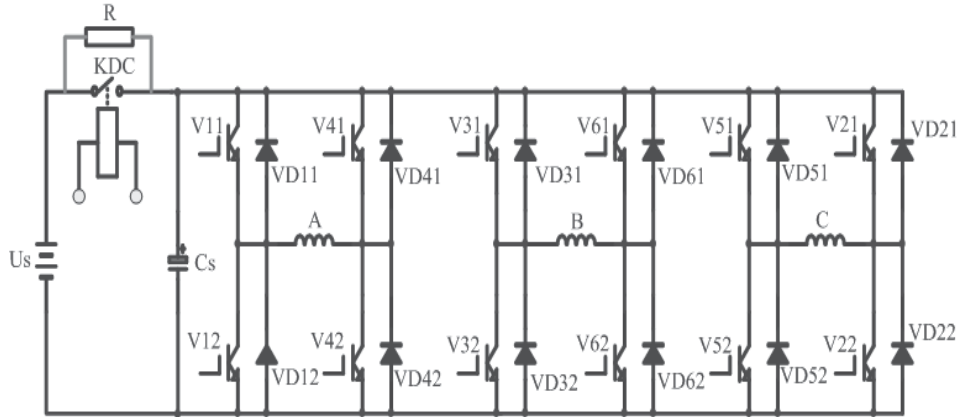


Fig. 8. Schematic Diagram of Power converter in Electrical Vehicle

3.1 Parameter selection of the main circuit

The driving power U_s is composed of 25 series lead acid batteries which rated voltage is 12V, capacity is 85Ah. Thus the whole volume of U_s is 300V. Because safety working voltage arrange of the single battery is from 10.5V to 14.4V, the actual group of batteries working voltage arrange is from 262.5V to 360V. Selecting maximum DC bus voltage 360V, in the asymmetric half bridge main circuit the main switch IGBT will bear the maximum DC power voltage from the bus. Considering twice surplus capacity, the IGBT withdraw voltage is in equation 8.

$$U_r = 2U_{smax} = 2 \times 360V = 720V \quad (8)$$

The effective rated value of the phase current for the designed SRM is 88.6784A, considering the overload current of the drive system two multiple of the phase current, the effective rated value of the IGBT current is in equation (9).

$$I_{srms} = 2I_N = 2 \times 88.6784A = 177.3568A \quad (9)$$

Having determined the effective rated value of the IGBT current, the peak current of the IGBT can be calculated in equation (10), viz

$$\hat{I}_S = \sqrt{2} \times 2 \times \sqrt{q} I_N = 434.3553A \quad (10)$$

In the equation (9), m is the number of the phase of the SRM which equals 3 in the system. Actually power converter parameters involved in the designed SR drive motor are listed in table 4. To sum up, the main circuit switch IGBT can be selected as BSM300GA120DLC of EUPEC which has 1200V bear voltage ($T_C = 80^{\circ}C$), 300A effective current value, 600A peak current value ($t_p = 1ms$).

Electrical parameters	Values
Average current of main switch	46.1426 A
Effective current of main switch	84.7971A
Peak current of main switch	188 A
Average current of after flow bidiode	11.878A
Effective current of after flow bidiode	27.0406 A
Peak current of after flow bidiode	138A

Table 4. Designed Parameters of SR Drive Motor

3.2 IGBT drive and snubbed electronic circuits design

IGBT is simply voltage driven switches, because their insulated gate behaves like a capacitor. Conversely, switches such as triacs, thyristors and bipolar transistors are "current" controlled, in the same way as a PN diode. Because IGBT gate drive condition is closely related to its static and dynamic performance. The turn-on voltage, switching time, switching loss, short-circuit withstand capability etc. are ordinately effected by positive and negative voltage (V_{GE} and $-V_{GE}$) between gate and emitter, gate electrode resistance (R_G). Being reasonably designed drive and protection circuit is quite important.

3.2.1 IGBT drive conditions

The concrete requirement of IGBT drive circuit is listed flowering.

(1)Because IGBT is a type of voltage drive module, it has a threshold voltage value of 2.5 V to 5.0V and has a capacitive input resistance. IGBT is very subtle to electric charge accumulation of the gate electrode, so the drive circuit must be very reliable to grantee there is a discharge loop with a low resistance itself, viz. there is as short as possible wire between the circuit and IGBT.

(2)Charging and discharging the gate oxide capacity with small interresistance drive supply inorder to gurantee that the gate electrode controlling voltage has much enough steep forward and reverse edge. Because IGBT has nonlinear capacitive character, the driver must have enough instantaneous absorbing current capability. Thus the gate electrode voltage can be set up or disappear soon inorder to decrease the switch loss lowerly. On the other hand, after the IGBT turns on, the gate electrode driver should supply enough power to avoide to be destroyed because of exit saturation. The drive interresistance can not be lower than commanded R_G , otherwise there will have underdamped harmonic motion between the stray inductance and the gate electrode capacity in the drive loop . Meanwhile, the surge current increases during short switching time. This induces booth unsafty in the main circuit and disturbance in the control circuit.

(3)Although the higher $+V_{GE}$, the higher current limit becomes, $+V_{GE}$ should be remained under maximum rated G-E voltage, $+V_{GES} = +20V$. The reason is once there is a over current

or short current, the higher $+V_{GE}$, the higher current, the bigger probability of the IGBT destroy because the time of enduring short current capability decreases. Usually, the value of $+V_{GE}$ is considered as between 12V and 15V.

(4) Set the enough gate reverse bias voltage value ($-V_{GE}$) to IGBT. While the IGBT is in off-state, there are some high frequency oscillation signals in the gate electrode circuit because the other part circuits are still working. These signals may let IGBT to be in micro on-state, it results in the power loss of IGBT increase. Therefore a recommended $-V_{GE}$ to IGBT is -5V to -10V (the maximum gate reverse bias voltage value is $-V_{GES} = -20V$), so that the IGBT can be cut off reliably even if there are switch noises in the gate electrode of IGBT.

(5) The gate electrode resistance effects R_G on the switch loss, switch speed, and even involves in whether the drive circuit appears oscillation and the collector electrode generates surge current. Usually the value of R_G can not be selected to be over 10 times than the producer recommended value. In actual application, R_G should be adjusted carefully. R_G should be disposed closely to the gate electrode.

(6) There should be have a gate electrode amplitude limiting circuit to avoid to breakthrough the gate electrode.

(7) The drive circuit should be isolated from the control circuit so that, when the IGBT is destroyed the other components can not be damaged. When the IGBT burns, the collector electrode high voltage usually pwties the drive circuit through destroyed the gate electrode, and then disrupts some components in the drive circuit. The gate electrode drive circuit as far as possible should be simple and actual. It is much better that the IGBT itself has protection and very strong the ability of disturbance. When the IGBT is under the state of load short circuit or over current, the IGBT can prevent fault current automatically through decreasing the gate electrode voltage gradually to be switched the IGBT off softly. That is to prevent very high di/dt causing by the fault current because of IGBT turn-off swiftly. The high value di/dt can produce high spiking voltage under the stray inductance function, results in the IGBT to be unbearable and damaged. By the same rule, the soft turn-off process of the drive circuit should not be effected by the input signal disappear. The drive circuit should have a time logical for the gate voltage control function. When there has over current, no matter whether there is the input signal, the drive circuit should be turned off unconditionally.

3.2.2 IGBT drive electric circuits design

The IGBT-driving hybrid IC EXB841 produced by Fuji Electric is used in the EV power converter. It can drive 300A/1200V or 400A/600V IGBT module and the drive signal delay reaches 1.5 μ s, the maximum switching speed is 40KHz. The drive circuit is designed in figure 9 around EXB841, in which C1 and C2 are two electrolytic capacitors to absorb the change of supply voltage. MC1413, LED, R1, R2 are composed of the drive line from the control circuit to EXB841. V3 and V4 are two voltage-stabilizing diodes to limit amplitude of EXB841 output drive voltage, so that to avoid the drive voltage higher and destroy the IGBT. V3 and V4 are two voltage-stabilizing diodes which are in inverted series and connected in parallel with collector and emitter electrode. The over current protective circuit for IGBT is composed of R3, E1, R4, V1 and V2, in which V1 and V2 connecting to the sixth pin of EXB841 completes to monitor the collector electrode voltage. V1 is the fast recover diode which is ERA 34-10 made from Fuji Electric. V2 is the voltage-stabilizing

diode which can change the controlled point of the current protection by adjusting the voltage-stabilizing value of the diode. Theoretically, if the over current protection of EXB841 takes effect is that the pin of EXB841 outputs a low electrical level when the collector electrode voltage monitoring the six pin is greater than 7.5V. Then the optocoupler in the figure outputs a fault signal to the control board which is high level OC signal. The signal produces interruption on the board and controls CPU to block trigger pulse for IGBT. The theoretical protective value 7.5V of EXB841 is the operating point which the supply voltage is strictly controlled at 20V. When the supply voltage has ripple or error, the protective value will change. When the supply voltage is greater than 20V, the protective value increases 1V as the supply voltage does. When the supply voltage of EXB841 is 20V, the drive voltage supplied IGBT turning on is 15V. According to the profile of switching losses of IGBT-inverter of BSM300GA120DLC, the curve of collector electrode current vs. IGBT switching on voltage drop V_{CE} can be obtained. The voltage drop between the gate and the emitter electrode can be calculated in the following equation and figure 10.

$$V_{CE} = RI_C + V_0 \quad (11)$$

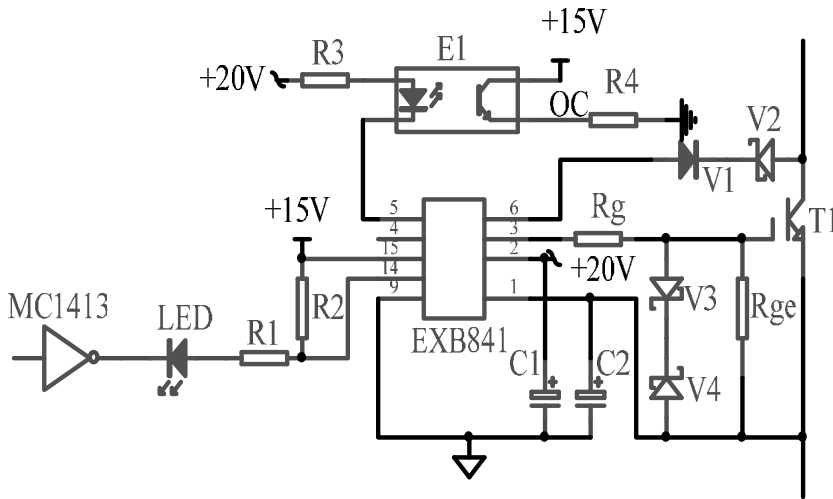


Fig. 9. IGBT drive circuit

According to the figure 10 and 11, when $T_{vj} = 125^\circ\text{C}$, IGBT output curve can be linearized by line $y = Ax + B$. Known the three points on the curve, respectively they are (2.0,208), (2.5,325), (3.0,465). Using the points (2.0,208) and (2.5,325), the equation is listed in 12.

$$V_{CE} = 0.0042735I_C + 1.01282 \quad (12)$$

Taking $I_C = 480\text{A}$, $V_{CE} = 3.0641\text{V}$, the error of V_{CE} and the percent rate of error are listed in following equations.

$$\Delta V_{CE} = 3.0641 - 3.06 = 0.0041 \quad (13)$$

$$\eta = \frac{0.0041}{3.06} \times 100\% = 0.133\% \tag{14}$$

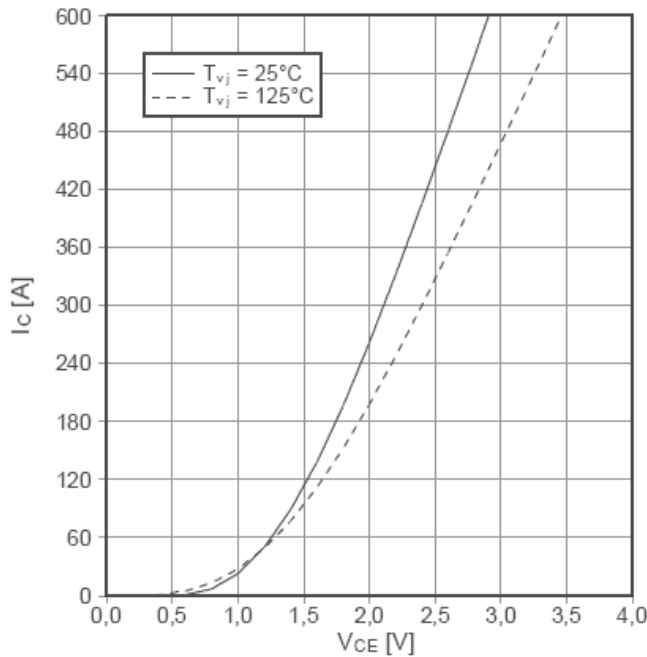


Fig. 10. IGBT BSM300GA120DLC output curve under different voltage

When the drive voltage supplied IGBT turning on is 15V, the collector electrode current is 600A, IGBT switching on voltage drop V_{CE} is about 3.5V calculated by 12 and in figure 10. Then the value of voltage-stabilizing diode V2 is selected as 9V. From the table 5, the gate resistance value can be chosen 3.3Ω.

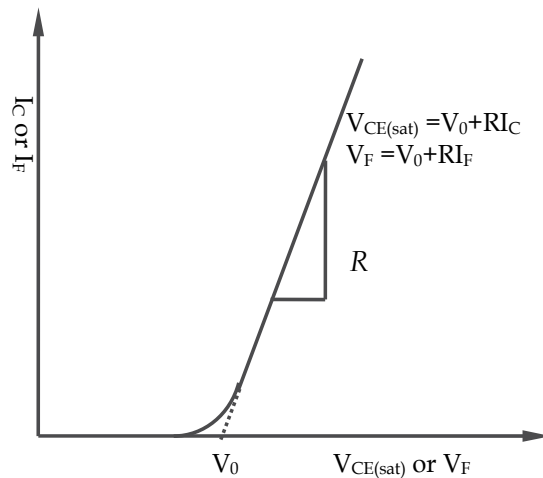


Fig. 11. Positive output characteristic curve of power devices

IGBT Rating	600V	200A	300A	400A	-
	1200V	200A	150A	200A	300A
R_G		12Ω	8.2Ω	5Ω	3.3Ω
I_{cc}	5kHz	20mA	22 mA	23 mA	27 mA
	10kHz	24 mA	27 mA	30 mA	37 mA
	15kHz	27mA	32 mA	37 mA	47 mA

Table 5. Recommended the gate resistance R_G and the current loss

3.2.3 IGBT snubbed electronic circuits design

When the power electronic device is used, buffer electronic circuit should be designed to inhibit respectively di/dt and dv/dt when the device switched on and off. The aim is to change switch locus of the device in order to avoid the maximum value of V_{CE} and i_C appear at same time. Thus the switching loss is decreased and reliability can be improved. The IGBT snubbed electronic circuit is put particular emphasis on the voltage absorbing and restraining in switch on state. That is because the IGBT working switch frequency is very high, tiny inductance in the electronic circuit can cause very big $L di/dt$ and produce over voltage to endanger the IGBT security. RCD snubbed electronic circuit is often used which is designed in figure 12. The RCD bridges joint every IGBT module connecting with two ends of the power. Capacity and resistance value selection has much more relationship with snubbing voltage in the snubbed electronic circuit. If the selection is improper, it would affect the voltage absorb so far as to bring about osillation in the circuit.

Within the IGBT switching off process, the current of device drops fastly, the current in the snubbed circuit increases at same change rating. The magnetic energy stored in the parasitic inductance in the main electronic circuit will wholly transfere into the electrical energy in the absorbing capacity. Assumming the current flowing the main switch device drops linearly when switching off, the current flowing the snubbed circuit increases linearly because the switching off process is very short. These two current can be expressed in the following equations.

$$i_T = \left(1 - \frac{t}{t_f}\right)I \quad (15)$$

$$i_C = I - i_T = \frac{t}{t_f}I \quad (16)$$

In the equations, i_T is the current in the main switch device; i_C is the charging current in the absorbing capacity; t_f is dropping time when switching off. I is the average current in the direct current bus line. Therefore, the voltage of capacity two ends is expressed in the equation 17.

$$U_{CS} = \frac{1}{C} \int_0^{t_f} i_C dt = \frac{1}{C} \int_0^{t_f} \frac{t}{t_f} I dt = \frac{It_f}{2C} \quad (17)$$

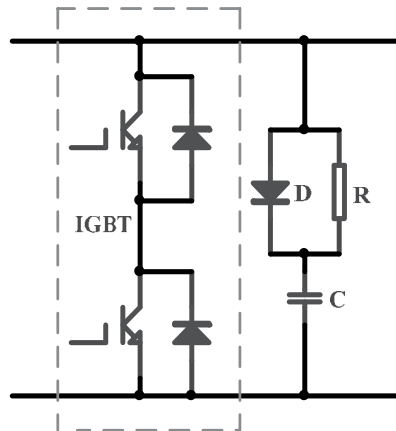


Fig. 12. IGBT snubbed electronic circuit.

The capacity voltage U_{CS} usually can be selected as 10 to 50 percent of the supply voltage U_{DC} at t_f . For example, selecting $U_{CS} = 0.5U_{DC}$, the capacity C is in the following equation.

$$C \geq \frac{It_f}{U_{DC}} \quad (18)$$

The value of the absorbing capacity can be selected as $0.47\mu\text{F}$ according to the the equation 18 and experience value. The selection rule of resistance R is to releasing electric charge thouroughly stored in the snubbed capacity before the IGBT switching off signal comes. If R is too large, it makes the discharging time of the capacity C lower. But if R is too small, the discharging current is too large and fast when the IGBT switching on, it can endanger the device security and cause the osillation. So period (T) of the switch device eaquals 1 or 2 times of $3RC$. So the value of the resistance R can be calculated in the equation 19.

$$R \leq \frac{1}{6 \times C \times f} \quad (19)$$

R calculated by the equation 19 can not be greater than 41.72 ohm , 39ohm is selcted in the RCD snubbed circuit. The maximum power loss on the absorbing resistance can be calcautaed as in the equation 20.

$$P_R = \frac{1}{2}C\Delta V^2 f = 20W \quad (20)$$

The fast recovery diode is selected as FR607. Beside the IGBT drive and snubbed electronic circuits design, the switched power supply circuit and control circuit should be designed. Because the length of the chapter, the content cannot be covered all the bases. As figure 13 shows, the control circuit structure of SRD system is given. With MICM2002 (Motor Intelligent Module) based on DSP and AT89C51 singlechip the folowing control strategy is realized. When the EV is powered, the controller goes into working state. The control signal from all kinds of fault signals and the driver operating system are coded and loaded the

AT89C51 through prior coder. If the system is checked with no fault and no operation, the system is in standby mode. When the driver gives the start and throttle given signal, according to the SRM rotor position signal from the position sensor, the singlechip sends out the phase turn on/off signal and the MICM produces the PWM signal, then the system integrates the protective and the current chopping signals to give the main circuit IGBT drive signal and control the power main circuit to supply the SRM windings electricity and move the motor. According to the positive and negative rotation setting and the position information of the motor, the singlechip controls the windings power-on sequences. When the motor rotates at low speed, current chopping control mode can be used. Firstly, the chip gives the upper limitation of the current chopping signal and puts it into the MICM through D/A converter; secondly, the MICM compares the current limitation with the phase current detecting from the current sensor, then calculates, optimizes and sends out the chopping signal. When the motor speed arrives above basic speed, the control mode changes into angle control from the current chopping control. When the driver changes the operating signal, the control circuit changes the working logic and implements corresponding dive requirement through the power circuit. If there is fault in the motor running, the control circuit blocks the trigger pulse of IGBT and protects IGBT, and displays and alarms through display circuit. Meanwhile it communiates with CAN module and sends the fault signal to driver video facility.

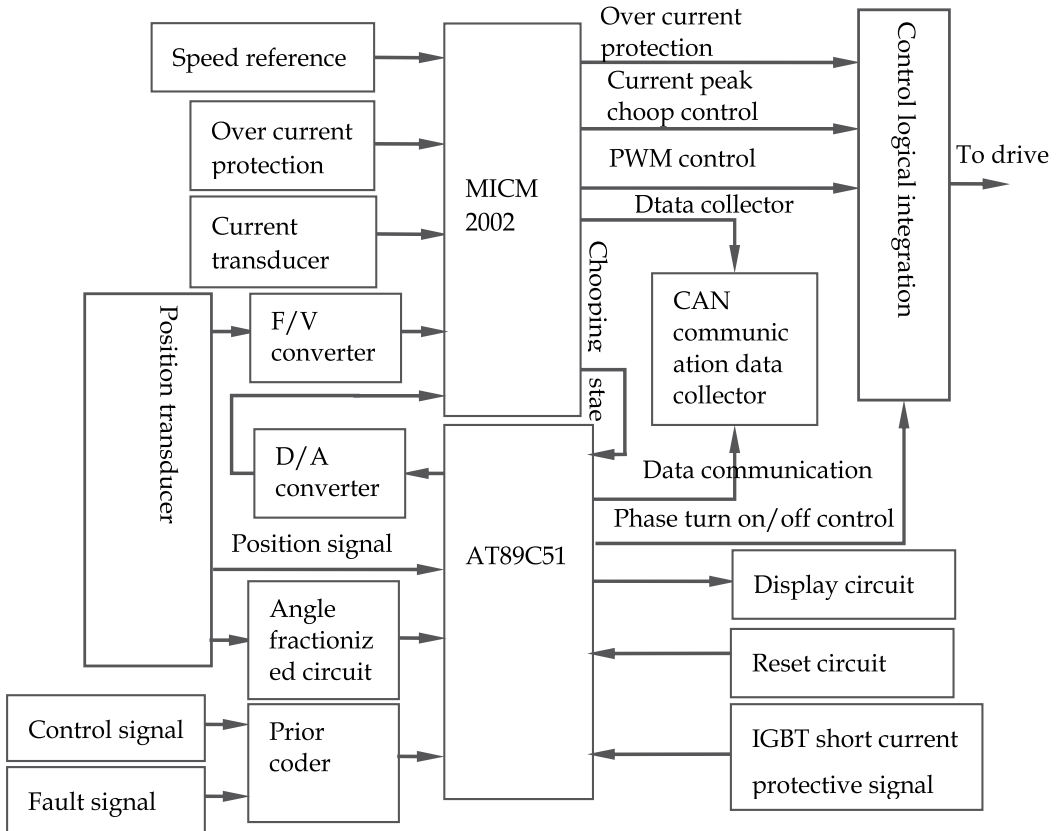


Fig. 13. Control circuit structure of SRD systems

4. SRM fuzzy logic adaptive torque control system

For the reason of the non-linearity in magnetic circuit, the SRM is hard to analyze and control. Also, it is difficult to build an accurate mathematical model. The fuzzy control are mainly applied to the system which is severely non-linearity or hard to get the mathematical model. The fuzzy adaptive control to the SRD system is proposed in order to further increase the speed regulating precision and minimize the torque fluctuation. This chapter presents a new type of SRM control system which combines the PI regulator and fuzzy logic control – the SRM fuzzy logic adaptive torque control system based on instantaneous torque sum.

4.1 Speed PI regulator design

Figure 14 presents the principal frame of SRM fuzzy logic adaptive control. The conventional PI regulator is applied in the external loop and the fuzzy logic adaptive control based on instantaneous torque sum is used in the inner loop system. According to the voltage balance equation of SR motor:

$$V_i = R_s i_a + \frac{d}{dt}(L a i_a) = R_s i_a + L_a \frac{d i_a}{dt} + i_a \frac{d L_a}{dt} = R_s i_a + L_a \frac{d i_a}{dt} + i_a \frac{d L_a}{d \theta} \cdot \frac{d \theta}{dt} = R_s i_a + L_a \frac{d i_a}{dt} + i_a \omega \cdot \frac{d L_a}{d \theta} \tag{21}$$

Suppose the inductance change rate is constant, which defined as g_L .

$$g_L = \frac{d L_a}{d \theta} \tag{22}$$

So the equation 21 can be written as following equation.

$$V_i = (R_s + \omega g_L) i_a + L_a \frac{d i_a}{dt} \tag{23}$$

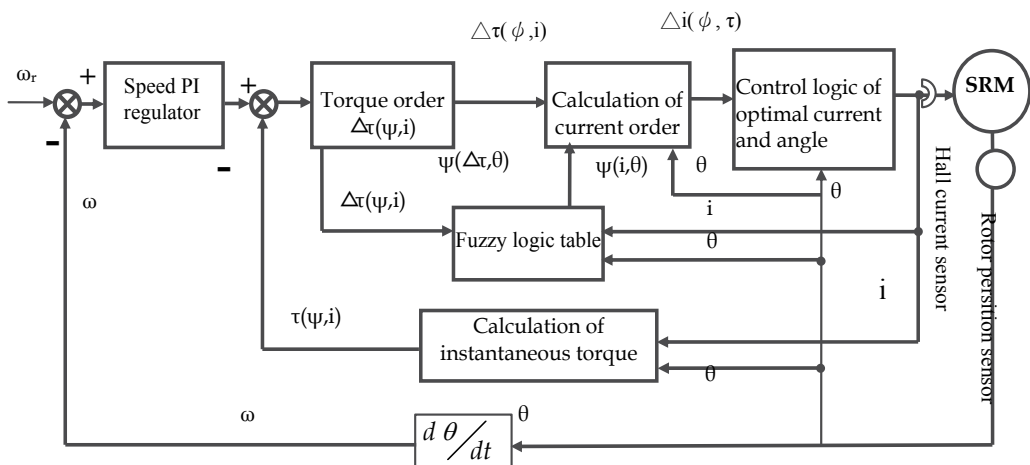


Fig. 14. Principal frame of SRM fuzzy logic adaptive direct torque control system

The electromagnetic torque created by phase A is:

$$\tau_e(\theta, i) = \frac{1}{2} g_L i_a^2 \quad (24)$$

According to the torque balance equation 25:

$$\tau_e(\theta, i) = \sum_{n=1}^3 \tau_{dn} = \tau_L(\omega) + k_\omega \omega + J \frac{d\omega}{dt} \quad (25)$$

When the system enters steady state, the torque is invariable:

$$\tau_e(\theta, i) = \sum_{n=1}^3 \tau_{dn} = \tau_L(\omega) + k_\omega \omega \quad (26)$$

$\tau_L(\omega)$ is load torque and k_ω is coulomb friction coefficient.

Compare equation (7) with equation (8), we get:

$$\Delta\tau_e(\theta, i) = J \frac{d\omega}{dt} \quad (27)$$

If the sample time T is small enough, load torque and $k_\omega \omega$ can be seen as constant in the sample interval. So $\Delta\tau_e(\omega)$ is proportional to $\Delta\omega$, equation (28) is:

$$\Delta\tau_e(\theta, i) \approx J \cdot \frac{\Delta\omega}{T} \quad (28)$$

In the equation above, $\frac{d\omega}{dt} \approx \frac{\Delta\omega}{T}$. Thus we get the torque deviation signal from speed deviation signal through the PI regulator.

$$\Delta\tau_e(\theta, i) \approx K_p \cdot \Delta\omega \quad (29)$$

The bandwidth of speed closed loop is small. It will be better when the proportional regulator used. But it is hard diminish to the steady-state error. So, in order to minimize the steady-state error and strengthen the disturbance rejection ability, we select the PI regulator. Equation 30:

$$\Delta\tau_e(\theta, i) \approx \left(K_p + K_i / s \right) \cdot \Delta\omega \quad (30)$$

4.2 Fuzzy controller design

From the figure 14, the inner loop is a direct torque control loop which is a three dimension self-adjust fuzzy logic control system, in which the torque loop is composed of the instantaneous sum torque negative feedback control. The inner loop is completed by software to accomplish the feedback of the fuzzy logic control itself, so that the SRM can be controlled in an optimal state. The following detail is about the fuzzy logic controller design and the adaptive "soft feedback" complement.

4.2.1 $\{(\theta, i) \rightarrow \psi\}$ Fuzzy logic tables

The SRM is multi input multi output controlled object. The fuzzy logic table describes the connection between input and output. In mathematics, this table can be seen as a two input single output non linear functions. The steps to build the table are as follows:

First step: confirm input and output fuzzy domain and its membership function.

Input variable is the rotor position angle and winding current. Their corresponding variation range are $0-45^\circ$ and $0-200A$. In order to improve learning rate, we assign that the membership function of fuzzy system input is isosceles triangle and its vertexes are located in the centre of triangle bottom. Shown in figure15(a)(b). The membership function of output flux linkage is shown in figure15(c) and its corresponding range is $0-0.18Wb$. The fuzzy subset of linguistic value which describes input and output value are: $\{S, M, B\}$, which S=Small, M=Medium, B=Big.

$$R_i : \text{if } \theta \text{ is } A_i^{M\theta(n)}, i \text{ is } B_i^{Mi(n)} \text{ then } \psi \text{ is } C_i^{M\psi(n)} \quad (31)$$

Second step: generate fuzzy rules from input data.

When every membership functions of input and output fuzzy domain is confirmed, we can get fuzzy rules from the measured data. Every input-output data pair is consist of current, rotor position and flux linkage which has specifically numerical relationship. In the first place, we get the membership degree from the corresponding fuzzy membership domain. Second, we assign the max membership degree to the variable in the domain. So, the value of nth data pair is $\theta(n), i(n), \psi(n)$. The assigned value will point to the fuzzy domain with the max membership degree, which can be written as the following fuzzy rules. In this equation, $A_i^{M\theta(n)}, B_i^{Mi(n)}, C_i^{M\psi(n)}$ are respectively represent the fuzzy domain of discrete data to $\theta(n), i(n), \psi(n)$. Table 2 is fuzzy rules. For example, if current is max and rotor position is max, the flux will be max.

Third step: confirm fuzzy rules membership degree.

When every new fuzzy rule is created from the input output data pair, a rule degree or fact is connected to this rule. The rule is defined as trust degree to the fuzzy rule. Actually the rule degree is related to the function, which describes the relationship between current, angle and flux linkage. The rule degree equals to the product of membership degree in each fuzzy domain. Like equation 31, can be depict as equation 32.

$$\text{Degree}(\text{Rule}) = \mu_{A_i^{M\theta(n)}} \times \mu_{B_i^{Mi(n)}} \times \mu_{C_i^{M\psi(n)}} \quad (32)$$

The instantaneous torque sum can be get from current, the rotor position angle and flux linkage in the following fuzzy logic table (Table 6).

4.2.2 Fuzzy model training

The phase current I is obtained by magnetic balance Hall current sensor and the angle θ by photoelectric position sensor. The flux linkage is calculated by the finite element analysis of current and the rotor position angle. The torque order is acquired from rotate speed order and then the current order is get from the torque order. Thus the current control can be realized. Figure 16 is the fuzzy controller based on MATLAB fuzzy toolbox. Figure 17 shows

the finite element analysis $\psi-i-\theta$ graph. According to finite element data, the model is training in the offered Matlab fuzzy toolbox. Figure 18 presents the $\psi-i-\theta$ graph acquired by training the static data in fuzzy model. As we can see from the Figure 17, the established fuzzy rules are correct that we can get accurate flux linkage ψ from the input phase current and the rotor position.

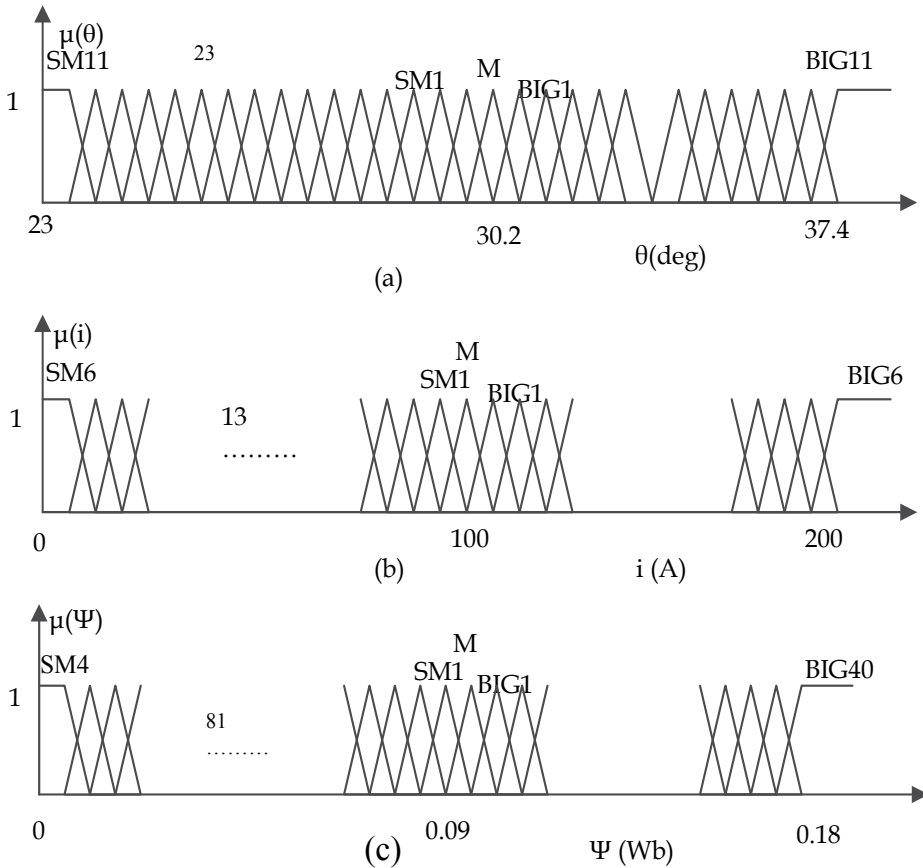


Fig. 15. Fuzzy domain regions and membership for each variable (a) Rotor position, (b) Current, (c) Flux linkage

		Flux linkage		
Current	Medium (M)	S	M	B
	Big (B)	S	S	B
		Small (S)	Medium (M)	Big (B)
		Rotor position		

Table 6. Fuzzy logic table between ψ and $i-\theta$

5. Result

5.1 Tests on the motor platform

Before the experiment on vehicle, we do the bench load test with the selected motor first. The experiment table includes three phase dynamometer, torque measurement oscilloscope, DC generator, resistance box and so on. The DC power needed by EV drive is supplied by 25 lead acid traction batteries. DC generator and resistance box make up the load of the

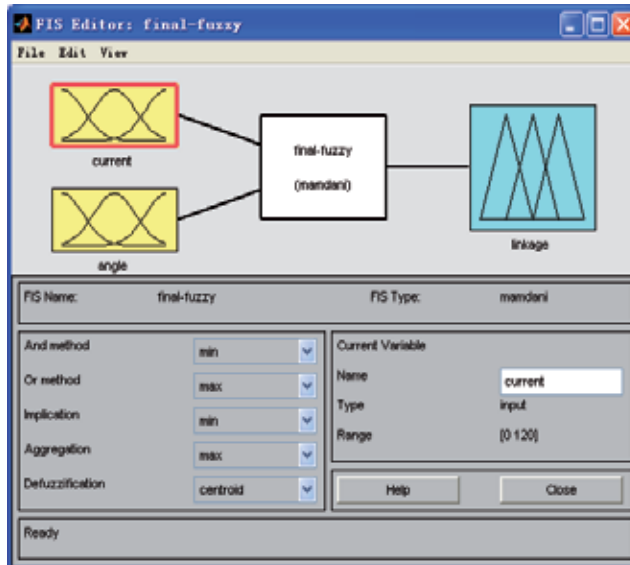


Fig. 16. Variation of the flux linkages of FEM for a single phase winding with rotor position and phase current

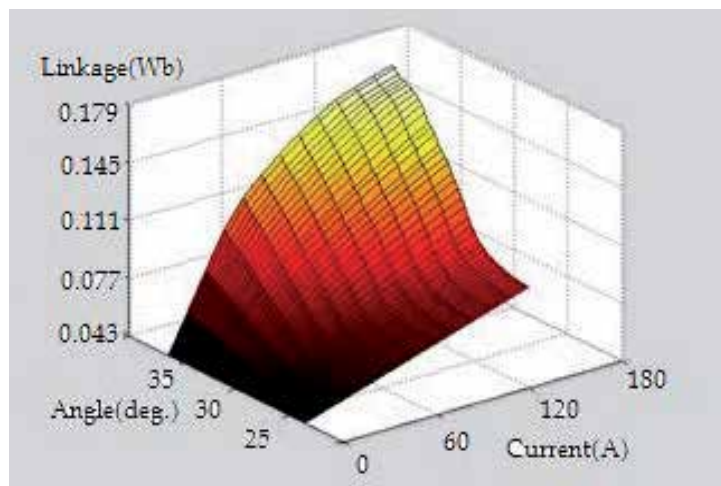


Fig. 17. Variation of the flux linkages of FEM for a single phase winding with rotor position and phase current

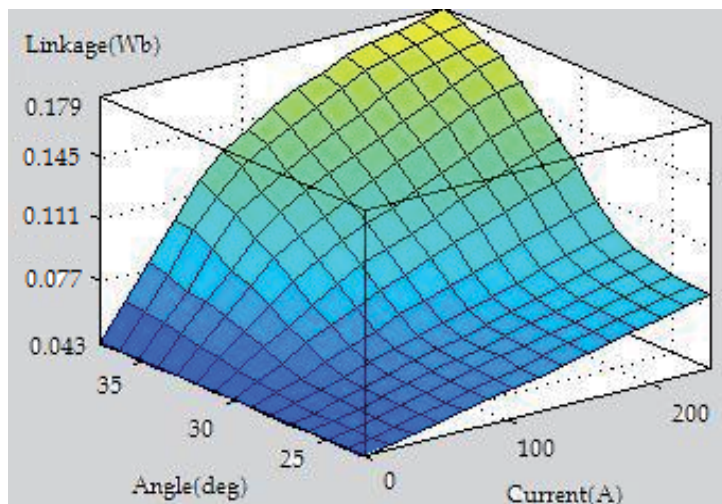


Fig. 18. Variation of the flux linkages of fuzzy controller for a single phase winding with rotor position and phase current

drive motor, which is adjusted by excitation voltage. Figure 19 shows the two phase winding current waveform of SRM when the motor speed at 500r/min and load with rated torque. From this figure we can see that the effective current increases so as to output required torque. The out power is 3.2kW, the efficiency is 84% of the SR drive system. Figure 20 shows the two phase winding current waveform of SRM when the motor speed at 500r/min and load with peak torque.

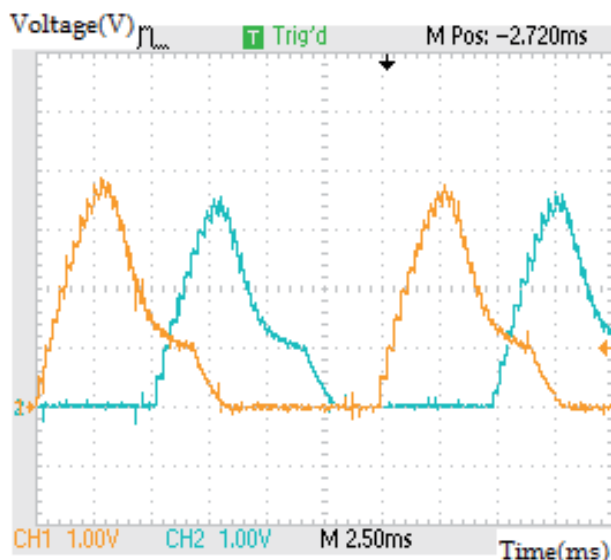


Fig. 19. Winding current waveform of $n=500\text{r}/\text{min}$ under loaded 72Nm

The output torque is 144N.m and output power is 6.4kw. It is obviously that winding current is controlled below the peak value (189A). The waveform of the current is flat top

and the drive system is working with full load. This status is used to provide peak torque when EV startup or accelerate. In order to improve system reliability, it is allowed to work overload for one minute. After that, the control system will lock trigger pulse and give overload alert to prevent system damage. The figure 21 shows steady state torque profile at speed of 400r/min and output power is 4kW , it shows the torque ripple is only within less than 10 N · m.

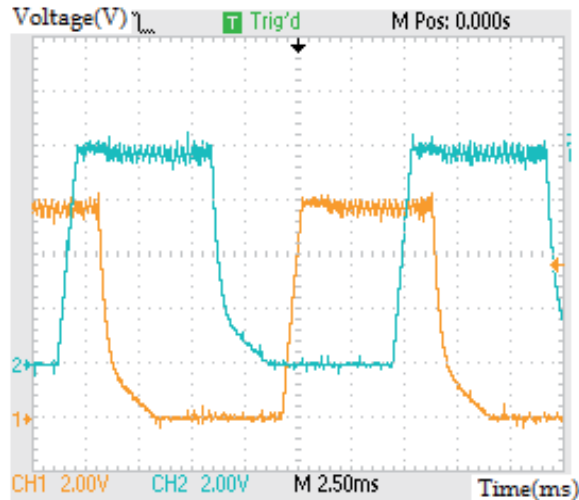


Fig. 20. Winding current waveform of SRM when the motor speed at 500r/min

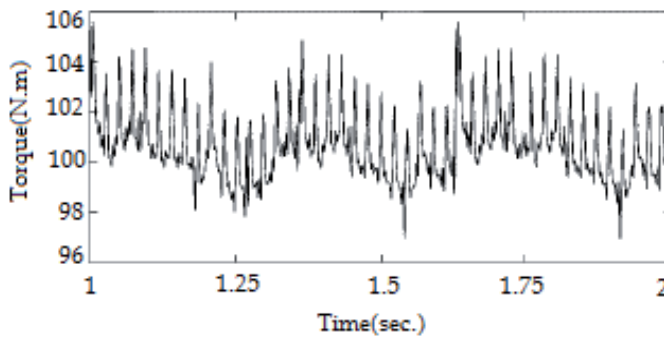


Fig. 21 Steady state torque profile at speed of 400r/min

5.2 Tests on the PEUGOT 505 SW8

The SR drive system designed in this chapter was installed on the PEUGEOT 505 SW8 to do vehicle tests. The van preserves clutch, gearbox and other transmission mechanism. Thus we can reduce effect on vehicle traction performance. On the other hand, in doing so can improve startup torque. The installment of Lead-acid Battery mainly considers axis

distribution and its structure. The battery is assembled by the space and axis load distribution rather than central installation to ensure the balance of front and rear bearing. The SR motor is in the position of engine and motor controller is fixed above it. It shows the excellent mechanical characteristics of the SRM when the van starts up. Pictures of the modified EV and the SR drive system are showed respectively in figure 22 and 23. The starting torque is almost twice the rated torque, which meet the requirement of starting, accelerating, climbing and some other complicated working conditions. The van starts up smoothly, the current of the bus is low which is less than 15A. The vehicle test was arranged with the battery which was charged full voltage (360V). The driving range was 205km. The battery voltage was 265V when the van stopped. Table 7 is running test data under different gears. Figure 24 shows the battery voltage and bus current when the EV climbed the hill which grade was greater than 25°. They were respectively 255V and 70A. The current was 120.5A when the EV accelerated and the maximum speed reached 165km/h.



Fig. 22. Modification of PEUGEOT 505 SW8



Fig. 23. SR drive system for EV

Number	Gear	Speed(r/min)	Battery voltage(V)	Bus current(A)
1	3	40	360	38
2	4	50	360	43.3
3	5	75	355	57
4	5	95	355	77
5	5	85	355	60
6	5	80	335	50
7	4	80	335	60
8	5	80	335	52
9	5	90	330	57
10	5	65	330	33
11	5	73	330	45
12	5	80	320	60
13	5	70	320	49
14	5	80	312	55
15	5	80	313	67.4
16	5	75	290	72.5
17	5	70	280	62.7

Table 7. Testing data of EV running parameter



Fig. 24 Battery voltage and bus current climbing the hill

6. Conclusion

Through the refitment of the gasoline car, the designed SR motor and drive system satisfy the demand of dynamic characteristics, the startup characteristics and the acceleration characteristics. In the stage of startup, the current of the SRM is 15A, the torque is stepless and the acceleration characteristics are quite well. The maximum speed comes up to 165kmph and the continuation of the journey reaches 205km or upward. The new rotor structure decreases the wind noise, the noise of SRM is only 76dB.

This chapter designed a 30kW SRD system used on PEUGEOT 505 SW8. The system applied fuzzy logic adaptive control based on instantaneous torque sum against the big torque fluctuation and strong noise on SRM. The vehicle tests automotive load experiment shows that the measures taken are effective. The designed SRD system has a low startup current, small torque fluctuation and high efficiency, all of which are especially suited for the dynamic characteristics of electric vehicle. So it has a broad application prospects. If the batteries and power systems are planned together, the designed SRD system will display its superiority by adjusting and integrating the subsystems.

7. Acknowledgment

The scientific research of SR drives system for EV was supported by Beijing Jiaotong University in 2006. Beijing Tongdahuquan Ltd. Company provided author a PEUGEOT 505 SW8 to test. We acknowledge them provide the fund and material.

8. References

- J. C. Moreira, "Torque ripple minimization in switched reluctance motors via bicubic spline interpolation," *IEEE Power Electronics Specialists Conference Record*, Toledo, Spain, June 1992, 0-7803-0695-3/92, pp. 851-856.

- F. Filicori, C. G. L. Bianco, and A. Tonielli, "Modeling and control strategies for a variable reluctance direct drive motor," *IEEE Trans. Industrial Electronics*, vol. 40, no. 1, pp. 105–115, 1993.
- D. G. Taylor, "An experimental study on composite control of switched reluctance motors," *IEEE Control System Magazine*, vol. 11, no. 2, pp.31–36, 1991.
- Nigel Schofield, *Electric Vehicle Systems Notes*, the University of Manchester, 2006
- Yin Tianming. A novel rotor structure for SRM. China, Utility Model Patent. 03279782.6
2003
- Technical information, IGBT-Module BSM300GA120DLC, EUPEC Power Electronics in Motion

LiFePO₄ Cathode Material

Borong Wu, Yonghuan Ren and Ning Li
*School of Chemical Engineering and Environment,
 Beijing Institute of Technology
 China*

1. Introduction

Rechargeable batteries have largely replaced primary cells as they save resource and reduce pollution. Recent increases in demand for oil, with the associated environment sustainable issues are continuing to exert pressure on an already stretched and strained world energy infrastructure. Clean and efficient energy production from renewable sources is wanted in our energy and environment-conscious society. Among the secondary batteries, lead batteries and NI-MH batteries have stepped back from market since a new and strong system comes into our sight, Li-ion batteries. Li-ion batteries meet what we need. High capacity, high electrochemical potential, superior energy density, durability, as well as the flexibility in design, all the above outstanding properties accelerate the substitution of conventional secondary batteries. They are now prevailing used in portable electronic devices, 57.4% of sale on mobile phone, 31.5% on notebook computer and 7.4% on camera. Their application has also been extended over other fields, including hybrid electric vehicle, space application, military vehicle et al. The differences between various batteries are exhibited in Tab.1.

cathode	Li-ion	Pb-Acid	Ni-Cd	Ni-MH
lifetime/cycle	500~1000	200~500	500	500
Working potential/V	3.6	1.0	1.2	1.2
Specific energy/Wh kg ⁻¹	100	30	60	70
Specific energy/Wh L ⁻¹	240	100	155	190

Table 1. The comparison between various batteries

cathode	LiFePO ₄	LiFePO ₄ +5%C	LiMn ₂ O ₄	LiCoO ₂	LiNi _{0.8} Co _{0.2} O ₂
Density/g cm ⁻³	3.60	3.48	4.31	5.10	4.85
Potential/V	3.50	3.50	4.05	3.90	3.6
Specific capacity /mAh g ⁻¹	169	159	148	274	274
Specific energy /Wh g ⁻¹	0.59	0.56	0.56	0.98	0.98

Table 2. Electrochemical parameters of several cathode materials

LiCoO₂ is first chose to work as cathode materials when Li-ion batteries come out in 1990. Its long history supports LiCoO₂ a big progress. During that process, other cathode materials are discovered, LiNiO₂, LiMn₂O₄, LiNi_{1/3}Co_{1/3}Mn_{1/3}O₂, LiFePO₄ et al. Comparisons of electrochemical parameters of several cathode materials are listed in Tab.2.

Each of them has their own characteristics. For example, LiCoO₂ is costly and toxic, and its resource is no longer abundant (A. G. Ritchie, 2001). LiMn₂O₄ owns a much lower capacity and inferior cycle stability (Yuan Gao & Dahn J. R, 1996). Iron-based compounds look attractive as Fe is abundant, inexpensive, and less toxic than Co, Ni, or Mn. The phospho-olivine LiFePO₄ is currently under extensive studies due to its low cost, low toxicity, high thermal stability and high specific capacity of 170mAhg⁻¹. Reduced reactivity with electrolytes results in the very flat potentials during charge-discharge processes.

The potential of material is partly decided by the Fermi level (A. K. Padhi et al, 1997). Much lower Fermi level is wanted to attain a higher working voltage. Among the iron-based compound, especially in LiFePO₄, (PO₄)³⁻ lowers the Fe³⁺/Fe²⁺ redox energy to useful levels. Strong covalent bonding within the polyanion (PO₄)³⁻ reduces the covalent bonding to the iron ion, which lowers the redox energy of iron ion. The Fe³⁺/Fe²⁺ redox energy is at 3.5 eV below the Fermi level of lithium in LiFePO₄. The lower is the Fe³⁺/Fe²⁺ redox energy and the higher the V *vs.* lithium for that couple. In LiFePO₄, approximately 0.6 lithium atoms per formula unit can be extracted at a closed-circuit voltage of 3.5 V *vs.* lithium. The most prominent advantages of LiFePO₄ are (1). The structure of material hardly changes while Li ion intercalation and deintercalation; (2). It holds a long voltage platform.

The working principle of Li-ion battery is revealed in Fig.1. Lithium ions extract from anode to insert in cathode in the discharge process. The route is inverted as charge takes place. FePO₄ is the second phase that is present on electrochemical extraction of lithium from LiFePO₄. The extraction of lithium from LiFePO₄ to charge the cathode may be written as Formula (1) and the insertion of lithium into FePO₄ on discharge as formula (2).

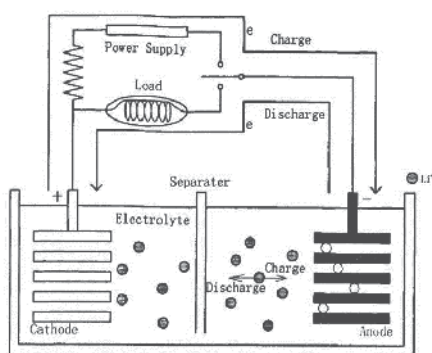




Fig. 1. The schematic diagram of working principle for lithium battery

More efforts are conducted on the investigations of new electrode materials for lithium-ion batteries (Li-ion). The iron based olivine type cathodes (mainly lithium iron phosphate,

LiFePO₄) are regarded as possible alternatives to cathodes based on rare metal composites (i.e. the transition metal oxides LiCoO₂, LiNiO₂).

2. Feature of LiFePO₄

2.1 Crystal structure of LiFePO₄

LiFePO₄ owns an ordered olivine structure, orthorhombic space group *Pnma*. Its systal constants of *a*, *b* and *c* are 1.033, 0.601 and 0.4693 μm respectively. Fig.2 and 3 show the crystal structure of LiFePO₄, an ideal model and actual structure. The framework of LiFePO₄ consists of FeO₆-octahedra and PO₄-tetrahedra. FeO₆-octahedra and PO₄-tetrahedra contact each other by sharing oxygen vertices in *b-c* plane. The FeO₆-octahedra then links another PO₄-tetrahedra by sharing a edge. All the PO₄-tetrahedra don't touch each other. Lithium atoms are situated in the interstitial voids of the framework, forming infinite chains along the *c*-axis in an alternate *a-c* plane. Li atoms occupy M1 site and Fe M2 site. The Fe atoms occupy zigzag chains of corner-shared octahedra running parallel to the *c*-axis in the other *a-c* planes. O arranges in terms of hexagonal close packed structure with a slight distortion.

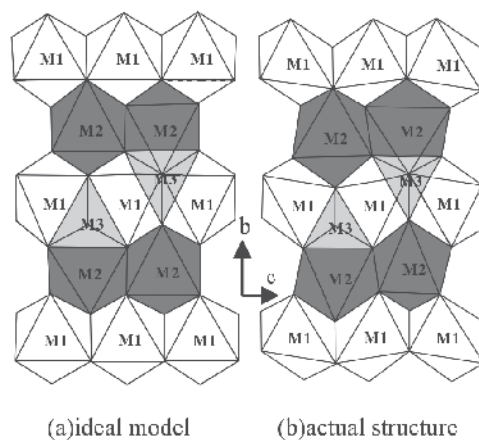


Fig. 2. Crystal structure of LiFePO₄ (a) ideal model and (b) actual structure.

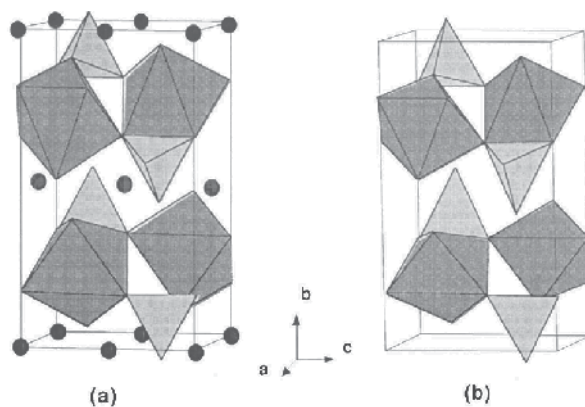


Fig. 3. Crystal structure of (a) LiFePO₄ and (b) FePO₄

The strong P-O covalent bond forms the 3D delocalizing chemical bond, herein LiFePO_4 is thermodynamically and dynamically stable even at temperature above 200°C .

A.K.Padhi pointed out that LiFePO_4 and FePO_4 almost possessed the same structure (Fig.3), both of them were of orthorhombic system (A. K. Padhi et al, 1997a, 1997b). The small distinction between the two compounds results in only slight volume change, so then it won't cause crystal structure damage during charge and discharge process. Not like other cathode materials, the unique olivine structure of LiFePO_4 can assure an excellent stability, therefore its lifetime is much longer.

Fig.4 illustrates the theoretical insertion/extraction process of LiFePO_4 which is different from others. During lithium ions insert into a cathode particle (discharge), the surface region of particles becomes lithiated. And a phase interface emerges between two distinct phase regions (a lithiated phase and a delithiated phase region). The interface shrinks with charge process until the particle becomes one phase region. As discharge proceeds, the surface region becomes delithiated. The phase interface between lithiated phase and delithiated phase propagates inwards until disappear so that a complete charge and discharge procedure is finished.

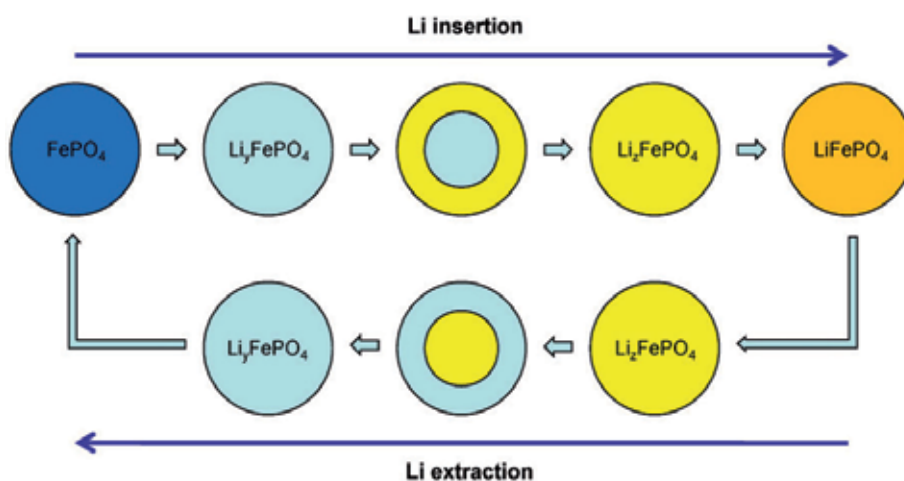


Fig. 4. Complete Li insertion and de-insertion cycle of a spherical LiFePO_4 particle.

That distinct mechanism can explain the phenomenon of super flat voltage plateaus which are related to the surface Li concentration of particles. Since the incoming Li leads only to inner shift of the phase interface, the Li concentration of surface region is constant. That unique flat voltage plateaus are caused by unusual insertion/extraction process of this material.

2.2 Progress in preparing material

LiFePO_4 occurs in nature as the mineral triphylite. However, its impurity could worsen the electrochemistry properties so that triphylite can't be utilized efficiently. Synthesis of LiFePO_4 is another way to obtain better materials. Preparation methods decide the microstructure of compounds which will carry a big weight in the performance of LiFePO_4 .

2.2.1 Solid and liquid state reaction synthesis technology

1. High temperature solid state method

It processes as follows: mix the precursor-salts and lithium salt with a definite ratio, sinter the mixture first at a much lower temperature (300~400°C) to remove volatiles second at a higher temperature (500~800°C) to crystallize LiFePO₄, and then cool, grind and sieve to prepare the product. Solid state reaction method has been a developed technology and been used much frequently since it's simple to synthesis and easy to make mass production. The need for high temperature unfortunately upgrades cost, what's more, the product size always can't be small. So other measures are added to circumvent those problems, such as slightly lowdowning temperature or adding carbon granules.

2. Co precipitation method

Blend the soluble precursor-salts and lithium salt in water, adjust the PH value under N₂ atmosphere with stirring until the mixture react to precipitate LiFePO₄. Filter, wash and dry LiFePO₄ so then dispose it under high temperature. The temperature won't largely affect the microstructure as high temperature solid state method does. This technology needs a shorter reaction time and lower temperature compared with solid state reaction. The particle size can reach the nanometer level and this reduced size can help to enhance the charge-discharge performance especially at big current condition. The inadequacies inhibiting mass production are the complex process and large power consumption.

3. Sol-gel method

Complexing agent helps the Li⁺, Fe²⁺ and PO₄³⁻ to form sol in water solution. Sinter the precipitation of sol-crystal at 400~900°C. The uniform distribution of ions in solution finally acts out a much uniform product that in nanometer size. Monitor the process is easy but industrialization of this technology is hard as the method is complex. Much waste water is produced at last also.

4. Hydrothermal method

The reactions of reactants that dissolve in water proceed in high pressure autoclave at a fixed temperature (<150°C). The product is then watered, filtered and dried to receive pure phase LiFePO₄, in small uniform size just like sol-gel does. This pure phase material can't behave excellent unless be doped with carbon. So then its capacity could reach to 137~160mAh g⁻¹. Rietveld analysis from S. Yang found that 7~8% Fe²⁺ occupy the Li⁺ sites, which is related to the weaker charge/discharge behavior (S. Yang et al ,2002). LiOH as precipitator is added excessively to make sure the completeness of reaction which increases the cost. This system no more needs the protection from inert gas since O₂ is hardly dissolved in water. But operation is on a tiny scale constrained by the manufacture condition.

5. Carbothermal method

J. Barker adopt a new way to synthesize LiFePO₄ with the very inexpensive and readily Fe₂O₃ as available precursor source, instead of FeC₂O₄ et al (J. Baker et al, 2003). The precursors are intimately mixed and pelletized. The reaction mixture is then heated in a tube furnace (at ~750°C) equipped with a flowing Ar atmosphere holding for about 8h. The transition metal reduction and lithium incorporation processes are each facilitated by the high temperature carbothermal reaction based on the transition from C to CO. The Fe³⁺

always can't be deoxidated absolutely and impurities can't be avoided virtually which will have a bad effect on battery performance.

6. High energy ball mill method

The reaction of Ball mill method is driven by the energy generated from steel balls in high speed revolution. A homogeneous solid solution with a small amount of contaminant, coming from the milling equipment, are obtained after 10~24h of high-energy milling of the initial mixture. A single calcination step goes on for no more than 1h. High energy ball mill method (also called Mechanochemical activation) is able to produce homogeneous powders with a particle size in the nanometer range, an increased specific surface area and typically, a high degree of activity. So the discharge capacity of LiFePO_4 can reach 150mAh g^{-1} at rate 0.5C as S.Franger have achieved (S.Franger et al, 2003).

7. Microwave synthesis method

The starting materials are mixed with ethanol in an agate mortar. The mixed powder is dried at $\sim 60^\circ\text{C}$ (lower than that required for furnace heating) and pressed into pellets. Each pellet is covered with glass wool and placed in an alumina crucible with a lid to be heated in microwave oven. Electromagnetic energy is simultaneously absorbed by all parts of precursor so that uniform and rapid heating can be achieved within a short period of time. This distinctive character results in no temperature gradient within all parts. The initial discharge capacity was about 125mA g^{-1} at 60°C by Masashi Higuchi et al which can increased to 161mAh g^{-1} if LiFePO_4 is doped with carbon.(Min-Sang Song et al, 2007) This method can be used together with other synthesis approach so to largely reduce their process time.

8. Pulsed Laser Deposition (PLD)

Thin film electrode can relief the problem of poor conductivity. Pulsed Laser Deposition has been used to fabricate LiFePO_4 thin film electrodes. During the synthesis process of LiFePO_4 , a laser with a fixed wavelength is used in the deposition. The films are deposited on platinum plates or basal planes of highly oriented pyrolytic graphite for minutes at room temperature. The films are then annealed at high temperature for hours under Ar or O_2 gas flow. The electric characters of thin film electrodes can be easily influenced by the articles size and fabrication process. Large particles on the surface of thin film electrode will lead to a bad capacity and poor cycling performance.

9. Electrostatic Spray Deposition (ESD)

A positive voltage of 8.0kV from a direct current power supply is applied to a stainless steel nozzle of a syringe to generate an aerosol. A syringe pump with a definite flowing rate is used to pump the precursor solution. The sample deposited on the substrate by ESD is calcinated at $500\sim 750^\circ\text{C}$ for hours under pure Ar ambient.(A. Yamada et al, 2001) Electrostatic force shatters the solution into small drop of liquid with charge. So then the coulomb repulsion between drops can prevent them from collecting together. Dispersion degree is flexible by adjusting various voltage electrostatic fields. ESD method offers many advantages for thin-film deposition, such as low cost set-up, high deposition efficiency and easy control of composition of the deposited films.

10. Template-mediated approach

Templates such as silica and polycarbonate are used in the process. Charles R. Sides adopted polycarbon to manipulate the method as follows. An approximately 1cm^2 piece of the

polycarbonate filter is immersed in the electrode precursor solution of 1M LiFePO₄ prepared by sol-gel method in water for 24h. The impregnated template is then attached to a Pt current collector and dried in air at 80°C for 10min. The template does not require tedious etching with HF or KOH to be removed since it is decomposed into carbon just for improved conductivity. The nanocomposite electrode prepared by Charles R. Sides (C. R. Sides et al, 2005) delivers almost 100% of its theoretical discharge capacity at the high discharge rate of 3C, and 36% of its theoretical capacity at the enormous discharge rate of 65C.

Lim et al reported the mesoporous LiFeO₄ using silica (KIT-6 and SBA-15) as template which is removed finally (Sunhye Lim et al, 2008). Both the nanowire and hollow LiFePO₄ cathodes demonstrate excellent rate capability, showing 137mAh g⁻¹ at 10C rate. However such ex situ templating methods are both expensive and inefficient.

Biological systems offer capabilities for environmentally benign materials synthesis. An M13 virus-based biological toolkit has been developed for the design of nano-architected structures and materials. Yun Jung Lee fabricated high-power nanowire batteries materials using M13 bacteriophage (phage or virus) organized on a polymer surface (Yun Jung Lee et al, 2009). The gene VIII protein (pVIII), a major capsid protein of the virus, is modified to serve as a template for amorphous iron phosphate (a-FePO₄) growth. The first discharge capacity of electrode generated by this method at 10C reaches 130mAh g⁻¹. And also this nanowire LiFePO₄ shows the stable capacity retention. Cycling at 1C, up to 50 cycles, virtually no capacity fade is observed.

11. Other novel methods

Ultrasonic spray pyrolysis (USP)

An aqueous solution containing sugar and raw material is ultrasonically nebulized and a flow of argon carries the droplets through a heated tubular reactor where solvent evaporation and precursor decomposition occur. The pyrolysis product is collected in a series of water bubblers at the reactor outlet where the salt byproduct dissolves leaving LiFePO₄. The manufacturing process is one-step process and can prepare the well crystallized and homogeneous small particles with the spherical shape, pure phase. LiFePO₄ powders, reported by Mu-Rong Yang, can get the initial discharge capacity of 150mAh g⁻¹ at C/10 and 50 °C. (M. R. Yang et al, 2006)

Freeze-drying

The procedure includes four steps: preparing the precursor solution, freezing the solution, drying the congelation, and calcining the drying product. The products of freeze drying are pure amorphous nanopowder without hard agglomerations. Nanocrystals are subsequently obtained by calcination.

Coupling technique

Quantities of methods have been developed but each generated with different characteristics. The combination of two and several techniques can take the merits and discard the defects.

Microwave hydrothermal method

Compared with Hydrothermal method, the process is almost the same but only the the type of heating is changed. The mixture in water is treated in a vessel using a microwave digestion system (Maria Cristina D'Arrigo et al, 1998). Microwave-hydrothermal method can be used to crystallize nanophase materials with very high surface areas in a matter of a few minutes.

Microwave-Co. precipitation method

K. S. Park reported a capacity of 151mAh g⁻¹ of LiFePO₄ at small current density through this coupling technique (K. S. Park et al, 2003). The use of microwave greatly cut down the reaction time for Co. precipitation method so that can save the power.

Ball-milling followed by solid-state reactions

Byoungwoo Kang successfully synthesized high-rate material through ball-milling and solid-state reaction. At 50°C, corresponding to a time of 72s to fully discharge the capacity, the material achieves about 80% of its theoretical capacity (Byoungwoo Kang et al, 2009). Precursor is synthesized by ball-milling, then heating the mixture at 350°C for 10h. The sample is cooled, ground and pelletized manually then heated at 650°C for 10h under argon. The excellent rate property is thought to be caused from the strategy to facilitate transport across the surface by creating a poorly crystallized layer with high Li⁺ mobility.

Various approaches have been developed to improve electrochemical performance. In addition, the performance can be enhanced through the optimization of the synthesis processes, adjusting weight and ratio of the raw materials even with common routes. Yanyi Liu fabricated nanocomposite film cathodes by sol-gel processing with excessive polymer additive (l-ascorbic acid C₆H₈O₆) while carbon serving as both defects and conductive nanocoating on the surface of LiFePO₄ particles. High electrochemical performance with initial discharge capacity of 312mAh g⁻¹ is observed (Yanyi Liu et al, 2011). Capacities higher than theoretical limit observed in other nanostructured electrode materials have also been reported in literatures by other authors (Colm O'Dwyer et al, 2009; Chunhai Jiang et al, 2007; Dawei Liu et al, 2009). On the other hand, different carbon sources for carbon coating around LiFePO₄ particles have been implemented at enhancing the intrinsic electronic conductivity of LiFePO₄. However, many obstacles have been encountered for these methods from a laboratory process to mass production because of the complicated synthesis techniques and the hard controlled synthesis situation. The lack of an excellent large-scale synthesis technique is the obstacle to the commercial application of LiFePO₄. Therefore, it is critical to develop economic and efficient synthesis routes for the practical application of LiFePO₄ materials.

2.3 Drawback analysis

Despite the above mentioned advantages, the observed electrochemical performances of LiFePO₄ are found to be less impressive at high rates as this material has intrinsically poor ionic and electronic conductivity. A report (Amin et al, 2007) on the electronic and ionic properties of LiFePO₄ single crystals pointed out that the Li⁺ conductivity was nearly four orders of magnitude lower than the electronic conductivity along the *b*- and *c*-axes and many orders of magnitude lower along the *a*-axis, implying that mass transport of Li⁺ was crucial for improving the kinetic issues. The low ionic conductivity can be attributed to the one-dimensional nature of Li diffusion in unique olivine LiFePO₄, as clearly shown by a recent first principles calculation (Chuying Ouyang et al, 2004a, 2004b). Normally speaking, there are three kinds of possible paths for lithium ions to transport, i.e. [010], [001], [101]. Fig.5 (b) directs that three move paths, denoted as A, B and C direction, respectively. Figuring out the diffusion pathways is always crucial in understanding the microscopic diffusion mechanism. Some articles investigate the diffusion via computing with sorts of methods. Saiful Islam calculated the activation energy of various passageways to estimate the most possible transport route using well-established atomistic modeling techniques (Saiful Islam

et al, 2005). The lowest Li migration energy is found for the pathway along the [010] channel with a nonlinear, curved trajectory between adjacent Li sites. D Morgan attained the diffusion constant of Li ions in different axis with density functional theory (DFT)-based calculations (D.Morgan et al, 2004) on LiMPO₄ (M Fe, Mn, Co, Ni), and have found low activation barriers for Li ion motion through one-dimensional channels. Different calculation methods lastly come into the same result as Tab.3 revealed.

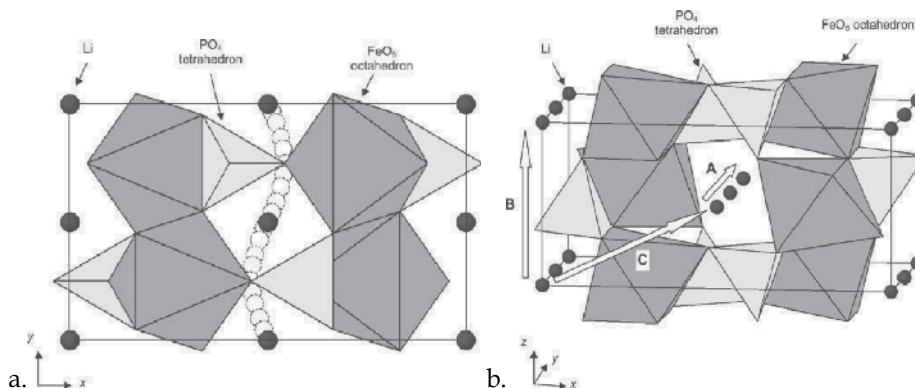


Fig. 5. Curved trajectories for Li ion migration between sites in the [010] direction. The diffusion path lies out of the x - y plane. (a, 2D model. b, 3D model, A, B, C denote [010], [001], [101] direction respectively)

This unique structure constrains the Li ions to move only in one wave-like chain since the polyhedra are slightly distorted (illustrated in Fig.5a). This “wavelike” trajectory for long-range migration results in lower migration energy than that of condition if the Li ion followed a direct, linear path. The different energy barriers for the three species are mainly due to the different atomic surroundings of the diffusion pathway, including the different ionic position and bonding length. Distortion of the *hcp* oxygen array has been related to the cation-cation coulomb repulsion across the shared edges.

	D. Morgan			M. Saiful Islam		
	[010]	[001]	[101]	[010]	[001]	[101]
Space between Li-Li	3	4.7	5.7	3.01	4.67	5.69
Emig(eV)				0.55	2.89	3.36
Eact(eV)	0.27	>2.5	1			
D(cm ² s ⁻¹)	10 ⁻⁸	10 ⁻⁴⁵	10 ⁻¹⁹			

Table 3. Description of Li⁺ migration path in LiFePO₄ crystal structure form some references

And within this crystal, all the FeO₆-octahedra can't form a share-edge network structure because polyanions PO₄ separate them. Therefore electrons also can't pass smoothly. In the layered compounds such as LiCoO₂, transition state of hybrid Co⁴⁺/Co³⁺ anions make a contribution to the electron conductivity between layers, whereas that don't happen in olivine LiFePO₄ structure because FePO₄ was formed after extraction of Li⁺.

The low temperature performance of LiFePO_4 is inferior. The capacity at 0.1C (156mAh g^{-1}) and 0.3C (148mAh g^{-1}) at 25°C deteriorate largely, and only 91mAh g^{-1} and 65mAh g^{-1} are yielded at 0.1C and 0.3C at -20°C respectively.

3. Avenues to enhance performance

The performances of LiFePO_4 , however, are limited by its poor electronic conductivity and the sluggish kinetics of lithium ions to diffuse through the $\text{LiFePO}_4/\text{FePO}_4$ interface, which can result in a significant loss of capacity at high currents (Padhi et al., 1997; Prosini et al., 2002). And the high power density is the requirement of the power batteries for electric vehicles. Avenues of synthesizing composite materials, doping ions, nanocrystallization and others are introduced to clarify its improved electrochemical properties.

3.1 Composite materials

Owing to the poor inherent electronic conductivity, LiFePO_4 can be incorporated with conductive additives to form composite materials.

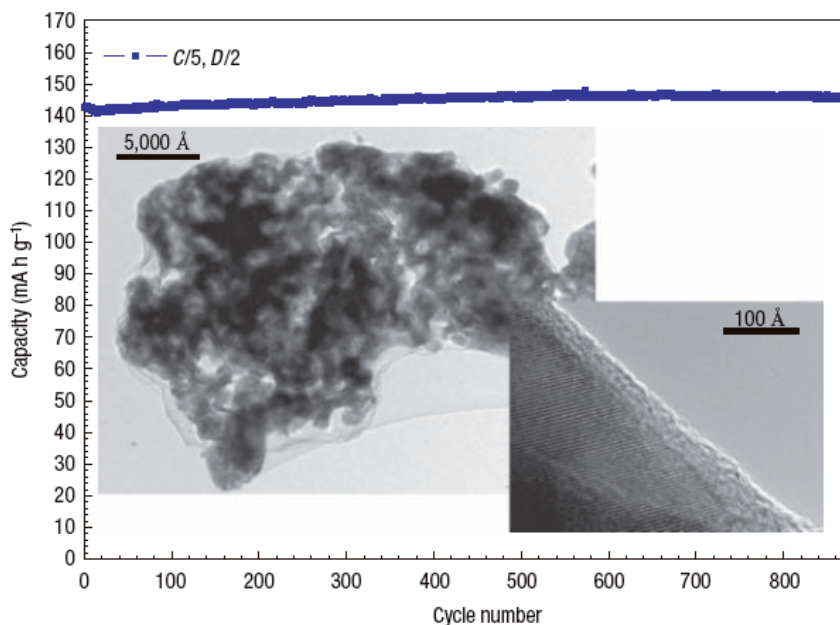


Fig. 6. The performances of C- LiFePO_4 composite materials (Aricò et al., 2005)

Carbon sources, such as acetylene black, glucose, sucrose and other organics, are added into the raw material and then carbonized at high temperature to form LiFePO_4/C materials. The LiFePO_4 particals are tightly coated with carbon and the interface between crystallized LiFePO_4 and amorphous carbon is nicely observed in Fig.6. An excellent cyclical stability is also observed. The reasons of its outstanding electrochemical performances are that the addition of carbon does not only perform its electrical conductivity, but also enhances electrolyte penetration into the cathode (Aricò et al., 2005). And the uniform small grain size would be beneficial to high rate performance. While the density of carbon is 40% lower than

that of LiFePO₄, adding too much of which would lead to low tap density and also influence volume energy density of the cathode. So a reasonable amount of it is preferred.

Electric polymer organics (PAN, PPy, PTh, PPP and so on) work with inorganic cathode has emerged as one measure to address problem. Such as adding polyaniline (PAN) into the C-LiFePO₄, both the function of electronic conductive reagents and that of active materials are performed by adding it. The capacity of 87mAhg⁻¹ can be performed by PAN at 0.1C, which can contribute to the specific capacity of the composites.

Some other materials like metals (Cu, Ag, Ni, etc.) can also be used to composite with semi-conducting LiFePO₄. TiO₂-LiFePO₄/C had higher electrochemical reactivity for lithium insertion and extraction than the un-doped LiFePO₄. The initial discharge specific capacity of the 30-min coating TiO₂-LiFePO₄/C material was about 161mAhg⁻¹, showing the potential of this material being used as a cathode material for Li-ion batteries. They decrease the charge transfer resistance and increase the surface electronic conductivity. Besides, the Fe dissolution might be simultaneously overcome by coating the LiFePO₄ particles with electrical conductive.

Compositing with additive can not only enhance the electronic conductivity and the penetration with electrolyte but also restrain the grain growth and the dissolution of Fe²⁺/Fe³⁺ ions in the electrolyte. Above all, the electrochemical performances can be improved through forming the composite materials.

3.2 Doping

LiFePO₄ is a semiconductor with a band gap of 0.3eV, which is determined by its structure. The electrons transport is restricted by the strong Fe-O bonds and the Li⁺ diffusion is limited by the Li-O bonds and one dimensional Li⁺ migration pathways. Coating LiFePO₄ with conductive materials did not change the structure parameters and had no effect on altering the inherent conductivity of the lattice, while doping ions into LiFePO₄ can make it. It could be an effective method in increasing its electronic conductivity and Li⁺ diffusion coefficient.

Many researchers have made numerous achievements. Various ions have been attempted to be doped in LiFePO₄. On the basis of different sites, it can be classified as doping at Li (M1) sites, Fe sites (M2) and O sites. Chung et al. reported chemical doping of LiFePO₄ with multivalent ions (Mg²⁺, Ti⁴⁺, Zr⁴⁺ and Nb⁵⁺) into the Li 4a site. They found the electronic conductivity was increased by eight orders of magnitude and absolute values >10⁻³ S cm⁻¹ over the temperature range from -20°C to +150°C (Fig.7). Doping it with supervalent ions can form p-type semiconductors with conductivities of ~10⁻² S cm⁻¹ arising from minority Fe³⁺ hole carriers (Chung et al., 2002).

The Li⁺ ion diffusion could be optimized by doping F⁻ into the lattice of olivine structure. The capacity is increased after doping and the value varies with the doping amount. As is shown in Fig.8, the capacities are improved after doping especially with the amount of 2%F⁻, achieving 156 mAhg⁻¹. The cycling performances are also enhanced. That could be attributed to the introduction of F⁻ into the lattice of olivine structure, which result in the weakness of Li-O bonds (Sun et al., 2010). However, as is shown above, there is an optimum doping amount to make the materials exhibit the best electrochemical performances. When the ions are doped to a certain extent, it will increase the degree of disorder of ions and so lead to the enhancement of impedance (Fig.9). And the electrochemical performances will be ultimately affected.

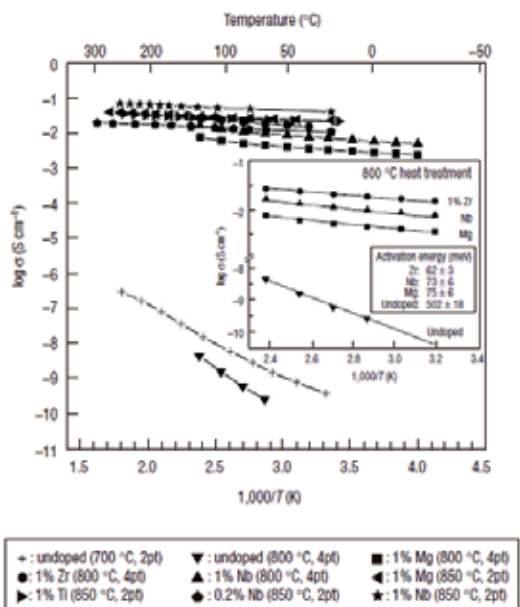


Fig. 7. The electrical conductivity of Doped olivines of stoichiometry $\text{Li}_{1-x}\text{M}_x\text{FePO}_4$ $\text{M}=\text{Mg}, \text{Ti}^{4+}, \text{Zr}^{4+}$ and Nb_{5+}) (Chung et al., 2002)

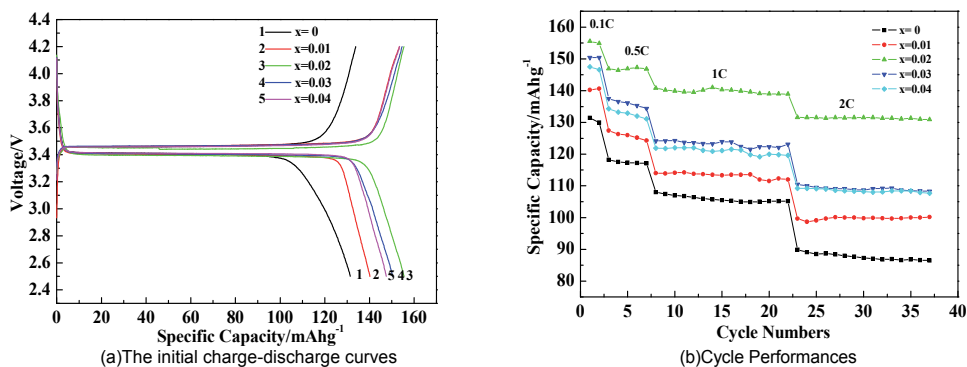


Fig. 8. The electrochemical performances of $\text{LiFe}(\text{PO}_4)_{1-x/3}\text{F}_x/\text{C}$ ($x=0, 0.01, 0.02, 0.03, 0.04$)

Compare doping with one kind of ions, the co-doping with two or more would be much more beneficial to increase the electrochemical properties. It has been proved to be successful in $\text{LiFe}_{0.99}\text{Mn}_{0.01}(\text{PO}_4)_{2.99/3}\text{F}_{0.01}/\text{C}$. Mn^{2+} and F^- addition make the lattice parameter and the cell volume expanded which can facilitate the Li^+ diffusion between LiFePO_4 phase and FePO_4 phase (Yang et al., 2010). The Mn-Cl co-doped in LiFePO_4 also shows outstanding electrochemical properties, it can be achieved the capacity of 157.7mAhg^{-1} at 0.1C and nearly unchanged after 50cycles. For all these reasons, doping is an effect avenue to enhance the inherent conductivity of the lattice.

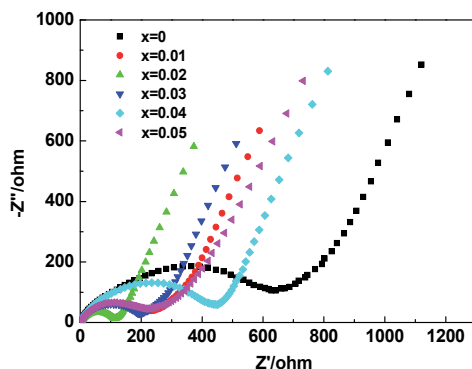


Fig. 9. Electrochemical impedance spectra of LiFe(PO₄)_{1-x/3}F_x/C (x=0, 0.01, 0.02, 0.03, 0.04) cathodes at 25°C (amplitude is 5mV in the frequency range of 10⁵Hz~0.01Hz)

3.3 Nanocrystallization and preferential growth of particles

Nanoarrays have attracted significant attention for their applications in energy storage/conversion devices. The nanocrystallization and preferential growth of cathode materials have advantages, including (i) short path length for lithium-ion and electronic transport and large surface area to enhance the electrode/electrolyte contact. All of these result in the improved cycle life and higher charge/discharge rates (Aricò et al., 2005). For the nano-sized materials, the limiting factor for charge/discharge is the delivery of Li⁺ and electrons to the surface rather than bulk diffusion (Kang & Ceder, 2009). So the inferior rate performance, caused by intrinsic low diffusion, can be perfected by synthesizing the coated nano-sized materials, the ultrafast charging and discharging performances of which are remarkable to be applied on EVs (Fig.10).

The morphologies can be controlled by adopting specific synthetic routes and additive. Spherical particles, nanorods, flaky materials and nanowires are the common morphologies (Fig.11), the sizes of which are all nano level.

The lithium ions can only be extracted from LiFePO₄ and intercalated into FePO₄ in the [010] direction (Islam et al., 2005). Preferential growth of particles can shorten the (010) facet path and may increase the ratio of one-dimension tunnels in the bulk of the crystal. Hence, the diffusion across the surface towards the (010) facet can be increased to enhance rate capability.

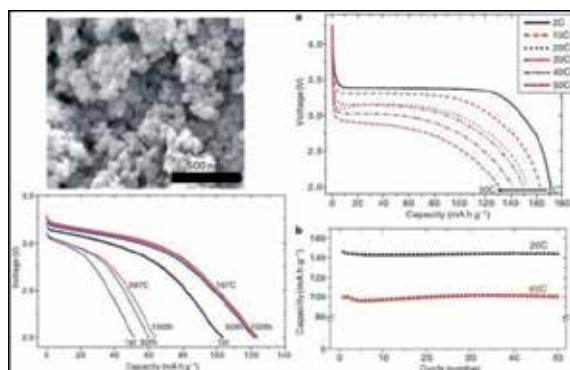


Fig. 10. The high rate performances of nano-sized LiFePO₄. (Kang & Ceder, 2009)

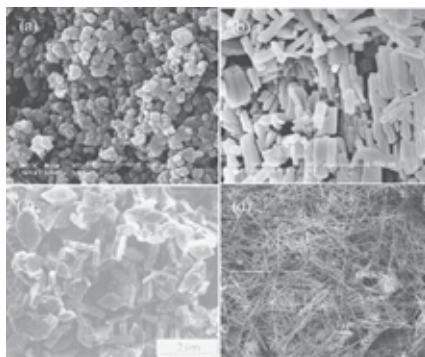


Fig. 11. The SEM micrograph of prepared LiFePO_4 with various morphologies: (a) Spherical particals(Kima et al., 2007), (b) nanorods(Huang et al., 2010), (c) flaky materials(Zhuang et al., 2005) and (d) nanowires(Wang et al., 2009)

3.4 Other means

To prepare the high power battery, the improvement of electrolyte and anode is also necessary, besides that of cathode. Especially at low temperature, the Li-ion cell containing liquid electrolyte can not cycle if the electrolyte is frozen. Ethylene carbonate (EC) is useful to form the solid electrolyte interphase (SEI) layers, but the high ratio of EC would result in high viscosity and high melting point. Adding low melting point electrolyte like Ethyl methyl carbonate (EMC) and diethyl carbonate (DEC) would increase the Li^+ ion diffusion performance. The LiPF_6 is widely used as electrolyte lithium salt but its weak stability leads to the formation of HF that accelerates the Fe dissolution from cathode. By contrast, LiODFB can match the low-temperature electrolyte and forms steady SEI film, so it can enhance the performances of batteries.

4. Application

To date, lithium ion batteries have become the predominant power source, owing to their high electrochemical potential *vs* Li/Li^+ , light weight, flexibility in design and superior energy density. Cost and safety are still seen as important factor limiting expansion of application of Li-ion batteries. Li-ion batteries are scattered in a wide range of industries. Mobile phone, notebook computer, and camera, such electronic products are the vast number of application. According to the need of development, Li-ion batteries tend to the use in electric vehicle.

4.1 HEV

Batteries make the consumer electronics convenient, even more after lithium ion batteries successfully enhance the power efficiency. This technology is now actively pursued for electric vehicle application. The lack of oil enhances the development of batteries, especially the one with high power and energy used in electric vehicle. High light is casted on Li-ion battery to look for hope.

Hybrid electric vehicle (HEV) is the most likely to be achieved as it combines the merits of electric vehicle (EV) and petrol-driven ones, i.e. HEV owns batteries and combustion engine simultaneously. According to the placement of combustion engine and electromotor, HEV is

divided into series-type and parallel-type. S-type HEV is driven by batteries which are charged by combustion engine. P-type HEV uses electromotor to work during complicated and changeable working condition (launch, speed change, et al), and it shifts to combustion engine if condition is steady such as long-distant course in suburb. Both P and S-type avoid the loadswing and fast response of combustion engine whereas the fuel automobiles do which can lessen thermal efficiency. Related to mass application in HEV, the most appropriate power system should be splendid in terms of safety, cycle, calendar lifetime and cost. In addition, the availability and cost of the transition metals used in these compounds are unfavorable as the Wh/\$ is a more important figure of merit than Wh/g in the case of large batteries to be used in an electric vehicle or a load-leveling system. Batteries are not so demanding in high energy and also capacity could not be high since engine can charge it consecutive. In HEV systems the operation windows would be defined much smaller (e.g. SOC=30–60%), according to power requirements, cold cranking and aging issues.

Low cost, long cycle life and non-toxic are the most obvious advantages of LiFePO₄. It's normal for LiFePO₄ to maintain almost sound structure after 1200 cycles at 1C. The power capability of olivine cells for very short-term pulse durations is nearly independent from SOC and SOC history. As a reference, the current price per unit of LiFePO₄ ranges from \$1.90/Wh to \$2.40/Wh. Although a little higher compared with \$0.86/Wh for typical manganese-based Li-ion batteries, it is estimated that the price of LiFePO₄ will go down accompanying with the rapid development of technique. It is reported that the electrolyte decomposes completely below the limit of 5.0V with lithium cobalt and manganese oxides as cathodes due to the catalyses effects on the electrolyte/electrode interface. The overcharge test of LiFePO₄ doping with Al³⁺ appreciates a higher electrolyte decomposing voltage plateau that appeared between 5.20 and 5.45V (Hui Xie et al, 2006). It has been proved that LiFePO₄ can maintain the perfect olivine structure of the composite under overcharging conditions. Its thermal stability is superior as LiFePO₄ can endure condition under 400~500°C (~200°C for LiCoO₂ and LiMn₂O₄). LiFePO₄ as cathode material has become one of the most promising candidate for hybrid/electric vehicle propulsion.

4.2 Potential in future

LiFePO₄ is adaptable to serve as the safety motive power so can scatter in much more fields besides vehicle. The prospect of the design of the rubber-tyred container gantry crane without diesel generating set becomes more and more practical owing to the application of this new energy storage unit. The transfer of the rubber-tyred gantry crane can be solved in essence owing to the adoption of lithium iron phosphate battery to supply power. Based on the development trend of the substation system, i.e. high-degree of automation and integration of service supply, the ferric phosphate lithium cell accelerates the step of bringing the trend into practice. It also can enhance the usage efficiency of green energy resource (solar, wind, et al) aiming at address the instability problem of these system since electricity produced by solar and wind are not always constant. LiFePO₄ has attracted considerable attention as next generation cathode material of lithium ion battery.

5. Conclusion

More knowledge is understood about LiFePO₄ and much more rapid is the ongoing progress. Lithium ion batteries have become the predominant power source, owing to their

high electrochemical potential *vs* Li/Li⁺, light weight, flexibility in design and superior energy density. To date, quantities of methods have been developed in order to realize mass practical application with favorable properties. Avenues of synthesizing composite materials, doping ions, nanocrystallization and others have been conducted to improve electrochemical properties. More enterprises dedicate their efforts into manufacturing olivine cell besides A123, Valence in USA and Phostech in Canada, the industry giants related to LiFePO₄ material. Quantity production and mass application are much closer to reality due to the durability, non-toxic, high capacity and energy density of LiFePO₄. The iron based olivine type cathodes (mainly lithium iron phosphate, LiFePO₄) are regarded as possible alternatives to cathodes based on rare metal composites.

6. References

- A. G. Ritchie. Recent development and future prospects for lithium rechargeable batteries. *Journal of power Sources*, Vol.96, No.1, (June 2001), pp.1-4, ISSN 0378-7753
- A. K. Padhi, K. S. Nanjundawamy & J. B. Goodenough. Phospho-olivines as positive electrode materials for rechargeable lithium batteries. *Journal of the Electrochemical Society*, Vol.144, No.4, (April 1997) pp.1188-1194, ISSN 0013-4651
- A. K. Padhi, K. S. Nanjundawamy, C. Msaquellier, S. Okada & J. B. Goodenough. Effect of structure on the Fe³⁺/Fe²⁺ redox couple in iron phosphates. *Journal of the Electrochemical Society*, Vol.144, No.5, (May 1997) pp.1609-1613, ISSN 0013-4651
- A. Yamada, S. C. Chung & K. Hinokuma. Optimized LiFePO₄ for Lithium Battery Cathodes. *Journal of The Electrochemical Society*, Vol.148, No. 3 (March 2001), pp. A224-A229, ISSN 0013-4651
- Aricò A. S., Bruce P., Scrosati B., Tarascon J. M. & Schalkwijk W. V. Nanostructured materials for advanced energy conversion and storage devices. *Nature Materials*, Vol. 4, No. 5, (May 2005), pp. 366-377, ISSN 1476-4660
- Byoungwoo Kang & GerbrandCeder. Battery materials for ultrafast charging and discharging. *Nature*, Vol.458, No.12, (March 2009), pp.190-193, ISSN 0028-0836
- C. R. Sides, F. Croce, V. Y. Young, C. R. Martin & B. Scrosati. A high-rate, nanocomposite LiFePO₄/carbon cathode. *Electrochemical and Solid State Letters*, Vol.8, No.9, (July 2005) pp.A484-A487, ISSN 1099-0062
- Chung S. Y., Bloking J. T. & Chiang Y. M. Electronically conductive phospho-olivines aslithium storage electrodes. *Nature Materials*, Vol. 1, (October 2002), pp. 123-128, ISSN 1476-4660
- Chunhai Jiang, Itaru Honma, Tetsuichi Kudo & Haoshen Zhou. Nanocrystalline Rutile TiO₂ Electrode for High-Capacity and High-Rate Lithium Storage. *Electrochemical and Solid-State Letters*, Vol.10, No.5, (March 2007), pp.A127-A129, ISSN 1099-0062
- Chuying Ouyang, Siqi Shi, Zhaoxiang Wang, Xuejie Huang & Liquan Chen. First-principles study of Li ion diffusion in LiFePO₄. *Physical Review B*, Vol.69, No.10, (March, 2004), pp.1-5, ISSN 0163-1829
- Colm O'Dwyer, Vladimir Lavayen, David A. Tanner, Simon B. Newcomb, Eglantina Benavente, Guillermo González & Clivia M. Sotomayor Torres. Reduced Surfactant Uptake in Three Dimensional Assemblies of VO_x Nanotubes Improves Reversible Li⁺ Intercalation and Charge Capacity. *Advanced Functional Materials*, Vol.19, No.11, (June 2009), pp.1736-1745 ISSN 1616-301X

- CY Ouyang, SQ Shi, ZX Wang, H Li, XJ Huang & LQ Chen. The effect of Cr doping on Li ion diffusion in LiFePO₄ from first principles investigations and Monte Carlo simulations. *Journal of Physics-condensed matter*, Vol.16, No.13, (April 2004), pp.2265-2272, ISSN 0953-8984
- D.Morgan, A. Vander Ven & G. Ceder. Li conductivity in Li_xMPO₄ (M=Mn,Fe,Co,Ni) olivine materials. *Electrochemical and Solid State Letters*, Vol.7, No.2, (2004), pp.A30-A32, ISSN 1099-0062
- Dawei Liu, Betzaida Battalla Garcia, Qifeng Zhang, Qing Guo, Yunhuai Zhang, Saghar Sepehri & Guozhong Cao. Mesoporous Hydrous Manganese Dioxide Nanowall Arrays with Large Lithium Ion Energy Storage Capacities. *Advanced Functional Materials*, Vol.19, No.7, (April 2009), pp.1015-1023, ISSN 1616-301X
- Huang, X. J.; Yan, S. J.; Zhao, H. Y.; Zhang, L.; Guo, R.; Chang, C. K.; Kong, X. Y.; & Han, H. Electrochemical performance of LiFePO₄ nanorods obtained from hydrothermal process. *Materials Characterization*, Vol. 61, No. 7, (July 2010), pp.720-725, ISSN 1044-5803
- HuiXie & ZhentaoZhou. Physical and electrochemical properties of mix-doped lithium iron phosphate as cathode material for lithium ion battery. *Electrochimica Acta*, Vol.51, No.10, (February 2006), pp.2063-2067, ISSN 0013-4686
- Islam, M. S., Driscoll, D. J., Fisher, C. A. J. & Slater, P. R.. Atom-Scale Investigation of Defects, Dopants, and Lithium Transport in the LiFePO₄ Olivine-type Battery Material. *Chemistry of Materials*, Vol.17, No.20, (September 2005) pp. 5085-5092, ISSN 0897-4756
- J. Baker, M. Y. Saidi & J. L. Swoyer. Lithium Iron (II) Phospho-olivines Prepared by a Novel Carbothermal Reduction Method. *Electrochemical and Solid state Letter*, Vol.6, No.3, (January 2003), pp.A53-A55, ISSN 1099-0062
- K.S.Park , J.T.Son, H.T.Chung, S.J.Kim, C.H.Lee & H.G.Kim. Synthesis of LiFePO₄ by coprecipitation and microwave heating. *Electrochemistry Communications*, Vol.5, No.10, (October 2003), pp.839-842, ISSN 1388-2481
- Kang, B. & Ceder, G. Battery materials for ultrafast charging and discharging. *Nature Materials*, Vol. 458, No. 12, (March 2009), pp. 190 - 193, ISSN 1476-4660
- Kima J. K., Cheruvally G., Choi J. W., Kima J. U., Ahna J. H., Chob G. B., Kimb K. W. & Ahnb H. J. Effect of mechanical activation process parameters on the properties of LiFePO₄ cathode material. *Journal of Power Sources*, Vol. 166 No. 1 (March 2007), pp.211-218, ISSN 0378-7753
- M. R. Yang, Y. H. Teng & S. H. Wu. LiFePO₄/carbon cathode materials prepared by ultrasonic spray pyrolysis. *Journal of power Sources*, Vol.159, No.1, (September 2006), pp.307-311, ISSN 0378-7753
- Maria Cristina D'Arrigo, Cristina Leonelli & Gian Carlo Pellacani. Microwave-Hydrothermal Synthesis of Nanophase Ferrites. *Journal of the American Ceramic Society*, Vol.81, No.11, (November 1998), pp.3041-3043, ISSN 0002-7820
- Min-Sang Song, Yong-Mook Kang, Jin-Ho Kim, Hyun-Seok Kim, Dong-Yung Kim & Hyuk-Sang Kwon. Simple and fast synthesis of LiFePO₄-C composite for lithium rechargeable batteries by ball-milling and microwave heating. *Journal of power Sources*, Vol.166, No.1, (March 2007) pp.260-265, ISSN 0378-7753

- Padhi A. K., Nanjundaswamy K. S. & Goodenough G. B. Phospho-olivines as Positive-Electrode Materials for Rechargeable Lithium Batteries. *J Electrochem Soc*, Vol. 144, No. 4, (April 1997), pp. 1188-1194, ISSN 0013-4651
- Prosini P. P., Lisi M., Zane D. & Pasquali M. Determination of the chemical diffusion coefficient of lithium in LiFePO_4 . *Solid State Ionics*, Vol.148, No.1-2, (May 2002), pp.45-51, ISSN 0167-2738
- Ruhul Amin, Palani Balaya & Joachim Maier. Anisotropy of Electronic and Ionic Transport in LiFePO_4 Single Crystals. *Electrochemical and Solid State Letters*, Vol.10, No.1, (2007), pp.A13-A16, ISSN 1099-0062
- S. Yang, Y. Song, P. Y. Zavalij & M. Whittingham. Reactivity, stability and electrochemical behavior of lithium iron phosphates. *Electrochemistry communications*, Vol.4, No.3, (Mar 2002) pp.239-244, ISSN 1388-2481
- S. Franger, F. Le Cras, C. Bourbon & H. Rouault. Comparison between different LiFePO_4 synthesis routes and their influence on its physico-chemical properties. *Journal of power Sources*, Vol.119-121, No.1, (June 2003) pp.252-257, ISSN 0378-7753
- Shoufeng Yang, Yanning Song, Peter Y. Zavalij & M. Stanley Whittingham. Reactivity, stability and electrochemical behavior of lithium iron phosphates. *Electrochemistry Communications*, Vol.4, No.3, (March 2002), pp.239-244, ISSN 1388-2481
- Sun C. S., Zhang Y., Zhang X. J. & Zhou Z. Structural and electrochemical properties of Cl-doped LiFePO_4/C . *Journal of Power Sources*, Vol. 195, (December 2009), pp. 3680-3683, ISSN 0378-7753
- Sunhye Lim, ChongS. Yoon & Jaephil Cho. Synthesis of Nanowire and Hollow LiFePO_4 Cathodes for High-Performance Lithium Batteries. *Chemistry of Materials*, Vol.20, No.14, (June 2008), pp.4560-4564, ISSN 0897-4756
- Wang, G. X.; Shen, X. P. & Yao J. One-dimensional nanostructures as electrode materials for lithium-ion batteries with improved electrochemical performance. *Journal of Power Sources*, Vol. 189, No. 1, (April 2009), pp. 543 - 546, ISSN 0378-7753
- Yang, L.; Jiao, L. F.; Miao, Y. L. & Yuan, H.T. Synthesis and characterization of $\text{LiFe}_{0.99}\text{Mn}_{0.01}(\text{PO}_4)_{2.99/3}\text{F}_{0.01}/\text{C}$ as a cathode material for lithium-ion battery. *J Solid State Electrochem*, Vol. 14, No. 6, (July 2009), pp. 1001 - 1005, ISSN 1432-8488
- Yanyi Liua, Dawei Liua, Qifeng Zhanga, Danmei Yua, Jun Liuc & Guozhong Cao. Lithium iron phosphate/carbon nanocomposite film cathodes for high energy lithium ion batteries. *Electrochimica Acta*, Vol.56, No.5, (February 2011), pp.2559-2565, ISSN 0013-4686
- Yuan Gao & Dahn J. R. Synthesis and characterization of $\text{Li}_{1+x}\text{Mn}_{2-x}\text{O}_4$ for lithium ion battery application. *Journal of the Electrochemical Society*, Vol.143, No.1, (1996) pp.100-144, ISSN 0013-4651
- YunJung Lee, Hyunjung Yi, Woo-Jae Kim, Kisuk Kang, DongSoo Yun, Michael S. Strano, GerbrandCeder & AngelaM.Belcher. Fabricating Genetically Engineered High-Power Lithium-Ion Batteries Using Multiple Virus Genes. *Science*, Vol.324, No.22, (May 2009) pp.1051-1055, ISSN 0036-8075
- Zhuang D. G., Zhao X. B., Cao G. S., Mi C. H., Tu J. & Tu J. P. Morphology and reaction mechanism of LiFePO_4 prepared by hydrothermal synthesis. *The Chinese Journal of Nonferrous Metals*, Vol. 15, No. 12, (2005), pp. 2034-2039, ISSN 1004-0609 Borong Wu, Yonghuan Ren and Ning Li

An Integrated Electric Vehicle Curriculum

Francisco J. Perez-Pinal
McMaster University
Canada

1. Introduction

Electric Vehicles (EV) have been available in the market the last 110 years. During the first stage of vehicles' development there were only two competitors, internal combustion engine (ICE) and EV. The EV was a lead vehicle compared to ICE until 1930; after that time the panorama changed due to the maturity of gasoline, the mass production of Ford Model T, the high performance of ICE and its low cost. Those facts and a limited electricity infrastructure produced a lack of interest and development of EV technology (Chan & Chau, 2001).

This forgotten research area for near 40 years came back in the early 70's with more strength since the appearance and continue development of advanced semiconductor devices, new storage technologies, sophisticated materials, advanced modeling and simulation techniques, real time implementation of complex control algorithms, maturity of power electronics and motor drives area. Since it is second big pushed to EV, a lot of improvements have been achieved by the constant effort of physics, chemical, mathematics, mechanical, computer, electrical and electronics specialists committed to develop a highly energy efficient device of transportation (Chan & Chau, 1997).

Nowadays, the term EV includes plug-in hybrids, extended range EV and all-EV, (Department of Energy of the United States of America, 2011). One big step forward to the mass introduction of all-EV has been the introduction of hybrid electric vehicle (HEV) in several automobile companies. The mass introduction of HEV started in 1997 by Toyota with the Hybrid-Prius, a parallel configuration integrated with a Toyota Hybrid Systems (THS). The THS-C was implemented later to the Estima Hybrid, (a THS combined with a continuous variable transmission (CVT)). Following this trend, a Toyota Hybrid Systems for Mild hybrid system (THS-M) was implemented in the Crown. In 2004, the THS II was installed in a new Prius, which had the main characteristic to increase the power supply voltage. This electric drive train added a direct current to direct current (DC/DC) converter, between the low voltage battery pack (276-288V) and the traction motor (500V or more), to use a smaller battery pack and more powerful motors compared with its previous version. In addition the THS name was modified to Hybrid Synergy Drive (HSD) to allow its use in other vehicles' brands (Pyrzak, 2009). It is necessary to say that Toyota is not the only vehicles' manufacturer to develop hybrid technology other brands include Ford, GM, Honda, Nissan, etc.

Today, the \$12 billion investment to develop vehicle technologies given by the Department of Energy (DOE) from the United States of America (USA) has opened a third stage in the development of EV. It is foreseen that the classical high vehicle costs, performance

predicaments, and safety issues claimed in EV sector; will be overcome in the near future motivated by the American Recovery and Reinvestment Act and DOE's Advanced Technology Vehicle Manufacturing (ATVM) Loan Program. Those programs will support the development, manufacturing, and deployment of the batteries, components, vehicles, and chargers necessary to put on America's roads millions of electric vehicles in 2015. Accordingly with USA's Vice President Joe Biden in 2015 the cost of batteries for the typical all-EV will drop almost 70% from \$33,000 to \$10,000, and the cost of typical PHEV batteries will fall in the same rate from \$13,000 to \$4,000 (Department of Energy, United States of America, 2011).

Currently, there is no doubt that EV is playing a fundamental role in our society and it is expected that it will continue growing specially in the social, economical and industrial sectors; lastly motivated by environmental issues. Besides the importance of EV, there are a few worldwide bachelors, undergraduate and postgraduate programs that attempt to synthesize all areas involved in the design of EV in a single curriculum (See Section 1.4). On the contrary, the development of EV has been addressed as an isolated application of previous training in the area of electric machines, power electronics, power energy, chemical engineering or mechanical structures. At the present time, it is usually missed the integration and particularities of the different aspects of this inherent multidisciplinary application, as a result potential and more cost-effective solution to develop high efficiency EV are missed or misunderstood due to the lack of experience and expertise.

1.1 Typical EV electrical architecture and energy storage unit

Current electric, hybrid and plug-in electric vehicle (EV, HEV, PHEV) power trains comprise at least of one on-board energy generation unit, energy storage, traction drive and peak power unit (Wirasingha & Emadi, 2011). The correct power management of those different sources increase the energy efficiency and reduces the overall fuel consumption (hence cost and emissions) (Kessels et al., 2008). In general the advantages of EV are higher energy efficiency and regenerative braking (Lukic & Emadi, 2004) compared with conventional ICE. Since electric motor efficiency is higher than the heat engine, overall significant efficiency fuel consumption can be achieved by assigning electric motor or engine for the propulsion depending on driving cycle. In addition, some EVs are able to generate electricity and recharge battery without any external supply (Emadi & Ehsani, 2001).

At the present moment, different HEV has been reported for instance vehicle to the grid (V2G), V2G plus vehicle-to-load, V2G plus vehicle-to-home, V2G plus vehicle-to-premise, V2G plus vehicle-to-grid-net metered, V2G plus advanced vehicle-to-grid (Tuttle & Baldick, 2011). The main characteristic of those proposals are the use of a particular power electric drive train for each specific applications.

In contrast all-EV traction train configuration proposed in literature are simpler than HEV and they can use for example battery (B), fuel cell (FC), photovoltaic (PV) as their main energy generation/energy storage unit. Additionally several arrays of B, FC and PV linked with supercapacitors (SC) in all-EV has been reported (Emadi, 2005), (Pay & Baghzouz, 2003), (Schofield, 2005), (Solero et al., 2005), (Intellicon, 2005). Figure 1 shows the most common configurations.

Today in the all-EV there are two main energy generation units, B and FC; both of them with the following characteristics,

1. They produce current just when it is supplied by its fuel/energy storage unit.
2. They achieve a high energy efficiency between 40-60%, which is load dependent.
3. B-EV and FC-EV produces zero or almost zero pollution and noise.
4. Li-ion battery and Proton Exchange Membrane (PEM) fuel cell are best candidate for vehicular applications due to its high power density, small volume and low temperature.

In contrast to the B-EV, the FC-EV particularities such as load dependency, incapacity to accept regenerative energy, intolerance to the input ripple current, start-up time, and slow load response, make unviable the single use of FC in traction applications. Therefore different FC-SC configurations have been proposed, i.e. characteristics of configuration i) are,

1. The use of only one power electronic converter (PEC).
2. The use of a SC as a peak power buffer during EV acceleration.
3. The SC accepts the regenerative power for the EV braking period.
4. There is an inherent decoupling between the peak and average EV power. As a result the power converter just deals with the average power. This behavior is translated in a small size and weight of the PEC.
5. The PEC needs to operate in a wide input voltage operation region caused by the FC load dependency.
6. It is necessary to implement a Power Management Strategy for the appropriate operation of the overall system.

It has been reported in literature different power converter that can be used as a step-up/down converter for configuration i). For example Boost, Buck/Boost, Boost interleaved, Half Bridge, Full Bridge, Full Bridge Zero Voltage Switching (ZVS) and/or Zero Current Switching (ZCS) or Push-Pull, (Profumo et al., 2004). Their main differences are the conversion ratio, power ratio, current ripple, uni/bidirectional capacity, efficiency and isolation (Blaabjerg et al., 2004) (See Section 1.3).

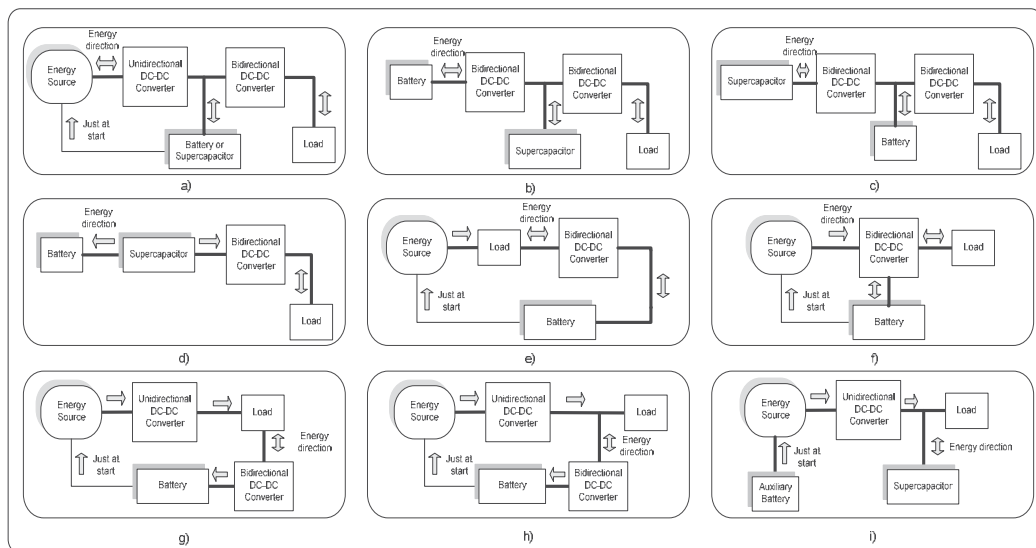


Fig. 1. Different all-EV configurations reported in literature.

1.2 Mechanical drivetrain EV

The basic mechanical architecture of EV, HEV and PHEV found in the market consists at least of one ICE and one electric motor where the torque produced by the engine is transmitted to the wheels by using a lossy and heavy mechanical shaft directly coupled to the rear or front wheels. Figure 2 a) shows a typical four wheel all-PEV with mechanical differential.

In this configuration, it is used a mechanical differential to produce different speed to each wheel during cornering, the closer wheel to the curve will run slower compared with the outer wheel. However such relationship is usually fixed and it does not depend of the steering angle and a rollover phenomena can be produced (a similar action is produced in the three wheel configuration). The trend for advanced vehicle architecture is to remove the traditional mechanical drive shaft and differential, and replacing it with an Electric Differential (ED) implemented by electric motors directly coupled to the wheels (using one fixed gear). Another trend is completely removing the gear and allocating the motor inside the wheel; this configuration is known as in-wheel motors, the in-wheel motors can be brushless or permanent magnet (Tabbache et al., 2011).

Additional features of ED are a) no mechanical link between the wheels, b) it is applied less power to the inner wheel in a turn, c) there is synchronization between the wheels during straight paths and d) it uses a virtual master for relative speed synchronization (Perez-Pinal, 2009). Figure 2 b) shows a typical four wheel all-PEV with ED.

The main characteristic of ED is the use of one PEC for each motor and the increment of vehicle's safety during cornering and risky maneuvers compared with its mechanical counterpart. Those advantages are achieved by two reasons: a direct torque control in the wheel and on-the-fly change in the differential ratio.

1.3 Modern EV design

At the beginning EV were directly adapted from ICE, such replacement was achieved by replacing the combustion engine and the fuel tank by an electric motor and a battery pack. In this kind of conversion usually were remained the overall components (Ehsani et al., 2004; Miller, 2004). However, low performance was a characterization of those EV.

The vehicles' mechanical operation (ICE or EV) are based in fundamental mechanical laws, the initial design variables are two, static and dynamic. The initial static characteristics are a desired acceleration, stop, driving and turning angle. The dynamic characteristics include the aerodynamic resistance, the rolling resistance, and the traction force (Emadi, 2005a).

Nowadays, to design a modern EV are involved chemistry, mechanical, electronics, computer engineers and business' guys (Ehsani et al., 2004), in other words an EV has evolved from a pure mechatronic system to a more chemechatronic system (the word chemistry plus mechatronic). The term chemechatronic was firstly employed in 1991 by the company Tosoh to describe its research efforts in the area of biotechnology and pharmaceuticals (Tosoh, 1991). In addition (이시우, 2003) used the same term to describe a system on a chip that includes in a single device chemical, mechanic, electronic, control system and computer science technology, it can be noticed that in essence an EV is chemechatronic system. Along this chapter the chemechatronic term refers to the approach that integrates areas of chemistry, control theory, computer science, electrical and electronics

within a product development with the main aim to enrich and/or optimize its functionality.

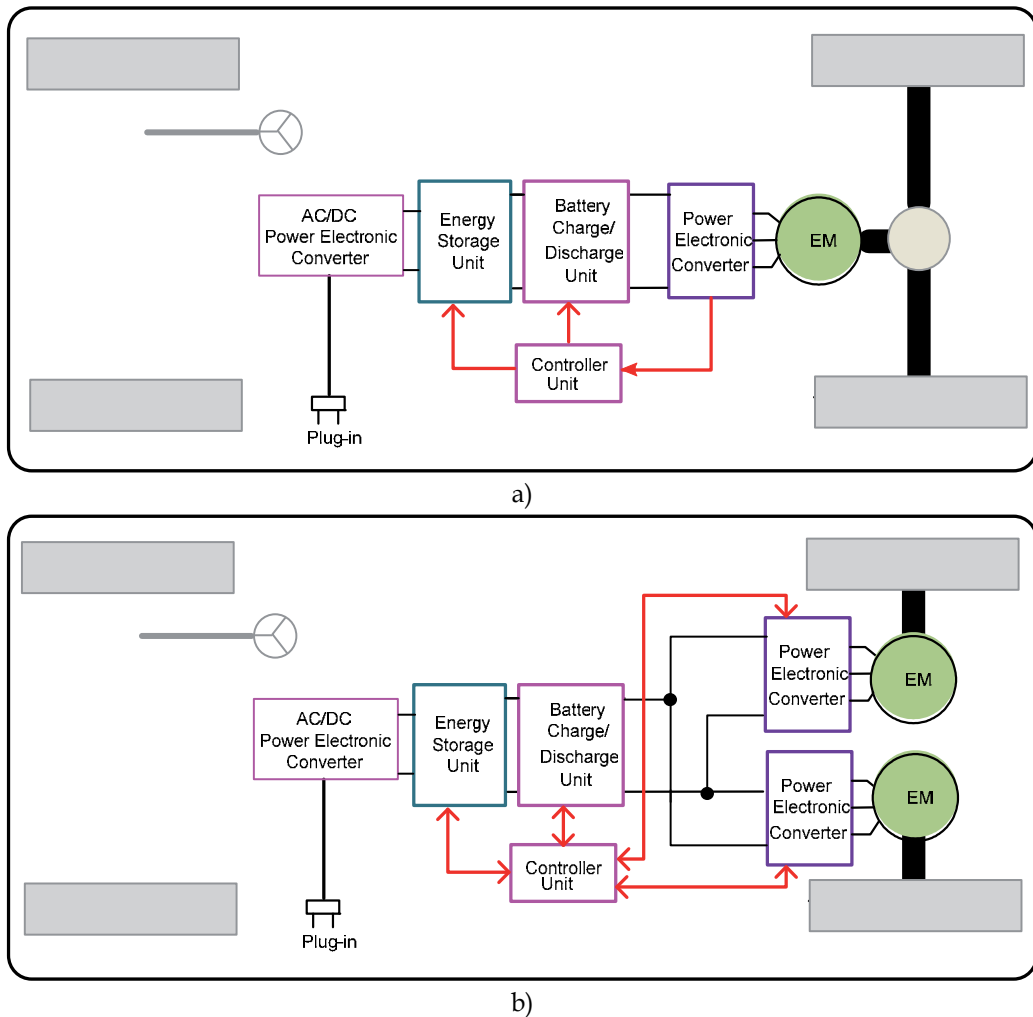


Fig. 2. Typical four wheel all plug-in electric vehicle a) with mechanical differential, b) with electric differential.

Accordingly with (Perez-Pinal, 2006) a lot of research has been done in order to develop accurate guidelines to design EV, some text book and classical papers can be found in literature (Ehsani et al., 2004; Miller, 2004; Emadi, 2005b; Ehsani et al., 1997; Husail & Islam, 1999). The main three characteristics required for modern EVs are,

1. Low weight.
2. High energy efficiency.
3. High torque response.

In addition, modern EV performance is evaluated in terms of,

1. Acceleration performance

- Acceleration time.
 - Acceleration distance.
2. Maximum cruise speed.
 3. Gradeability.
 4. All the last characteristics inside a driving cycle.

The first step to design an EV is to determine the relationship between the mechanical torque and the power electronic stage including the electric motor (Perez Pinal, et al., 2006). There exist two different techniques to initially design the power stage of an EV. The first technique determines the maximum mechanical power needed by the EV based on a driving cycle. The second technique finds the average mechanical power needed in terms of an initial speed, acceleration time and the maximum speed, for both techniques once the mechanical power is determined.

The second step sizes the maximum electric power needed for the power stage; in this step it must be considered the kind of electric motor and power losses. The kind of motor is generally chosen in terms of the base speed, maximum mechanical speed, power losses, and control topology.

The third step determines the main source and DC- bus voltage. In this stage there are many possibilities in terms of energy source and energy storage unit. The main motivation to choose one or another are based on the environment of the final product, sell point, and performance (Ehsani et al., 2004), this step is related with the selection of the PEC to step up the energy source unit. Here, it can be found several architectures related with the PEC, some criteria to select one or another are related with the power range, isolation requirement, efficiency and cost. However, the most important criterion to select one PEC configuration is to supply the deficiencies of the power source unit. For instance, a PEC for a FC power source unit should fulfill the following characteristics,

1. An efficient increment of the low output voltage from the FC to the motor drive.
2. A low input current ripple.
3. A unidirectional power direction between the power source unit and the motor drive.

As it can be implied from the list of requirements, there are several PEC architectures that satisfy those needs, the most usual are the following (Profumo et al., 2004), (Blaabjerg et al., 2004).

1. Boost converter,
2. Buck/boost converter.
3. Interleaved boost converter.
4. Half bridge and full bridge converter.
5. Full bridge converter with zero voltage-zero current switching (ZVS-ZCS).
6. Push-pull converter.

Table 1 summaries the overall characteristics of the PEC, it can be observed that several PECs can be used for the DC/DC power stage.

The general characteristic of the isolation architectures is that an input current reduction can be achieved at the expenses of increasing the inductors' values, or increasing the switching frequency. However an increment of the switching frequency produces an increment of the semiconductors switching losses. Isolation architectures are suitable for applications with high conversion ratio or where isolation is mandatory i.e. Japan and USA. In order to select the appropriated topology for any EV, it is necessary to perform a comparison of the device losses, power density, and efficiency. Recently there is a trend to use paralleled or

interleaved topologies; some advantages of those topologies are an inherent power sharing between the number of cells, an inherent robustness, and an increment of the switching frequency (Chan & Pong, 1997).

Converter	Conversion ratio	Current ripple	Power direction	Efficiency	Power range	Isolation
Boost	Up to 5 times	High	Unidirectional	Medium	< 3kW	No
Buck/boost	Up to 2 times	High	Unidirectional	Medium	< 3kW	No
Boost interleaved	Up to 5 times	Low	Unidirectional	High	< 10kW	No
Half bridge	Variable with Transformer	High	Bi-directional	Medium	< 10kW	Possible
Full bridge	Variable with Transformer	High	Bi-directional	Medium	< 10kW	Possible
Full bridge ZVS-ZCS	Variable with Transformer	High	Bi-directional	High	< 10kW	Possible
Push-pull	Variable with Transformer	High	Unidirectional	High	< 10kW	Yes

Table 1. Overall characteristics of different DC/DC converters.

After it has been determined the size and characteristics of the power source and storage unit, the following step is to select the motor drive. The final drive depends on the selected motor, which can be direct current (DC) or alternating current (AC). For example, the available topologies considering a three - phase induction motor are,

1. Hard-switching voltage source inverter (VSI).
2. Hard-switching current source inverter (CSI).
3. Resonant phase leg inverter (RPLI).
4. Active clamp resonant dc link inverter (ACRDI).
5. Auxiliary resonant commutated pole inverter (ARCPI).
6. Push pull.

Additionally, it can be integrated the step-up converter and inverter in a single stage, i.e. the Z converter (Blaabjerg et al., 2004). Once again, the most important criterion to select one or another is the energy efficiency, power density and cost.

1.4 Current curricula efforts

There are different programs in the area of EV and HEV implemented up to now, Table 2 shows a list of current programs available in the market, (Center for Automotive Research, 2003; CSU Ventures, 2009; Ferdowsi, 2010; Hammerstrom & Butts, 2011; Heinz & Schwendeman, 2011; Michigan Technological University, 2011; Purdue University, 2010; Rizkalla et al., 1998; Simon, 2011; The National Alternative Fuels Training Consortium, 2009; University of Detroit Mercy, 2009).

Additionally to these programs other universities and companies offer courses in the EV and HEV such as the Department of Automotive Engineering Cranfield University, the company Georgia Power, The Illinois Institute of Technology (IIT), The University of Manchester (UMIST), among others.

Year	Program Title / University	Level	Area
1998	A new EE curriculum in electric vehicle applications, Purdue School of Engineering and Technology at Indianapolis	Undergraduate, Graduate	EV
2003	Center for Automotive Research, The Ohio State University	Certificate Program, Graduate	EV, HEV
2007	Designing a Multi-Disciplinary Hybrid Vehicle Systems Course Curriculum Suitable for Multiple Departments, Minnesota State University, Mankato	Graduate	EV, HEV
2009	The National Alternative Fuels Training Consortium, West Virginia University	Colleges, Undergraduate	EV, HEV
2009	Certificate engineering program in Advanced Electric Vehicles (AEV), University of Detroit Mercy	Undergraduate, Graduate	EV, HEV
2009	Advanced Electric Drive Vehicle Education Program: CSU Ventures, Colorado State University (CSU), Georgia Tech (GT), Ricardo, MRI, KShare, Arapahoe Community College, Douglas County Schools	Colleges, Undergraduate	EV, HEV
2009	J Sargeant Reynolds Community College	Certificate, Undergraduate	EV, HEV
2010	Advanced Electric Drive Vehicles –A Comprehensive Education, Training, and Outreach Program, Missouri University of Science and Technology, University of Central Missouri, Linn State Technical College, St. Louis Science Center	College, Undergraduate, Graduate	EV, HEV
2010	Electric Vehicles part 1 and 2, Portland State University	Undergraduate, Graduate	EV, HEV
2010	Indiana Advanced Electric Vehicle Training and Education Consortium, (I-AEVtec), Purdue University, NotreDame University, IUPUI, Ivy Tech, Purdue-Calumet, Indiana University –Northwest	Technician, Undergraduate, Graduate	EV, HEV
2010	Development and Implementation of Degree Programs in Electric Drive Vehicle Technology, Macomb Community College, Wayne State University, NextEnergy	Certificate, Undergraduate, Graduate	EV, HEV

Table 2. Current HEV, EV programs.

From Table 2, it can be observed that only three programs have a link between college and graduate studies. One similarity in those programs is a permanent effort between regional Colleges, Universities and vehicles' companies. For example, the program from The University of Detroit, Mercy's College of Engineering and Science in conjunction with Engineering Society of Detroit is founded by Ford. This program is focused on electric and hybrid drivetrain technology, and it is expected to open seven new courses related to the automotive and defense ground vehicles industries.

Another similarity between those programs is to prepare and recruiting technician and automotive engineers starting in the high school level by conducting seminars and summer camps. In addition, it is expected to develop education material and video demonstration about EV and HEV to inform the general public by using internet as their main platform. After analyzing those programs and its references were identified eight different areas related with EV, Figure 3.

It must be mentioned that overall areas from the technician to the PhD level proposed in this chapter are related with Figure 3 (see Section 2). In general the area of technician is related with the maintenance and repair of the end user product, in this stage the understanding of each particular area and a general appraise of each stage is not fundamental. This level is related to know how work the overall EV's devices and it is not emphasized to answer why they behave in a certain or different way. Those questions are further explained in the undergraduate and graduate levels, where a fully understanding and generation of novels ideas to the state of the art is expected in the final levels.

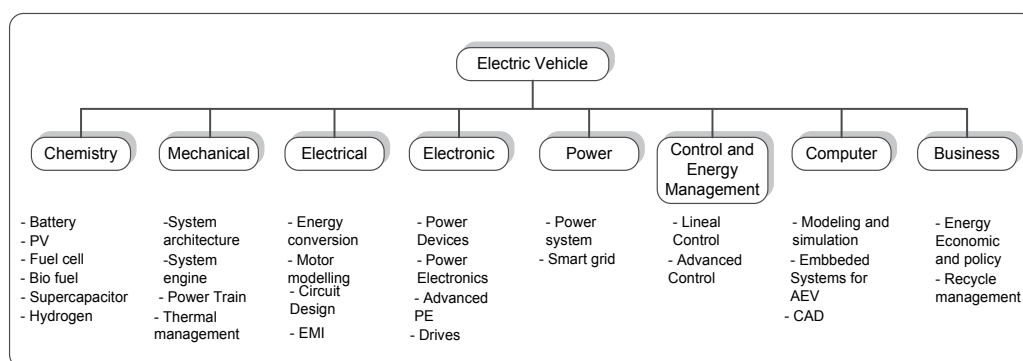


Fig. 3. Typical areas covered by Electric Vehicles.

1.5 Organization of the chapter

In order to come out with an integrated curriculum, different active learning techniques and curriculum strategies were compared and integrated in this proposal. The chapter begins (Section 2) with the overall description of the curricula in the following levels: Technician, Bachelor in Technology, Bachelor in Science, Master in Engineering/Science and Doctor in Philosophy (Ph. D.). Moreover, the objective of each level, its requirements, expected results, and overall recommendations are also given. This section provides the mandatory and final elective courses in each level. In Section 3, it is presented the proposed teaching model based on inquiry-based learning and active learning techniques widely developed in McMaster University. The inquiry process is about exploring, discovering, and ultimately, reaching a higher level of understanding. Here, it is addressed the recommended methodology to

lecture this topics and a general flowchart is provided. Finally some concluding remarks, future directions, and particularities are given in Section 5.

2. Curricula description

It is widely know that the design of a curriculum is not an easy task. The curriculum itself is the fundamental part of any institution, from basic to graduate level, in the design of a curriculum can be given the desired requirements and characteristics for admission and graduation. In addition, it can be addressed the general requirements and difficulty of each course, textbook, interrelation to other courses, lab session, credits, duration, syllabus, etc.

The design of a curriculum in engineering has been performed before in other areas. For example in the area of electronic engineering was proposed a power electronics (PE) curriculum after a meeting sponsored by the National Science Foundation (NSF), (Batarseh et al., 1996). As a result of that meeting, new directions and activities to increase the recruiting of students was pointed out i.e., to use EV as a catch, the intensive use of multimedia, state of the art lab facilities, open houses for research labs and environmental concerns. Those activities were summarized and they were a basic step in the development and growth of this area. However, several changes have been produced around the globe the last years in the area of engineering i.e. globalization, financial reorganization, advances in information technology and resource limitation. Those are some factors that motivate a substantial change in the design of a curriculum in the areas of engineering (Faculty of Engineering, 2009). Additionally to those facts, the area of EV is broader than PE, and it is in essence a multidisciplinary area, see Section 1. Therefore in order to come out with an integrated curriculum, in this section is proposed a modular curriculum oriented from the basic understanding of EV to the development and researching of more advanced applications. This proposal has been inspired by tools introduced in the Development of a Curriculum (DACUM, 2011), and it was complemented to the new and expected needs in the area of EV.

Accordingly with (DACUM, 2011), the main characteristic of DACUM are a natural relationship from its early stages between a desired competence or module, measurement on performance, and the curriculum designed to fulfil that competence; that basic idea has been preserved in this work. However, that idea has been completed with the following methodology (Schmal & Ruiz-Tagle, 2008): an identification of a module, module sequence, structuring of module, revision of each module, revision of curriculum and construction of syllabus for each module. As it can be noticed from this process the curriculum is an active entity, which needs to be adjusted and updated in a regular time-basis. Additionally, it has been emphasized the competency-based in all the stages of this curriculum and the permanent link between industry and academia. Figure 4 shows the three key areas interrelated in this proposal: experience, infrastructure and collaboration.

Experience from academics is one fundamental requirement in the practice of any curriculum. This experience and expertise must be reflected in the number of papers, books, patents, projects, etc., summarized for the overall academia involved in the curriculum implementation. However the isolated knowledge of the engineering area is just one requirement, for a good practice of this curriculum; it is recommended to implement a mandatory training in learning and lecturing in higher education. The main idea of that mandatory course is to increase the understanding of student learning, to improve the academic teaching expertise, and develop information for educational improvement at the level of courses at overall programme (McMaster University, 2010).

Another important area is infrastructure which is related with collaboration. There is no doubt that economic constraints have produced a new way to accomplish the learning activity. Today it is not longer attractive to have one laboratory per module or per academic faculty this way of organization is impractical and expensive. In this work, it is proposed the use of share resources at four different levels, industry, government, departments and universities. Through this scheme a more efficient way to achieve the learning scheme can be accomplished, see section 3.

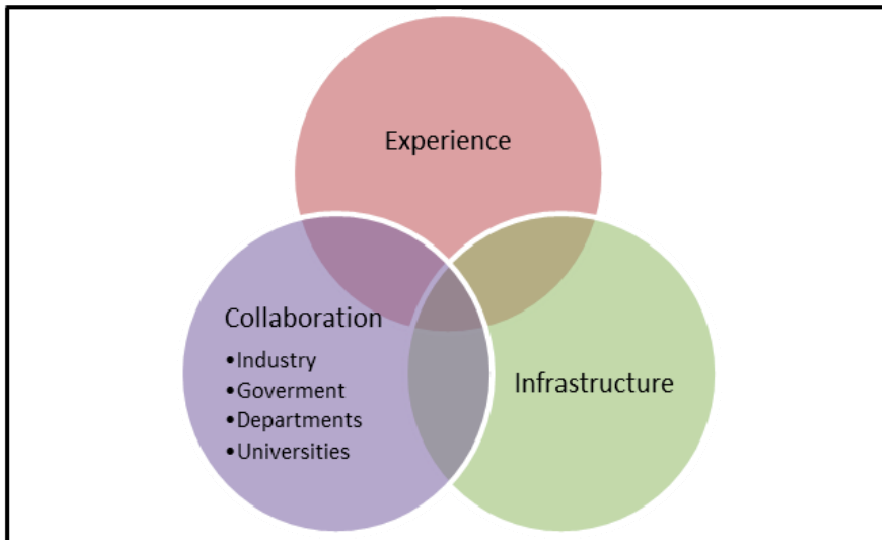


Fig. 4. Areas to match.

Based on the premises discussed previously, Figure 5 shows the modular EV curriculum. Here, it is proposed at the beginning a three year studies finishing with a technician degree. This technical level is mainly focused to the maintenance and service of EV; areas covered in this level are fundamentals of mechanics, battery management and disposal, circuits, fundamentals of electronics and others.

The second stage comprises two possible degrees the first part is a two year Bachelor in Technology, which can be updated to a traditional Bachelor in Science with an additional two years studies and mandatory one module section. The main characteristic of this level is the emphasis in hands-on experience in the first two years and the optional module complete the knowledge in math and engineering required for continuing with the Bachelor in Science. The difference between the Bachelor in Technology and Science is that the second option is more design oriented rather than maintenance or diagnostic. Both programs can be delivered in the form of lectures, tutorials, seminars and laboratories. Nowadays, a similar program is being adopted by Mohawk College and McMaster University, Canada; those programs offer university level courses, work in industry-focused lab and mandatory co-op work experience (McMaster-Mohawk, 2010). The main difference with the current system in McMaster University-Mohawk College and this proposal, it is the natural link between technician, bachelor level and graduate level proposed here, which is not currently offered.

A similar two year program is proposed in the graduate studies with two options, Master in Engineering and Master in Science. Here, it is proposed a 180 credits program for the first option (one year and a half) and 180 credits for the second one (two years), the different between both programs is the teaching or research oriented emphasis. This organization is already implemented with good results in universities like The University of Manchester, UK. The final stage proposed in the graduate level is PhD, here it is proposed a traditional three year course oriented to research in the areas discussed in Figure 3.

It can be noticed in the right of each level a transversal module. Those modules are proposed to be elective and they must be satisfied to change from one grade to another. This flexibility is based on the premise that some students start from the know-how and they become interested in the know-why. In addition, it has not been provided any percentages or credits per grade with the main aim to provide flexibility for the adoption of this curriculum to any institution.

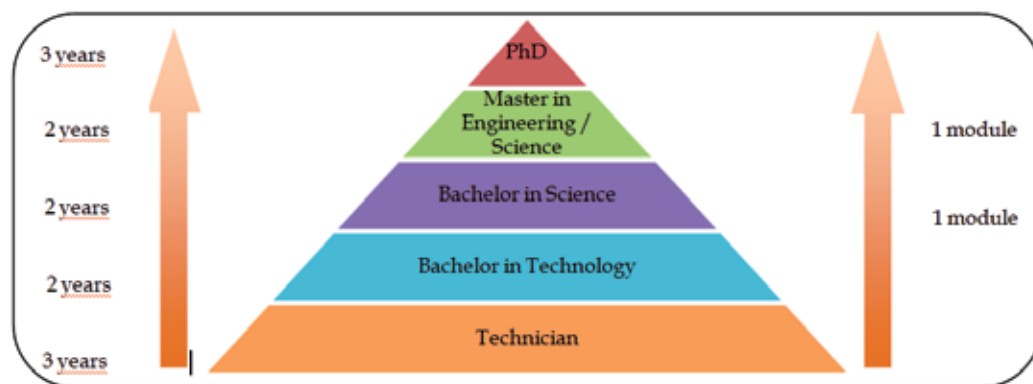


Fig. 5. Proposed modular model.

2.1 Technician curricula

The main objective is to bring the students the knowledge of maintenance and repair of EV considering the different automakers philosophy and EV structure. In this level, the student will acquire training in basic dynamic, electric fundamentals, computing, safety, equipment, tools, and software related with the diagnostic of EV. The student will be able to deal with user and maintenance manuals, to detect failures in the areas of mechanics, electric and electronics. In addition, the student must fulfill preventive and corrective maintenance for the different EV automakers.

This level is organized in two terms per year and five courses per term. A common core is proposed for the first four terms based on chemistry, physics, computing and mathematics. Table 3 shows the common core following by a list of optional third year courses.

In order to obtain industry experience before completing the technician level; it is proposed a mandatory four month internship or co-op after completing the second term in year two. This practical experience will help the student to probe their skills before completing the third year and it will help them to further select their final years' areas of interest. In addition, it is proposed to review the technical program every three years for possible updates. As mentioned earlier, it is proposed in the final terms elective courses following the main areas shown in Figure 3.

Year 1		Year 2		Year 3	
Term 1	Term 2	Term 1	Term 2	Term 1	Term 2
Math 1	Math 2	Electric Circuits 1	Electric Circuits 2	Optional	Optional
Computer Science 1	Computer Science 2	Electronics 1	Electronics 2	Optional	Optional
Physics 1	Physics 2	Mechanics 1	Mechanics 2	Optional	Optional
Chemistry 1	Chemistry 2	Introduction to EV	Automotive software	Optional	Optional
Reading and writing workshop 1	Reading and writing workshop 2	Health and Safety	Management	Optional	Optional

Table 3. Technician level organization.

Area Chemistry

1. Introduction to Energy Storage Unit.
2. Maintenance and repair of Energy Storage Unit.
3. Administration and Recycle of EV materials.

Area Mechanics

4. Introduction to ICE.
5. Introduction to Diesel motor.
6. Maintenance and repair of Suspension.
7. Maintenance and repair of Braking System.
8. Maintenance and repair of Automatic Transmission and CVT.
9. Maintenance and repair of ICE.
10. Maintenance and repair of Diesel motor.

Area Electrical

11. Introduction to Electric Machines.
12. Maintenance and repair of Electronic and Control Unit.
13. Maintenance and repair of Electric System.
14. Maintenance and repair of Electric Machines.
15. Maintenance and repair of Charging Station.

It can be noticed from Table 3 that the first and second year gives to the student the basic tools that they will use in more advanced courses. In addition the working co-op experience will provide to the students a real-world experience for a better choice of specialization. In addition, it would provide to the academic a state of the-art feedback from their student resulting in a better understanding of the market needs.

2.2 Bachelor in technology / science curricula

The main objective of the Bachelor in Technology (B. Tech.) is to provide the knowledge of analysis, operation and planning in the maintenance and repair of EV considering the different automakers philosophy and EV structure. In this level, the student will acquire advanced training in mechanics, electric systems and software related with EV. The student

will be able to deal with different automaker's maintenance manuals to detect errors and implementing upgrades in the areas of mechanics, electric and electronics. Additionally, after completing the Bachelor in Technology, the students have the option to take in the summer a mandatory module required to pursue a Bachelor in Science (B. Sc.) degree.

It is necessary to say that the Bachelor in Science is a design oriented program rather than maintenance in the areas shown in Figure 3. In particular, emphasis is given in: power source, materials, manufacturing, electric and electronic systems, charging infrastructure, control systems, embedded systems, management and quality control. Table 4 shows the core for both programs following by a list of optional second year's courses.

In order to obtain industry experience before completing the Bachelor in Technology and Bachelor in Science; it is proposed a mandatory four month internship or co-op after completing the second term in year two, respectively. In a similar way that in the Technician level, this practical experience will help the student to master their skills before completing the second year and it will help them to further select their final years' courses. In addition, it is proposed to review both programs every two years for possible updates.

As mentioned earlier, it is proposed in the second year several elective courses for the Bachelor in Technology and Sciences following the main areas shown in Figure 3.

Year 1		Year 2	
Term 1	Term 2	Term 1	Term 2
Math 1	Math 2	Elective	Elective
Mechanics 1	Mechanics 2	Elective	Elective
Chemistry 1	Chemistry 2	Elective	Elective
Electronics 1	Electronics 2	Elective	Elective
Electric Circuits 1	Electric Circuits 2	Elective	Elective
Year 3		Year 4	
Term 1	Term 2	Term 1	Term 2
Math 3	Math 4	Elective	Elective
Mechanics 3	Mechanics 4	Elective	Elective
Chemistry 3	Chemistry 4	Elective	Elective
Electronics 3	Electronics 4	Elective	Elective
Electric Circuits 3	Electric Circuits 4	Elective	Elective

Table 4. Bachelor level organization.

Elective Year 2. Bachelor in Technology

Area Chemistry

1. Energy Storage Unit.
2. Advance Material.

Area Mechanics

3. ICE and Diesel Motor.
4. Heat Transfer.
5. Thermodynamics.

6. Steering and Suspension.
7. Introduction to Mechatronics.

Area Electrical

8. Energy Conversion.
9. Electric Drive in EV.
10. Electromechanics.

Area Electronic

11. Electronic Control Unit.
12. Power Electronics.

Area Power

13. Power System Distribution.
14. Renewable Energy.

Area Control and Management

15. Automatic Control of Dynamic System.

Area Computer

16. Vision Systems.
17. DSP Programming.

Area Business

18. Administration and Recycle of EV Materials.
19. Business Logistic and Supply Chain.
20. Quality Control of EV.
21. Project Management.

Elective Year 2. Bachelor in Science

Area Chemistry

1. Production and Storage Hydrogen.
2. Production and Storage Biofuel.
3. Fuel Cell and Supercapacitor Technology.

Area Mechanics

4. Modeling and Design of Steering and Suspension.
5. Modeling and Design of Advanced Braking System.
6. Modeling and Design of CVT and Transmission.
7. Computer-aided Design, (CAD).

Area Electrical

8. Advanced Theory of Electric Machines.
9. Electromagnetic Interference in EV.

Area Electronics

10. Embedded Systems.
11. Design of Hardware in the Loop Automotive Systems.
12. Modeling of PE.

13. Control of PE.

Area Power

14. Design of Charging Station.

15. Power Protection.

16. Smartgrid.

Area Control and Management

17. Advanced Control.

18. Digital Control.

Area Computer

19. Design of Navigation System.

20. Finite Element Analysis.

21. Dynamic Programming.

Area Business

22. Energy and Sustainability Management.

23. Human System Integration in EV.

Once again, it can be noticed from Table 4 that the first year gives to the student the basic knowledge that they will use in more advanced courses. The required course from Bachelor of Technology to Bachelor in Science is proposed related with Mathematics for Engineering. Once completing the Bachelor levels the students could work in areas such as: design of EV and their components, manufacturing of EV, quality control, development of electronic, electric, and software related with EV, etc.

2.3 Master in engineering / science curricula

In this document a Master degree is understood like a postgraduate study to specialize in some area related with EV, it is proposed a Master in Engineering (M. Eng.) and Master in Science (M. Sc.) postgraduate studies. The following are the common structure for both degrees: two year length, full or part-time, lectures, assignments, exams, laboratory and one year common core. The difference between both degrees is on the second year where the students have to select among a professional oriented program M. Eng. and a research intensive program M. Sc.

The objective of the M. Eng. to provide the students with in-depth skills in a particular area of EV. Once completing this program, the student will be able to propose new designs, to lead projects and to manage people under its supervision in the area of EV. In order to graduate from this program, it is necessary to submit a teaching- based project report.

In contrast, the objective of the M. Sc. is to provide the students with research skills in a particular area of EV. Once completing this program, the student will be able to propose and develop innovative solutions for new designs and carry on projects in the area of EV. In order to graduate from this program, it is necessary to submit a research thesis, two research papers in a major conference of the area, or one paper in an ISI transaction.

Table 5 shows the proposed structure program. Once again in order to select a project can be used the areas shown in Figure 3.

Year 1		Year 2 MEng	
Term 1	Term 2	Term 1	Term 2
Storage System 1	Storage System 2	Seminar	Seminar
Control System 1	Control System 2	Management 1	Management 2
Computer Design 1	Computer Design 2	Business 1	Business 2
Advanced Power Electronics	Automotive motor drives	Project MEng	Project MEng
Mechatronics Systems	Mechatronics Systems 2	Year 2 MSc	
		Seminar	Seminar
		Project MSc	Project MSc

Table 5. Master Degree level organization.

2.4 PhD curricula

The degree of Ph. D. is proposed to be a minimum of three year research oriented program, with the main aim to provide original results in one or more areas related with EV, Figure 3. Here, it is proposed to follow the traditional scheme and presenting after the first year a comprehensive report to the supervisory committee outlining the proposed line of research, timetable, expected minimum deliveries, etc. Once completing this program, the student will be able to propose and develop novel solutions for new designs and carry on independent projects in the area of EV. In order to graduate from this program, it is necessary to submit a research thesis, and least one paper in an ISI transaction.

3. Some implementation guidelines

There is no doubt that the era of Information and Technology (I&T) has arrived in the classroom, in fact our students are more active and visual that they used to be just five years ago. Today, we face in the lecture or classroom the Y generation; so far Facebook, Twitter, Blogs, wikis, instant messaging are just some of the several tools currently used by our students to share information. The use of a computer or smartphone with several ads-on for everyday activity is familiar to our students and the students expect from the faculty to be familiar with those tools and they also expect an inclusion of those technologies in the classroom (McMaster University, 2010b). Therefore, for a better practice of this curriculum is recommended to include those new tools in the design of the overall courses. This will provide a natural way to engage the student's interest in the subject. For example, it can be included a twitter account for the course administrated by the faculty, where the students can check any last minute announcement.

In addition, another change in the classroom is the increment of students per academic faculty, in the first world universities is a common practice the use of large auditoriums for lecturing. That fact has reduced to a minimum the classical relationship between the student and instructor and the learning activity has become almost anonymous. Those constrains have opened a new paradigm in the area of research and development in academia and industry, today is not longer valid the exclusive use of blackboard and chalks for the academic intercourse. Based in that scenario, it is recommended to implement new teaching techniques in the proposed curriculum, the students learn by doing, making, writing, designing, creating and solving (McMaster University, 2010b). Therefore, it is proposed for a

successful implementation of this curriculum the adoption of active learning techniques, which contributes to the student motivation and curiosity to learn new material. Active learning techniques have been widely applied in McMaster University by the Centre for Leadership in Learning. Some examples of active learning strategies are a) to capitalize on student's interest, b) to collect students' feedback regarding what makes their classes more or less motivating, c) to increase motivation and curiosity.

Figure 5 shows a proposed flowchart based on active learning techniques, which can be implemented to any level by giving emphasis to the engineering or science degree. It is necessary to say that the academic faculty can develop their own flowchart based on their teaching style and needs.

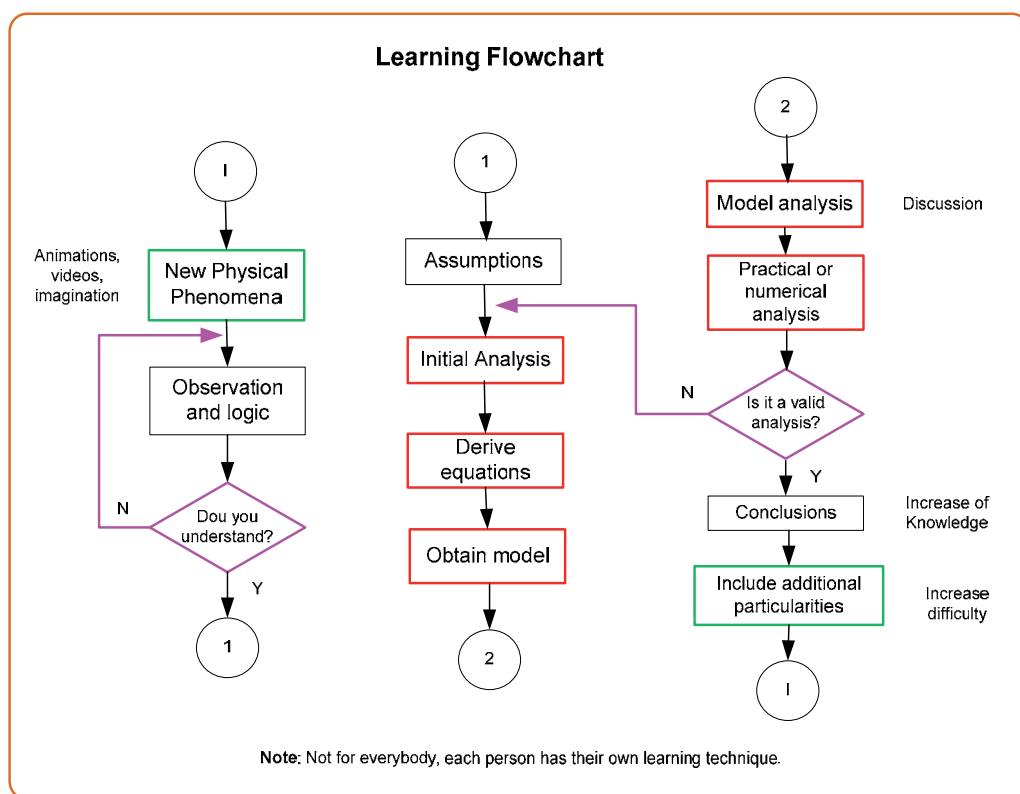


Fig. 5. General learning flowchart.

3.1 Course webpage

In addition to the active learning techniques included in the lecture or classroom; it is necessary to prepare a well-organized course and friendly webpage. Those actions will increase the interest in the students providing them with all the required information in one single place; and it will help the academic faculty to reduce his time delivering new material related to the course, Figure 6 shows a proposed web page per faculty and teaching course (Perez-Pinal, 2011). It is necessary to say that there is in the market software oriented for delivering courses such as Blackboard, Avenue, Moodle, etc. That software is known like Course Management System (CMS), also known as a Learning Management System (LMS)

or a Virtual Learning Environment (VLE), those are applications that instructors can use to create effective online learning sites (Blackboard, 2011). Objectives of those platforms are the same that the course website, which are to connect more effectively to the students with their instructor to keep the student, informed, involved and collaborating in the course.

Figure 6 shows a proposed course webpage, which is divided in three main sections, left menu, center part to display information and right menu to provide the course in-depth details.

In the left section, it is given a menu to select the information regarding the instructor, i.e. background, expertise, awards and citation, news, contact etc. This menu will provide all the information to the student about his instructor, providing confidence about the instructor's expertise. In addition, at the center section it is displayed all the information selected in the left menu.

In particular, the teaching course section has a submenu titled "Further details," this submenu option will display a password protected menu displayed on the right, Figure 7. This new menu provides all the information regarding the particular course, for instance course home, syllabus, readings, labs, assignments, exams, tools, and download course material. Here it is proposed to publish the announcement in the course home in addition to the course description and course characteristics. In this section is also included the information regarding the textbook. The syllabus sections provides the information of the term, teaching assistant, lab staff, schedule, prerequisite, course description, course objectives, assessment criteria, written work and late submissions, academic integrity, and notes. The reading section gives information on the course's lecture sessions; here are posted the lectures' slide, complementary notes, animations, and simulations presented in the lectures. The labs section provides information on the laboratory sessions schedule, laboratory manuals and laboratory policy, and safety considerations. The assignment section provides information regarding the assignments topic and schedule, tutorial calendar and slides. In addition, here it is proposed to include some practice problems with solutions. The exam section contains the current term's exams, i.e. midterm, final and test samples. The section tools contain the tutorials, multimedia and simulation resources for the course. Finally, the option "course materials to download" contain the same content as the online version in a single file.

It can be noticed that this proposed webpage design can be upgraded with a twitter account, a question & answer section and blog to obtain instant feedback from students. In addition, it can be included a section of video lectures to provide off-campus service.

4. Conclusion

In this work it has been given an overview of electric vehicle technology. It has been presented a typical EV electrical architecture and energy storage unit, the mechanical drivetrain, some guidelines regarding the EV design, and it has been provided a state of the art of the current curricula efforts. It was concluded that the EV is becoming a chemechatronic system, and it is foreseen that this trend will remain in the area.

Moreover, it has been proposed an integrated curriculum that emphasizes the main areas of EV, and it proposes EV's studies from the technician to graduate studies. Here it was given the main objectives in each level, its requirements and different areas of specialization. In general eight areas have been detected and different subareas of specialization have been proposed. In addition, some general guidelines for a correct implementation of the proposed



Fig. 6. Web page model one.

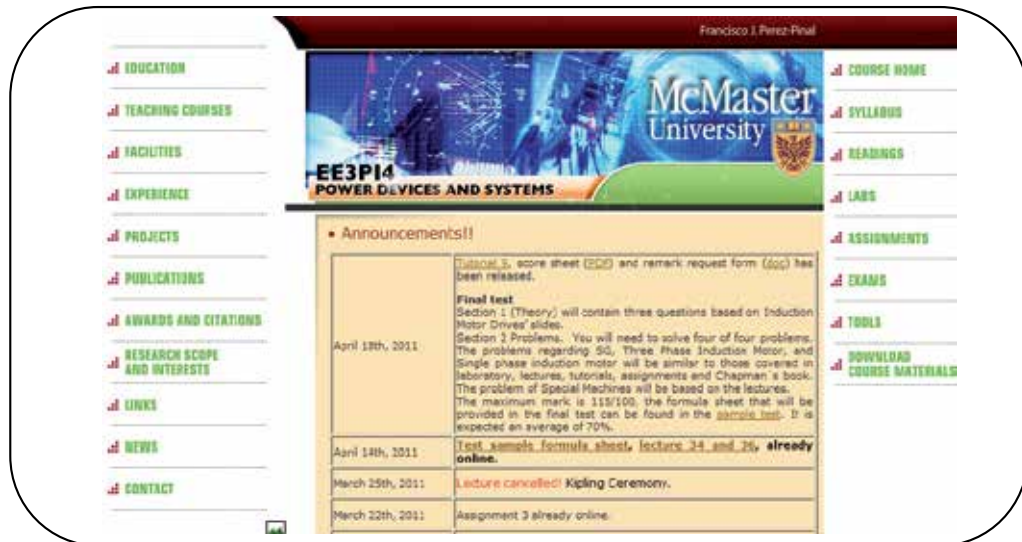


Fig. 7. Web page model, two.

curriculum were presented, which are based on active learning techniques. It was also presented an example for a webpage design related with a course that presents in a single place all the information regarding the course.

It is necessary to say, that there still a lot of open questions in the area of EV and EV's curriculum development. This dynamic area of researching and development must be able to adopt in a natural path the state of the art tools and techniques in software, animations, learning skills, etc; in order to guarantee the transportation demands for today and future generations.

5. Acknowledgment

Dr. David Capson and Dr. Ali Emadi for their discussion in several topics related with a better teaching practice; and Ana Serrato-Martinez for her design of the course webpage.

6. References

- Batarseh I., Gonzalez A., Qu Z., & Khan A. (1996). Proposed power electronics curriculum, *Proceedings Conference Record Southcon/96*, , pp. 251-262, June 25-27, 1996
- Blaabjerg F., Chen Z., & Kjaer S. B. (2004). Power electronics as efficient interface in Dispersed Power Generation Systems, *IEEE Transactions on Power Electronics*, Vol. 19, pp. 1187-1194 Blackboard (June 2011). 07.06.2011, Available from: <http://www.blackboard.com/>
- Center for Automotive Research (June 2011). The Ohio State University, Certificate Program, Graduate course, EV and HEV, 07.06.2011, Available from http://elearn.eng.ohio-state.edu/certificate_progs_05.pdf
- Chan C.C. & Chau K.T. (1997). An overview of power electronics in electric vehicles. *IEEE Transactions on Industrial Electronics*, Vol.44, No.1, pp. 3-13
- Chan C.C., & Chau K.T. (2001). *Modern Electric Vehicle Technology*, Oxford Science Publications, ISBN 0198504160, Oxford UK
- Chan C.H., & Pong M.H. (1997). Input current analysis of interleaved boost converters operating in discontinuous-inductor- current mode. *IEEE Proceedings Power Electronics Conference*, pp. 392-398
- CSU Ventures (2009). Advanced Electric Drive Vehicle Education Program, Colorado State University (CSU), Georgia Tech (GT), Ricardo, MRI, KShare, Araphoe Community College, Douglas County Schools. 07.06.2011, Available from http://www1.eere.energy.gov/vehiclesandfuels/pdfs/merit_review_2011/technology_integration/arravt031_ti_ebron_2011_p.pdf
- DACUM (2011). Developing a Curriculum. 07.06.2011, Available from <http://www.dacum.org/>
- Department of Energy, United States of America (2011). One Million Vehicles by 2015, February 2011 Status report. 07.06.2011, Available from www.energy.gov/media/1_Million_Electric_Vehicle_Report_Final.pdf
- Ehsani M., Rahman K., & Toliyat H. (1997). Propulsion system design of electric and hybrid vehicles. *IEEE Transactions on Industrial Electronics*, Vol. 44 No. 1, February 1997.
- Ehsani M., Yimin G., Gay S. E., & Emadi A. (2004). *Modern Electric, Hybrid Electric, and Fuel Cell Vehicles: Fundamentals, theory and design*, CRC Press, 2004.

- Emadi A., & Ehsani M. (2001). Chapter 21 More electric vehicles, *Handbook of Power Electronics*, CRC Press, Nov. 2001.
- Emadi A. (2005a). Tutorial Notes. Modern automotive systems: power electronics and motor drive opportunities and challenges. *IEEE, Proceedings of International Electric Machines and Drives Conference, Laredo Texas, USA May 15-18, 2005*.
- Emadi A. (2005b). *Handbook of Automotive Power Electronics and Motor Drives*. Edited by Ali Emadi, CRC Press, 2005.
- Faculty of Engineering (2009). Engineering a sustainable society. MacMaster University, Strategic Plan 2009-2014, 07.06.2011, Available from <http://www.eng.mcmaster.ca/strategicplan/StrategicPlan.pdf>
- Ferdowsi M. (2010). Advanced Electric Drive Vehicles –A Comprehensive Education, Training, and Outreach Program, Missouri University of Science and Technology, University of Central Missouri, Linn State Technical College, St. Louis Science Center, 07.06.2011, Available from Linn State Technical College, St. Louis Science Center, 07.06.2011, Available from http://www1.eere.energy.gov/vehiclesandfuels/pdfs/merit_review_2011/technology_integration/arravt034_ti_ferdowsi_2011_p.pdf
- Hammerstrom D., & Butts M. (2011). Electric Vehicles part 1 and 2, Portland State University. 07.06.2011, Available from <http://web.cecs.pdx.edu/~strom/ev1/ev1.html>
- Heinz R., Schwendeman L- K. (2011), “Advanced electric drive vehicles,” J. Sargeant Reynolds Community College. 07.06.2011, Available from http://www1.eere.energy.gov/vehiclesandfuels/pdfs/merit_review_2011/technology_integration/arravt039_ti_schwendeman_2011_p.pdf
- Husail I., & Islam Mo., (1999). Design, modeling and simulation of an electric vehicle system. *SAE, International Congress and Exposition, Detroit Michigan, March 1-4, 1999*.
- Intellicon, (2005). Development of a smart DC/DC converter for light traction applications. White paper, 07.06.2011, Available from <http://www.intellicon.info/>
- Kessels J.T.B.A., Koot M.W.T., Van den Bosch P.P.J., & Kok D.B. (2008). Online energy management for hybrid electric vehicles. *IEEE Transactions on Vehicular Technology*, Vol. 57, No. 6, pp.3428-3440, Nov. 2008.
- Lukic S.M., & Emadi A. (2004). Effects of drivetrain hybridization on fuel economy and dynamic performance of parallel hybrid electric vehicles. *IEEE Transactions on Vehicular Technology*, Vol. 53, No. 2, pp. 385- 389
- McMaster University, (2010). Teaching at McMaster, Centre for Leadership in Learning, 2010-2011 New Faculty Handbook, White paper, 07.06.2011. Available from: http://cfl.mcmaster.ca/resources/pdf/NewFacultyHandbook_2010.pdf
- McMaster University, (2010b). Lecturing Short Course Notes, October 21-November 11, 2010, Centre for Leadership in Learning. Whitepaper.
- McMaster-Mohawk (2010). Bachelor of Technology. White paper, 07.06.2011. Available from <http://mybtechdegree.ca/>
- Michigan Technological University (2011), Hybrid Electric Vehicle Engineering, Available from http://www.doe.mtu.edu/hybrid_vehicle_engineering/

- Miller J. (2004). *Propulsion systems for hybrid vehicles*, IEE, 2004 Pay S., & Baghzouz Y. (2003). Effectiveness of Battery- Supercapacitor Combination *Electric Vehicle. IEEE Proceedings Power Tech Conference, 2003 Bologna, Vol.3, pp., 23-26, June 2003.*
- Perez-Pinal F. J., Nunez C., Alvarez R., & Gallegos M. (2006). Step by step design procedure of an Independent-Wheeled Small EV applying EVLS. *IEEE Proceedings of 32nd Annual Conference on Industrial Electronics, IECON 2006*, pp. 1176-1181, 6-10 Nov. 2006.
- Perez-Pinal F. J., Cervantes I., & Emadi A. Stability of an electric differential for traction applications. *IEEE Transactions on Vehicular Technology*, Vol. 58, No.7, pp. 3224 - 3233
- Profumo F., & Tenconi A. (2004). Fuel cells for electric power generation: Peculiarities and Dedicated solutions for power electronic conditioning systems. *IEE Proceedings of European Power Electronics- Power Electronics and Motion Control, Riga, Latvia, 2004.*
- Purdue University, (2010). Indiana Advanced Electric Vehicle Training and Education Consortium, (I-AEVtec. Purdue University, NotreDame University, IUPUI, Ivy Tech, Purdue-Calumet, Indiana University -Northwest. White paper, 07.06.2011 Available from http://www1.eere.energy.gov/vehiclesandfuels/pdfs/merit_review_2010/technology_integration/tiarravt032_caruthers_2010_o.pdf.
- Pyrzak K. (2009). Development of hybrid electric technology, *Proceedings of Electric Vehicles, Renewable Energies, Monaco, March 26-29, 2009.*
- Rizkalla M.E., Yokomoto C.F., Sinha A.S.C., El-Sharkawy M., Lyshevski S., & Simson J. (1998). A new EE curriculum in electric vehicle applications. *Proceedings Circuits and Systems, 1998*, pp.186-189, 9-12 Aug 1998.
- Schmal R., & Ruiz-Tagle A. (2008). A methodology for competency oriented curricula design," *Ingeniare Revista chilena de ingeniería*, Vol. 16 No. 1, 2008, pp. 147-158
- Schofield N. (2005). *Course Notes Electric Vehicle Systems*. The University of Manchester UK, 2005.
- Simon, K. Y. (2011). Development and Implementation of Degree Programs in Electric Drive Vehicle Technology. Macomb Community College, Wayne state University, NextEnergy, White paper, 07.06.2011, Available from http://www1.eere.energy.gov/vehiclesandfuels/pdfs/merit_review_2011/technology_integration/arravt035_ting_2011_p.pdf
- Solero L., Lidozzi A., & Pomilio J. (2005). Design of multiple-input power converter for Hybrid Vehicles, *IEEE Transactions on Power Electronics*, Vol. 20, No. 5, September 2005, pp. 1007- 1015
- Tabbache, B., Kheloui, A., & Benbouzid, M.E.H. (2011). An adaptive electric differential for Electric vehicles motion stabilization, *IEEE Transactions on Vehicular Technology*, Vol.60, no.1, pp.104-110, Jan. 2011.
- The National Alternative Fuels Training Consortium (2009). West Virginia University, Undergraduate and Colleges. White paper, 07.06.2011, Available in <http://www.naftc.wvu.edu/>
- Tosoh (1991) White paper, Available on <http://www.icis.com/Articles/1991/02/07/11676/japans-careful-steps-into-global-niche-markets.html>

- Tuttle D. P., & Baldick Ross (2011). The evolution of plug-in electric vehicle-grid interactions. White paper, 07.06.2011, Available from <http://users.ece.utexas.edu/~baldick/papers/PEV-Grid.pdf>,
- University of Detroit Mercy (2009). Certificate engineering program in advanced electric vehicles (AEV). White paper, 07.06.2011, Available from http://www.udmercy.edu/governance/proposals/adoptedpolicies/pdf/Elec_Vehicles_Grad_Certificate.pdf
- Winstead, V. (2007). Designing a multi-disciplinary hybrid vehicle systems course curriculum suitable for multiple departments, *Proceedings of American Society of Engineering Education*,
- Multiple Departments, *Proceedings of ASEE 2007, American Society of Engineering Education*, Honolulu, Hawaii, June 24-27, 2007
- Wirasingha S.G., & Emadi A. (2011). Classification and review of control strategies for Plug-In Hybrid electric vehicles. *IEEE Transactions on Vehicular Technology*, Vol. 60, No. 1, pp. 111-122,
- Electric Vehicles. *IEEE Transactions on Vehicular Technology*, Vol. 60, no. 1, pp. 111-122, Jan. 2011
- 이시우, (2003) System on chip. White paper, 07.06.2011, Available on: www.postech.ac.kr/soc/presentation/sw-rhee.pdf



Edited by Seref Soylu

In this book, theoretical basis and design guidelines for electric vehicles have been emphasized chapter by chapter with valuable contribution of many researchers who work on both technical and regulatory sides of the field. Multidisciplinary research results from electrical engineering, chemical engineering and mechanical engineering were examined and merged together to make this book a guide for industry, academia and policy maker.

Photo by Iaroslav Neliubov / Shutterstock

IntechOpen

