



IntechOpen

Biodiesel

Feedstocks and Processing Technologies

Edited by Margarita Stoytcheva and Gisela Montero



WEB OF SCIENCE™

BIODIESEL – FEEDSTOCKS AND PROCESSING TECHNOLOGIES

Edited by **Margarita Stoytcheva**
and **Gisela Montero**

Biodiesel - Feedstocks and Processing Technologies

<http://dx.doi.org/10.5772/1094>

Edited by Margarita Stoytcheva and Gisela Montero

Contributors

Margarita Stoytcheva, Gisela Montero, Lydia Toscano, Velizar Gochev, Benjamin Valdez, Bo Hu, Ganesh Bhausheeb Shinde, Vilas Sapkal, Rajendra Sapkal, Nitin Raut, Paula Catalina Mazo, Gloria Restrepo, Luis Rios, Simrat Kaur, Mohan C. Kalita, Ravi B. Srivastava, Charles Spillane, Carlos Alberto Guerrero-Fajardo, Fabio Emiro Sierra Vargas, Carlos Andrés Guerrero Romero, Kandukalpatti Chinnaraj Velappan, Nagarajan Vedaraman, Amrit Goswami, Claudia Letizia Bianchi, Daria Camilla Boffito, Carlo Pirola, Stefania Vitali, Gianni Carvoli, Davide Barnabè, Ada Rispoli, Renzo Bucchi, Ana Aurelia Chirvase, Luminita Tcacenco, Nicoleta Radu, Irina Lupescu, Asnida Yanti Ani, Dr. Mohd Azlan Mohd Ishak, Khudzir Ismail, Emad Shalaby, László Kótai, Junchao Huang, Zhen Fang, Feng Guo, Maddalena Rossi, Alberto Amaretti, Stefano Raimondi, Alan Leonardi, Somkiat Ngamprasertsith, Ruengwit Sawangkeaw, Carlos Roman Vera, Mariana Busto, Juan Carlos Yori, Gerardo Torres, Debora Manuale, Sergio Canavese, Jorge Sepúlveda, Vivian Feddern, Anildo Cunha Jr., Marina Prá, Paulo G. De Abreu, Martha M. Higarashi, Jonas I. Dos Santos Filho, Arlei Coldebella, Mauro Sulenta, Marcio Jose Da Silva, Melinda Griffiths

© The Editor(s) and the Author(s) 2011

The moral rights of the and the author(s) have been asserted.

All rights to the book as a whole are reserved by INTECH. The book as a whole (compilation) cannot be reproduced, distributed or used for commercial or non-commercial purposes without INTECH's written permission.

Enquiries concerning the use of the book should be directed to INTECH rights and permissions department (permissions@intechopen.com).

Violations are liable to prosecution under the governing Copyright Law.



Individual chapters of this publication are distributed under the terms of the Creative Commons Attribution 3.0 Unported License which permits commercial use, distribution and reproduction of the individual chapters, provided the original author(s) and source publication are appropriately acknowledged. If so indicated, certain images may not be included under the Creative Commons license. In such cases users will need to obtain permission from the license holder to reproduce the material. More details and guidelines concerning content reuse and adaptation can be found at <http://www.intechopen.com/copyright-policy.html>.

Notice

Statements and opinions expressed in the chapters are those of the individual contributors and not necessarily those of the editors or publisher. No responsibility is accepted for the accuracy of information contained in the published chapters. The publisher assumes no responsibility for any damage or injury to persons or property arising out of the use of any materials, instructions, methods or ideas contained in the book.

First published in Croatia, 2011 by INTECH d.o.o.

eBook (PDF) Published by IN TECH d.o.o.

Place and year of publication of eBook (PDF): Rijeka, 2019. IntechOpen is the global imprint of IN TECH d.o.o.

Printed in Croatia

Legal deposit, Croatia: National and University Library in Zagreb

Additional hard and PDF copies can be obtained from orders@intechopen.com

Biodiesel - Feedstocks and Processing Technologies

Edited by Margarita Stoytcheva and Gisela Montero

p. cm.

ISBN 978-953-307-713-0

eBook (PDF) ISBN 978-953-51-4407-6

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,100+

Open access books available

116,000+

International authors and editors

120M+

Downloads

151

Countries delivered to

Our authors are among the
Top 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Meet the editors



Professor Margarita Stoytcheva graduated from the University of Chemical Technology and Metallurgy of Sofia, Bulgaria, with titles of Chemical Engineer and Master of Electrochemical Technologies. She has a Ph.D. and DSc. degrees in chemistry and technical sciences. She has acted in research and teaching in several Universities in Bulgaria, Algeria and France. From 2006. to the present she has participated in activities of scientific research, technological development and teaching in Mexico at the University of Baja California, Institute of Engineering, Mexicali, as a full time researcher. Since 2008. she has been a member of the National System of Researchers of Mexico. Her interests and areas of research are analytical chemistry and biotechnology.



Dr. Gisela Montero, Chemical engineer graduated from National Autonomous University of Mexico, (UNAM), specialized in heat transfer engineering projects in Mexican Petroleum Institute (IMP), Master in thermodynamic engineering by Autonomous University of Baja California (UABC), obtaining the maximum honors. Doctorate in Chemical Sciences (chemical engineering) by UNAM. She has written several technical papers and chapters related to energy, biofuels and exergy analysis. She worked as a specialist in the Combustion Engineering Division in IMP; after she worked as a researcher in Exergy group in the same institute. She was coordinator of Geothermal energy program in UABC. Currently, working as full-time researcher in Engineering Institute of UABC on energy-saving projects, exergy analysis, simulation and adaptation of processes to obtain biofuels.

Contents

Preface XIII

- Part 1 Feedstocks for Biodiesel Production 1**
- Chapter 1 **Non Edible Oils: Raw Materials for Sustainable Biodiesel 3**
C.L. Bianchi, C. Pirola, D.C. Boffito, A. Di Fronzo, G. Carvoli,
D. Barnabè, R. Bucchi and A. Rispoli
- Chapter 2 **Biodiesel Production from Waste Cooking Oil 23**
Carlos A. Guerrero F., Andrés Guerrero-Romero and Fabio E. Sierra
- Chapter 3 **Animal Fat Wastes for Biodiesel Production 45**
Vivian Feddern, Anildo Cunha Junior, Marina Celant De Prá,
Paulo Giovanni de Abreu, Jonas Irineu dos Santos Filho,
Martha Mayumi Higarashi, Mauro Sulenta and Arlei Coldebella
- Chapter 4 **Getting Lipids for Biodiesel
Production from Oleaginous Fungi 71**
Maddalena Rossi, Alberto Amaretti,
Stefano Raimondi and Alan Leonardi
- Chapter 5 **Microbial Biodiesel Production -
Oil Feedstocks Produced from Microbial Cell Cultivations 93**
Jianguo Zhang and Bo Hu
- Chapter 6 **Algal Biomass and Biodiesel Production 111**
Emad A. Shalaby
- Chapter 7 **Microalgae as Feedstocks for Biodiesel Production 133**
Jin Liu, Junchao Huang and Feng Chen
- Chapter 8 **Eco-Physiological Barriers and Technological
Advances for Biodiesel Production from Microalgae 161**
Simrat Kaur, Mohan C. Kalita,
Ravi B. Srivastava and Charles Spillane

- Chapter 9 **Advantages and Challenges of Microalgae as a Source of Oil for Biodiesel** 177
Melinda J. Griffiths, Reay G. Dicks,
Christine Richardson and Susan T. L. Harrison
- Chapter 10 **An Integrated Waste-Free Biomass Utilization System for an Increased Productivity of Biofuel and Bioenergy** 201
László Kótai, János Szépvölgyi, János Bozi, István Gács,
Szabolcs Bálint, Ágnes Gömör, András Angyal, János Balogh,
Zhibin Li, Moutong Chen, Chen Wang and Baiquan Chen
- Part 2 Biodiesel Production Methods** 227
- Chapter 11 **Production of Biodiesel via In-Situ Supercritical Methanol Transesterification** 229
Asnida Yanti Ani, Mohd Azlan Mohd Ishak and Khudzir Ismail
- Chapter 12 **Transesterification in Supercritical Conditions** 247
Somkiat Ngamprasertsith and Ruengwit Sawangkeaw
- Chapter 13 **Alternative Methods for Fatty Acid Alkyl-Esters Production: Microwaves, Radio-Frequency and Ultrasound** 269
Paula Mazo, Gloria Restrepo and Luis Rios
- Chapter 14 **Transesterification by Reactive Distillation for Synthesis and Characterization of Biodiesel** 289
G.B.Shinde, V.S.Sapkal, R.S.Sapkal and N.B.Raut
- Chapter 15 **Gas-Liquid Process, Thermodynamic Characteristics (19 Blends), Efficiency & Environmental Impacts, SEM Particulate Matter Analysis and On-Road Bus Trial of a Proven NO_x Less Biodiesel** 317
Kandukalpatti Chinnaraj Velappan and Nagarajan Vedaraman
- Chapter 16 **Biodiesel Production with Solid Catalysts** 339
Feng Guo and Zhen Fang
- Chapter 17 **Heterogeneous Catalysts Based on H₃PW₁₂O₄₀ Heteropolyacid for Free Fatty Acids Esterification** 359
Marcio Jose da Silva,
Abiney Lemos Cardoso, Fernanda de Lima Menezes,
Aline Mendes de Andrade and Manuel Gonzalo Hernandez Terrones
- Chapter 18 **An Alternative Eco-Friendly Avenue for Castor Oil Biodiesel: Use of Solid Supported Acidic Salt Catalyst** 379
Amrit Goswami

- Chapter 19 **The Immobilized Lipases in Biodiesel Production 397**
Margarita Stoytcheva, Gisela Montero,
Lydia Toscano, Velizar Gochev and Benjamin Valdez
- Chapter 20 **Progress in Vegetable Oils
Enzymatic Transesterification to Biodiesel - Case Study 411**
Ana Aurelia Chirvase, Luminita Tcacenco,
Nicoleta Radu and Irina Lupescu
- Chapter 21 **Adsorption in Biodiesel Refining - A Review 427**
Carlos Vera, Mariana Busto, Juan Yori, Gerardo Torres,
Debora Manuale, Sergio Canavese and Jorge Sepúlveda

Preface

The increasing demand for energy worldwide, together with the depletion of crude oil reserves, environmental threats due to greenhouse gas emissions and new national and international legislation, is resulting in the imperative for petroleum-derived fuels to be complemented or substituted by biofuels. Such an alternative, renewable, biodegradable and nontoxic biofuel is biodiesel.

The book “Biodiesel: Feedstocks and Processing Technologies” is intended to provide a professional look on the recent achievements and emerging trends in biodiesel production. It includes 21 chapters, organized in two sections.

The first book section: “Feedstocks for Biodiesel Production” covers issues associated with the utilization of cost effective non-edible raw materials and wastes, and the development of biomass feedstock with physical and chemical properties that facilitate its processing to biodiesel. Chapter 1 is focused on the possible use of *Brassicaceae* spp., namely *B.juncea* in biodiesel production, and demonstrates the sustainability of an agronomic rotation between *Brassicaceae* and *nicotiana tabacum* to produce vegetable oil from marginal soils. Chapter 2 comments on waste cooking oils transesterification to produce biodiesel, identifying the main types of cooking oils and supplying production process details. The generation of animal fat wastes in Brazil, their characterization and use for biodiesel synthesis is summarized in Chapter 3. The current knowledge advances in oleaginous fungi metabolism, physiology, and strain improvement are discussed in Chapter 4. Oleaginous fungi, and particularly yeasts, are considered as very efficient in the accumulation of intracellular triacylglycerols and it is expected that they will be exploited by the biofuel industry in the future. In continuation of the topic, Chapters 5-9 provide an overview on the various aspects of the use of microalgae as a source of oil for biodiesel, focusing on: a description of algae and their properties with regards to oil production, requirements and key factors in microalgal cultivation, methods and challenges in harvesting and processing of algal biomass, economic and environmental feasibility of microalgal biodiesel, mechanisms to enhance lipid productivity of microalgae, and future research directions. Finally, Chapter 10 discusses the implementation of an integrated waste-free biomass utilization system for an increased productivity of biofuel and bioenergy.

The second book section: "Biodiesel Production Methods" is devoted to the advanced techniques for biodiesel synthesis. Chapters 11 and 12 discuss the technological aspects of the process of supercritical transesterification in biodiesel production, highlighting the effect of the reaction parameters, and the operational conditions. The economical feasibilities and the chemical limitations of supercritical transesterification, as well as process improvements and prospective are commented in details. Chapter 13 reports some alternative methods for biodiesel production reducing the reaction time, the reactive ratio, the quantity of the by-products, and the energy consumption. These include microwaves, radio frequency and ultrasound techniques. Biodiesel production efficiency improvement applying reactive distillation, and optimized transesterification processes are commented in Chapters 14 and 15. Recent advances in solid catalyst method for biodiesel production are reported in Chapters 16-18. Catalyst synthesis and characterization, as well as catalytic mechanism and catalytic activity are discussed, making use of research results. Chapters 19 and 20 comment on some aspects of the enzymatic approach to biodiesel production. Chapter 19 provides an overview on the use of immobilized lipases in biodiesel production, the techniques applied for enzyme immobilization, and the factors affecting the process. Chapter 20 is focused on a case study, namely the transesterification of rapeseed oil with immobilized yeast lipase. Biodiesel refining process is the subject of Chapter 21. The theoretical and practical aspects related to the functioning, design and operation of adsorbers and their application to the purification of biodiesel product and feedstocks are comprehensively reviewed.

The adequate and up-to-date information provided in this book should be of interest for research scientist, students, and technologists, involved in biodiesel production.

All the contributing authors are gratefully acknowledged for their time and efforts in preparing the different chapters, and for their interest in the present project.

Margarita Stoytcheva
Gisela Montero
Mexicali, Baja California
Mexico

Part 1

Feedstocks for Biodiesel Production

Non Edible Oils: Raw Materials for Sustainable Biodiesel

C.L. Bianchi et al.*

*Università degli Studi di Milano,
Dipartimento di Chimica Fisica ed Elettrochimica, Milano,
Italy*

1. Introduction

In EU directive 2003/30/EC biodiesel is defined as “methyl ester produced from vegetable or animal oil, of diesel quality, to be used as biofuel”. The more recent EU directive 2009/28/EC has set the targets of achieving, by 2020, a 20% share of energy from renewable energy sources in the EU’s overall energy consumption and a 10% share of energy from renewable sources in each member State’s transport energy consumption. In this context special consideration is paid to the role played by the development of a sustainable and responsible biofuels production, with no impact on food chain.

Nowadays most biodiesel is produced through triglycerides transesterification of edible oils with methanol, in the presence of an alkaline catalyst (Lotero et al., 2005). The so obtained product has low viscosity and is a biofuel (fatty methyl ester) that can replace petroleum-based diesel fuel with no need of engine modifications (Suwannakarn et al., 2005). Furthermore, if compared to fossil fuel, the formed ester fuels are non-toxic, safe to handle, and biodegradable (Krawczyk, 1996). Glycerine is also obtained as by-product as shown in Fig. 1.

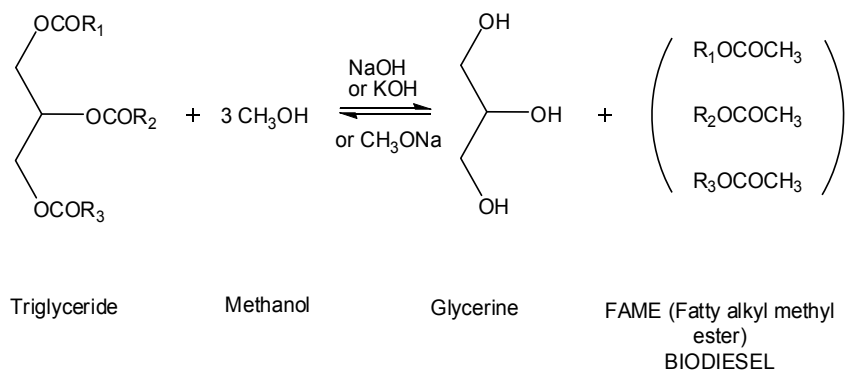


Fig. 1. Transesterification of a trygliceride.

* C. Pirola¹, D.C. Boffito¹, A. Di Fronzo¹, G. Carvoli¹, D. Barnabè², R. Bucchi² and A. Rispoli²
¹ Università degli Studi di Milano – Dipartimento di Chimica Fisica ed Elettrochimica, Milano, Italy,
² Agri2000 Soc. Coop., Bologna, Italy.

Refined, low acidity oilseeds (e.g. those derived from sunflower, soybean, rapeseed, tobacco etc.) may be easily converted into biodiesel, but their exploitation significantly raises the production costs, resulting in a biofuel that is not competitive with the petroleum-based diesel (Loreto et al., 2005). Presumably, as the market increases and technology is improved, costs will be driven down. In any case, the raw materials constitute a large portion of the manufacturing cost of biodiesel (up to 80%) (Bender, 1999).

Current oilseeds production systems raise environmental concerns because lands are intensively cultivated requiring high fertilizer and water inputs. These practices, aiming to increase yield, must be reduced or carefully regulated to prevent emissions of greenhouse gases or other environmental impacts. To do this, improved agronomic practices as the use of mixed species or crop rotation undoubtedly play a key role in mitigating negative impacts and enhancing biodiversity. A deep understanding of the microbial diversity of soils, its impacts on nutrient uptake and therefore on yield is crucial for sustainable cropping systems (The Royal Society, 2008).

Energy crops for industrial destination may represent a strategic opportunity in land use and income generation. However, in addition to the environmental aspects, economical concerns exist regarding the subtraction of lands for food cultivation. In a high market tension, it could have major impact on food/feed prices, increasing inequality, especially in developing countries. In addition, increased demand for food can result in the slowdown in biodiesel production due to reduced raw material availability. This was noticed in 2007 with industrial plants exploiting only 50% of their production capacity (Carvoli et al., 2008).

For all these reasons, it is highly desirable to produce biodiesel from crops specifically selected for their high productivity and characterized by low input requirements, or from low-cost feedstock such as waste cooking oil (WCO), animal fats and greases (Canakci et al., 2005; Zhang et al., 2003).

While edible crops available for biodiesel production are restricted to few species (mainly palm/ soybean in the U.S. and palm/ rapeseed in the E.U.), the intent of using dedicated alternative feedstock opens a wide choice for new species that may be more suitable for specific conditions resulting on high yields.

The high WCO potential is recognized also by the EU directive 2009/28/EC, where waste vegetable or animal oil biodiesel is reported to save about the 88% of greenhouse emissions, a quite high value if compared to biodiesel from common vegetable oils, whose greenhouse emission savings range from 36 to 62%. The main issue posed by such a raw material is the need of its standardization, especially with regard to acidity decrease. Several methods have been proposed to solve this problem. Among them it is worth mentioning, besides the cited alkali refining method, addition of excess catalyst (Ono & Yoshiharu, 1979), extraction with a solvent (Rao et al., 2009), distillation refining process (Xingzhong et al., 2008) and pre-esterification method (Loreto et al., 2005; Pirola et al., 2010; Bianchi et al., 2010; Parodi and Martini, 2008). This last seems to be the most attractive approach and has recently received much attention.

In the following paragraphs, the authors expose how it is possible to exploit waste materials or oils derived from crops not addressed to the food as potential raw materials for biodiesel production. Both the agronomic and chemical aspects deriving from the experimental work of the authors will be displayed.

2. Agronomical aspects

The authors present here preliminary results of a three years study about the feasibility of using new oilseed species for biodiesel production in Italy¹. The intent is to propose an innovative agronomic solution that may affect the energy balance and the ability to achieve a high level of sustainability in the oilseeds production.

2.1 Non edible oil crops in the Mediterranean basin

A considerable amount of studies are available on mainstream and alternative crops for biodiesel feedstock. The authors made a selection of the most promising crops to be introduced in the Mediterranean zone, taking into account that currently the Mediterranean basin comprises not only temperate climate but also slightly-arid lands. Some of these are being effectively tested under the mentioned project as part of a unique rotation program.

Among oil crops the Brassicaceae family has an outstanding position. Rapeseed (*Brassica napus*) is the third largest oil crop with 12% of the world plant oil market with best yields when cultivated in cold-temperate regions (Carlsson, 2009). Yet, the large biodiversity of Brassicaceae reveal incipient species, among which *Brassica juncea*, *Brassica nigra*, *Brassica rapa*, *Brassica carinata*, *Sinapis alba*, *Camelina sativa*, *Eruca sativa ssp. oleifera*, etc. Besides the potential as raw material for biodiesel, their high content of glucosinolates (GSL) make them able to recover soils made marginal by soil-borne pests as nematodes (e.g. galling nematodes from the *Meloidogyne* genus and cyst nematodes from *Heterodera* and *Globodera* genera) (Romero et al., 2009; Curto & Lazzeri, 2006). Many researchers also report weed-suppressive effects of Brassicaceae (e.g. Al-Khatib, 1997; Krishnan, 1998) as well as filtering-buffering effects against heavy metals pollution (Palmer et al., 2001).

On the other side an unexpected source of oilseed seems to arise from the tobacco culture. In anticipation of changes in tobacco market, selections of new varieties destined for energy production are coming out. Tobacco, as drought resistant species, seems a good option to face the shift of some previously fertile into arid lands caused by climate change.

2.1.1 *Brassica carinata*

The recent interest in *B. carinata* (also known as Ethiopian or Abyssinian mustard) is mainly a result of its high resistance to biotic and abiotic stresses such as drought tolerance. *Brassica carinata*, is an annual crop noted to be highly resistant to many rapeseed pests: blackleg (*Leptosphaeria maculans*), white rust (*Albugo candida*), *Sclerotinia* sp. and *Phyllotreta cruciferae* (Pan, 2009). According to Razon (2009), *B. carinata*, together with *E. sativa ssp. oleifera*, is the most promising oilseed for biodiesel purpose in temperate zones, not just for the yield but also for its adaptability to hard pedo-climatic conditions. It may be used in a crop rotation system with cereals and on low nutrient soils. Best results are achieved sowing on autumn (IENICA, 2004). Harvesting may be done with same equipment used for rapeseed with the advantage that *B. carinata* shows a good resistance to the dehiscence of mature siliquae. The vegetable oil obtained from *B. carinata* is characterized by the presence of erucic acid, making it unsuitable for human consumption. On the other hand, its physico-chemical properties meet the European

¹ SUSBIOFUEL project ("Studio di fattibilità per la produzione di biocarburanti da semi oleosi di nuove specie e da sottoprodotti o materiali di scarto" - D.M. 27800/7303/09), financially supported by the Ministry of Agricultural, Food and Forestry Policies - Italy.

specifications defined for biodiesel destination by the normative EN 14214:2002. Beyond its oil production capabilities, it was pointed out that the *B. carinata*'s lignocellulosic biomass can also be used to generate power and especially heat (Gasola et al., 2007), revealing an even greater potential.

2.1.2 *Brassica juncea*

Brassica juncea (also known as wild mustard or Indian mustard) varieties are grown for edible leaves or for condiment mustard only in some countries, while its use as an oilseed crop is increasingly growing. Canadian plant breeders have developed *B. juncea* cultivars with canola characteristics (Potts et al., 1999). As a result, canola varieties of *B. napus* and canola-type *B. juncea* have similar compositional characteristics. The key differences between *B. napus* and canola-type *B. juncea* lie in their agronomic characteristics. *Brassica juncea* tolerates high temperatures and drought better than *B. napus*, and thus it is better suited for the warmer, drier climates as the Upper Plains of the U.S. or the Mediterranean area. Green manure of *B. juncea* is a current practice in some countries (e.g. Italy and U.S.) making use of the GSL-Myrosinase system as a natural biofumigant. At the same time, this practice supplies organic matter to soil. To make the most of its biocidal activity against soil-borne pests and diseases, the mulching and incorporation to soil must be done at flowering time (Curto & Lazzeri, 2006).

2.1.3 *Nicotiana tabacum*

The tobacco (*N. tabacum*) is an annual herbaceous plant belonging to the Solanaceae family, widespread in North and South America, commonly grown for the collection of leaves. The seeds are very small (up to 10,000/g) and contain 36 to 39% of oil having a high percentage of linoleic acid (Giannelos et al., 2002). Currently, the common varieties directed to leaf production reach the modest order of 1 to 1.2 t seeds/ha (Patel, 1998, as cited in Usta, 2005) as a result of selection to reduce the amount of seed produced. Recently researchers were able to over express, through genetic engineering, genes responsible for the oil production in the leaves (Andrianov et al., 2010). However, the seeds potential for oil production is much higher. In this sense, another recent outcome on tobacco improvement is a variety that can at least triple seed (up to 5 t/ha) and oil production. The energy tobacco varieties exist both in the non GMO and the GMO version for resistance factors against herbicides and insects (Fogher, 2008). Its high oil yield makes it very competitive in front of mainstream oil crops as rapeseed, sunflower and soybean. The remaining meal revealed to be relevant for combustion or to be used as a protein source for livestock. Tests with pigs demonstrated its palatability to animals, a good conversion rate and therefore its equivalence to the soybean meal (Fogher, 2002). In addition, the presence of consolidate agricultural practices and know-how make clear the advantage of using a well-known species as tobacco as alternative feedstock for biodiesel. The research on Energy Tobacco has also found new economies for the transplant management as well as direct sowing techniques are currently under test. Combine-harvesters for the harvest of the whole inflorescences are available.

2.1.4 *Ricinus communis*

Ricinus communis (castor bean) is an oilseed crop that belongs to the Euphorbiaceae family, which includes other energy crops as cassava (*Manihot esculenta*), rubber tree (*Hevea*

brasiliensis) and physic nut (*Jatropha curcas*). Among non-edible oils, the one extracted from castor bean is the most used for a wide variety of industrial purposes. Its oil is primarily of economic interest having cosmetic, medical and chemical applications. The presence of a high proportion of ricin oleic acid makes it suitable for the production of high-quality lubricants (Sanzone & Sortino, 2010). The use of castor oil is particularly supported in Brazil, with attempts to extract the ethyl esters using ethanol from sugarcane fermentation (although less reactive than methanol), making it a complete natural and renewable product (Pinto et al., 2005). Albeit the actual productivity is not very high, between 600 and 1,000 kg seeds/ha year, this value could triplicate with genetic improvement (Holanda, 2004). With the recent report on the draft genome sequence of castor bean revealing some key genes involved in oil synthesis (Chan et al., 2010), this possibility becomes even more palpable. In addition to this, the ease with which it can be cultivated in unfavorable environments contributes to its appeal as a raw material for sustainable biodiesel. In agreement to this, a two years field experiment conducted in south Italy using local ecotypes yielded around 2.3 t/ha of seeds, with up to 38% oil content, a quite high number for the dry conditions of the region (Sanzone & Sortino, 2010). The main limitation is the hand harvest, the current practice in the biggest producer countries as India, Brazil and China. However mechanization of harvesting is recently available for the collection of dwarf hybrid plants (Clixoo, 2010).

2.1.5 *Cynara cardunculus*

Among the species of interest for the production of biodiesel, the cardoon or artichoke thistle (*C. cardunculus*) is an important resource to be exploited, particularly in light of its adaptability to different soils. *Cynara cardunculus* is a perennial herbaceous species belonging to the family Asteraceae. Its deep root system allows the plant to extract water and nutrients from very deep soil zones revealing a plant with a small demand for fertilization and extremely resistant to drought. This characteristic makes it suitable to be grown on dry marginal or abandoned lands in the Mediterranean basin. Production reaches 30-35 t/ha per year, with about 2 tons of seeds; the seeds contain up to 25 % oil, with a similar composition to sunflower oil (Pasqualino, 2006). Recently, studies have been conducted within the EU project "Biocard - Global Process to Improve *C. cardunculus*". In the framework of this project, a research on the harvesting procedures, i.e. a crucial point of the cultivation of the thistle has also been conducted. As an example, a combine prototype designed to separate and thresh the capitula and to drop the biomass proved to be feasible, with a good cost/working capacity relation (Pari et al., 2008).

2.2 A new proposal for biodiesel production

The rationale of this proposal consists in the use of non-edible crops on soils no longer suitable for food production due to infestation by nematodes. The authors tested the possibility to rescue marginal soil fertility in consequence of the cultivation and the green manure of a naturally biocidal crop (*B. juncea* and *B. carinata*). Thanks to this practice the soil could be quickly good enough to produce oilseeds with satisfying yields for industrial destination. Furthermore a reduction in inputs of fertilizers is also expected due to preservation of organic matter content of soil. This practice offers the possibility to rescue soils availability for food production. Indeed, after some cycles of this rotation, the pest

control and the progressive increase of organic matter should make the soil eligible again for quality productions.

2.2.1 Experimental details

The agronomic rotation was tested under a wide range of situations. Three field trial locations were chosen taking into account Italy's wide latitudinal distribution². Experimental design was thought to produce oilseed from *N. tabacum* and from traditional oilseed crops (sunflower, soybean, and rapeseed), used as comparison to validate the methodology. Each field was divided into two parts and *B.juncea* was sown only in one half of the field. To maximize the biofumigant effect, green manuring with *B.juncea* biomass was carried out when the crop reached flowering. After this, sowing of soybean, sunflower and rapeseed as well as the transplant of tobacco plantlets took place in both parts of the field. In order to make the proposal as flexible as possible, four different fertilization treatments were used: low input (30 kg/ha of chemical fertilizer³), medium input (90 kg/ha of chemical fertilizer), high input (140 kg/ha of chemical fertilizer) or organic input (10000 kg/ha of poultry manure). Untreated plots were set up as control. All field tests were conducted under Good Experimental Practices (GEP).

To evaluate the effect of the green manure of *B.juncea* on nematode infection, countings of *Meloidogyne* spp. were carried out on soil samples taken from both sides of the field while effects on yield of crops grown in succession were monitored recording the fresh weight per hectare (kg/ha) of plant biomass from both sides of the field. Since the green manure of *B.juncea* supplies organic matter to soil, possibly increasing also its sulphur content, it's relevant to ensure that crops grown after this agronomical practice are not enriched in sulphur and therefore less suitable for biodiesel production⁴. To check this, sulphur quantification in sunflower seeds and oil were done. Seed samples were taken from the unfertilized plots of both sides of the field, and sulphur content detected by ICP-MS (Inductively Coupled Plasma Mass Spectrometry).

2.2.2 Results and discussion on agronomical aspects

Research on alternative biofuel aims to face the increasing demand for energy requirements by means of a more sustainable energy supply. From this point of view, greenhouse gases saving is expected from biofuels.

The first year of experimentation makes clear that plants grown in succession of *B. juncea* resulted in higher biomass. This could be due either to the increase in the organic matter content or to the pest control. Indeed, counting of nematodes revealed a strong effect of the green manure of *B.juncea* on nematode control. The average number of larvae found was almost four times lower in the presence of the biofumigant crop. The use of *B. juncea* as green manure does not influence the sulphur content in sunflower seeds and oil, suggesting no sulphur accumulation occurs in succeeding crops.

In order to assess the chemical properties of *B. juncea* oil for biodiesel destination, the authors quantified the total sulphur, nitrogen and phosphorus content in oil from commercial seeds of *B. juncea*. In table 1 data of the quantifications are reported.

² Altedo (BO), Vaccolino (FE) and Santa Margherita di Savoia (FG).

³ Urea (Nitrogen 46%)

⁴ The contents of this element in the final product must be under 10 ppm (UNI EN 14214 - Automotive fuels. Fatty acid methyl esters (FAME) for diesel engines. Requirements and test methods).

Element	Unit	Value	Standard Test Method
sulphur	mg/kg	112	UNI EN 20846:2005
nitrogen	% (mass)	0,35	ASTM D5291-09
phosphorus	mg/kg	< 4	UNI EN 14107:2003

Table 1. Nitrogen, sulphur and phosphor content in *B. juncea* oil.

In table 2 the mean percentage increasing of biomass of *B. napus*, *H. annus*, *G. max*, and *N. tabacum* produced after green manuring of *B. juncea* is summarized.

Crop	Unit	Biomass increasing
<i>N. tabacum</i>	%	21
<i>B. napus</i>	%	15
<i>H. annus</i>	%	26
<i>G. max</i>	%	28

Table 2. Increasing of biomass of oilseed crops produced after green manuring of *B. juncea*.

3. Chemical aspects: Standardization of the raw materials and biodiesel production

3.1 Oil characterization

Oil characterization before proceeding with the standardization of the raw material is a very important issue. Some properties remain in fact unchanged from the starting material to the finished biodiesel, or they are anyway predetermined. It is so important to check that the values of such chemical and physical oil properties are in range with those required by the standard regulations (see Table 3). The experimental procedures to get the values of such properties are also standardized and are indicated in the regulations. The following are parameters for starting oil that can affect the quality of the final biodiesel.

- **Sulfur and phosphorous content:**

High sulphur and phosphorous content in the fuels cause greater engine wear and in particular shorten the life of the catalyst. Biodiesel derived from soybean, rapeseed, sunflower and tobacco oils are known to contain virtually no sulphur (Radich, 2004; Zhiyuan et al., 2008).

The authors have nevertheless found that the oil obtained from *B.juncea* seeds may contain high concentrations of sulphur due to the presence in the plant's tissues of glucosinolates, the molecules responsible for the biofumigation effect.

- **Linoleic acid methyl ester, iodine value and viscosity**

Soybean, sunflower, peanut and rapeseed oils contain a high proportion of linoleic fatty acids, so affecting the properties of the derived ester with a low melting point and cetane number. Quantitative determination of linoleic acid methyl ester is accomplished by gas chromatography with the use of an internal standard after the substrate has been transesterified and allows also the quantification of the other acid methyl esters (Environment Australia, 2003). The super-critical chromatography is another useful analytical technique, suitable for the direct analysis of the oils.

Specification	Units	limits		Method
		Min	Max	
Ester content	% (m/m)	96.5		EN 14103
Density 15°C	kg/m ³	860	900	EN ISO 3675 EN ISO 12185
Viscosity 40°C	mm ² /s	3.50	5.00	EN ISO 3104
Sulphur	mg/kg	-	10.0	preEN ISO 20846 preEN ISO 20884
Carbon residue (10% dist.residue)	% (m/m)	-	0.30	EN ISO 10370
Cetane number		51.0	-	EN ISO 5165
Sulphated ash	% (m/m)	-	0.02	ISO 3987
Water	mg/kg	-	500	EN ISO 12937
Total contamination	mg/kg	-	24	EN 12662
Cu corrosion max		-		EN ISO 2160
Oxidation stability, 110°C	h (hours)	6.0	-	EN 14112
Acid value	mg KOH/g	-	0.5	EN 14104
Iodine value	gr I ₂ /100 gr	-	120	EN 14111
Linoleic acid ME	% (m/m)	-	12.0	EN 14103
Methanol	% (m/m)	-	0.20	EN 14110
Monoglyceride	% (m/m)	-	0.80	EN 14105
Diglyceride	% (m/m)	-	0.20	EN 14105
Triglyceride	% (m/m)	-	0.20	EN 14105
Free glycerol	% (m/m)	-	0.02	EN 14105
Total glycerol	% (m/m)	-	0.25	EN 14105
Gp I metals (Na+K)	mg/kg	-	5.0	EN 14108 EN14109
Gp II metals (Ca+Mg)	mg/kg	-	5.0	EN14538
Phosphorous	mg/kg	-	5.0	EN 14538

Table 3. European Standard specifications for biodiesel (automotive fuels).

An indicative fatty acid methyl esters composition of the raw oils typically used for biodiesel production and of the ones adopted by the authors, is given in Table 4 (Velasco et al., 1998; Tyson, 2002; Winayanuwattikun et al. 2008, Zheng & Hanna, 1996).

Oil	Comon Name	Fatty acid composition, wt%
<i>Arachis hypogea</i>	Peanut	11.9 (16:0), 3.0 (18:0), 40.0 (18:1), 40.7 (18:2), 1.2 (20:0), 3.2 (22:0)
<i>Brassica juncea</i>	Indian mustard	3.6 (16:0), 1.1 (18:0), 13.9 (18:1), 21.5 (18:2), 13.7 (18:3), 8.7 (20:1), 33.5 (22:1)
<i>Brassica napus</i>	Canola	4.7 (16:0), 0.1 (16:1), 1.6 (18:0), 66.0 (18:1), 21.2 (18:2), 5.2 (18:3), 0.9 (20:0), 0.3 (22:0)
<i>Carthamus tinctorius</i>	Safflower	0.1 (14:0), 6.4 (16:0), 2.2 (18:0), 14.1 (18:1), 76.6 (18:2), 0.2 (18:3), 0.2 (20:0) 0.2 (22:0)
<i>Elaeis guineensis</i>	Palm	0.5 (12:0), 1.0 (14:0), 38.7 (16:0), 3.3 (18:0), 45.5 (18:1), 10.8 (18:2), 0.1 (18:3), 0.1 (20:0)
<i>Glycine max</i>	Soybean	10.7 (16:0), 3.0 (18:0), 24.0 (18:1), 56.6 (18:2), 5.3 (18:3), 0.2 (20:0), 0.2 (22:0)
<i>Helianthus annuus</i>	Sunflower	6.6 (16:0), 3.1 (18:0), 22.4 (18:1), 66.2 (18:2), 1.0 (18:3), 0.3 (20:0), 0.4 (22:0)
<i>Jatropha curcas</i>	Physic nut	0.1 (12:0), 0.2 (14:0), 14.8 (16:0), 0.8 (16:1), 4.2 (18:0), 41.0 (18:1), 38.6 (18:2), 0.3 (18:3)
<i>Nicotiana tabacum</i>	Tobacco	6.6 (16:0), 3.1 (18:0), 22.4 (18:1), 66.2 (18:2), 1.0 (18:3), 0.3 (20:0), 0.4 (22:0)
Lard	-	4.8 (14:0), 28.4 (16:0), 4.7 (16:1) 14.8 (18:0), 44.6 (18:1), 2.7 (18:2)
Yellow grease	-	1.0 (14:0), 23.0 (16:0), 1.0 (16:1) 10.0 (18:0), 50.0 (18:1), 15.0 (18:2)
Brown grease	-	1.7 (14:0), 23.0 (16:0), 3.1 (16:1) 12.5 (18:0), 42.5 (18:1), 12.2 (18:2), 0.8 (18:3)

Table 4. Indicative acidic composition of some raw materials for biodiesel production.

- **Iodine value, viscosity and density**

The iodine value (IV) is an index of the number of double bonds in biodiesel, and therefore is a parameter that quantifies the degree of unsaturation of biodiesel. Both EN and ASTM standard methods measure the IV by addition of an iodine/chlorine reagent. Biodiesel viscosity is directly correlated to the IV of biodiesel for biodiesel with iodine numbers of between 107 and 150 (Environment Australia, 2003).

One of the main reasons for processing vegetable oils for use in engines is to reduce the viscosity thereby improving fuel flow characteristics. High viscosities can cause injector spray pattern problems that lead to excessive coking and oil dilution. These problems are associated with reduced engine life. Nevertheless, the necessary characteristics depend also on the end use; the engines for the production of energetic power in fact allow the use of fuels with higher viscosity (i.e. from palm oil).

Density dictates the energy content of fuel where high densities indicate more thermal energy for the same amount of fuel and therefore better fuel economy.

The authors have already published the results of the measurement of the IV obtained for some oils selected as potential raw materials for BD production (Pirola et al., 2011). In Table 5 the values of IV, viscosity and density found by the authors for waste cooking oil and its mixture with raw rapeseed oil are shown, demonstrating that the properties of the feedstock can be improved by the use of blends of different oils. The values reported in the Table 5

evidences that with the dilution with rapeseed oil it is possible to decrease the viscosity of WCO but increasing the number of IV. Nevertheless also in the case of most diluted sample the IV value is lower than those of rapeseed oil.

Oil	Iodine value (gI ₂ /100g oil)	Viscosity (mm ² /s 40 °C)	Density (kg/m ³ 15° C)
WCO	54	82.2	918
WCO:rapeseed oil 1:1	85	52.8	914
WCO:rapeseed oil 3:1	100	40.5	926
Rapeseed	115	n.d.	n.d.

Table 5. IV, viscosities and densities of some potential raw materials for biodiesel production.

It has to be taken into account that after the transesterification process the IV of the feedstock remain unchanged, the viscosity is reduced from 10 to 15 times, whereas density has been found to remain almost the same or to be reduced in some cases (Zheng & Hanna, 1996).

3.2 Oil standardization: Free fatty acids esterification reaction

As already mentioned in the introduction paragraph, the use of raw, non edible oils poses the problem of standardization before the transesterification process, especially with regard to acidity decrease. In fact oils, besides triglycerides contain also free fatty acids (FFA). These lasts are able to react with the alkaline catalyst used for the transesterification reaction yielding soaps which prevent the contact between the reagents. A FFA content lower than 0.5% wt is also required by the EN 14214.

Among the different deacidification methods listed in the introduction, the authors have recently paid attention to the pre-esterification process (Loreto et al., 2005; Pirola et al., 2010; Bianchi et al., 2010). This method is particularly convenient as it is not only able to lower the acidity content of the oils but also provides methyl esters already at this stage, so increasing the final yield in biodiesel. A scheme of the FFA esterification reaction is given in Fig.2.




Fig. 2. Scheme of the Free Fatty Acid Esterification Reaction.

The use of heterogeneous catalysts (Sharma & Singh, 2011) is usually preferred to the use of homogeneous ones (Alsalmé et al., 2008) as it prevents neutralization and separation costs, besides being not corrosive, so avoiding the use of expensive construction materials. Another important advantage is that the recovered catalysts can be potentially used for a long time and/or multiple reaction cycles.

In the recent years the authors have deepened the study of the pre-esterification process investigating the effect of the use of different kinds of oils, different types of reactors and catalysts and different operating conditions (Pirola et al., 2010; Bianchi et al., 2010; Pirola et al. 2011)

In the following paragraphs, the most relevant aspects of the experimental work and the results obtained by the authors for what concerns the pre-esterification process are reported.

3.2.1 Experimental details

A remarkable aspect of the proposed process is represented by the mild operative conditions, i.e. low temperature (between 303 and 338 K) and atmospheric pressure. Moreover, the adopted working temperature is the same of the following transesterification reaction and of the methanol recovery by distillation. Each single reaction has been carried out for six hours withdrawing samples from the reactor at pre-established times and analysing them through titration with KOH 0.1 M. The percentage of FFA content per weight was calculated as otherwise reported (Marchetti & Errazu, 2007, Pirola et al. 2010). All the esterification experiments have been conducted using a slurry reactor as the one already described elsewhere (Bianchi et al., 2010). A slurry reactor is the simplest type of catalytic reactor, in which the catalyst is suspended in the mass of the reagents thanks to the agitation.

Much attention has been paid by the authors to the use of acid ion exchange resins. Amberlyst®46 (named A46 in this chapter), i.e. a commercial product by Dow Advanced Materials, and D5081, a catalyst at the laboratory development stage by Purolite® have been successfully applied in this reaction. The main features of the employed catalysts are reported in Tab. 6.

Resin	Matrix	Functional Group	Ionic form	Acid capacity (meq H ⁺ /g)	Max. operating Temp (°C)
D5081	Styrene-divinylbenzene	R-SO ₃ ⁻	H ⁺	1,0	130
A46	Styrene-divinylbenzene	R-SO ₃ ⁻	H ⁺	0,60	120

Table 6. Main features of the ion exchange resins adopted as catalysts in the FFA esterification reaction.

The acid capacity of the catalysts, corresponding to the number of the active sites per gram of catalyst was also experimentally determined by the authors by ion exchange with a NaCl-saturated solution and successive titration with NaOH (López et al., 2007). The values were found to be in agreement with the ones provided by technical sheets.

A distinguishing feature of A46 and D5081 is represented by the location of the active acid sites: these catalysts are in fact sulphonated only on their surface and not inside the pores. Consequently, A46 and D5081 are characterized by a smaller number of acid sites per gram if compared to other Amberlysts®, which are also internally sulphonated (Bianchi et al., 2010).

3.2.2 Deacidification results

In Fig. 3 the results from the esterification reaction performed on different raw oils are shown.

From the graph it can be noticed that in almost all the cases it is possible to obtain a FFA concentration lower than 0.5% wt after 6 hours of reaction. The differences in the acidic composition seem not to affect the final yield of the reaction. What seems to influence the FFA conversion is the refinement degree of the oil. Waste cooking oil (WCO) is in fact more hardly processable with the esterification in comparison to refined oils, probably due to its higher viscosity which results in limitations to the mass transfer of the reagents towards catalysts. Indeed, the required acidity limit is not achieved within 6 hours of reaction. Adding rapeseed oil, less viscous, to the WCO in different ratios it is possible to increase the

final FFA conversion and reaching a FFA content lower than 0.5% wt. The blend of a raw oil characterized by high viscosity with a less viscous one is also effective in shortening the time to reach the plateau of conversion, as displayed in Fig. 4.

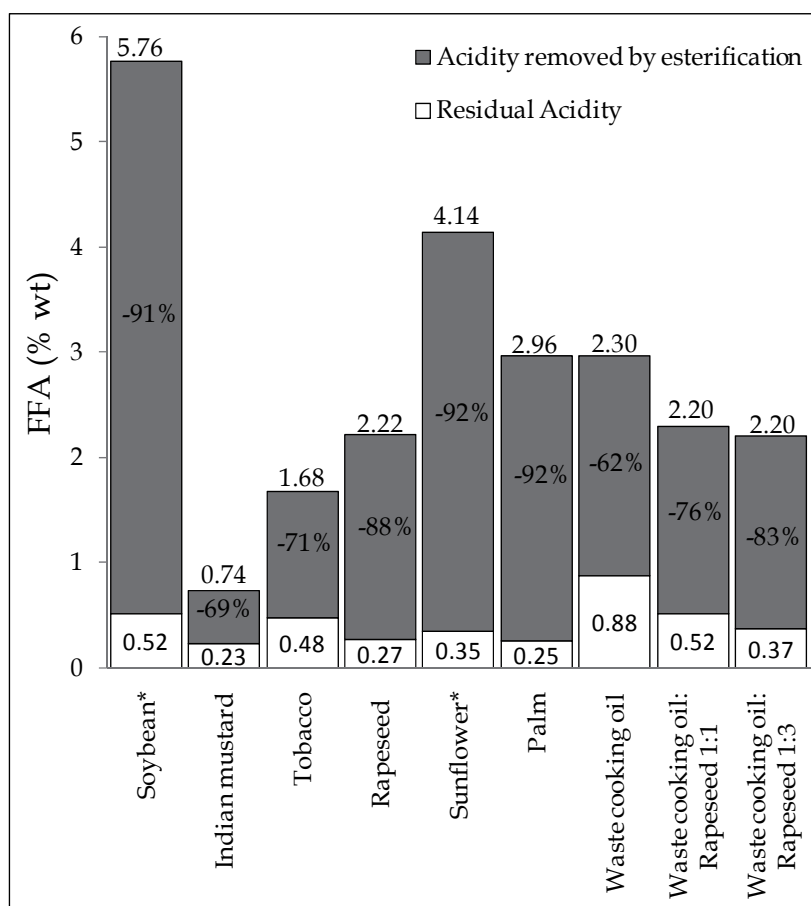


Fig. 3. Acidity removed by esterification (6 hr) and residual acidity of different oils used as raw material: slurry reactor, $T=338\text{K}$, catalyst: Amberlyst® 46 weight ratio methanol/oil= 16:100, weight ratio catalyst/oil=1:10; *commercial, refined oils with the addition of pure oleic acid.

In Fig. 4 the conversion curves concerning the recycles of the use of the catalyst A46 in the case of WCO are also shown. The catalyst does not show a drastic drop in its activity notwithstanding the used substrate is not refined. This decrease in the catalytic performance might be ascribable to the catalyst's settling in the reaction environment (Pirola et al., 2011) or to the presence of cations inside the oil. This aspect is still under investigation.

It is convenient to use an excess of methanol respect the stoichiometric amount in order to shift the equilibrium towards the product. Nevertheless, when adding methanol a double phase system is formed (the maximum solubility of methanol in oil is in the interval 6- 8%) and therefore it is not convenient to increase further this parameter.

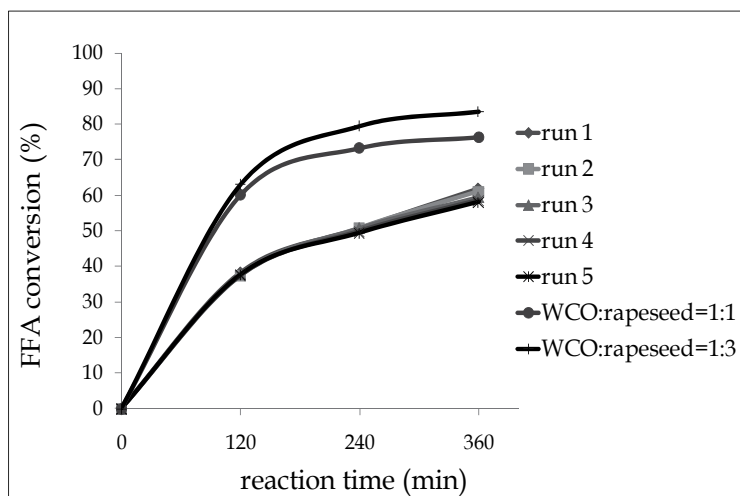


Fig. 4. FFA conversion (%) vs reaction time of waste cooking oil (WCO) and its blends with rapeseed oils: slurry reactor, $T=338\text{K}$, catalyst: Amberlyst® 46 weight ratio methanol /oil= 16:100, weight ratio catalyst/oil=1:10.

The lifetime of the catalyst is a very important issue from an industrial standpoint. The authors have already performed a deep study on the ion exchange resins endurance in the FFA esterification reaction (Pirola et al., 2010). The most important outcome of this study is that resins like A46 (Dow Advanced Materials) and D5081 (Purolite), which are functionalized only on their surface are very stable in the reaction conditions and can guarantee long operating times without being replaced.

A comparison between these two resins is displayed in Fig. 5.

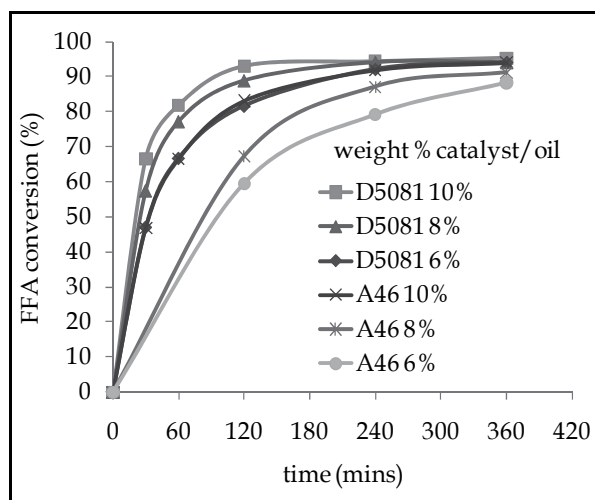


Fig. 5. FFA conversion (%) vs reaction time for different amounts of catalysts A46 and D5081, rapeseed oil with initial acidity=5%, slurry reactor, weight ratio methanol/oil= 16:100, $T=338\text{K}$. Dots are experimentally obtained. Continue lines are simulated (see paragraph 3.2.3)

As can be seen from the graph, catalyst D5081 shows better results than A46 at lower catalyst's loading. This can be easily explained by the higher number of acid sites located on its surface. In particular, the use of a ratio of 10 %wt of catalyst D5081 vs. oil allows reaching the maximum conversion in 2 hours. From the graph can be seen how the curves for 6% of D5081 and 10% wt catalyst/oil of A46 perfectly overlap. This outcome suggested that a fixed amount of acid active sites per gram of FFA was required to reach the maximum of conversion in 4 hours. Based on the experimental data obtained, this amount was found to be equal to 1.2 meq of H⁺.

3.2.3 Simulation of the catalytic results

The considered reaction system turns out to be an highly non-ideal system, being formed by a mixture of oil, methylester, methanol, FFA and water. Indeed, activity coefficients instead of concentrations are used not only for the phase and chemical equilibria calculations, but also for the kinetic expressions. Modified UNIFAC model was used adopting the parameters available in literature and published by Gmehling et al., 2002 (Pirola et al., 2011).

A pseudohomogeneous model was used for describing the kinetic behavior of the reaction (Pöpken et al., 2000). The adopted model is displayed in the following equation:

$$r = \frac{1}{m_{\text{cat}}} \frac{1}{v_i} \frac{dn_i}{dt} = k_1 a_{\text{FFA}} a_{\text{methanol}} - k_{-1} a_{\text{methylester}} a_{\text{water}}$$

where:

r= reaction rate

m_{cat}= dry mass of catalyst, gr

v_i= stoichiometric coefficients of component i

n_i= moles of component i

t = reaction time

k₁= kinetic constant of direct reaction

k₋₁= kinetic constant of indirect reaction

a_i= activity of component i

The temperature dependence of the rate constant is expressed by the Arrhenius law:

$$k_i = k_i^0 \exp\left(\frac{-E_{A,i}}{RT}\right)$$

where k_i⁰ and E_{A,i} are the pre-exponential factor and the activation energy of the reaction i, respectively (i=1 for the direct reaction, i=-1 for the indirect reaction), T is the absolute temperature and R the Universal Gas Constant. The adopted parameters set is the same reported by Steinigeweg (Steinigeweg & Gmehling, 2003).

All the simulations were carried using Batch Reactor of PRO II by Simsci - Esscor. The model turned out to be able to reproduce qualitatively the behavior of different systems, characterized by different catalyst type and content.

In the previous Figure 5, continue lines represent simulated behaviors using the same parameters, but considering a different catalyst mass due to different catalyst acidity and concentration.

3.3 Oil transformation: The transesterification reaction

The transesterification reaction has been performed by the authors on the rapeseed and *B.juncea* (Indian mustard) oilseeds deacidified with the esterification process described in the previous paragraph.

Sodium Methoxide (MeONa) was employed as catalyst. MeONa is known to be the most active catalyst for triglycerides transesterification reaction, but it requires the total absence of water (Schuchardt, 1996). For this reason, the unreacted methanol and the reaction water were evaporated from the deacidified oils before processing them with the transesterification reaction.

The employed experimental setup was the same employed for the slurry esterification.

Being the transesterification an equilibrium reaction, it was performed in two steps, removing the formed glycerine after the first step. The adopted conditions were the following:

- 1st step: weight ratio methanol/oil=20:100, weight ratio MeONa/oil=1:100, 233 K, 1,5 h;
- 2nd step: weight ratio methanol/oil=5:100, weight ratio MeONa/oil=0.5:100, 233 K, 1 h.

The total ester content is a measure of the completeness of the transesterification reaction. Many are the factors affecting ester yield in the transesterification reaction: molar ratios of glycerides to alcohol, type of catalyst(s) used, reaction conditions, water content, FFA concentration, etc.

The European prEN14214 biodiesel standard sets a minimum limit for ester content of >96.5% mass, whereas the US ASTM D 6751 biodiesel standard does not set a specification for ester content.

Mono- and di-glycerides as well as tri-glycerides can remain in the final product in small quantities. Most are generally reacted or concentrated in the glycerine phase and separated from the ester.

Both in the case of rapeseed oil and *B.juncea* oilseed, the final yield in methylester was higher than 98%.

The analyses of methyl esters and unreacted mono-, di- and triglycerides are accomplished through gas chromatography.

The detailed requirements for biodiesel according to both EN 14214 and US ASTM D 6751 are listed in paragraph 1.

In the US a standard for biodiesel (ASTM D 6751 – Standard Specification for Biodiesel Fuel (B100) does not include the same number of parameters as prEN 14214 but the parameters that coincide have similar limits. The US specification covers sulfur biodiesel (B100) content much higher if compared to the one of European Standard. For use as a blend component with diesel fuel oils defined by ASTM D 975 Grades 1-D, 2-D, and low sulfur 1-D and 2-D. (Environment Australia, 2003).

4. Conclusion

The use of the oilseed deriving from alternative crops or waste oils as a feedstock for biodiesel production represents a very convenient way in order to lower the production costs of this biofuel.

From the agronomic point of view the authors verified that the green manure of *B.juncea* resulted in nematode infestation drastically decreased and improved soil quality, reflected in higher yield of crops in agronomic succession. In the first year of experimentation *B. juncea* was preferred to *B.carinata* because of its suitability to spring planting (starting period

of the project SUSBIOFUEL). Further work will be necessary to improve the setting up of the agronomic proposal. Winter sowing of *B.carinata* will be done in the next years and alternative promising patented variety of tobacco (selected for seed production)⁵ are currently under test. The authors are also evaluating the proposed rotation in comparison with commercial pellets⁶ of defatted Brassicaceae meal. In addition, more outcomes are attended: yield grains⁷, evaluation of the weed control potential of *B. juncea* and survival rate of transplanted *N.tabacum* plantlets following the green manuring or not.

The flexibility of Brassicaceae (efficient green manure and/or oil crop) allows using these species with a dual aim according to the situation, thus increasing the sustainability of the system. On the other hand new tobacco varieties promise yields above the best rape harvests around Europe. Under this light tobacco is a really interesting alternative oil crop especially in countries like Italy where it has been cultivated since a long time and Good Agricultural Practices (GAP) for this crop have long been known: all points in favour to the conversion of tobacco cultivation toward oil seeds production. To give a more comprehensive evaluation of innovations introduced in the whole biodiesel production chain, the authors aim to develop a method able to assess biodiesel sustainability.

The authors are aware that their proposal alone does not solve the overall sustainability problem of biodiesel production, but it contributes significantly to a wider portfolio of land-use strategy, stimulating the call for innovations both in technology and emissions reduction measures. Food production from marginal soils would worsen soil depletion and nematodes infestation. The restoring of soil fertility avoiding the chemicals usage, and in the mean time the generation of income from vegetable oils, assure the ethical, economical and environmental sustainability of the solution. Policy strategies will be needed to increasingly shift abandoned or low biodiversity value marginal lands to this kind of ecologically-friendly practices.

From the chemical point of view, the high concentration of FFA contained in these raw materials (waste or alternative crops) leading to the formation of soaps during the final transesterification step can be easily overcome by performing a pre-esterification reaction. This treatment allows lowering the acid content of the raw material below the limit required by the biodiesel standard, so avoiding also the formation of soaps during the transesterification stage. The FFA esterification is also helpful in increasing the final yield in biodiesel as it produces methyl esters.

Oilseeds of *Brassica juncea*, *Nicotiana tabacum*, rapeseed, palm, soybean and sunflower have been successfully deacidified with esterification reaction. Waste cooking oil (WCO) itself does not represent a good potential raw material for biodiesel production due to its properties which hardly match the required standards. Nevertheless it is possible to exploit this kind of feedstock by its use in blends with other oils characterized by a lower viscosity. The authors have successfully deacidified blend of WCO and rapessed oil, also obtaining an increase of the reaction rate.

Two acid ion exchange resins have been selected as catalysts: Amberlyst®46 (Dow Advanced Materials) and Purolite® D5081 (Purolite). Both these resins gave satisfactory results in the studied reaction. D5081 resulted to me more active than A46, being able to give the maximum of conversion in shorter times than A46, other conditions being equal.

⁵ Kindly supplied by Sunchem Holding S.r.l.

⁶ Biofence by Triumph Italia S.p.a.

⁷ This kind of data is necessary to express results in terms of functional unit as required by a life cycle thinking approach.

A process simulation of the FFA esterification, able to predict the reaction progress through a thermodynamic and kinetic analysis was successfully performed using the software PRO II (SimSci). A pseudohomogeneous model was used for describing the kinetic behaviour of the reaction, using a modified UNIFAC model for the calculation of the activity coefficients (used not only for the phase and chemical equilibria calculations, but also for the kinetic expressions). The data obtained from the use of this model showed to be in a very good correlation with the experimental results

5. Acknowledgment

The authors gratefully acknowledge the financial support by Italian Ministero delle Politiche Agricole, Alimentari e Forestali (project SUSBIOFUEL – D.M. 27800/7303/09).

6. References

- Al-Khatib, K., Libbey, C. & Boydston, R. (1997). Weed Suppression with Brassica Green Manure Crops in Green Pea. *Weed Science*, Vol. 45, No. 3, pp. 439-445, ISSN 1939-7291.
- Alsalmeh, A., Kozhevnikova, E.F. & Kozhevnikov, I. (2008) Heteropoly acids as catalysts for liquid-phase esterification and transesterification. *Applied Catalysis A*, Vol. 349, pp.170-176.
- Andrianov, V., Borisjuk, N., Pogrebnyak, N., Brinker, A., Dixon, J., Spitsin, S., Flynn, J., Matyszczyk, P., Andryszak, K., Laurelli, M., Golovkin, M. & Koprowski, H. (2010). Tobacco as a Production Platform for Biofuel: Overexpression of *Arabidopsis* DGAT and *LEC2* genes Increases Accumulation and Shifts the Composition of Lipids in Green Biomass. *Plant Biotechnology Journal*, Vol. 8, (April 2010), pp. 277-287, ISSN 1467-7644.
- Bender, M. (1999). Economic Feasibility Review for Community-Scale Farmer Cooperatives for Biodiesel. *Bioresource Technology*, Vol. 70, (October 1999), pp. 81-87, ISSN 0960-8524.
- Bianchi, C.L., Boffito, D.C., Pirola, C. & Ragaini, V. (2010) Low temperature de-acidification process of animal fat as a pre-step to biodiesel production. *Catalysis Letters*, Vol. 134, (November, 2009), pp. 179-183.
- Canakci, M. & Sanli, H. (2008) Biodiesel production from various feedstocks and their effects on the fuel properties. *Journal of Industrial Microbiology Biotechnology*, Vol. 35, pp. 431-441.
- Carlsson, A. S. (2009). Plant Oils as Feedstock Alternatives to Petroleum - A Short Survey of Potential Oil Crop Platforms. *Biochimie*, Vol. 91, (June 2009), pp. 665-670, ISSN 0300-9084.
- Carvoli, G., Ragaini, V. & Soave, C. (2008) Il futuro è dietro l'angolo. *La Chimica e l'Industria*, Vol. 1, pp. 38-41.
- Chan, A. P., Crabtree, J., Zhao, Q., Lorenzi, H., Orvis, J., Puiu, D., Melake-Berhan, A., Jones, K. M., Redman, J., Chen, G., Cahoon, E. B., Gedil, M., Stanke, M., Haas, B. J., Wortman, J. R., Fraser-Liggett, C. M., Ravel, J. & Rabinowicz, P. D. (2010). Draft Genome Sequence of the Oilseed Species. *Ricinus communis*. *Nature Biotechnology*, Vol. 28, (August 2010), pp. 951-956, ISSN 1087-0156.

- Clixoo (2010). Preview of Comprehensive Castor Oil Report, In: *Castor Oil Industry Reference & Resources*, 30.05.2011, Available from <http://www.castoroil.in>
- Curto, G. & Lazzeri, L. (2006). Brassicacee, un Baluardo Sotterraneo Contro i Nematodi. *Agricoltura*, Vol. 34, No. 5, (May 2006), pp.110-112.
- Environment Australia (2003). National Standards for Biodiesel – Discussion Paper, In *Setting National Fuels Quality Standards*, 0 642 54908 7 pp. 1-196, Retrieved from www.ea.gov.au/atmosphere/transport/biodiesel/index.html .
- Fogher, C. (2008). Sviluppo di un Ideotipo di Tabacco per la Produzione di Seme da Usare a Fini Energetici. Presented at the workshop “*La Filiera del Tabacco in Campania: Ristrutturazione e/o Riconversione. La ricerca come motore per l’innovazione tecnologica, la sostenibilità e la competitività della filiera*”, Portici, Italy, February, 2008
- Gasol, C. M., Gabarrella, X., Antonc, A., Rigolad, M., Carrascoe, J., Ciriae, P., Solano, M. L. & Rieradeva, J. (2007). Life Cycle Assessment of a *Brassica carinata* Bioenergy Cropping System in Southern Europe. *Biomass and Bioenergy*, Vol. 31, No. 8, (August 2007), pp. 543–555, ISSN 0961-9534.
- Giannelos, P. N., Zannikos, F., Stournas, S., Lois, E. & Anastopoulos, G. (2002). Tobacco Seed Oil as an Alternative Diesel Fuel: Physical And Chemical Properties. *Industrial Crops and Products*, Vol.16, (July 2002), pp. 1–9, ISSN 0926-6690.
- Holanda, A. (2004). *Biodiesel e Inclusão Social*, Câmara dos Deputados, Coordenação de Publicações, Brasília, Brazil, Retrieved from <http://www2.camara.gov.br/acamara/altosestudos/pdf/biodiesel-e-inclusao-social/biodiesel-e-inclusao-social>
- IENICA (2004). Agronomy Guide, Generic guidelines on the agronomy of selected industrial crops. *IENICA - Interactive European Network for Industrial Crops and their Applications*, Retrieved from <http://www.ienica.net/agronomyguide/agronomyguide05.pdf>
- Krawczyk, T. (1996). Biodiesel - Alternative Fuel Makes Inroads but Hurdles Remain. *INFORM*, Vol. 7, No. 8, (August 1996), pp. 801-829.
- Krishnan, G., Holshausen, D. L. & Nissen, S. J. (1998). Weed Control in Soybean (*Glycine max*) with Green Manure Crops. *Weed Technology*, Vol. 12, No. 1, (Jan.-Mar. 1998), pp. 97-102.
- López, D.E., Suwannakarn, K., Bruce, D.A., & Goodwin, J.G. (2007) Esterification and transesterification on tungstated zirconia: Effect of calcination temperature. *Journal of Catalysis*, Vol. 247, pp. 43-50.
- Lotero, E., Liu, Y., Lopez, D.E., Suwannakara, K. Bruce, D.A. & Goodwin J.G. (2005). Synthesis of Biodiesel Via Acid Catalysis. *Industrial & Engineering Chemistry Research*, Vol. 44 (14), (January 2005) pp. 5353-5363.
- Palmer, C.E., Warwick, S. & Keller, W. (2001). Brassicaceae (Cruciferae) Family, Plant Biotechnology, and Phytoremediation. *International Journal of Phytoremediation*, Vol. 3, No. 3, pp. 245–287, ISSN: 1549-7879.
- Pan, X. (2009). A Two Year Agronomic Evaluation of *Camelina sativa* and *Brassica carinata* in NS, PEI and SK (Master's thesis). Dalhousie University, Halifax, Canada, Retrieved from Digital Repository Unimib database of Dalhousie University at <http://dalspace.library.dal.ca/handle/10222/12370>
- Pari, L., Fedrizzi, M. & Gallucci, F. (2008). *Cynara cardunculus* Exploitation for Energy Applications: Development of a Combine Head for Threshing and Concurrent

- Residues Collecting and Utilization. *Proceedings of 16th European Biomass Conference & Exhibition*, ISBN 978-88-89407-58-1, Valencia, Spain, 2-6 June 2008
- Parodi, A., Marini, L. (2008) Process for the production of biodiesel. Patent WO 2008/007231.
- Pasqualino, J.C. (2006). *Cynara cardunculus as an Alternative Crop for Biodiesel Production* (Ph.D. Thesis). Universitat Rovira I Virgili, Tarragona, Spain, Retrieved from <http://tdx.cat/bitstream/handle/10803/8545/PhDThesisJPasqualino.pdf?sequence=1>
- Pinto A. C., Guarierio L. L. N., Rezende M. J. C., Ribeiro N. M., Torres E. A., Lopes W. A., Pereira, P. A. de P. & de Andrade J. B. (2005). Biodiesel: an Overview. *Journal of the Brazilian Chemical Society*, Vol. 16, No.6b, pp. 1313-1330, ISSN 0103-5053
- Pirola, C., Bianchi, C.L., Boffito, D.C., Carvoli, G. & Ragaini, V. (2010) Vegetable oil deacidification by Amberlyst : study of catalyst lifetime and a suitable reactor configuration. *Industrial & Engineering Chemistry Research*, Vol. 49 (2010), pp. 4601-4606.
- Pirola, C. Boffito, D.C. Carvoli, G., Di Fronzo, A. Ragaini, V. & Bianchi, C.L. (2011) Soybean oil de-acidification as a first step towards biodiesel production. In *Soybean/Book 2*, ISBN 978-953-307-533-4
- Pöpken, T. Götze, L. Gmehling, J. (2000). *Reaction Kinetics and Chemical Equilibrium of Homogeneously and Heterogeneously Catalyzed Acetic Acid Esterification with Methanol and Methyl Acetate Hydrolysis*. *Industrial Engineering Chemistry Research*, Vol. 39, pp. 2601-2611.
- Potts, D. A., Rakow, G. W. & Males, D. R. (1999). Canola-Quality *Brassica juncea*, a New Oilseed Crop for the Canadian Prairies. *Proceedings of the 10th International Rapeseed Congress*, Canberra, Australia, September 1999
- Radich, A. (1998). Biodiesel Performance, Costs, and Use. Energy Information Administration Available from:
<http://www.eia.doe.gov/oiaf/analysispaper/biodiesel/pdf/biodiesel.pdf>
- Rao, K.V., Krishnasamy, S., Penumarthy, V. (2009) WO 2009047793
- Razon, L. F. (2009). Alternative Crops for Biodiesel Feedstock. *CAB Reviews: Perspectives in Agriculture, Veterinary Science, Nutrition and Natural Resources*, Vol. 4, No. 56, (October 2009), pp. 1-15, ISSN 1749-8848
- Romero, E., Barrau, C. & Romero, F. (2009). Plant Metabolites Derived from *Brassica* spp. Tissues as Biofumigant to Control Soil Borne Fungi Pathogens. *Proceedings of the 7th International Symposium on Chemical and non- Chemical Soil and Substrate Disinfestation*, ISBN 9789066056237, Leuven, Belgium, September 2009.
- Sanzone, E. & Sortino, O. (2010). Ricino, Buone Prospettive Negli Ambienti Caldo-Aridi. *Terra e Vita*, No. 7, pp. 28-29, ISSN 0040-3776.
- Sharma, Y.S. & Singh, B. (2011). Advancements in solid acid catalysts for ecofriendly and economically viable synthesis of biodiesel. *Biofuels, Bioproducts & Biorefining*, Vol. 5, pp. 69-92.
- Steinigeweg, S. & Gmehling, J. (2003). Esterification of a Fatty Acid by Reactive Distillation. *Industrial Engineering Chemistry Research*, Vol. 42, pp. 3612-3619
- Suwannakarn, K., Loreto, E., Goodwin J.G.Jr. & Lu, C. (2008). Stability of sulfated zirconia and the nature of the catalytically active species in the transesterification of tryglicerides. *Journal of Catalysis*, Vol 255, pp. 279-286.

- T. Ono, K. Yoshiharu, US Patent 4,164, 506, 1979.
- The Royal Society (2008). Sustainable Biofuels: Prospects and Challenges. *The Clyvedon Press Ltd*, ISBN 978 0 85403 662 2, Retrieved from <http://royalsociety.org/Sustainable-biofuels-prospects-and-challenges/>
- Tyson, K.S. (2002) Brown grease feedstocks for biodiesel, In : *National Renewable Energy Laboratory*, January 3, 2008 available from <http://www.nrbp.org/pdfs/pub32.pdf>.
- Usta, N. (2005). Use of Tobacco Seed Oil Methyl Ester in Turbocharged Indirect Injection Diesel Engine. *Biomass & Bioenergy*, Vol. 28, (January 2005), pp. 77-86, ISSN 0961-9534.
- Velasco, L., Goffman, F.D. & Becker H.C. (1998). Variability for the fatty acid composition of the seed oil in a germplasm collection of the genus Brassica. *Genteic Resources and Crop Evolution*, Vol. 45, pp. 371-382.
- Winayanuwattikun, P., Kaewpiboon, C., Piriyananon, K., Tantong, S., Thakernkarnkit, W., Chulalaksananukul, W. & Yongvanich, T. (2008). Potential plant oil feedstock for lipase-catalyzed biodiesel production in Thailand. *Biomass and Bioenergy*, Vol. 32, pp. 1279-1286, ISSN 0961-9534.
- Xingzhong, Y., Jia, L., Guanming, Z., Jingang, S., Jingyi, T. & Guohe, H. (2009). Optimization of conversion of waste rapeseed oil with high FFA to biodiesel using response surface methodology. *Renewable Energy*, Vol. 33, pp. 1678-1684.
- Zhang, Y., Dube, M.A., McLean, D.D. & Kates, M. (2003). Biodiesel production from waste cooking oil: 1. Process design and technological assessment. *Bioresource Technology*, Vol. 90, pp. 229-240.
- Zheng, D. & Hanna, M.A. (1996) Preparation and properties of methyl esters of beef tallow. *Bioresource Technology*, Vol. 57, pp. 137-142, ISSN 0960-8524.
- Zhiyuan, H., Piqiang, T., Xiaoyu & Y. Diming, L. (2008). Life cycle energy, environment and economic assessment of soybean-based biodiesel as an alternative automotive fuel in China. *Energy*, Vol. 33, pp. 1654-1658, ISSN 0360-5442.

Biodiesel Production from Waste Cooking Oil

Carlos A. Guerrero F., Andrés Guerrero-Romero and Fabio E. Sierra
*National University of Colombia,
Colombia*

1. Introduction

Biodiesel refers to all kinds of alternative fuels derived from vegetable oils or animal fats. The prefix bio refers to renewable and biological nature, in contrast to the traditional diesel derived from petroleum; while the diesel fuel refers to its use on diesel engines. Biodiesel is produced from the triglycerides conversion in the oils such as those obtained from palm oil, soybean, rapeseed, sunflower and castor oil, in methyl or ethyl esters by transesterification way. In this process the three chains of fatty acids of each triglyceride molecule reacts with an alcohol in the presence of a catalyst to obtain ethyl or methyl esters.

The ASTM (American Society for Testing and Materials Standard) describes the biodiesel as esters monoalkyl of fatty acids of long chain that are produced from vegetable oil, animal fat or waste cooking oils in a chemical reaction known as transesterification.

Biodiesel has the same properties of diesel used as fuel for cars, trucks, etc. This may be mixed in any proportion with the diesel from the oil refined. It is not necessary to make any modifications to the engines in order to use this fuel.

"The use of pure biodiesel can be designated as B100 or blended with fuel diesel, designated as BXX, where XX represents the percentage of biodiesel in the blend. The most common ratio is B20 which represents a 20% biodiesel and 80% diesel" (Arbeláez & Rivera, 2007 pp 4). Colombia in South America, is taking advantage of the opportunities that biofuels will open to the agriculture. With more than a million liters a day, Colombia is the second largest producer of ethanol in Latin America, after Brazil. This has decongested the domestic market of sugar at more than 500 thousand tons. The result is strong revenue for the 300,000 people who derive their livelihood from the production of panela (from sugar cane).

In Colombia the biodiesel is produced from the palm oil and methanol, "being the last imported to meet the demand in the biodiesel production". In the past two years, the biodiesel production from Palm was between 300000 liters/day to 965000 liters per day, distributed in four plants located in the Atlantic coast and in the country center.

In the biodiesel production is technically possible to use methanol and ethanol alcohol (Cujia & Bula, 2010. pp 106).

The palm oil is one of oilseeds trade more productive on the planet; it is removed between six and ten times more oil than the other as soy, rapeseed and sunflower. Colombia has more than 300,000 hectares planted in Palm oil, generating permanent and stable employment for more than 90,000 people.

The biodiesel advantages are that it is a renewable and biodegradable biofuel; it produces less harmful emissions to the environment than those that produce fossil fuels. Specifically the Palm biodiesel pure or mixed with diesel fuel reduces the emissions of CO₂, nitrogen oxides (NO_x) and particulate material. Table 1, shows the world production of vegetable oils.

OILS	MILLION TONS
Palm oil (fruit)	43.20
Soy oil	38.11
Rapeseed oil	19.38
Sunflower oil	11.45
Cotton oil	4.94
Palm oil (seed)	5.10
Peanut oil	4.93
Coconut oil	3.62
Olive oil	2.97

Table 1. World production of vegetable oils, 2008/2009. (Source: "Oilseeds: World markets and trade". FAS-USDA, October 2008)

The estimated consumption of diesel in the world at the end of the year 2005 was 960 billion liters. On the other hand, the production of biodiesel during the same year was 4.2 billion liters (Figure 1). For example, assuming that 2% of diesel was replaced with biodiesel, it would mean an increase of 15 billion liters in the biodiesel global production. This amount of biodiesel has other impacts, including overproduction of glycerin, the use of more land, etc.

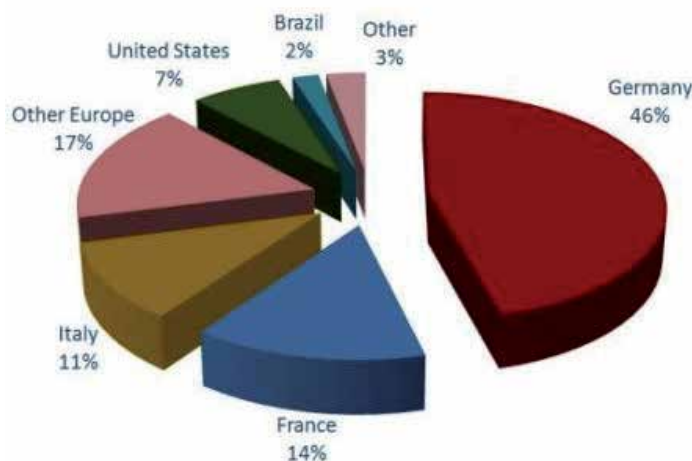


Fig. 1. World production of biodiesel (Source: National Federation of Oil Palm Growers (FEDEPALMA)).

ASTM has specified different fuel tests needed to ensure their proper functioning. Table 2, lists the specifications established for biodiesel and the corresponding test method.

FEATURES	UNIT	LIMITS		TEST METHOD
		Minimum	Maximum	
Ester content	%(m/m)	96.5	-	EN 14103
Density a 15°C	Kg/m ³	860	900	EN ISO 3675 EN ISO 12185
Viscosity a 40°C	Mm ² /g	3.50	5.00	EN ISO 3104
Flash point	°C	120	-	Pr EN ISO 3679
Sulfur content	mg/kg	-	10.0	PrEN ISO 20846 pr EN ISO 20884
Carbon residue (in 10% of distilled residue)	%(m/m)	-	0.30	EN ISO 10370
Cetane index		51.0		EN ISO 5165
Sulphated ash content	%(m/m)	-	0.02	ISO 3987
Water content	mg/kg	-	500	EN ISO 12937
Total contamination	mg/kg	-	24	EN 12662
Cooper band corrosion (3 h at 50°C)	Classification	Class 1		EN ISO 2160
Oxidation stability 110°C	Hours	6.0		EN 14122
Acid index	mg KOH/g		0.50	EN 14111
Iodine index	g de iodine/ 100 g		140	EN 14103
Methyl ester of linoleic acid	%(m/m)		12.0	EN 14103
Methyl esters of methylpoli-unsaturated (> = 4 double bonds)	%(m/m)		1	
Methanol content	%(m/m)		0.20	EN 14110
Monoglycerides content	%(m/m)		0.80	EN 14105
Diglycerides content	%(m/m)		0.20	EN 14105
Triglycerides content	%(m/m)		0.20	EN 14105
Free glycerin	%(m/m)		0.20	EN 14105 EN 14105
Total glycerin	%(m/m)		0.25	EN 14105
Metals of group 1 (Na+K)	mg/kg		5.0	EN 14108 EN 14109
Metals of group 2 (Ca+Mg)	mg/kg		5.0	PrEN 14538
Phosphorus content	mg/kg		10.0	EN 14107

Table 2. ASTM Features

1.1 Environmental problems for disposing used cooking oil

Used cooking oil causes severe environmental problems, "a liter of oil poured into a water course can pollute up to 1000 tanks of 500 liters". It's feasible to demonstrate the contamination with the dumping of these oils to the main water sources.

The oil which reaches the water sources increases its organic pollution load, to form layers on the water surface to prevent the oxygen exchange and alters the ecosystem. The dumping of the oil also causes problems in the pipes drain obstructing them and creating odors and increasing the cost of wastewater treatment. For this reason, has

been necessary to create a way to recover this oil and reuse it. Also due to the wear and tear resulting in sewer pipes may cause overflows of the system, "generating diseases that can cause mild stomach cramps to diseases potentially fatal, such as cholera, infectious hepatitis and gastroenteritis, due to the sewage contains water which can transport bacteria, viruses, parasites, intestinal worms and molds" (Peisch. Consulted: http://www.seagrantpr.org/catalog/files/fact_sheets/54-aguas-usadas-de-PR.PDF). The dangerous odors generate impact negatively on health, "is formed hydrogen sulfide (H₂S), which can cause irritation of the respiratory tract, skin infections, headaches and eye irritation" (Peisch. Consulted: http://www.seagrantpr.org/catalog/files/fact_sheets/54-aguas-usadas-de-PR.PDF).

2. Types of cooking oil

Among the alternatives as a vegetal raw material to extract the oil are: oil palm, soybean, sesame, cotton, corn, canola, sunflower and olives.

2.1 Palm oil

Palm oil is retrieved from the mesocarp of the Palm fruit, this oil is regarded as the second most widely produced only surpassed by the soybean oil. The oil palm is a tropical plant characteristic of warmer climates that grows below 500 meters above sea level. "Its origin is located in the Guinea Gulf in West Africa." "Hence its scientific name, *Elaeis guineensis* Jacq and its popular name: African oil palm" (FEDEPALMA. Consulted: <http://www.fedepalma.org/palma.htm>).

Colombia is the largest producer of palm oil in Latin America and the fourth in the world. "The extracted oil from the palm contains a relationship 1:1 between saturated and unsaturated fatty acids, is also a major source of natural antioxidants as tocopherols, tocotrienols and carotenes"(FEDEPALMA. Consulted: <http://www.fedepalma.org/palma.htm>). It has been proven that Palm oil is natural source vitamin E, in the form of tocopherols and tocotrienols. The tocotrienol act as protectors against cells aging, arteriosclerosis, cancer and some neurodegenerative diseases such as Alzheimer's disease. Unrefined palm oil is the richest in beta-carotene natural source; its consumption has proved to be very useful for preventing and treating the deficiency of vitamin A in risk populations.

2.1.1 Characteristics of plant

The oil palm presents fruit by thousands, spherical, ovoid or elongates, to form compact clusters of between 10 and 40 kilograms of weight. Inside, they kept a single seed, almonds or palmist, to protect with the fart, a woody endocarp, surrounded in turn by a fleshy pulp. Both, pulp and almond oil generously provide. The productive life of the oil palm can be most of fifty years, but from the twentieth or twenty-five the stem reaches a height that hinders the work of harvest and marks the beginning of the renewal in commercial plantations. 25 to 28 °C on average monthly temperatures are favorable, if the minimum average temperature is below 21 °C. Temperatures of 15 °C stop the growth of the seedlings from greenhouse and decrease the performance of adult palms. Between 1,800 and 2,200 mm precipitation is optimal, if it is well distributed in every month. Like the coconut palm, the palm oil is favored by deep, loose and well drained soils. A superficial phreatic level limits the development and nutrition of roots. In general, the

physical characteristics good, texture and structure, are preferable to the level of fertility, as it can be corrected with mineral fertilization. The palm oil resists low acidity levels, up to pH 4. Too alkaline soils are harmful. Although you can plant with success on land of hills with slopes above of 20 °, are preferred levels or slightly wavy, with no more than 15 ° gradients.

2.1.2 Pests

The major pest of palm oil and its damage are:

- Acaro: They are located on the underside of the leaves, mainly in vivarium palms. The damages are identified by the discoloration of the leaves, which reduces the photosynthetic area. We can fight it with Tedi6n.
- Arriera ant: it is common in tropical areas. This animal can cause serious defoliations in palms of all ages. We can fight it with bait poisoned as Mirex, applied to the nest mouths.
- Estrategus: Is a beetle of 50 to 60 mm long, black, with two horns. This animal drills in the ground, at the foot of the Palm, a gallery of even 80 cm; penetrates the tissues of the trunk base and destroys it. It is controlled with 200 g of heptachlor powdered 5%, slightly buried around the Palm.
- Rats: This animal can cause damage at the trunk base of young palms. Controlled with baits of coumarine, which must be changed regularly.
- Yellow beetle or alurnus: attacks the young leaves of the plant heart as well as on the coconut tree. It is controlled with sprayings of Thiodan 35 EC, solution of 800 cc in 200 liters of water. Apply 2 to 4 liters in palm.
- Beetles or black palm weevil: In Palm oil causes the same damage to the coconut palm.
- Lace bug: is 2.5 mm long. It is an insect of transparent grey color. It is located in the underside of the leaves. Their stings favor infections by various fungi, which may cause draining of the leaves.

2.2 Rapeseed or canola oil

Rapeseed is a "specie oilseed in the cruciferous family. Many of the species of this family have been cultivated since long time ago that their roots, stems, flowers and seeds are edible" (Iriarte, Consulted: <http://www.inta.gov.ar/ediciones/idia/oleaginosa/colza01.pdf>). Ideally grows in climates that go from temperate to slightly cold and wet (minimum of 0 °C and maximum of 40 °C). When the seeds of rapeseed are crushed we can obtain oil and a kind of pulp or prized residue from always to feed livestock, since that gives a 34% protein and 15% crude fiber. The biodegradable properties of rapeseed or canola oil make it ideal to be used on the basis of paints, herbicides, lubricants, food packaging, etc.

2.2.1 Characteristics of plant

Oilseed rape (*Brassica napus*) is a crucifer of deep and pivoting root. The stem has a size of 1.5 m approximately. The lower leaves are petiolate but the superiors entire and lanceolate. The flowers are small, yellow, and are grouped in terminal racemes. The fruits have a number of grains by pod around 20-25, depending on the variety. The rapeseed composition is showed in the table 3:

COMPOSITION	%
Proteins	21,08
Fat	48,55
Fiber	6,42
Ashes	4,54
Nitrogen-free extracts	19,41
TOTAL	100,00

Table 3. Rapeseed composition.

The seeds are spherical of 2 to 2.5 mm in diameter and when are mature have a reddish or black brown color. Rapeseed has a proportion (39%) of oil where there are a large number of fatty acids of long-chain, which quantitatively the most important is the erucic acid. The cultivation of rapeseed has ability to grow in temperate climates to temperate cold with good humidity. It adapts to different soil types, the ideals are the franc soils of good fertility and permeable which is a very sensitive crop to the superficial flooding.

2.2.2 Pests

- Rape stem weevil (*Ceuthorrhynchus napi*): the grub of this insect deforms the stem of the rape, which is curved and often indenting in a certain length.
- Terminal bud Weevil (*Ceuthorrhynchus piciparsis*): adults do not cause damage, but the larvae destroy the terminal bud and force the plant to produce side shoots. The treatments are made with endosulfan and Fosalón.
- The siliques weevil (*Ceuthorrhynchus assimilis*): adults bite the young siliques and the larvae gnaw seeds causing a significant decrease in the harvest. Endosulfan and Fosalón are used in treatments.
- Cecydomia (*Dasyneura brassicae*): The larvae of this insect destroy the siliques totally. The endosulfan and fosalon control this plague.
- Meligetos of the cruciferous (*Meligethes sp*): adults are in charge of gnawing the buttons of the rapeseed; these attacks are more important younger are the buttons. When begin the flowering the damage decrease.
- Flea of rapeseed (*Psyllodes chrysocephala*): adults appear in autumn rape fields, generally shortly after birth gnawing the leaves and can destroy large number of plants. Karate to doses of 40-80 cc/hL is recommended for the treatment.
- Flea of the cabbage (*Phyllotreta sp*): adult insects wintering in the soil in September and appear in April. Karate works very well against these insects.

2.3 Sunflower oil

The oil extracted from sunflower seeds is considered to be of high quality for a low percentage of saturated fatty acids and a high percentage of unsaturated fatty acids. It also contains essential fatty acids and a considerable amount of tocopherols that gives it stability. The acidic composition of the sunflower depends on the genotype and the environment. There are currently three groups of genotypes: traditional, oleic medium and oleic high.

2.3.1 Characteristics of plant

The sunflower belongs at the family "*Asteraceae*", whose scientific name is *Helianthus annuus*. It is an annual plant with a vigorous development in all its organs. Within this species there

are many types or subspecies grown as ornamental plants, oilseeds and forage plants" (INFOAGRO, Consulted: <http://www.infoagro.com/herbaceos/oleaginosas/girasol.htm>). Average sunflower cycle includes between 100 and 150 days according to genotypes, dates of planting, latitude and availability of water and nutrients. The "temperature is the most important factor in the control of the seeds germination being the optimal near to 26 °C with maximum temperatures of 40 °C and minimum from 3 to 6 °C. The threshold for soil temperature (0 to 5 cm) from which normally starts sowing is between 8 and 10 °C" (Diaz-Zorita et al, Consulted: http://www.asagir.org.ar/Publicaciones/cuadernillo_web.pdf). The availability of water acts on the soaking of seeds, on the subsequent growth of the seedling. The water excess decreases the amount of air in the soil.

2.3.2 Pests

Pests of early-onset (e.g. cutting caterpillars, leafcutter ants, velvety larvae, worm wire, tenebrionido of the sunflower, underground grille, weevils, black beetle, slugs, etc.) produce damage in seeds and seedlings. Slugs cause great damage to the leaves. The control is convenient with treatments of seeds or specific toxic baits.

3. Biodiesel production process

The biodiesel production is given by the transesterification reaction which consists of three consecutive and reversible reactions. First, the triglyceride is converted in diacylglycerol, and running at monoglyceride and glycerin. In each reaction one mole of methyl ester is released as shown in Figure 2.

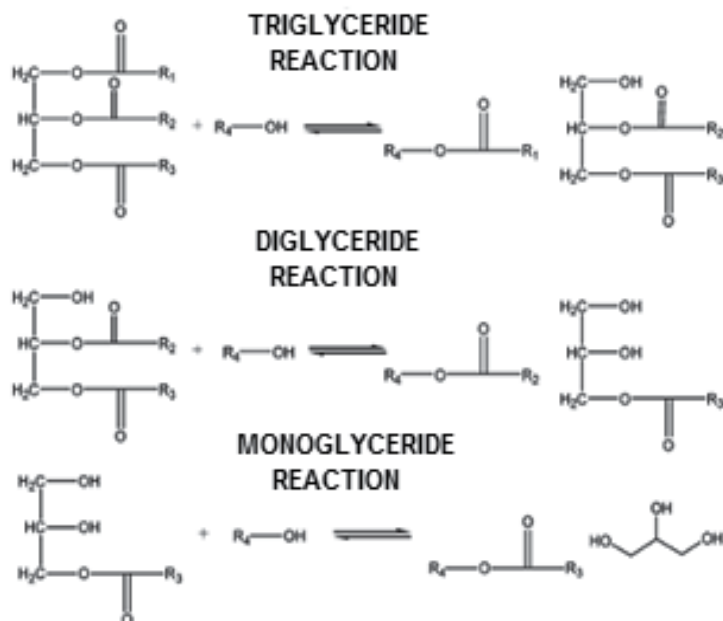


Fig. 2. Stages of the transesterification reaction (Arbelález & Rivera, 2007. pp 13)

Figures 3 and 4 show the secondary reactions that may occur: the saponification reaction and the neutralization reaction of free fatty acids.

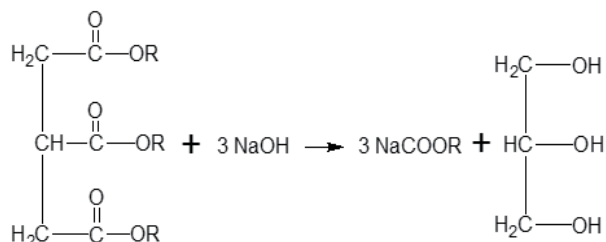


Fig. 3. Saponification reaction (Arbeláez & Rivera, 2007. pp 13)




Fig. 4. Neutralization reactions of free fatty acids (Arbeláez & Rivera, 2007. pp 13)

3.1 Raw materials

The biodiesel production comes mostly from oils extracted oilseed plants especially sunflower, soy, rapeseed and animal fats. However, any material that contains triglycerides can be used for the biodiesel production. "In addition to the oil or fat is needed an alcohol and catalyst to convert oils and fats in alkyl esters". (Arbeláez & Rivera, 2007. pp7)

3.1.1 Alcohol

"Primary and secondary alcohols with string of 1-8 carbons are used for the biodiesel production, among the alcohols that can be used in this process are: methanol, ethanol" (Cujia & Bula, 2010. pp 106), propanol y butanol. "When are used alcohols such as ethanol is more complicated the recovery of pure alcohol in the process because the azeotrope that forms with water" (Cheng et al. 2008. pp 4) and the performance of ethyl esters is less compared to the methyl esters due methanol has a lower molecular weight (32.04 g/mole) compared to ethanol (46.07 g/mole)." "On the other hand if you use methanol, not would contribute to environmental issues and sustainability, biodiesel would not be completely bio, by having a fossil component provided by the alcohol, because methanol is made from natural gas, which is fossil" (Cheng et al. 2008. pp 4). To use methanol or ethanol is needed "a mechanical agitation to encourage the transfer of mass" (Arbeláez & Rivera, 2007. pp 10). "In the course of the reaction form emulsions, using methanol is easy and quickly dissolved, forming a glycerol-rich bottom layer and a higher layer in methyl esters, while using ethanol these emulsions are more stable making the process of separation and purification of ethyl esters more difficult" (Arbeláez & Rivera, 2007. pp 10).

Is preferred to use methanol in the biodiesel production because of their low viscosity (0.59 m * Pa * s at 20 °C), because using alcohols such as ethanol with high viscosity (1,074 m * Pa * s at 20 °C), the biodiesel viscosity increases and as a result a "fuel of high

viscosity not will be pulverized properly by injection systems that have diesel engines. Also increase the opacity of fumes which limits their application in automotive engines" (Benjumea et al. 2007. pp 149).

In the reaction performance is feasible to reach "higher conversions with methanol, ethanol using the process is more complex, expensive, requires a higher consumption of energy and time" (EREN. 2003. pp 38). "We found that it requires less reaction time when using methanol rather than ethanol, either in acid or alkaline catalysis, reaching high yields" (Giron et al. 2009. pp 18).

With the above, the methanol is selected to be used in the biodiesel production due to its lower cost, better performance and less time and energy during the reaction.

3.1.2 Catalysts

Homogeneous, heterogeneous or enzyme catalysts are used in the biodiesel production. Homogeneous catalysts are soluble in the middle of reaction, i.e. they are in a single phase either liquid or gaseous. "One of the advantages of homogeneous catalysis is the high speed of reaction, and moderate temperature and pressure conditions" (EREN. 2003. pp 4). The catalysts can be acids or alkalis, the acid catalysts are effective but require a time interval extremely long and temperatures exceeding 100 °C for its action. "Getting conversions of 99% with a concentration of 1% sulfuric acid in relation to the amount of oil, it takes about 50 hours" (EREN. 2003. pp 13). We can use this catalytic process when the oils have a high degree of acidity and "harm the action of alkali catalysts with acidity greater than 10 %" (EREN. 2003. pp 39). We can use sulfuric acid (H_2SO_4), phosphoric acid (H_3PO_4), among others. When is used "acid catalysts with alcohol excess is that the recovery of glycerin is more difficult as the quantities of alcohol are quite large compared to other type of catalyst" (Arbeláez & Rivera, 2007. pp13).

"Using HCl are achieved yields of 61% and with H_2SO_4 we can obtain 80%" (Liu et al. 2006a pp 186), but these "catalysts are more corrosive than alkali catalysts" (Errazu et al. 2005 pp 1305). In comparison with the acidic catalysts, the basic catalysts accelerate the reaction rate, the disadvantage of basic catalysts is that produces soaps due to the high amounts of free fatty acids and water by which we must add the appropriate amount of base to neutralize fatty acids free. The most commonly used are sodium hydroxide (NaOH), potassium hydroxide (KOH) and inappropriate for industrial application (CH_3ONa) sodium methoxide since this is more expensive and "requires total absence of water" (EREN. 2003 pp 40). "The catalysts are dissolved in the reaction mixture alcohol-oil what does that not can be recovered at the end of the transesterification reaction" (Arbeláez & Rivera, 2007. pp13). "By using KOH as a catalyst we can produce potassium fertilizers such as potassium chloride, potassium sulphate and potassium nitrate if the product with phosphoric acid is neutralized" (Arbeláez & Rivera, 2007. pp14).

"The maximum yield found with NaOH is 85% at a sodium hydroxide concentration of 1,0%. Adding an excess in the amount of the catalyst, it gives rise to the formation of an emulsion which increases viscosity and leads to the gel formation" (Cheng et al. 2008. pp 2210). "With regard to the use of catalyst as ($NaOCH_3$) sodium methoxide and ($KOCH_3$) potassium methoxide we can observe high efficiency compared with other alkali catalysts" (Cheng et al. 2008. pp 2210). The temperature of the transesterification reaction "should not exceed the boiling point of alcohol, because it vaporizes and forms bubbles which limit the reaction in the interfaces alcohol/oil/biodiesel" (Giron et al. 2009. pp 18)

"To be used as catalyst NaOH with methanol, has been found that the optimum temperature to achieve high yields was 60 °C, while using KOH to this same temperature not achieved such high yields and higher catalyst concentrations should be used to using NaOH" (Liu et al. 2006b pp 110). "In an alkali catalyzed process is reached high purity and yields in short periods of time ranging between 30 - 60 minutes" (Liu et al. 2006a pp 186).

Heterogeneous catalysts are found in two phases and a contact area, "the use of these catalysts simplifies and makes more economical the purification process due the easy separation of the products and reactants. The disadvantage is the difficulty to temperature control for very exothermic reactions, limitations on mass transfer of reactants and products, as well as high mechanical resistance to the catalyst" (Arbeláez & Rivera, 2007. pp12). Among the most common catalysts are the metal oxides (MgO, CaO), acids of Lewis (SnCl₂), etc. For example, by using zinc oxide are obtained yields of 50.7%, when using Al₂O₃ is obtained 57.5% and using CaO yield of 65%" (Rojas & Torres. 2009 pp 15). "These catalysts have limitations on transfer of mass of reactants and products" (Arbeláez & Rivera, 2007. pp12), but they have the advantage that they are not corrosive to the reactor" (Guan et al. 2009 pp 520). The easy separation of the products generates a "simplification of the manufacturing process since the catalyst can be separate from the products of reaction with a simple filtration process" (Lles et al. 2008 pp 63). "Don't generate byproduct of soap by reaction with free fatty acids (AGL)". (Bournay et al. 2005. pp 191) "Using CaO is achieved a yield of 65% and by using MgO a yield of 64%" (Bournay et al. 2005. pp 192). To achieve high yields the reaction must be carried out "to a higher temperature increasing energy costs" (Bournay et al. 2005. pp 191). Reported high reaction times, because the "speed of transesterification reaction with these catalysts is lower in comparison with homogeneous catalysts, due to the mass transfer resistance" (Guan et al. 2009 pp 522).

Finally, the lipases being effective for the transesterification reaction can be used between the enzyme catalysts. "This type of catalysis has the advantage of allowing the use of alcohol with high content of water (more than 3%), low temperatures, which is an energy-saving and high degrees of acidity in oils" (EREN. 2003. pp 41).

3.1.3 Waste cooking oil

The waste cooking oil is generated from the fried food, which need large amounts of oil because it requires the full immersion of food at temperatures greater than 180 °C. Accordingly to the high temperatures are generated changes in its chemical and physical composition, as well as in its organoleptic properties which affect both the food and oil quality.

Reuse of domestic oil has a high risk to the health of consumers as depending on the type of food subjected to frying, "this absorbs between 5% and 20% of the used oil, which can increase significantly the amount of hazardous compounds that provide degraded oil to food" (EREN. 2003. pp 31). "In an alkali catalyzed process is reached high purity and high yields in short periods of time ranging between 30 - 60 minutes" (Liu et al. 2006 pp 186).

Used cooking oil is normally black, a strong odor and does not have large amount of solids because its collection is passed through a fine mesh. In Figure 5, we can see a sample of used oil from the hotel sector.



Fig. 5. Sample of waste cooking oil

3.1.3.1 Domestic waste oil treatment

Wastes containing these types of oils are products of decomposition that impair the oil quality causing reduction in productivity in the transesterification reaction and may also generate undesirable by-products which hurt the final product. For these reasons, it is important to refine the waste domestic oil for the biodiesel production. "This type of refinement has a right effect on the yield of the reaction from 67% to 87% after bleaching". (EREN. 2003. pp 36). For the treatment of adequacy of waste domestic oil, the operations that can be applied are filtration, de-acidification or neutralization and whitening. The processes of degumming and deodorization aren't needed because the oils have already been treated prior to use and although during degradation odors occur, the removal is not essential for the biodiesel production.

- *Filtration.* The operation is for removing solids, inorganic material, and other contaminants in the oil. It can be carried out at temperatures higher than 60 °C, where substances carbonaceous produced from burnt organic material, pieces of paper, waste food and other solids are removed or occur at low temperatures which depend on the physical condition of the oil. In addition, we can delete solid fats or products of low melting points from the frying process.
- *Desacidification* It is the process by which free oils fatty acids are removed, various methods are used:
 - a. Neutralization with alkaline solution: in this process the acids are removed in the form of soaps.
 - b. Esterification with glycerin: seeks to regenerate the triglyceride.
 - c. Extraction by solvents: where it is used ethanol in proportions 1.3 times the amount of oil.
 - d. The distillation of fatty acids, this method requires a high energy cost.
 - e. Removal of fatty acids with ion-exchange: a resin of strongly basic character for the removal of free fatty acids and the color of the oil is used.

Method that provides greater account of productivity in the removal of free fatty acids is the neutralization by caustic soda, since it not only are obtained high relations, but also helps in the bleaching of the oil, because made soaps help dragging the color generators. There are basically two procedures:

- Neutralization with dilute alkali: are used concentrations of 0.75 to 2 N.
- Neutralization with concentrated alkali, where the concentration of caustic soda vary between 2 and 5 N.

In each of the procedures mentioned above neutralization is carried out hot, with oil at a temperature between 50 - 60 °C and addition of caustic soda between 70-80 °C.

3.1.3.2 Chemical characteristics of the used oil

Chemical characterization of the used oil, is presented in table 4

FEATURES	OIL COLLECTED BY THE HOTEL SECTOR
Acidity (%)	0.56
Moisture	0.25
Viscosity at 37°C (centistokes)	44.78
Iodine index (CgI ₂ /g)	108.22
Peroxide index (meq. Oxygen active/Kg of sample)	16.61
Unsaponifiable material (%)	1.70
Saponification index (mg KOH/g)	195.87
Ash (%)	0.030
Refractive index 25°C	1.4700
Density 15°C (g/mL)	0.9216

Table 4. Characterization of cooking oil collected by the hotel sector (Source: Avalquímico Ltda.2010)

4. Biodiesel production from used cooking oils

According to table 5, the catalyst with higher industrial scaling, economic cost, high yields and short reaction time, is the alternative of basic catalysis, using sodium hydroxide. Although soap can be formed using sodium hydroxide in the transesterification reaction, this occurs if the content of free fatty acids is greater than 1% and the type of oil collected from the hotel sector has a percentage of acidity of 0.54%, so it is not problem to use this type of catalyst for the biodiesel production.

SELECTION PARAMETERS	Comparison of alternatives		
	Alkaline	Heterogeneous	Acid
Catalyst	NaOH	CaO	H ₂ SO ₄
Alcohol	Methanol	Methanol	Methanol
Scaling	High	Low	Low
Catalyst separation	Low	High	Low
By-products formation	Glycerin Soap, pasty	Glycerin	Glycerin
Environmental impact	High	Low	High
Cost	Economic	High	Moderate
Availability	Medium	Low	Medium
Catalyst concentration (%w/w)	Low	Medium	High
Molar ratio alcohol/oil	Medium	Low	High
Temperature (°C)	Low	High	Medium
Yield	High	Low	Medium
Reaction time (hours)	Low	Low	High
Safety level	High	Low	High

Table 5. Comparison of alternatives for the biodiesel production.

To select the best alternative for the biodiesel production are defined three ranges for the operation conditions to be used in the transesterification reaction (table 6).

SELECTION PARAMETERS	RANGES		
	Low	Middle	High
Catalyst concentration (% w/w)	0.2% - 1%	>1% - 3%	>3% - 15%
Molar ratio alcohol/oil	3:1 - 6:1	>6:1 - 12:1	>12:1 - 80:1
Temperature (°C)	50 - 60	>60 - 100	>100 - 200
Yield (%)	20 - 70	>70 - 90	> 90 - 100
Reaction time (hours)	0.16 - 1	>1 - 2	> 2 - 40

Table 6. Ranges established for the operation conditions of the transesterification reaction (Rojas & Torres. 2009. pp 18).

4.1 Experimental design

It is a key to make a design from which the most appropriate values for each of the design factors can be established. The selected factors were: molar ratio alcohol/oil, percentage of catalyst, temperature and washing agent, where the first three are design variables and the latter is a design condition. Before starting the design is important defines the ranges and levels for these factors, for this reason, we search the experimental phase in scientific articles related to the project (table 7).

DESIGN FACTORS	RANGE
Molar ratio alcohol/oil	6:1- 15:1
Catalyst Percentage (% wt.)	0,4-1
Temperature (°C)	40-70
Washing agent	Water (40°C) - Acetic acid

Table 7. Ranges for the design factors

Based on the ranges set out in table 7, we provide that the factorial design appropriate for the process is the factorial design 2^k , which can be solved by the technique of Yate contrasts which establish two levels for each of the design factors, these levels are high (+) and low (-) (see table 8)

Design Factor	High level (+)	Low level (-)
Molar ratio alcohol/oil	9:1	6:1
Catalyst Percentage(% wt)	0.7	0.5
Temperature(°C)	60	50
Washing agent	Acetic acid	Water (40°C)

Table 8. Levels for each design factor

For the molar ratio alcohol/oil is found a ratio of 6: 1 that is optimum for achieving high conversions, some articles display that lower ratio not is possible to reach a complete transesterification reaction. There are also good results with ratios ranging between 9:1 and 12:1, while if we use higher than 15:1 molar ratio there are difficulties in the separation of glycerin and methyl esters.

For the catalyst concentration the values vary in a range of 0.4 - 2% being the concentration 1% better but the reaction yield is not very high.

For the design factorial mentioned we can set the number of trials, having clear that 2 is the number of levels and k is the number of factors, i.e. which has a total of 2^4 treatments and is carried out a duplicated for each one, as should be taken into account the time limit and the project costs, which in total we have 16 experiments. Then is defined the signs matrix (table 9), where it is necessary to enumerate the trials and then is assigned a combination of treatments that aims to relate the design factors.

Consecutively is assigned the level for each combination, positive for the design factor that is being evaluated in the trial and negative for whose are not related. For this type of design the first trial has low levels and the final test has the higher levels.

Trial	Combination of Treatments	Design Factors			
		A	B	C	D
1	1	-	-	-	-
2	A	+	-	-	-
3	B	-	+	-	-
4	C	-	-	+	-
5	D	-	-	-	+
6	AB	+	+	-	-
7	AC	+	-	+	-
8	AD	+	-	-	+
9	BC	-	+	+	-
10	BD	-	+	-	+
11	CD	-	-	+	+
12	ABC	+	+	+	-
13	ABD	+	+	-	+
14	ACD	+	-	+	+
15	BCD	-	+	+	+
16	ABCD	+	+	+	+

Table 9. Matrix of signs

Performance is evaluated according to the treatments combination, considering that a duplicated is made by treatment. With data from the response variable, which is the yield, we carry out a statistical analysis by means of the ANOVA table or analysis of variance for data, which gives the more appropriate conditions for each factors of design and allows establishing that trials were the best.

For each main effect and interaction effect we have associated a single degree of freedom, so this is calculated using the following expression:

$$GL_i = N^0_{niveles} - 1 \quad (1)$$

Where:

i : is any combination of treatment

$N_{levels}^o = 2$, because we have a high level and one low

To determine that interactions are significant an f for each source of variation is calculated and compared to $f_{0,05}(1,16) = 4,49$, with this we can determine in which region (probable region RP or critical region RC) is each treatment and thus be able to establish that treatment is accepted or rejected with the help of figure 6.

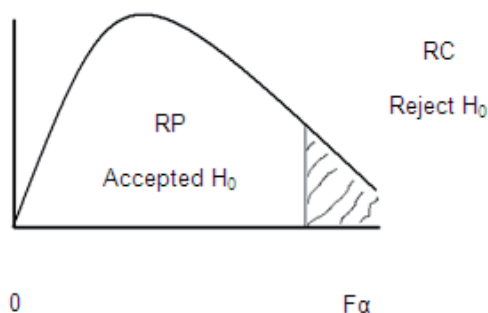


Fig. 6. Function f

4.2 Experimental development at the laboratory level

Table 10, shows the quantities determined at the laboratory level for each compound that is involved in the biodiesel production.

AMOUNT OF REAGENTS	
Waste cooking oil (mL)	150
Amount of methanol (6:1) (mL)	40.63
Amount of methanol (9:1) (mL)	60.95
Amount of NaOH grams (0.5%p/p)	0.823
Amount of NaOH grams (0.7%p/p)	1.105
Amount of HCl grams (0.5% p/p)	1.466
Amount of HCl grams (0.7% p/p)	2.053

Table 10. Amount of reagents

First is the filtration of used oil, then mixing alcohol/catalyst to add it to the reactor which contains the oil at the temperature of the transesterification reaction, then is the separation of biodiesel and glycerin, washes the biodiesel and finally is the distillation of the biodiesel. "The dissolution is agitated at low rpm because that at high revolutions sodium hydroxide can be oxidized" (Arbeláez & Rivera, 2007. pp45), should also be covered because amount of methanol due to its volatility can be lost. For the transesterification reaction are used reactors of four mouths with capacity of 500 mL and 1000 mL, magnetic stirrers, plates of agitation, spiral capacitors, mercury thermometers, thermostat bath and temperature controller. Figure 7, shows the setup for the biodiesel production.

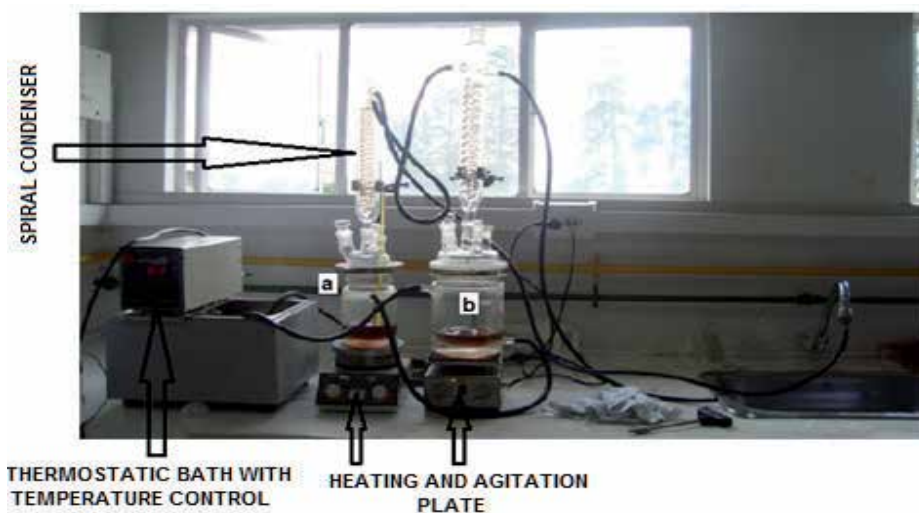


Fig. 7. Biodiesel production assembly: a) Reactor of 500 mL b) Reactor of 1L.

To carry out the transesterification reaction is loaded oil at the reactors and heated up to reaction temperature, while it reaches the temperature is made the mixture of the catalyst with alcohol, then it is added to the reactor. At the end of the reaction time is added HCl to 37 per cent in order to neutralize the reaction.

Completed reaction, the product is poured into the separation funnels and let a minimum time of 8 hours, to ensure good separation of the phases (Figure 8). Separation times were not equal for all runs varied between 10-24 hours.



Fig. 8. Biodiesel-Glycerin separation

Once separate the glycerin from biodiesel, it is carried out the washing on the funnels. Separate the glycerin, the biodiesel must be washed because that may contain residues of catalyst, methanol, soaps and glycerides without reacting. Two types of washings are established according to the experimental design.

In one of the washing, water at 40 °C is used for three washes. Other tests of washing have been conducted with acetic acid 10% wt, where is used the same amount of used cooking oil; two washes are carried out with acid solution and the third is done with deionized water.

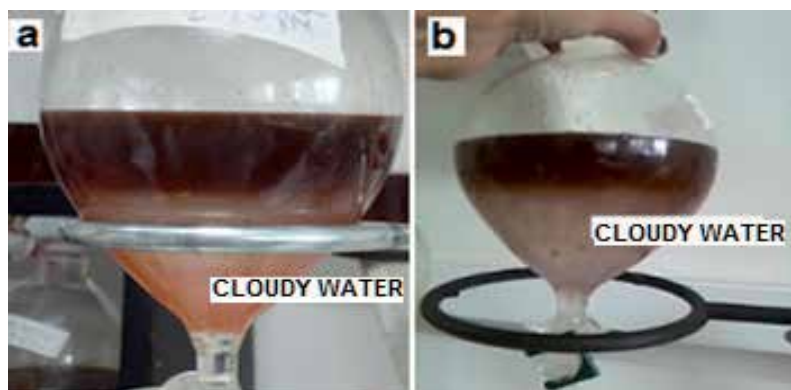


Fig. 9. First biodiesel wash: (a) Water at 40 °C (b) acetic acid solution

The distillation is carried out at 40 °C, temperature which is below the boiling point of methanol. The vacuum pump is used in order to minimize the time of distillation and vacuum trap is used to prevent waste of alcohol and water to the pump.

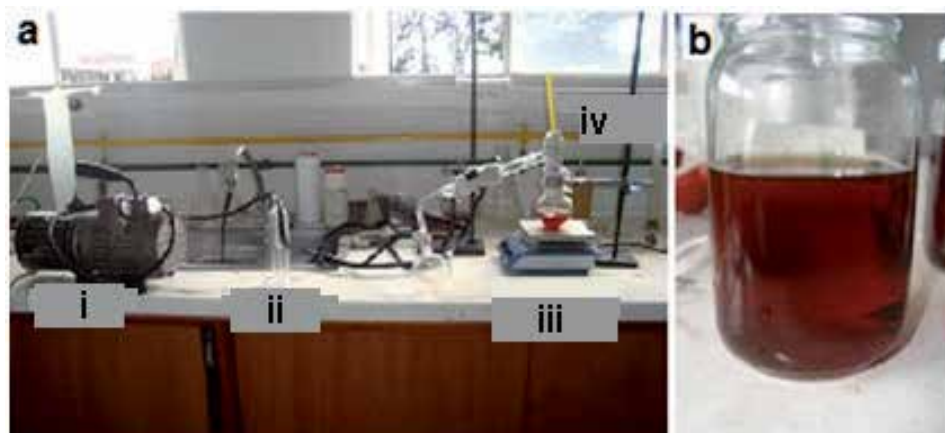


Fig. 10. Biodiesel distillation (a) Mounting: i. vacuum pump ii. Vacuum trap iii. Hot plate iv. Thermometer (b) Distilled biodiesel

4.3 Results and analysis

We show the results and analysis of tests conducted at the laboratory level, as its density and the analysis of variance. According to the literature retrieved biodiesel is "liquid, transparent and reddish color without any content of solids or gels" (Arbeláez & Rivera, 2007. pp37).

Taking into account the results of the biodiesel appearance, it can be concluded that the catalyst percentage influences in the biodiesel stability because that similar conditions were equal in appearance. The majority of samples that had contained solids, gels and their appearance was opaque, were the samples where used 0.5% NaOH.

Opaque samples as the 3, 4 and 7 are because have much water content, this might be for the washes with water at 40 °C and its water content was increased. Opacity is an indicator that the methyl esters have presence of water.

The table 11 shows the densities for each test sample.

TEST	DUPLICATE 1	DUPLICATE 2
	Biodiesel density (g/ml)	Biodiesel density (g/ml)
1	0,902	0,910
2	0,902	0,877
3	0,867	0,887
4	0,893	0,881
5	0,897	0,903
6	0,885	0,887
7	0,883	0,906
8	0,906	0,860
9	0,871	0,887
10	0,885	0,893
11	0,914	0,906
12	0,897	0,891
13	0,900	0,895
14	0,885	0,875
15	0,883	0,862
16	0,873	0,891

Table 11. Density for each sample

The biodiesel density according to standard ASTM D-1298 must be in a range of (0.86 - 0.90 g/ml), the density does not guarantee that retrieved biodiesel is of good quality, but is taken to compare samples with each other, due there is evidence that satisfy with the provided density but its appearance is not adequate or are samples which do not comply with the permitted density value but its appearance is appropriated. As for example, the duplicate 2 from sample 1 exceeds the density range allowed for biodiesel, but the appearance fulfill with the stipulated features. For the sample 11, both the duplicate 1 and the 2 exceed the density level and its appearance is a little opaque.

Samples 11 and 12 are in the density range allowed but the appearance does not meet any features because have high solids content and are highly opaque.

Some samples contain solids and do not fulfill with the physical characteristics of biodiesel, have a density within the level agreed by the ASTM D-1298 standard for a biodiesel of good quality, which must be due to that the solids are smaller proportion than the liquid phase that is rich in methyl esters.

It can be concluded that the density and appearance analysis are not reliable parameters to determine the biodiesel quality. For this reason, based on the order of the table 12, we can determine the variable response (table 13), which is expressed as the ratio between the mass of the biodiesel produced and the mass of oil used for the production (productivity per cent).

TEST	COMBINATION OF TREATMENTS	DESIGN FACTORS			
		A	B	C	D
1	1	6:1	0,5	50	Water (40°C)
2	A	9:1	0,5	50	Water (40°C)
3	B	6:1	0,7	50	Water (40°C)
4	AB	9:1	0,7	50	Water (40°C)
5	C	6:1	0,5	60	Water (40°C)
6	AC	9:1	0,5	60	Water (40°C)
7	BC	6:1	0,7	60	Water (40°C)
8	ABC	9:1	0,7	60	Water (40°C)
9	D	6:1	0,5	50	Acetic Acid (T amb)
10	AD	9:1	0,5	50	Acetic Acid (T amb)
11	BD	6:1	0,7	50	Acetic Acid (T amb)
12	ABD	9:1	0,7	50	Acetic Acid (T amb)
13	CD	6:1	0,5	60	Acetic Acid (T amb)
14	ACD	9:1	0,5	60	Acetic Acid (T amb)
15	BCD	6:1	0,7	60	Acetic Acid (T amb)
16	ABCD	9:1	0,7	60	Acetic Acid (T amb)

Table 12. Rearranged experimental matrix

TEST	COMBINATION OF TREATMENTS	PRODUCTIVITY (%)	
		DUPLICATE 1	DUPLICATE 2
1	1	70	44,9
2	A	79,5	74,3
3	B	85,6	84,5
4	AB	93,7	93,9
5	C	69,4	68,4
6	AC	62,3	88,2
7	BC	64,5	62,6
8	ABC	88,7	85,5
9	D	62,1	63,1
10	AD	89,5	60,7
11	BD	76,2	80,7
12	ABD	88,9	88,5
13	CD	61,3	57,5
14	ACD	81,2	80,3
15	BCD	74,8	71,8
16	ABCD	86,2	81,8

Table 13. Reaction productivity

We carry out the ANOVA statistical analysis (table 14) and the test of hypothesis (table 15).

COMBINATION OF TREATMENTS	EFFECTS	SQUARES SUM	FREEDOM DEGREES	MEAN SQUARE	f CALCULATED
A	14,1125	1593,30	1	1593,30	22,78
B	12,2	1190,72	1	1190,72	17,02
C	-3,225	83,205	1	83,21	1,19
D	-0,7125	4,06125	1	4,06	0,06
AB	-0,8	5,12	1	5,12	0,07
AC	1,375	15,125	1	15,12	0,22
AD	-0,4125	1,36125	1	1,36	0,02
BC	-6,2875	316,26125	1	316,26	4,52
BD	-0,55	2,42	1	2,42	0,03
CD	1,375	15,125	1	15,13	0,22
ABC	2,437500	47,531250	1	47,53	0,68
ABD	-2,425000	47,045000	1	47,05	0,67
ACD	0,950000	7,220000	1	7,22	0,10
BCD	3,212500	82,561250	1	82,56	1,1803
ABCD	-4,5375	164,71125	1	164,71	2,35
ERROR		1119,21	16	69,950625	
TOTAL		4694,97875	31		

Table 14. ANOVA TABLE

COMBINATION OF TREATMENTS	EFFECTS	f CALCULATED	f alfa	DECISION
A	14,1125	22,77751271	4,49	NOT ACCEPTED
B	12,2	17,02229251	4,49	NOT ACCEPTED
C	-3,225	1,189481867	4,49	ACCEPTED
D	-0,7125	0,058058809	4,49	ACCEPTED
AB	-0,8	0,073194485	4,49	ACCEPTED
AC	1,375	0,216223944	4,49	ACCEPTED
AD	-0,4125	0,019460155	4,49	ACCEPTED
BC	-6,2875	4,521206923	4,49	NOT ACCEPTED
BD	-0,55	0,034595831	4,49	ACCEPTED
CD	1,375	0,216223944	4,49	ACCEPTED
ABC	2,437500	0,679497145	4,49	ACCEPTED
ABD	-2,425000	0,672545814	4,49	ACCEPTED
ACD	0,950000	0,103215661	4,49	ACCEPTED
BCD	3,212500	1,180278947	4,49	ACCEPTED
ABCD	-4,5375	2,354678747	4,49	ACCEPTED

Table 15. Hypothesis test

The factor A, the molar ratio alcohol/oil, has a significant effect on the reaction productivity, since the effect is positive by increasing the molar ratio increases productivity, for this reason the highest 9:1 ratio is selected.

The factor B, the catalyst concentration has a significant effect on the reaction productivity so increasing the catalyst concentration increases the reaction productivity for this reason we select 0.7% w/w. The factor C, the reaction temperature has no significant effect, but is recommended to work with the lowest level, i.e. at a temperature 50 °C to prevent a further loss of methanol due to its volatility. The factor D, the washing agent has no significant effect because the effect is negative, we select the low level (-) water at 40 °C.

The combination of treatments AB, AC, AD, CD, ABC, ABD, ACD, BCD, ABCD, do not has significant effects on the reaction productivity. The treatment combination BC has significant effects on the reaction productivity, so it is advisable to work with levels higher for each factor, catalyst concentration of 0.7 %p/p and reaction temperature of 50 °C.

Table 16, shows the made characterization of the sample obtained to a molar ratio alcohol/oil 9:1, catalyst concentration 0.7% w/w, reaction temperature of 50 °C and water at 40 °C as washing agent that is the biodiesel with a best properties.

Properties	Unit	Results	Standard (ASTM D-6751)
Density at 15.6 °C	kg/m ³	889.9	860- 900
Grades API		27	Minimum 32
Cinematic Viscosity at 40°C	Cst	5.21	1.9 – 6
Cetane index		48	Minimum 47
Caloric value	J/g	40,873.00	37,216.00
Temperature 90% distilled	°C	332	Maximum 360

Table 16. Properties of the biodiesel sample to the best conditions

API gravity for the biodiesel retrieved is in a range of 32-34 degrees API, the analyzed sample showed a value below the reported ranges, which indicates that the biodiesel retrieved from this sample has a high density, which as we see in the analysis is of 889.9 kg/m³, taking into account that the API gravity is inversely proportional to the density. As for the other properties analyzed, these can be found within the values reported by the literature, which guarantees the quality of biodiesel.

5. Conclusions

We can conclude that using acetic acid or water as a washing agent does not affect the reaction productivity, similar to the reaction temperature has no effect on the variable response within the levels used in the research. The unique variables that affect the biodiesel production are the catalyst concentration and the molar ratio alcohol/oil.

According with the above, the best conditions of operation are:

- Molar ratio alcohol/aceite: 9:1
- Catalyst concentration of: 0.7% w/w
- Reaction temperature: 50 °C
- Washing agent: water at 40 °C

6. Acknowledgment

This research was carried out in the laboratory of the Natural Resources Energetic Exploitation research group of the Chemistry Department's National University of

Colombia and sponsored for the research group CDM & EG of the Mechanical Department of Engineering Faculty of the National University of Colombia.

7. References

- Arbeláez, M., Rivera, M. (2007). *Diseño conceptual de un proceso para la obtención de biodiesel a partir de algunos aceites vegetales colombianos*. Universidad Eafit. Medellín.
- Benjumea P, Benavides A Y Pashova V. (2007). *El biodiesel de aceite de higuerilla como combustible alternativo para motores diesel*, Universidad Nacional De Colombia Sede Medellín.
- Bournay L, Casanave D, Chodorge J, Delfort D Y Hillion G. (2005), *new heterogeneous process for biodiesel production: a way to improve the quality and the value of the crude glycerin produced by biodiesel plants*, France.
- Chen G, Meng X Y Wang Y. (2008). *Biodiesel production from waste cooking oil via alkali catalyst and its engine test*, China Architecture Design & Research Group, Beijing, China.
- Cujia G., Bula A. (2010). *Potencial obtención de gas de síntesis para la producción de metanol a partir de la gasificación de residuos de palma africana*. Asociación Interciencia Venezuela.
- Diaz-Zorita, M., Et Al., El cultivo De Girasol, In: ASAGIR, 2003, <[Http://Www.Asagir.Org.Ar/Publicaciones/Cuadernillo_Web.Pdf](http://www.Asagir.Org.Ar/Publicaciones/Cuadernillo_Web.Pdf)>
- Ente Regional De La Energía De Castilla Y León (EREN) (2003). *Plan piloto de recogida de aceites de cocina usados para la producción de biodiesel*. España.
- Errazu A, Marchetti J Y Miguel V.(2005). *Possible methods for biodiesel production*, Planta Piloto De Ingeniería Química, Argentina.
- FEDEPALMA(n.d.), Biodiesel, In: FEDEPALMA. 20 of june of 2011, Available from: <[Http://Www.Fedepalma.Org/](http://www.Fedepalma.Org/)>
- Girón E, Rojas A Y Torres Harlen. (2009). *variables de operación en el proceso de transesterificación de aceites vegetales: una revisión*. In: *Catálisis Química*, Vol 29 No 3.
- Guan G, Kusakabe K Y Yamasaki S.(2009). *Tri-potassium phosphate as a solid catalyst for biodiesel production from waste cooking oil*, Department Of Living Environmental Science, Fukuoka Women's University,
- INFOAGRO, El Cultivo Del Girasol (1ª Parte) 20 of june of 2011, In: INFOAGRO, Available from: <[Http://Www.Infoagro.Com/Herbaceos/Oleaginosas/Girasol.Htm](http://www.Infoagro.Com/Herbaceos/Oleaginosas/Girasol.Htm)>
- Iriarte, L. El Cultivo De Colza En Argentina, In: ANTI, 20 of june of 2011, Available from: <[Http://Www.Inta.Gov.Ar/Ediciones/Idia/Oleaginosa/Colza01.Pdf](http://www.Inta.Gov.Ar/Ediciones/Idia/Oleaginosa/Colza01.Pdf)>
- Liu P, Ou S, Wang, Y. Zhang Z. (2006a). *Preparation of biodiesel from waste cooking oil via two-step catalyzed process*, Department Of Food Science And Engineering.
- Liu P, Ou S, Tang S, Wang Y Y Xue F.(2006b) *comparison of two different processes to synthesize biodiesel by waste cooking oil*, Department Of Food Science And Engineering, Jinan University.
- Peisch, S. (n.d.). Aguas Usadas En Puerto Rico: Amenaza A La Salud Publica Y Al Ambiente, In: *Datos Marinos #54*. 20 of june of 2011, Available from: <[Http://Www.Seagrantpr.Org/Catalog/Files/Fact_Sheets/54-Aguas-Usadas-De-Pr.Pdf](http://www.Seagrantpr.Org/Catalog/Files/Fact_Sheets/54-Aguas-Usadas-De-Pr.Pdf)>
- Rojas A Y Torres H. (2009). *Variables de operación en el proceso de transesterificación de aceites vegetales: una revisión* In: *Catálisis Química*.
- Lles M, Pires E, Royo C. (2008). *Estudio de catalizadores heterogéneos en la síntesis de biodiesel a partir de aceite de girasol*.

Animal Fat Wastes for Biodiesel Production

Vivian Feddern et al.*
Embrapa Swine and Poultry,
Brazil

1. Introduction

Our society is highly dependent on petroleum for its activities. However, petroleum is a finite source and causes several environmental problems such as rising carbon dioxide levels in the atmosphere. About 90% is used as an energy source for transportation, heat and electricity generation, being the remaining sources used as feedstocks in the chemical industry (Carlsson, 2009). As demands for energy are increasing and fossil fuels are limited, research is directed towards alternative renewable fuels (Bhatti et al., 2008). High petroleum prices and the scarcity of known petroleum reserves demand the study of other sources of energy. In this context, agroindustrial wastes (animal fats, wood, manure) play an important role as energetic materials. Oils and fats are basically triacylglycerols (TAG) composed of three long-chain fatty acids. These triacylglycerols have higher viscosity and therefore cannot be used as fuel in common diesel engines. In order to reduce viscosity, triacylglycerols are converted into esters by transesterification reaction. By this means, three smaller molecules of ester and one molecule of glycerin are obtained from one molecule of fat or oil. Glycerin is removed as by-product and esters are known as biodiesel (Fazal et al., 2011).

Biodiesel fuels are attracting increasing attention worldwide as a blending component or a direct replacement for diesel fuel in vehicle engines. Biodiesel consists of a mixture of fatty acid (chain length C_{14} - C_{22}) alkyl esters, derived from a renewable lipid feedstock, such as vegetable oil or animal fat. In the case when methanol or ethanol are used as reactants, it will be a mixture of fatty acid methyl esters (FAME) or fatty acid ethyl esters (FAEE), respectively. However, methanol is commonly and widely used in biodiesel production due to its low cost and availability. Other alcohols such as isopropanol and butyl may also be used. A key quality factor for the primary alcohol is the water content, which interferes with the transesterification reactions and can result in poor yields and high level of soap, free fatty acids (FFA) and TAG in the final fuel (Demirbas, 2009a; Lam et al., 2010).

Biodiesel is a low-emission diesel substitute fuel made from renewable resources and waste lipid. The most common way to produce biodiesel is through transesterification, especially

* Anildo Cunha Junior, Marina Celant De Prá, Paulo Giovanni de Abreu, Jonas Irineu dos Santos Filho, Martha Mayumi Higarashi, Mauro Sulenta and Arlei Coldebella
Embrapa Swine and Poultry, Brazil.

alkali-catalyzed transesterification (Leung et al, 2010). The most commonly used catalysts for converting TAG to biodiesel are sodium hydroxide, potassium hydroxide and sodium methoxide. The alkaline catalysts are highly hygroscopic and form chemical water when dissolved in the alcohol reactant. They also absorb water from the air during storage. Acid catalysts include sulfuric and phosphoric acids, being more related to directly esterification of FFA, although they are considered to be slow for industrial processing (Demirbas, 2009a). When the raw materials (oils or fats) have a high percentage of FFA or water, the alkali catalyst will react with the FFA to form soaps (Leung et al, 2010).

An alternative fuel to petrodiesel must be technically feasible, economically competitive, environmentally acceptable and easy available (Demirbas, 2009a). FAME from vegetable oils and animal fats have shown promise as biodiesel, due to improved viscosity, volatility and combustion behaviour relative to triacylglycerols, and can be used in conventional diesel engines without significant modifications (Bhatti et al., 2008). The advantages of biodiesel over diesel fuel are its portability, ready availability, renewability, higher combustion efficiency, lower sulphur and aromatic content, higher cetane number, higher biodegradability, better emission profile, safer handling, besides being non-toxic (Lapuerta et al., 2008; Demirbas, 2009a, Balat & Balat, 2010). Besides the superb lubricating property of biodiesel and its similarities in physicochemical properties to diesel, makes it an excellent fuel for compression ignition engines, revealing its potentials and practical usability for the replacement of petrodiesel in the nearest future (Atadashi et al., 2010). Moreover, biodiesel offers advantages regarding the engine wear, cost, and availability. When burned, biodiesel produces pollutants that are less detrimental to human health (Fazal et al., 2011).

Biodiesel has superior emission profile than diesel, substantially reducing emissions of unburned hydrocarbons, carbon monoxide, sulfates, polycyclic aromatic hydrocarbons, nitrated polycyclic aromatic hydrocarbons, and particulate matter (Lapuerta et al., 2008). Diesel blends containing up to 20% biodiesel can be used in nearly all diesel-powered equipment, and higher level blends and pure biodiesel can be used in many engines with little or no modification. Lower-level blends are compatible with most storage and distribution equipments, but special handling is required for higher-level blends (Demirbas, 2009a).

Usage of biodiesel will allow a balance to be sought between agriculture, economic development and environment (Demirbas, 2009a). Lower cost feedstocks are needed since biodiesel from food-grade oils is not economically competitive with petroleum-based diesel fuel. Main animal fat sources are beef tallow, lard, poultry fat and fish oils. Yellow greases can be mixtures of vegetable oils and animal fats. The FFA content affects the type of biodiesel process used and the yield of fuel from that process. Other contamination present can affect the extent of feedstock preparation necessary to use a given reaction chemistry (Demirbas, 2009a). Tallow is beef fat produced by slaughterhouse, while lard is hog fat and chicken fat refers to poultry. Brown grease comes from restaurant grease traps, sewage plants, and "black grease" (sludge). The brown one is gelatinous at room temperature and has low overall oil content. Yellow and brown grease as well as tallow can be converted into biodiesel, although the costs of processing are higher and the per-gallon biodiesel yield is lower. According to the USDA, the United States produces over 1.4 billion gallons of used cooking oil and animal fat each year. In fact, around 74% of the inedible tallow and grease produced goes to animal feed, while the remainder is used to make soaps, lubricants and other products such as Biodiesel (Tickell, 2006).

Soybean oil is the major feedstock for biodiesel in the USA and in other parts of the world. Rapeseed oil is the major source of oil in Europe and it contributes about 85% of the oil for

world biodiesel production, followed by sunflower seed oil, soybean oil and palm oil. Some sources for vegetable oil extraction to be used in biodiesel production are: castor berry, palm pulp, palm kernel oil, babassu kernel, sunflower seeds, coconut kernel, cotton seed, peanut grain, canola seed (Leung et al., 2010). According to European Biodiesel Board (EBB, 2008), European production of biodiesel reached 5.7 million tons compared to US production of 1.7 billion liters in 2007. Germany is the largest producer of biodiesel among EU countries, accounting for about half of the total European biodiesel production. In the East Asian countries, palm oil is the major feedstock for biodiesel, being the annual average production expected to be about 31.4 million tons/year over the period 2006-2010 (Shrestha & Gerpen, 2010).

In 2010, about 2.4 billion liters of biodiesel were produced in Brazil, corresponding to 14% of the global participation. The country has a wide variety of feedstocks to be used in the production of oil and fatty acids. However, it is important to find new sources that don't compete with food chains. Therefore, it is necessary to invest in finding residual oils and other products (Pacheco, 2006). Sustainable alternatives for biodiesel production are being researched with the use of enzymes, which allow for mild reaction conditions and easier recovery of glycerol, preventing the drawbacks of the chemical synthesis (Rodrigues & Ayub, 2011).

2. Meat production around the world

In the last years, meat production has increased significantly. World meat production reached 237.7 million tons in 2010, from which 42.7%, 33.4%, 23.9% corresponds to respectively pork, poultry and beef (USDA, 2010). Consequently, a larger amount of residues from animal processing-plants has been generated in countries with intensive livestock production. Within agroindustrial residues, lipid sources may be used as feedstock to biodiesel supply, helping to solve inappropriate environmental disposal, besides contributing to energy demand.

Animal protein consumption in the world is a great well-being indicator of corporations (excluding those who decide for several reasons do not consume animal protein). As can be seen in Figure 1, consumption growth is directly related to the population income level and tends to rise as income rises, because in rich countries energy consumption is 3,470 kcal, while in poorest countries this value is 2,660 kcal (FAO, 2010). In Brazil, the studies done by Hoffmann (2000), Schlindwein (2006) and Pintos-Payeras (2009) also demonstrate income great importance in meat consumption. The percentage of meat in the diet is approximately twice the richer countries. In Brazil, it is noted that meat national consumption is already, in proportional terms, similar to consumption in rich countries, although in absolute terms the energy consumption of 3,060 kcal was below the same period.

These data show that income growth in peripheral countries will have a pronounced impact on meat consumption. Thus, per capita income growth in underdeveloped countries (China, India, Brazil and Russia) in the last three decades will be determinant of consumption growth and meat production. The possibility of per capita income growth in Africa will undoubtedly be a propeller of meat consumption in the near future. The surprising economic growth in China over the past 10 years and its impact on animal protein production has turned this country into a major propeller of meat dynamics in the world. In this period the gross national per capita income has grown at rates of 13.44%, and following the same line, meat consumption grew 2.3% annually (12.7 million tons in the period). In

India, increase in per capita income of 9.23% over the same period was responsible for an increase in meat consumption in the same order of 6.68% per year (2.2 million tons). In Brazil, although less intense, we can see economic growth of 5.22% from 2000 to 2009. However, it must be taken into account that the best income distribution of the Brazilian economy lead to higher meat consumption by the poorest population (+3.64% per year meaning 4.8 million tons). A similar phenomenon was observed in Russia where meat consumption grew 5.07% per year between 2000 and 2009 (3 million tons).

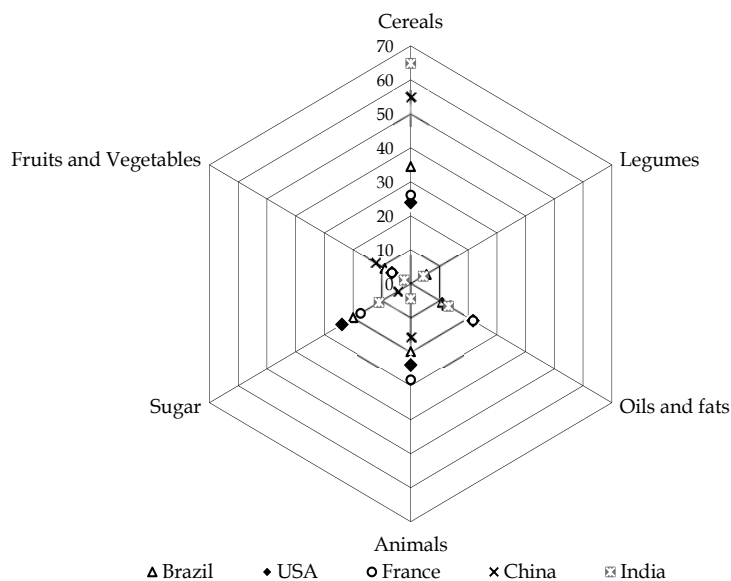


Fig. 1. Sources of per capita energy consumption from the diet as a percentage of the average period 2001-2003.

Source: FAO (2010).

The gradual effect shown in Figure 1 is a major driver of food economy, domestic and global levels, through increasing the middle class and the adoption by families who arrive there, the consumer behavior of those already there (Homem de Mello, 1990). As a result of this graduation, there would be huge demand in animal protein, legumes, fruits and vegetables. This dynamic evolution of food demand, as economic growth explains meat production growth in the world in the last two decades. Although it has been reported a large percentage increase in major meat consumption, the absolute volume consumed in India is still very low (3.8 kg) including beef, pork and poultry, when compared to 89.69, 49.9 and 57.2 kg in Brazil, China and Russia, respectively. Thus, in this country is to be expected that the continuous increase in per capita income by more than a decade will boost meat consumption to a level closer to developing countries. Worldwide, source of animal protein (except milk) most produced and consumed is pork with 29.86% (Figure 2), followed by chicken meat (22.97%), eggs (18.05%) and beef (17.56%). These four groups of sources account for 88.44% of animal protein total consumption in the world.

In a second group of sources, the following four are responsible for more than 7.00% of animal protein consumption. This group comprises the consumption of sheep (2.39%),

turkey (1.77%), eggs of other birds (1.42%) and goat (1.42%). Rounding out the meat group: duck (1.09%), buffalo (0.97%), goose and guinea fowl (0.69%), rabbits (0.53%), hunt (0.49%), other meat (0.36%), horse (0.29%), camel (0.10%), other birds (0.03%) and ostrich (0.004%). At the same group, deserves attention the consumption of buffalo that occurs almost entirely in India, where beef consumption is forbidden by Hindu religion (83% of India population). India and Pakistan are also important producers of sheep and goats. Similarly horse consumption is concentrated in Asian countries. Rabbits are produced mostly in China, Venezuela and Italy. China also concentrates the production of geese, goats, ducks and sheep.

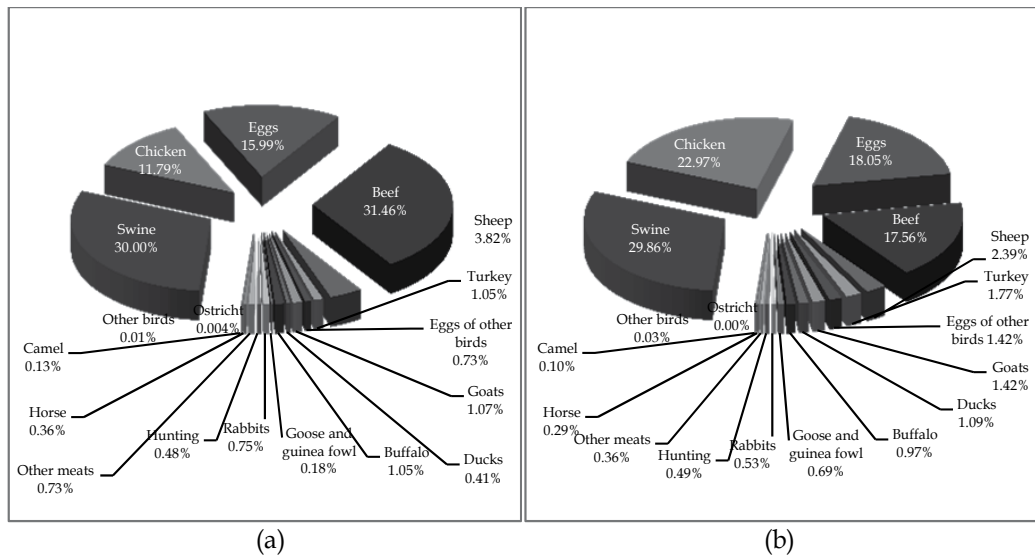


Fig. 2. Distribution of animal protein production in the world in 1975 (a) and 2008 (b)
Source: FAO (2010) adapted by the authors.

Globally, a great dynamic in animal protein production can be noted. Even being less expressive regarding total production, the highest growth rates in animal protein production are focused on meat of birds. Among the most important sources, chicken may be highlighted showing an annually growth of 4.1% over the past 10 years. The negative highlight is related to beef which presented one of the lowest growth rates (1.1%). In an intermediate form, pork production increased in the order of 2.52%. Since 1975, year after year, poultry industry is consolidating itself as one of the most important animal protein sources for the population. According to data from the United States Department of Agriculture (USDA), world production of broilers grew consistently over the past 35 years, from 10.6 million tons in 1975 to 71 million tons by the end of the first decade of this century. Brazil has a different dynamic for meat production. Unlike the rest of the world, the main animal protein is chicken (41.31%), beef (36.49%), pork (12.19%), and eggs (7.38), which represent 97.37% of total produced in the country (Figure 3).

As a result of these factors one should expect a continued growth in production and consumption of meat, mainly chicken, followed by pork and beef (Figure 4).

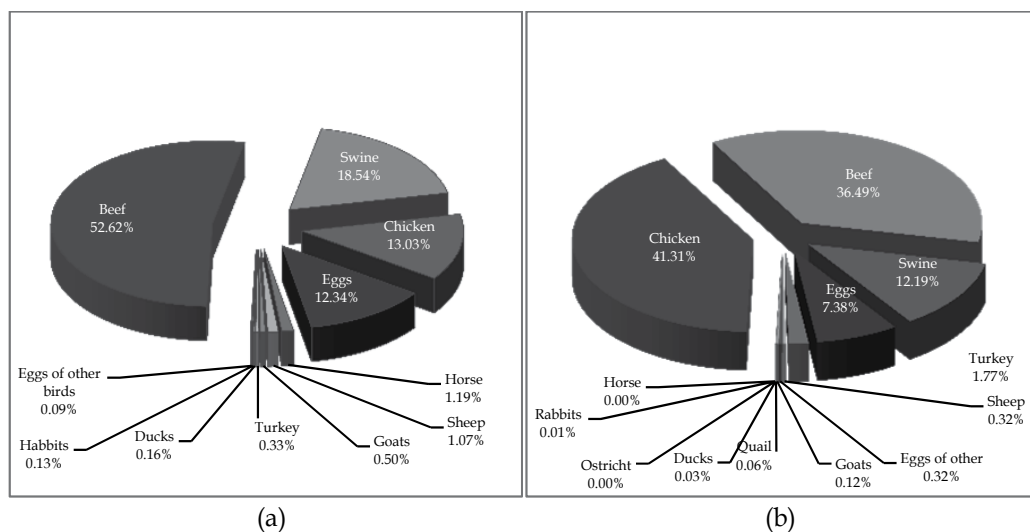


Fig. 3. Distribution of animal protein production in Brazil in 1975 (a) and 2008 (b)
Source: FAO (2010) adapted by the authors.

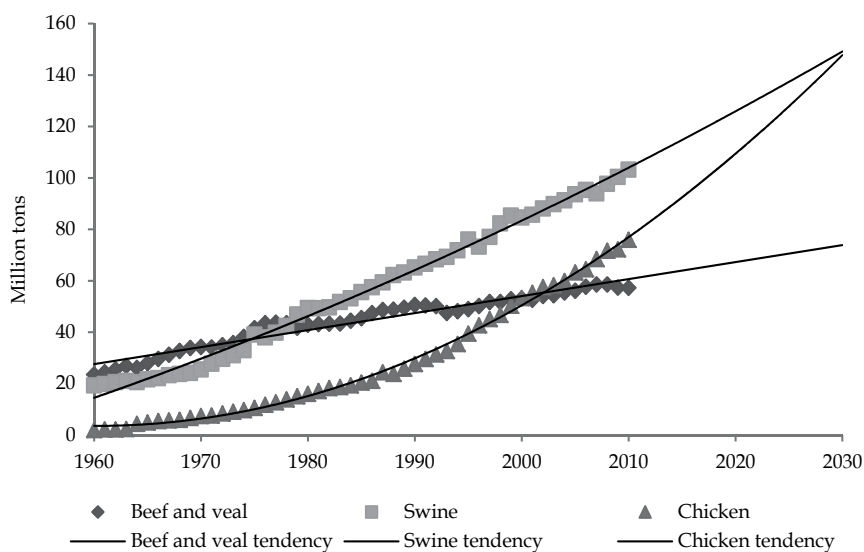


Fig. 4. Tendency of main animal protein production in the World
Source: USDA (2010) adapted by the authors.

3. Characterization and generation of animal fat wastes

Oils and fats are found in living organisms, consisting essentially of fatty acid esters and glycerin mixtures, and are known as triacylglycerols (commonly called triglycerides), which are hydrolyzed during extraction processes and storage, releasing fatty acids and glycerin.

Moreover, the use of oils or fats as fuel for internal combustion engines and their derivatives have been proposed for this intention over the past 100 years, when Rudolf Diesel applied in their assays crude petroleum and peanut oil. However, the problems of petroleum supply on the world market, generated by armed conflict that began in the 30s, led to the search for viable solutions for replacing fossil fuel.

The use of greases and animal fats eliminates the need to dispose them, besides contributing to the supply of biodiesel (Janaun & Ellis, 2010). Animal fats are highly viscous and mostly in solid form at ambient temperature because of their high content of saturated fatty acids. The high viscous fuels lead to poor atomization and result in incomplete combustion. The consequences are the increased emissions of pollutants and particulate in the exhaust gas (Kerihuel et al., 2006). Animal fats are readily available because slaughter industries are generally well managed for product control and handling procedures. However, there's a biosafety issue related to animal fats that could come from the contaminated animals. The future research to ensure biodiesel quality from animal waste (cradle to grave) has been highlighted (Janaun & Ellis, 2010). Biodiesel made from used cooking oil or from animal fat is less resistant to cold weather than biodiesel made from virgin soybean oil or most other virgin oils. As additives are developed specifically for the biodiesel industry, even this distinction could soon disappear (Tickell, 2006).

Black greases are defined loosely as greases resulting from sewage or other unconventional oil sources. It has a low conversion factor to biodiesel due to its high content in FFA. Brown greases are generally defined as a combination of greases and trappings from the slaughter industry. Yellow greases comprehend the oils and greases produced in the fast food industry and collected by the rendering industry (Tickell, 2006).

In Brazilian meat chain, most animal fats are generated in slaughterhouses and rendering plants. Products of rendering industry usually have lower market value. Materials that for aesthetic or sanitary reasons are not suitable for human food are intended as feedstocks for rendering processes. Among these materials, there are fatty trimmings, bones, and offal, as well as entire carcasses of animals condemned at slaughterhouses, and those that have died on farms (deadstock) or in transit. The raw materials are collected in slaughterhouses, butcherhouses and supermarkets by trucks that take them to rendering plants. There are some industrial-scale slaughterhouses that process the residues within their own facilities. Once in the rendering plants the residues are chopped and heated in a steam-jacketed vessel to drive off the moisture and simultaneously release the fat from the fat cells using this so called "dry" method. The internal temperature of reactor reaches 1200 °C under 5-6 kg/cm² of pressure during 2 h per batch.

In Brazil, does not exist an animal fat classification, only a general designation based on the animal from which the fat originates, such as chicken fat or fish oil, tallow and lard. The greases produced in Brazil are generally described as follows:

- a. Tallow: extracted from residues of bovine slaughter and it can be filtered or not since it has guaranteed that the product contains minimum 90% total fatty acids, unsaponifiable impurities maximum 1.5% and no FFA or fat degradation products;
- b. Lard: extracted from swine slaughter residues, being its specification and quality guarantees the same as for tallow;
- c. Chicken fat: extracted from broiler slaughter residues and it can be filtered or not since it has guaranteed that the product contains minimum 90% total fatty acids, maximum 3% unsaponifiable impurities, without FFA or fat degradation products;

- d. Animal fat mix: extracted from slaughter residues of mammals or birds. It can be filtered or not since it has guaranteed that the product contains total fatty acids minimum 90%, maximum 2% unsaponifiable impurities, without FFA or products of fat degradation unless the ones generated even with good production practices implemented.

The animal species from which the fat originates must be specified. Additions of antioxidants must be informed in any of these products. The main difference between animal fat and vegetable oil is their fatty acid composition. Vegetable oils have high content of unsaturated fatty acids, mainly oleic and linoleic acid, while animal fat composition has higher proportion of saturated fatty acids (Table 1).

Oil or Fat	12:0	14:0	16:0	16:1	18:0	18:1	18:2	18:3	20:4	≥ 20
Chicken	0.1	1-1.3	17-20.7	5.4	6-12	42.7	20.7	0.7-1.3	0.1	1.6
Lard	0.1	1-2	23.6-30	2.8	12-18	40-50	7-13	0-1	1.7	1.3
Tallow	0.1	3-6	23.3-32	4.4	19-25	37-43	2-3	0.6-0.9	0.2	1.8
Fish	0.2	6.1	14.3	10.0	3.0	15.1	1.4	0.7	0.7	56.5
Butter	-	7-10	24-26	-	10-13	1-2.5	2-5	-	-	-
Soybean	-	0.1	6-10.2	-	2-5	20-30	50-60	-	-	-
Rapeseed	0.2	0.1	3.9	0.2	1.7	60.0	18.8	9.5	-	4.0
Corn	-	1-2	8-12	0.1	2-5	19-49	34-62	0.7	-	2.0
Olive	-	-	9-10	-	2-3	73-84	10-12	Traces	-	-
Cotton	-	-	20-25	-	1-2	23-35	40-50	Traces	-	-

Table 1. Average fatty acid composition of some vegetable oil and animal fat (Pearl, 2002; Rostagno et al., 2011)

Traditionally in Brazil, cleaning and toilet products industries use part of animal fat residues to produce soaps and waxes while other parts are employed in the production of lubricants and leather preservatives. Nevertheless, in Brazil, the beginning of National Program of Biodiesel Production and Use (Law #11.097) has rapidly changed this scenario and between October/2008 and March/2009 biodiesel plants consumed 43% of total tallow, which corresponds to approximately 15% of whole biodiesel produced. Although Brazil is also a major producer of chicken and swine meat, fats from these species are still not being used for biodiesel production. According to UBABEF (2009) data, Brazil produced around 23 million tons of meat, from which 3, 9 and 11 million correspond to swine, cattle and poultry, respectively. Considering the amount of residues 45% (wt/wt) cattle and 25% (wt/wt) swine and poultry contain approximately 15% fat. Thus, feedstock potential amount is 607,500, 412,500 and 112,500 tons for cattle, poultry and swine, respectively.

Wastes from slaughterhouses are constituted by non-edible by-products and wastewater which pass through flocculation and flotation process. Non-edible animal by-products are sent for rendering plants where flours are processed and good-quality fats besides acid fats are originated. Good-quality fats are destined for drugs and cosmetics, while acidic fats (which don't attend industry acid requirements and flotation stage) have low or no commercial value, being their promising target energy or biodiesel production. Wastewater undergoes flocculation and flotation process with the aid of coagulants, being separated into solid (flotation stage) and liquids (liquid phase). The first one is destined to rendering plants, while the second one goes to treatment lagoons, as is shown in Figure 5. Animal fats are classified in three categories (low, medium and high-grade quality fat) according to the risk level, following Regulation (EC) 1774/2002 of the European Parliament and of the

Council of 3 October 2002. High-grade quality fat has below 2% of FFA, which are mainly used for drugs and cosmetics, besides pet food. Medium-grade fat presents 3-5% FFA, while low-grade fat has above 5% FFA and are destined to biofuel production.

In Brazil, according to the National Petroleum Agency (ANP 2011), raw materials of animal origin used for biodiesel production account for 14.82% of authorized nominal capacity. This value is still low compared to the raw materials of vegetable origin that account for 84.45% of biodiesel production. However, volume of animal feedstocks tends to grow since Brazil has one of the largest animal herds in the world. Brazil is currently the second largest cattle producer (over 9.1 million tons), the fourth largest pork producer (more than 3.1 million tons), and the third largest chicken meat producer, with more than 11.4 million tons. In this context, lipid by-products from slaughterhouses should become attractive, especially for economical and environmental reasons.

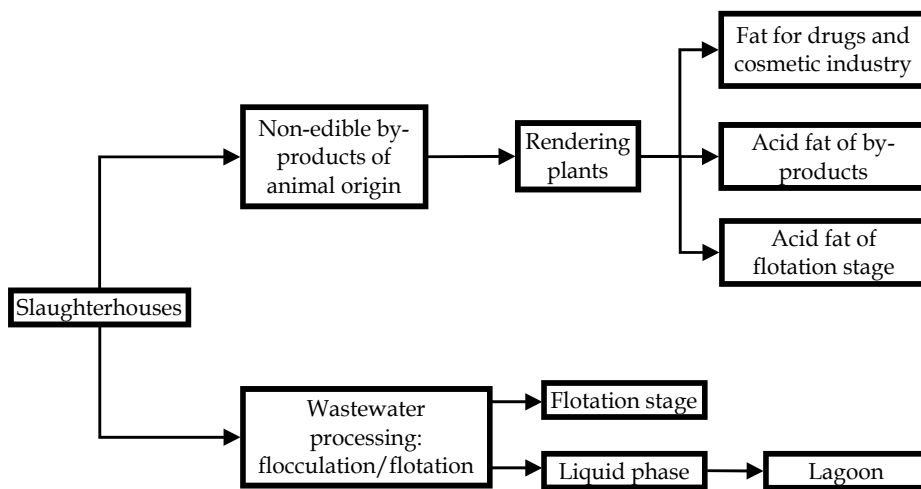


Fig. 5. Scheme of fat processing in slaughterhouses.

4. Biodiesel production from animal fat wastes: technical challenges

The feedstocks issue is the critical point affecting the economic feasibility of biodiesel production, since accounts around 80% of the biofuel total cost. In this context, several efforts have been carried out in order to reduce biodiesel prices, essentially by altering lipid sources (Zhang et al., 2003a, 2003b; Canakci, 2007; Canakci & Sanli, 2008; Wang, 2009; Janaun & Ellis, 2010; Martins et al., 2011). Nowadays, edible vegetable oils are the major starting materials for biodiesel preparation. In consequence, prospection for novel feedstocks has been primarily attributed to investigations involving oleaginous species for inedible oil extraction (Nass et al., 2007). In recent, alternatively lipid residues as waste frying oil and inedible animal fats have also receiving considerable attention from biofuel sector. To take advantage of these low cost and low quality resources, a convenient action would be to reuse residues in order to integrate sustainable energy supply and waste management in food processing facilities.

To get a better understanding of challenges involved on biodiesel synthesis from animal fat wastes, a brief review regarding to fundamental reactions of carboxylic acids and esters is

presented (Formo, 1954; Carey & Sundberg, 1983; Morrison & Boyd, 1996). As illustrated in figure 6a, carboxylic acids originate their salts (soaps) by treatment with aqueous alkaline solutions (hydroxides or carbonates). Additionally, carbonyl group confers an interesting synthetic versatility to carboxylic acids since they can be converted into derivatives by nucleophilic substitution. In fact, esters are directly obtained reacting carboxylic acids using alcohols as acyl-acceptors under acidic conditions, being this process usually referred as Fisher esterification (Figure 6b). The strategy frequently employed to shift equilibrium to the right includes the use of large amounts of alcohol and water removal from the reactional medium.

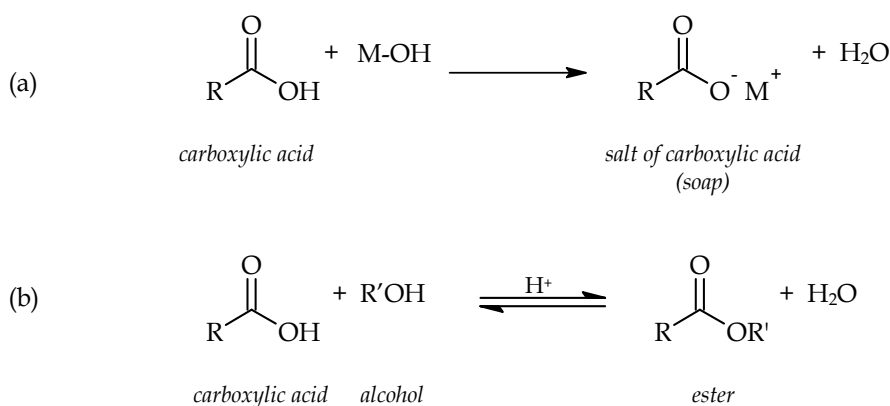


Fig. 6. Reactions of carboxylic acids: (a) acid-base neutralization (where M is Na⁺ or K⁺); (b) acid-catalyzed esterification

Esters are carboxylic acid derivatives that can be hydrolyzed either in acid or basic medium. The alkali-catalyzed process is essentially irreversible (Figure 7a). On the other hand, hydrolysis in acidic solution is an equilibrium reaction, being dependent on the relative alcohol and water concentrations (Figure 7b).

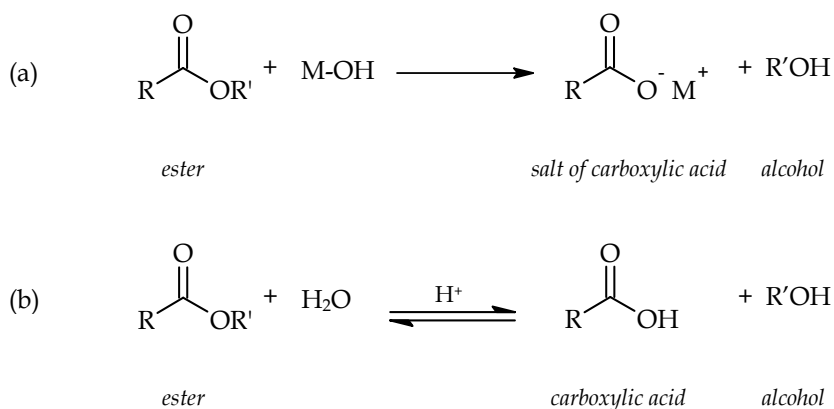


Fig. 7. Ester hydrolysis: (a) alkali-catalyzed (where M is Na⁺ or K⁺); (b) acid-catalyzed

According to Xu (2003), transesterification is a general term for the reactions between an ester and a fatty acid (acidolysis), an alcohol (alcoholysis), or another ester (transesterification). Esters are converted into another by alkoxy group exchanger as exemplified in figure 8. The displacement of $-OR'$ molecular unit is carried out when the original ester react with an alcohol to provide a new carboxylic acid derivative. Alcoholysis is usually denominated by most authors as transesterification, general term that will be used from now on to describe biodiesel production reaction. The transesterification is an equilibrium process and addition of an excessive amount of alcohol can be used in favor of products' synthesis:

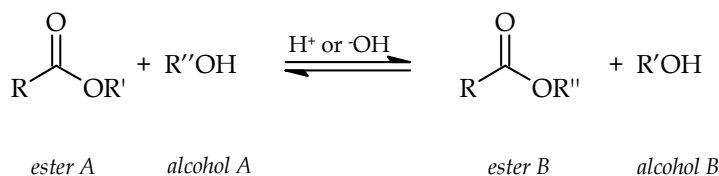


Fig. 8. Transesterification type alcoholysis

Oils and fats are complex lipids derived respectively from vegetable and animal sources. Their compositions are primarily based on triacylglycerols (TAG), which molecules consist of a glycerol backbone attached by ester bonds to three long-chain carboxylic acids (fatty acids). Reactions of ester linkages of oils and fats were recognized a long time by their technological importance (Formo, 1954). Nowadays, non-hydrolytic ester reactions (esterification and transesterification) play a fundamental role in the applied chemistry. For instance, biodiesel is a mixture of fatty acid mono-alkyl esters readily produced from TAG transesterification by using a short chain alcohol, as showed in figure 9.

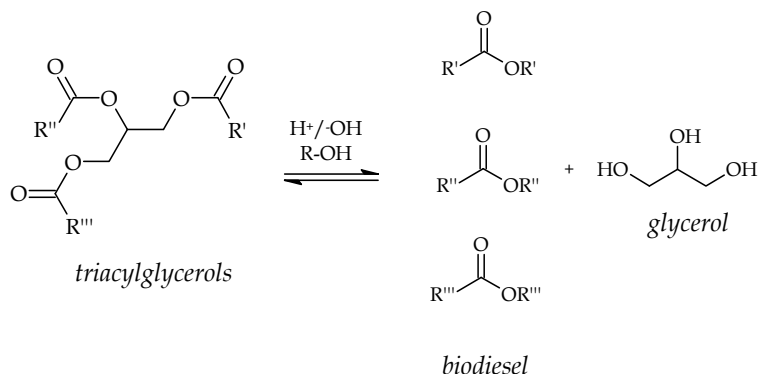


Fig. 9. Overall scheme of the TAG transesterification for biodiesel production (where R is $-\text{CH}_3$ or $-\text{CH}_3\text{CH}_2$)

Transesterification of TAG is a process of three consecutive and reversible acid- or basic-catalyzed reactions. Diacylglycerols (DAG) and monoacylglycerols (MAG) are intermediates. The stoichiometry of the overall reaction requires a molar ratio of 1:3 (TAG:alcohol) to give 3 mol of ester and 1 mol of glycerol. Its course involves stepwise conversions of TAG to DAG to MAG to glycerol (GL) (Figure 10).

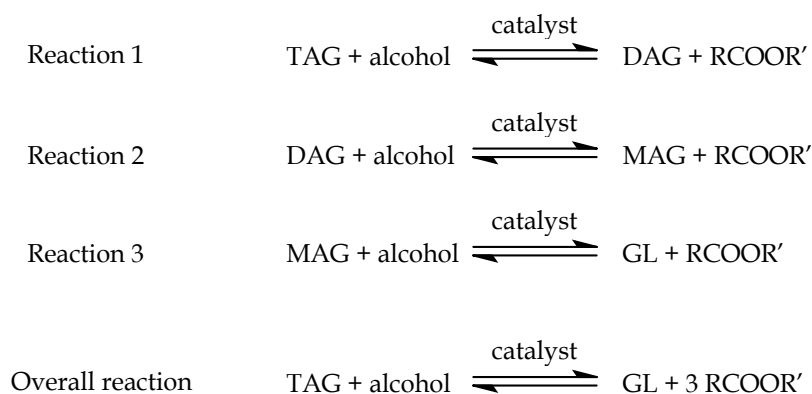


Fig. 10. Chemistry of TAG transesterification

Few studies were concerned with detailed kinetic aspects of the transesterification of vegetable oils (Freedman et al., 1986; Nouredini & Zhu, 1997; Darnoko & Cheryan, 2000; Komers et al., 2002). Freedman et al. (1986) investigated the kinetics of acid- and base-catalyzed transesterification of TAG with methanol and 1-butanol at 6:1 and 30:1 molar ratio alcohol:oil. The authors proposed pseudo first-order kinetics at high molar ratio alcohol:oil and second-order kinetics combined with a shunt-reaction at low alcohol:oil ratio. According to Nouredini & Zhu (1997), alkali-catalyzed methanolysis of oils can be described as follow: a) initially reaction is characterized by a mass transfer controlled regime (slow) that results from low miscibility of reactants; b) ester produced at beginning can act as mutual solvent and favor a kinetic controlled regime (fast) characterized by a sudden surge in products formation; c) in the final, an equilibrium regime (slow) is approached. Figure 11 shows typical distribution of reactants, intermediates and products during the course of transesterification, where a sigmoid behavior for ester production is exemplified.

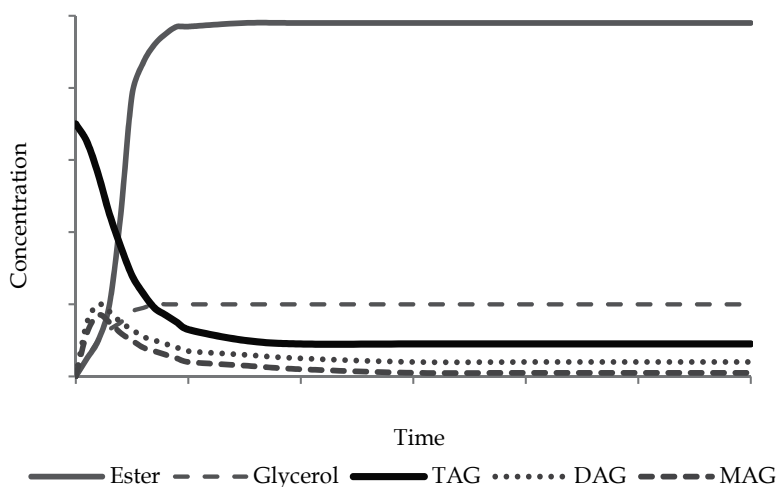


Fig. 11. Illustrative scheme of component concentration change during transesterification

Besides transesterification, reactions showed previously in this section can be involved during biodiesel preparation from lipid feedstocks depending on catalyst used. In fact, this reaction comprises a complex system. Komers and co-workers (2001b), in a fundamental research, were able to show that the reaction mixture of alkaline methanolysis of oils includes the following main components: TAG, DAG, MAG, methyl esters, methanol, soaps, KOH (in the form of OH^-), CH_3OK (as CH_3O^-), and water. Considering the system summarized in figure 12, the great issue is to establish appropriate conditions to minimize possible side reactions (hydrolysis and soaps formation) and, in consequence, drive the process toward ester production.

As is already well-know, transesterification may be influenced by several factors such as: feedstock composition; FFA content in raw materials, water concentration; alcohol to TAG molar ratio; catalyst type and concentration; type of alcohol; temperature; pressure; and mixing intensity. Researches have been intensively conducted to evaluate variables affecting ester yields and their respective interactions. Background about these parameters is detailed in several critical reviews (Schuchardt et al., 1998; Ma & Hanna, 1999; Fukuda et al., 2001; Van Gerpen & Knothe, 2005; Meher et al., 2006; Sharma et al., 2008; Vasudevan & Briggs, 2008; Demirbas, 2009b; Basha et al., 2009; Helwani et al., 2009; Vasudevan & Fu, 2010; Atadashi et al., 2010; Leung et al., 2010).

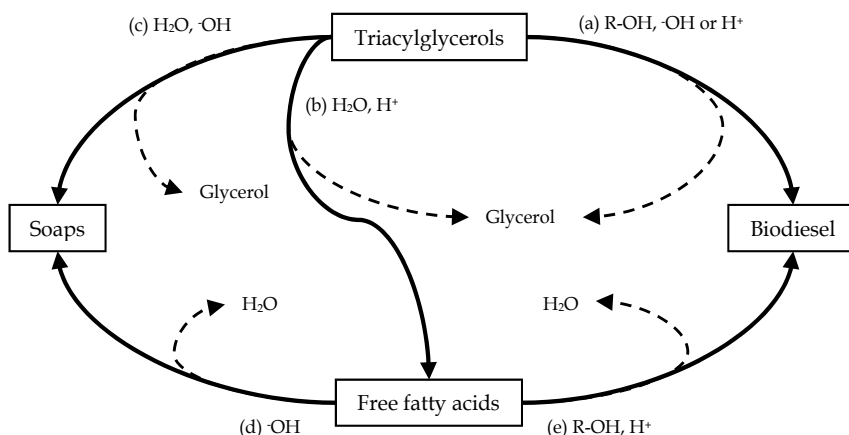


Fig. 12. Reactions involved in conventional biodiesel production: (a) alkali-catalyzed transesterification (expected route); (b) acid-catalyzed hydrolysis; (c) alkali-catalyzed hydrolysis; (d) acid-base neutralization; (e) acid-catalyzed esterification (expected route)

Homogeneous alkali-catalyzed transesterification is the most widely employed industrial process for biodiesel production (Helwani et al., 2009; Atadashi et al., 2010; Leung et al., 2010). This fact is because the base-catalyzed reaction is faster than the acid one under mild conditions (Formo, 1954) resulting in a fuel-grade biodiesel. Alkaline catalysts are furthermore less corrosive than acidic compounds. Batch reactors are used for transesterification of refined vegetable oils with alcohol (molar ratio alcohol to oil 6:1) under anhydrous conditions. In summary, high esters conversion rates (>95%) are obtained in short times (after 1 h) at atmospheric pressure in temperatures ranged from 40 to 70 °C.

Metal hydroxides (NaOH and KOH) and methoxides (NaOCH₃ and KOCH₃) are generally applied as catalysts in concentrations ranging from 0.5 to 2% wt/wt of oil (Vicent et al., 2004; Dias et al., 2008). The most common acyl-receptor is methanol owing to its low cost. However, ethanol can be successfully used as well (Feuge & Gros, 1949; Wu et al., 1999; Encinar et al., 2002; Ghassan et al., 2004; Ferrari et al., 2005; Bouaid et al. 2007). Ethylic route is particularly interesting in countries with consolidated sugarcane industry like Brazil (Nass et al., 2007), allowing biodiesel production entirely based on biomass resources. Afterwards reaction achievement, spontaneous separation of biodiesel and rich-glycerol phases occurs by gravitational settling. In some cases, a centrifugation step may be used to speed up the separation of phases. Then biodiesel is isolated and purified by removal alcohol excess, water washing, drying, and vacuum distillation.

Rendered animal fats are attractive raw materials for biodiesel industry once they are immediately available and found in huge amounts at relative low-prices in regions with intensive livestock. The mentioned lipid sources are generated in meat-processing plants with different quality degrees. Often, inedible residual fats don't present specific requirements for direct application in conventional biodiesel approach mediated by alkalis. According to system showed in figure 12, feedstocks and reactants necessarily should meet suitable quality with respect to FFA and moisture. For that reason, refined vegetable oils are favored instead of lipid wastes.

The main technical restrictions with processing animal fat wastes are their relative high FFA (ranging from 5% to 30%) and water content. These two factors are key parameters for determining viability of transesterification process, because they may cause catalyst effectiveness and promote soaps formation. In fact, alkaline catalysts are consumed by neutralization with FFA in the reactional medium, leading to soaps and water formation. As a result of catalyst deactivation, ester yield is significantly reduced. In addition, post-treatment of the final mixture is more difficult by the occurrence of soaps, which prevents phase separation between esters and glycerol, promoting stable emulsion establishment in washing operations. Kusdiana & Saka (2004) were able to demonstrate this effect on TAG methanolysis using 1.5% NaOH (wt/wt) as illustrated in figure 13a. Restrictive limits of FFA ranging from <1% to <3%, as recently reported (Atadashi et al., 2010). According to reports involving fat residues, starting materials for basic-catalyzed transesterification should not exceed values beyond 0.5% FFA, which corresponds to an acid number of 1 mg KOH/g of oil (Ma et al., 1998; Canakci & Van Gerpen, 2001). For vegetable oils, a FFA value lower than 3% (6 mg KOH/g of oil) is recommended for good conversion efficiency (Dorado et al., 2002; Tamasevic & Siler-Marinkovic, 2003; Phan & Phan, 2008). In both cases, transesterification rate can be enhanced with bases if FFA is around 5%, although further quantity of catalyst must be added to compensate higher acidity and loss due soap formation (Van Gerpen, 2005). Particularly, this procedure involving excessive amount of catalyst is not recommended since it gives rise to the formation of gels that interfere in the reaction, hinder glycerol separation, and contribute to emulsification during water washing.

It's well-established that TAG transesterification with basic catalysis is also sensitive to water content. Water is one of the main causes for side reactions besides alcoholysis. The effective catalyzing agents in the alkaline catalyzed transesterification are alkoxide ions (RO⁻). According to equilibrium study reported by Komers et al. (2001a), initial concentration of alkolate (RO⁻) decreases with an increasing amount of water in methanol and KOH. This effect can also occur by water presence in oils and fats. Then, transesterification doesn't occur without catalyst

generation and besides hydrolysis may take place as competitive reaction follow-on to soaps production. For the alkaline-catalyzed methanolysis of oils, ester conversion was slightly reduced when water concentration increased in reaction system, as showed in figures 13b and 14a (Canakci & Van Gerpen, 1999; Kusdiana & Saka, 2004). The effects of FFA and water content on alkali-transesterification of beef tallow were investigated by Ma and co-workers (1998). A significant interaction between two factors was clearly observed, characterizing synergistic negative effect on the reaction, according to data showed in figure 15b. With respect to the single effect, the apparent yield of beef tallow methyl esters (BTME) was the highest without addition of FFA and water. The apparent yield decreased with the increase of the water amount without addition of FFA. A similar behavior was noted without water addition when FFA level increased. Water generally can be removed from raw materials by drying, gravitational settling or with desiccant agents before processing transesterification.

The FFA content turn waste lipids unsuitable for conventional biodiesel route. Transesterification via acid catalysis is an alternative process claimed as more tolerant to high FFA levels (Lotero et al., 2005). The homogeneous acid-catalyzed transesterification is slower than alkaline process. Generally, this reaction is performed at high molar ratios of alcohol:oil (50:1) at 80°C, and high catalyst concentrations (3% by weight of lipid feedstock). Besides, strong mineral acids (HCl and H₂SO₄) are corrosives, causing damages to reactors. As can be see in figure 13b, water is the major obstacle to this reaction, being more critical than in base catalysis. According to Canakci and Van Gerpen (1999), in order to achieve good ester conversion, the acid catalyst also requires water content lower than 0.5%, which is around the same for alkaline reaction. Only 0.1% of water in reaction medium is enough to result in some reduction of the methyl ester yield (Kusdiana & Saka, 2004). In acid-catalyzed transesterification mechanism, the key-step is the protonation of the carbonyl oxygen. This increases the electrophilicity of the carbonyl carbon, making it more prone to nucleophilic attack. When present in reactional medium, water can form clusters around protons with less acid strength than alcohol-only proton complexes. Therefore, the catalytic species (H⁺) are deactivated by hydration, and don't allow TAG and their intermediates susceptible to alcohol attack (Helwani et al., 2009). On the other hand, acids are able to simultaneously catalyze both transesterification and esterification. Acid catalysts are effective at converting FFA to ester quickly. The integrated process is convenient to produce biodiesel from feedstocks having high FFA levels (Canakci & Van Gerpen, 2001; Zhang et al., 2003a, 2003b). The two-step approach includes an acid-catalyzed pre-treatment to esterification of FFA prior to alkali-catalyzed transesterification of TAG.

Nevertheless, as mentioned previously in this section, acid-catalyzed esterification is an equilibrium reaction, and hydrolysis occurs as inverse process. Water is produced in reactional medium when FFA react with alcohol to give esters. Canakci & Van Gerpen (1999), simulating FFA content in oil with palmitic acid, showed that water formed during acid-catalyzed esterification has similar negative effect on transesterification than when water was deliberately added to reaction mixture. This fact is noted in figure 15a by coincident lines of acid-catalyzed transesterification (3% H₂SO₄, molar ratio 6:1, at 60°C) with water from reaction of palmitic acid and only with water addition. Then, water formed in the esterification limited FFA levels in the lipid source to 5%.

Even with all the above mentioned details regarding to raw materials' properties, several researches have stated that animal fat wastes are really important sources for biodiesel production. In Table 2, reactional conditions for biodiesel preparation from different animal fats are summarized.

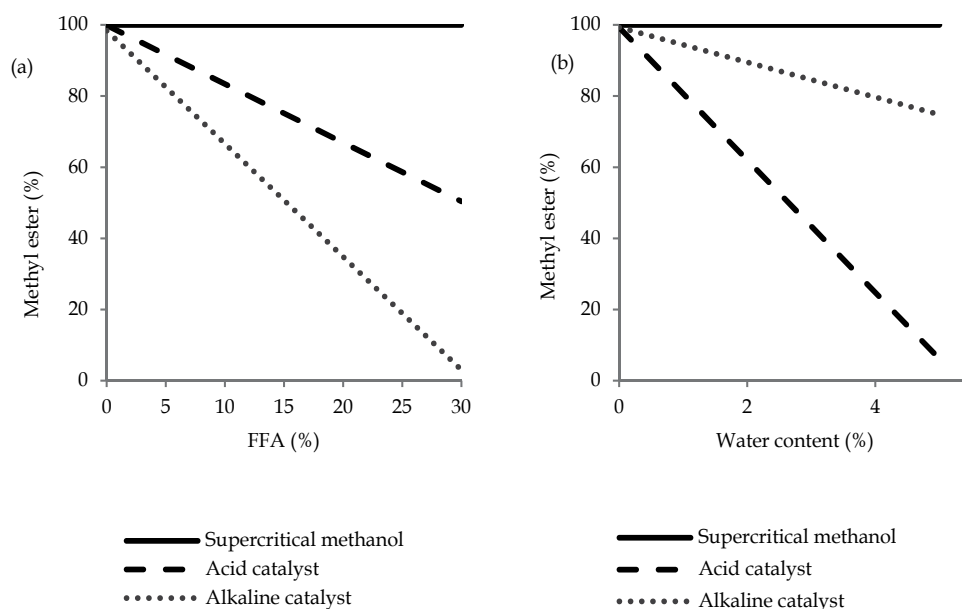


Fig. 13. Effects of FFA (a) and water (b) contents on the transesterification reaction of oils (adapted from Kusdiana & Saka, 2004).

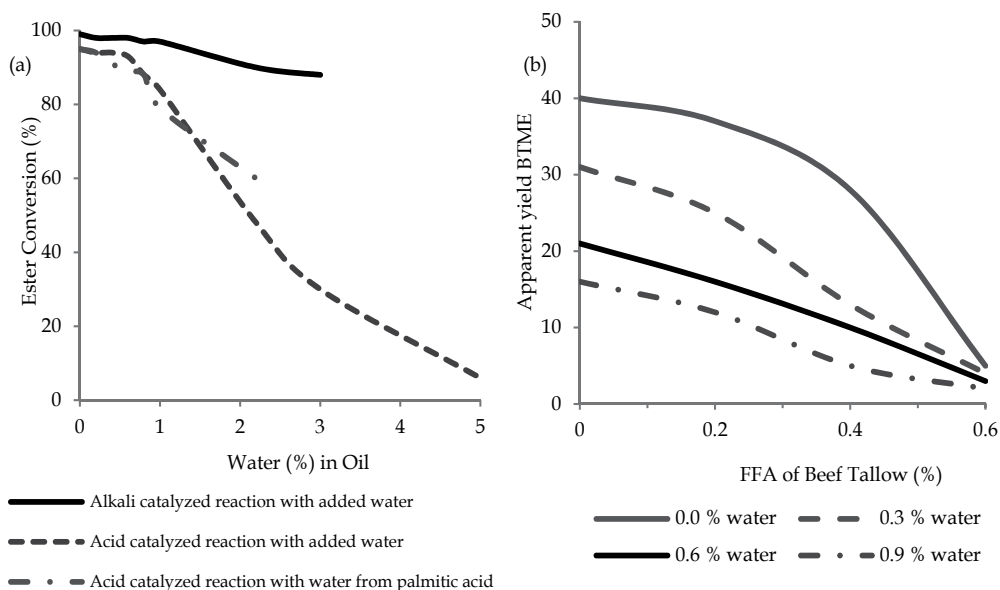


Fig. 14. (a) Water effect on transesterification of oils (adapted from Canakci & Van Gerpen, 2001); (b) FFA and water effects on alkali-catalyzed transesterification of beef tallow (adapted from Ma et al., 1998)

Feedstock	Catalyst (wt/wt of fat)	Alcohol	Molar ratio	T (°C)	Time (h)	Conv. (%)	Reference
Beef tallow	Step 1: NaOH 1% Step 2: NaOH 0.2%	MeOH	6:1 20%	70 60	0.5 1	-	Zheng & Hanna, 1996
Beef tallow	H ₂ SO ₄ 1%	MeOH	6:1	60	48	13.0	Alcantara et al., 2000
Beef tallow	NaOCH ₃ 1%	MeOH	6:1	60	3	Quantitative	Alcantara et al., 2000
Beef tallow	KOH 2%	MeOH	-	65	1.5	>95	Moraes et al., 2008
Beef tallow	KOH 1.50%	MeOH	6:1	65	3	Quantitative	da Cunha et al., 2009
Beef tallow	Sulfonated polystyrene 20 mol%	MeOH	100:1	64	18	70.0	Soldi et al., 2009
Beef tallow: sunflower oil blends	NaOH 1%	MeOH	6:1	60	1	-	Taravus et al., 2009
Chicken tallow	H ₂ SO ₄ 25% NaOH 1.5%	MeOH MeOH	30:1 -	50 30	24 1	Quantitative 88.1	Bhatti et al., 2008
Feather meal fat	KOH 1%	MeOH	9:1	70	1/4	Quantitative	Kondamudi et al., 2009
Mutton tallow	H ₂ SO ₄ 25% NaOH 1.5% KOH 1%	MeOH MeOH MeOH	30:1 - 6:1	60 30 65	24 1 3	93.2 78.3 79.7	Bhatti et al., 2008
Duck tallow	NaOH 1% NaOCH ₃ 1%	MeOH MeOH	6:1 6:1	65 65	3 3	62.3 79.3	Chung et al., 2009
Lard:soybean oil blends	NaOH 0.8%	MeOH	6:1	65	1	81.7-88.6	Dias et al., 2008
Lard:waste frying oil blends	NaOH 0.8%	MeOH	6:1	65	1	81.7-88.0	Dias et al., 2008
Lard	Step 1: H ₂ SO ₄ 2% Step 2: NaOH 1%	MeOH	6:1	65	Step 1: 5 Step 2: 1	66.2	Dias et al., 2009
Lard:soybean oil blend (25:75 wt/wt)	Step 1: H ₂ SO ₄ 2% Step 2: NaOH 1%	MeOH	6:1	65	Step 1: 5 Step 2: 1	64.4	Dias et al., 2009
Lard:soybean oil blend (25:75 wt/wt)	NaOH 1%	MeOH	6:1	65	1	77.8	Dias et al., 2009
Lard	Immobilized-lipase (<i>Candida</i> sp. 99-125)	MeOH	1:1(3x)	40	1/2	87.4	Lu et al., 2007
Lard	KOH 1.26%	MeOH	7.5:1	65	1/3	98.6	Jeong et al., 2009
Lard	KOH 0.9%	MeOH	6:1	60	1/3	89.2	Berrios et al., 2009
Leather	KOH 0.75%	MeOH	6:1	50	1/4	Quantitative	İsler et al., 2010
Poultry fat	Mg-Al hydrocalcite 10%	MeOH	30:1	120	8	93.0	Liu et al., 2007
Tallow	NaOH 0.5%	MeOH	6:1	60	3	-	Öner & Altun, 2009
Waste animal fat	H ₂ SO ₄ 2.25 M	EtOH	-	50	2	78.0	Ghassan et al., 2004
Waste animal fat	Step 1: H ₂ SO ₄ 0.08% Step 2: NaOH 0.01%	MeOH	-	62	2	89.0	Gürü et al., 2009

Table 2. Conditions of animal fats transesterification for biodiesel preparation

Figure 15 presents the raw materials employed for biodiesel production in Brazil from March 2010 until March 2011. As can be seen, soybean oil is the major feedstock. Additionally, beef tallow also plays an important role in this economic segment. The application of animal lipid sources in the Brazilian bioenergy sector is likely to increase because of accessibility to others profitable raw materials such as chicken and swine fat wastes. Recently, the simulation of investment in an industrial plant, made by Santos Filho et al. 2010, with processing capacity of 10,000 liters per day presented results that attest to the profitability of the enterprise.

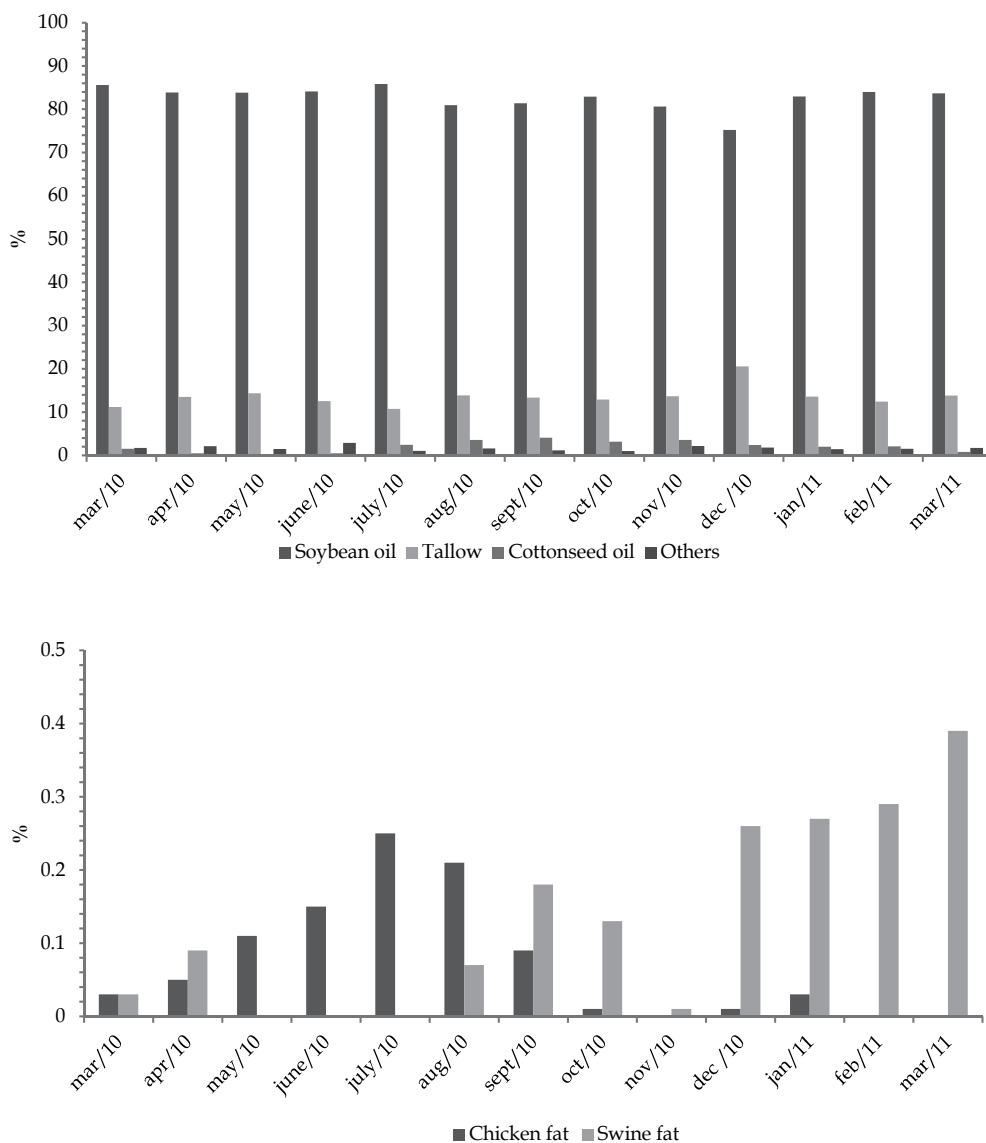


Fig. 15. Raw materials used for biodiesel production in Brazil
Source: (ANP, 2011)

The internal rate of return for an undertaking was 191%, the payback time was 1.51 years and the minimum price that enables the project was R\$ 1,57, about US\$ 1.00 (currency exchange August, 3rd, 2011), which is lower than the worst market since 2005. According to the authors, the results indicate that the use of acid fat from the slaughter of pigs and poultry for biodiesel production is technically and economically feasible, because there is high supply of raw material in different states of the country, facilitating logistics and providing a low cost transport of products. Increased demand for biofuels, especially for biodiesel, which year after year has been more requested for blending with diesel fuel, rising from 2% (2008) to 5% (2010) representing a consistent demand for production. Therefore, conversion of swine and poultry fats into biodiesel is advantageous for meat-processing industries that use this waste for burning and heat generation for boilers. Its use allows an increase in income and the chain will also be promoting an increase in the competitiveness of pork and poultry, turning a product with virtually no value into an income generator.

5. Conclusion

Worldwide vegetable oils are preferred as the main lipid starting materials for biodiesel production. However, animal fats have a great potential as feedstocks for biofuel segments, because they are not commodities, having a lower market value. Over the last years, meat production has increased significantly attaining 237.7 million tons in 2010, from which 42.7%, 33.4%, 23.9% corresponds respectively to pork, poultry and beef. Then a larger amount of residues from animal processing-plants has been generated in countries with intensive livestock production. Within agroindustrial residues, lipid sources may be used to solve inappropriate environmental disposal, besides contributing to energy supply. Brazilian government demands increasing addition of biodiesel into fossil diesel, taking place in 2010 a novel regulatory mark which raised the level up to 5%. Therefore, it has been encouraged the search for other renewable raw materials for application in the biofuel industry, such as non-edible oils and waste animal fats. Brazil is one of the main meat producers account to 9.1 beef, 3.2 pork, and 12.3 poultry million tons, dominating the world market together with the USA. In Brazil there is a broad range of residual lipid sources from slaughterhouse and rendering establishments ready available for application in biodiesel synthesis, including tallow, lard, poultry fat, mixed animal fat (mammal and poultry fat), and floating material from wastewater treatment plants. In a couple of years, researches focusing on fat residues should be accomplished mainly in order to improve feedstocks standardization process, because FFA and water content are decisive factors determining economic viability and biodiesel quality. Besides, researches in the field of prominent process such as heterogeneous catalysis (Di Serio et al., 2008; Cordeiro et al., 2011), enzyme-based process (Shimada et al., 2002), and supercritical fluids (Demirbas, 2006) should be carried out using animal fat wastes turning these raw materials more and more attractive.

6. Acknowledgements

Authors would like to acknowledge EMBRAPA (Empresa Brasileira de Pesquisa Agropecuária) and FAPESC (Fundação de Amparo a Pesquisa e Inovação do Estado de Santa Catarina) for the financial support.

7. References

- Alcantara, R., Amores, J., Canoira, L., Fidalgo, E., Franco, M. J., & Navarro, A. (2000). Catalytic production of biodiesel from soy-bean oil, used frying oil and tallow. *Biomass and Bioenergy*, Vol.18, No.6, (June 2000), pp. 515-527, ISSN 0961-9534
- ANP, 2011. Boletim mensal do biodiesel. Agência Nacional do Petróleo, Gás Natural e Biocombustível. Superintendência de Refino e Processamento de Gás Natural – SRP. Ministério de Minas e Energia. Abril 2011. Available from: <http://www.udop.com.br/download/estatistica/anp_biodiesel/2011/0411_boletim_mensal.pdf>
- Atadashi, I. M., Aroua, M. K., & Aziz, A. A. (2010). High quality biodiesel and its diesel engine application: A review. *Renewable and Sustainable Energy Reviews*, Vol.14, No.7, (September 2010), pp.1999-2008, ISSN 1364-0321
- Balat, M. & Balat, H. (2010). Progress in biodiesel processing. *Applied Energy*, Vol.87, No.6, (June 2010), pp.1815-1835, ISSN 0306-2619
- Basha, S. A.; Gopal, K. R., & Jebaraj, S. (2009). A review on biodiesel production, combustion, emissions and performance. *Renewable and Sustainable Energy Reviews*. Vol.13, No.6-7, (August /September 2009), pp. 1628-1634, ISSN 1364-0321
- Berrios, M., Gutiérrez, M. C., Martín, M. A., & Martín, A. (2009). Application of the factorial design of experiments to biodiesel production from lard. *Fuel processing and Technology*, Vol.90, No.12, (December 2009), pp. 1447-1451, ISSN 0378-3820
- Bhatti, H. N., Hanif, M. A., Qasim, M., & Rehman, A. U. (2008). Biodiesel production from waste tallow. *Fuel*, Vol.87, N.13-14, (October 2008), pp.2961-2966, ISSN 0016-2361
- Bouaid, A., Martinez, M., & Aracil, J. (2007). A comparative study of the production of ethyl esters from vegetable oils as a biodiesel fuel optimization by factorial design. *Chemical Engineering Journal* , Vol.134, No.1-3 (November 2007) pp. 93-99, ISSN 1385-8947
- Canakci, M. & Gerpen, J. V. (1999). Biodiesel production via acid catalysis. *Transactions of the ASABE*, Vol.42, No.5, pp. 1203-1210, ISSN 0001-2351
- Canakci, M. & Gerpen, J. V. (2001). Biodiesel production from oils and fats with high free fatty acids. *Transactions of the ASAE*, Vol.44, No.6, (November/December 2001), pp. 1429-1436, ISSN 0001-2351
- Canakci, M. (2007). The potential of restaurant waste lipids as biodiesel feedstocks. *Bioresource Technology*, Vol.98, No.1, (January 2007), pp. 183-190, ISSN 0960-8524
- Canakci, M. & Sanli, H. (2008). Biodiesel production from various feedstocks and their effects on the fuel properties. *Journal of Industrial Microbiology and Biotechnology*, Vol.35, No.5, (May 2008), pp. 431-441, ISSN 1476-5535
- Carey, F. A., Sundberg, R. J. (1983). *Advanced Organic Chemistry* (2nd edition), Plenum Press, ISBN 0-306-41088-5, New York
- Carlsson, A. S. (2009). Plant oils as feedstock alternatives to petroleum – A short survey of potential oil crop platforms. *Biochimie*, Vol.91, No.6, (June 2009), pp. 665-670, ISSN 0300-9084
- Chung, K.-H. & Kim, J. (2009). Biodiesel production by transesterification of duck tallow with methanol on alkali catalysts. *Biomass and Bioenergy*, Vol.33, No.1, (January 2009), pp. 155-158, ISSN 0961-9534

- Cordeiro, C. S., da Silva, F. R., Wypych, F. & Ramos, L. P. (2011). Heterogeneous catalysts for biodiesel production. *Química Nova*, Vol.34, No.3, (March, 2011), pp. 477-486, ISSN 0100-4042
- da Cunha, M. E., Krause L. C., Moraes, M. S. A., Faccini, C. S., Jacques, R. A., Almeida, S. R., Rodrigues, M. R. A., & Caramão, E. B. (2009). Beef tallow biodiesel produced in a pilot scale. *Fuel Processing Technology*, Vol.90, No.4, (April 2009), pp. 570-575, ISSN 0378-3820
- Darnoko, D. & Cheryan, M. (2000). Kinetics of palm oil transesterification in a batch reactor. *Journal of the American Oil Chemists' Society*, Vol.77, No.12, (December 2000), pp. 1263-1267, ISSN 0003-021X
- Demirbas, A. (2006). Biodiesel production via non-catalytic SCF method and biodiesel fuel characteristics. *Energy Conversion and Management*, Vol.47, No.15-16, (September 2006), pp. 2271-2282, ISSN 0196-8904
- Demirbas, A. (2008). Comparison of transesterification methods for production of biodiesel from vegetable oils and fats. *Energy Conversion and Management*, Vol.49, N.1, (January 2008), pp. 125-130, ISSN 0196-8904
- Demirbas, A. (2009a). Biofuels. In: Demirbas A, editor. Biofuels: Securing the planet's future energy needs. London (England): Springer; 336 p, e-ISBN 978-1-84882-011-1
- Demirbas, A. (2009b). Progress and recent trends in biodiesel fuels. *Energy Conversion and Management*, Vol.50, No.1, (January 2009), pp. 14-34, ISSN 0196-8904
- Dias, J. M., Alvim-Ferraz, M. C. M., & Almeida, M. F. (2008). Comparison of the performance of different homogeneous alkali catalysts during transesterification of waste and virgin oils and evaluation of biodiesel quality. *Fuel*, Vol.87, No.17-18, (December 2008), pp. 3572-3578, ISSN 0016-2361
- Dias, J. M., Alvim-Ferraz, M. C., & Almeida, M. F. (2009). Production of biodiesel from acid waste lard. *Bioresour. Technology*, Vol.100, No.24, (August 2009), pp. 6355-6361, ISSN 0960-8524
- Di Serio, M., Tesser, R., Pengmei, L., & Santacesaria, Elio. (2008). Heterogeneous catalyst for biodiesel production. *Energy & Fuels*, Vol.22, No.1, (December 2007), pp. 207-217, ISSN 1520-5029
- Dorado, M. P., Ballesteros, E., de Almeida, J. A., Schellert, C., Löhrlin, H. P., & Krause, R. (2002). An alkaline-catalyzed transesterification process for high free fatty acid waste oils. *Transactions of the ASABE*, Vol.45, No.3, pp. 525-529, ISSN 0001-2351
- Encinar, J. M., González, J. F., Rodríguez, J. J., & Tejedor, A. (2002). Biodiesel fuels from vegetable oils: transesterification of *Cynara cardunculus* L. oils with ethanol. *Energy & Fuels*, Vol.16, No.2, (January 2002), pp. 443-450, ISSN 1520-5029
- European Parliament (October 10 2002), 2011 Regulation (EC) 1774/2002 of the European Parliament and of the Council of 3 October 2002 (laying down health rules concerning animal by-products not intended for human consumption), Available from: <<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2002:273:0001:0095:EN:PDF>>
- FAO, 2010. Faostat. March 2010. Available from <<http://www.fao.org/corp/statistics/en/>>
- Fazal, M.A., Haseeb, A. S. M. A., & Masjuki, H. H. (2011). Biodiesel feasibility study: An evaluation of material compatibility; performance; emission and engine durability.

- Renewable & Sustainable Energy Reviews*, Vol.15, No.2, (February 2011), pp. 1314-1324, ISSN 1364-0321
- Ferrari, R. A., Oliveira, V. S., & Scabio, A. (2005). Biodiesel de soja – Taxa de conversão em ésteres etílicos, caracterização físico-química e consumo em gerador de energia. *Química Nova*, Vol.28, No.1, (January/February 2005), pp 19-23, ISSN 1678-7064
- Feuge, R. O. & Gros, A. T. (1949). *Journal of the American Oil Chemists' Society*, Vol.26, No.3, (March 1949), pp. 97-102, ISSN 0003-021X
- Formo, M. W. (1954). Ester reactions of fatty materials. *Journal of the American Oil Chemists' Society*, Vol.31, No.11, (November 1954), pp. 548-559, ISSN 0003-021X
- Freedman, B., Pryde, E. H., & Mounts, T. L. (1984). Variables affecting the yields of fatty esters from transesterified vegetable oils. *Journal of the American Oil Chemists' Society*, Vol.61, No.10, (October 1984), pp. 1638-1643, ISSN 0003-021X
- Freedman, B., Butterfield, R. O., & Pryde, E. H. (1986). Transesterification Kinetics of Soybean Oil. *Journal of the American Oil Chemists' Society*, Vol.63, No.10, (October 1986), pp. 1375-1380, ISSN 0003-021X
- Fukuda, H., Kondo, A., & Noda, H. (2001). Biodiesel fuel production by transesterification of oils. *Journal of Bioscience and Bioengineering*, Vol.92, No.5, pp. 405-416, ISSN 1389-1723
- Gürü, M., Artukoglu, B. D., Keskin, A., & Koca, A. (2009). Biodiesel production from waste animal fat and improvement of its characteristics by synthesized nickel and magnesium additive. *Energy Conversion and Management* Vol.50, No.3, (March 2009), pp. 498-502, ISSN 0196-8904
- Helwani, Z., Othman, M. R., Aziz, N., Fernando, W. J. N., & Kim, J. (2009). Technologies for production of biodiesel focusing on green catalytic techniques: A review. *Fuel Processing Technology*, Vol.90, No.12, (December 2009), pp. 1502-1514, ISSN 0378-3820
- Hoffmann, R. (2000). Elasticidade-renda das despesas com alimentos em regiões metropolitanas do Brasil em 1995-96. *Informações Econômicas*, Vol.30, No.2, (Fevereiro 2000), pp. 17-24, ISSN 1678-832X
- Homem de Mello, F. (1990). O crescimento agrícola brasileiro dos anos 80 e as perspectivas para os anos 90. *Revista de Economia Política*, Vol. 10, No 3, (Julho-Setembro 1990), pp. 22-30, ISSN 0101-3157
- Isler, A., Sundu, S., Tuter, M., Karaosmanoglu, F. (2010). Transesterification reaction of the fat originated from solid waste of the leather industry. *Waste Management*, Vol.30, No.12, (December 2010), pp. 2631-2635, ISSN 0956-053X
- Janaun, J. & Ellis, N. (2010). Perspectives on biodiesel as a sustainable fuel. *Renewable and Sustainable Energy Reviews* Vol.14, No.4, (May 2010), pp.1312-1320, ISSN 1364-0321
- Jeong, G.-T., Yang, H.-S., & Park, D.-H. (2009). Optimization of transesterification of animal fat ester using response surface methodology. *Bioresource Technology*, Vol.100, No.1, (January 2009), pp. 25-30, ISSN 0960-8524
- Kerihuel, A, Kumar, M. S., Bellettre, J., & Tazerout, M. (2006). Ethanol animal fat emulsions as a diesel engine fuel - Part 1: Formulations and influential Parameters. *Fuel*, Vol.85, No.17-18, (December 2006), pp. 2371-2684, ISSN 0016-2361
- Komers, K., Machek, J., & Stloukal, R. (2001a). Biodiesel from rapeseed oil, methanol and KOH 2. Composition of solution of KOH in methanol as reaction partner of oil.

- European Journal of Lipid Science and Technology*, Vol.103, No.6, (June 2001), pp. 359-362, ISSN 1438-9312
- Komers, K., Stloukal, R., Machek, J., & Skopal, F. (2001b). Biodiesel from rapeseed oil, methanol and KOH 3. Analysis of composition of actual reaction mixture. *European Journal of Lipid Science and Technology*, Vol.103, No.6, (June 2001), pp. 363-371, ISSN 1438-9312
- Komers, K., Skopal, F., Stloukal, R., & Machek, J. (2002). Kinetics and mechanism of the KOH - catalyzed methanolysis of rapeseed oil for biodiesel production. *European Journal of Lipid Science and Technology*, Vol.104, No.11, (November 2002), pp. 728-737, ISSN 1438-9312
- Kondamudi, N., Strull, J., Misra, M., & Mohapatra, S. K. (2009). A green process for producing biodiesel from feather meal. *Journal of Agricultural and Food Chemistry*, Vol.57, No.14, (June 2009), pp. 6163-6166, ISSN 0021-8561
- Kusdiana, D. & Saka, S. (2004). Effects of water on biodiesel fuel production by supercritical methanol treatment. *Bioresource Technology*, Vol.91, No.3, (February 2004), pp. 289-295, ISSN 0960-8524
- Lam, M. K., Lee, K. T., & Mohamed, A. R. (2010). Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: A review. *Biotechnology Advances* Vol.28, No.4, (July-August 2010), pp.500-518, ISSN 0734-9750
- Lapuerta, M., Armas, O., & Rodríguez-Fernández, J. (2008). Effect of biodiesel fuels on diesel engine emissions. *Progress in Energy and Combustion Science*, Vol.34, No.2, (April 2008), pp. 198-223, ISSN 0360-1285
- Leung, D. Y C., Wu, X., & Leung, M. K. H. (2010). A review on biodiesel production using catalyzed transesterification. *Applied Energy*, Vol.87, N.4, (April 2010), pp. 1083-1095, ISSN 0306-2619
- Liu, Y., Lotero, E., Goodwin Jr, J. G., & Mo, X. (2007). Transesterification of poultry fat with methanol using Mg-Al hydrotalcite derived catalysts. *Applied Catalysis A: General*, Vol.331, pp. 138-148, ISSN 0926-860X
- Lotero, E., Liu, Y., Lopez, D. E., Suwannakarn, K., Bruce, D. A., & Goodwin Jr., J. G. (2005). Synthesis of biodiesel via acid catalysis. *Industrial & Engineering Chemistry Research*, Vol.44, No.14, (January 2005), pp.5353-5363, ISSN 1520-5045
- Lu, J., Nie, K., Xie, F., Wang, F., & Tan, T. (2007). Enzymatic synthesis of fatty acid methyl esters from lard with immobilized *Candida* sp. 99-125. *Process Biochemistry*, Vol.42, No.9, (September 2007), pp. 1367-1370, ISSN 0032-9592
- Ma, F., Clements, L. D., & Hanna, M. A. (1998). The effects of catalyst, free fatty acids, and water on transesterification of beef tallow, *Transactions of the ASAE*, Vol.41, No.5, pp. 1261-1264, ISSN 0001-2351
- Ma, F. & Hanna, M. A. (1999). Biodiesel production: a review. *Bioresource Technology*, Vol.70, No.1, (October 1999), pp. 1-15, ISSN 0960-8524
- Martins, R., Nachiluk, K., & Bueno, C. R. F. & de Freitas, S. F. (2011). O biodiesel de sebo bovino no Brasil. *Informações Econômicas*, Vol.41, No.5, (Maio 2011), pp. 56-70, ISSN 1678-832X
- Meher, L. C., Sagar, D. V., & Naik, S. N. Technical aspects of biodiesel production by transesterification - a review. (2006). *Renewable & Sustainable Energy Reviews*, Vol.10, No.3, (June 2006), pp. 248-268, ISSN 1364-0321

- Monteiro, M. R., Ambrozini, A. R. P., Lião, L. M., & Ferreira, A. G. (2008). Critical reviews on analytical methods for biodiesel characterization. *Talanta*, Vol.77, No.2, (December 2008), pp. 593-605, ISSN 0039-9140
- Moraes, M. S. A., Krause, L. C., da Cunha, M. E., Faccini, C. S., de Menezes, E. W., Veses, R. C., Rodrigues, M. R. A., & Caramão, E. B. (2008). Tallow Biodiesel: Properties Evaluation and Consumption Tests in a Diesel Engine. *Energy & Fuels*, Vol.22, No.3, (March 2008), pp. 1949-1954, ISSN 1520-5029
- Morrison, R. & Boyd, R. (1996). *Química Orgânica* (13th edition), Fundação Calouste Gulbenkian, ISBN 972-31-0513-6, Lisboa
- Nass, L. L., Pereira, P. A. A., & Ellis, D. (2007.) Biofuels in Brazil: An Overview. *Crop Science*, Vol.47, No.6 (November/December 2007), pp. 2228-2237, ISSN 1435-0653
- Noureddini, H. & Zhu, D. (1997). Kinetics of transesterification of soybean oil. *Journal of the American Oil Chemists' Society*, Vol.74, No.11, (December 1997), pp. 1457-1463, ISSN 0003-021X
- Öner, C. & Altun, S. (2009). Biodiesel production from inedible animal tallow and an experimental investigation of its use as alternative fuel in a direct injection diesel engine. *Applied Energy*, Vol. 86, No. 10, (October 2009), pp. 2114-2120, ISSN 0306-2619
- Pacheco, J. W. (2006). *Guia técnico ambiental de graxarias – Série P+L*, CETESB, São Paulo.
- Phan, A. N. & Phan, T. M. (2008). Biodiesel production from waste cooking oils. *Fuel*, Vol.87, No.17-18 (December 2008), pp. 3490-3496, ISSN 0016-2361
- Pinto-Payeras, J. A. Estimaco do sistema quase ideal de demanda para uma cesta ampliada de produtos empregando dados da pof de 2002-2003. *Economia Aplicada*, v. 13, n. 2, 2009, pp. 231-255
- Rodrigues, R. C. & Ayub, M. A. Z. (2011). Effects of the combined use of *Thermomyces lanuginosus* and *Rhizomucor miehei* lipases for the transesterification and hydrolysis of soybean oil. *Process Biochemistry*, Vol.46, No.3, (March 2011), pp. 682-688, ISSN 1359-5113
- Rostagno, H. S., Albino, L. F. T., Donzele, J. L., Gomes, P. C., Oliveira, R. F., Lopes, D.C., Ferreira, A. S., Barreto, S. L. T., & Euclides, R. F. (2011). *Brazilian Tables for poultry and swine: Food Composition and Nutritional Requirements*. Viosa Federal University (UFV), CDD 22. ed. 636.085, 3rd ed, 252 p., Viosa, MG, Brazil
- Santos Filho, J. I. (2010). Viabilidade econmica da utilizao de gordura cida de frangos e sunos na produo de biodiesel, *Proceedings of 4^o Congresso da Rede Brasileira de Tecnologia de Biodiesel*, Belo Horizont (MG), October 2010
- Sch lindwein, M. M. Influncia do custo de oportunidade do tempo da mulher sobre o padro de consumo alimentar das famlias brasileiras. 2006. 118 p. Tese (Doutorado em Economia Aplicada) - Escola Superior de Agricultura "Luiz de Queiroz", Universidade de So Paulo, Piracicaba
- Schuchardt, U., Sercheli, R., & Vargas, R. M. (1998). Transesterification of vegetable oils: a Review. *Journal of the Brazilian Chemical Society*, Vol.9, No.3, (May/June 1998), pp. 199-210, ISSN 0103-5053
- Sharma, Y.C., Singh, B., & Upadhyay. (2008). Advancements in development and characterization of biodiesel: A review. *Fuel*, Vol.87, No.12 (September 2008), pp. 2355-2373, ISSN 0016-2361

- Shimada, Y., Watanabe, Y., Sugihara, A., & Tominaga, Y. (2002). Enzymatic alcoholysis for biodiesel fuel production and application of the reaction to oil processing. *Journal of Molecular Catalysis B: Enzymatic*, Vol.17, No.3-5, (June 2002), PP. 133-142, ISSN 1381-1177
- Shrestha, D. & Gerpen, J. V. (2010). Biodiesel from Oilseed Crops, In: *Industrial Crops and Uses*, B.P. Singh, (Ed.), 140-156, ISBN-13 9781845936167, CABI, Wallingford, U.K. 512 p.
- Soldi, R. A., Oliveira, A. R. S., Ramos, L. P., & César-Oliveira, M. A. F. (2009). Soybean oil and beef tallow alcoholysis by acid heterogeneous catalysis. *Applied Catalysis A: General*, Vol.361, No.1-2 (June 2009), pp. 42-48, ISSN 0926-860X
- Taravus, S., Temur, H. & Yartasi, A. (2009). Alkali-Catalyzed Biodiesel production from Mixtures of Sunflower Oil and Beef Tallow, *Energy & Fuels*, Vol.23, No.8, (July 2009), pp. 4112-4115, ISSN 1520-5029
- Tashtoush, G. M., Al-Widyan, M. I., Al-Jarrah, M. M. (2004). Experimental study on evaluation and optimization of conversion of waste animal fat into biodiesel. *Energy Conversion and Management* Vol.45, No.17, (October 2004), pp. 2697-2711, ISSN 0196-8904
- Teixeira, R., Almeida, E., Oliveira Jr., L., & Fernandes, H. (2010). Sep 28. Produtividade e logística na produção de biodiesel. *Ensaio FEE*, Porto Alegre, Vol.31, No.1, (August 2010), pp. 7-30. Available at:
<http://revistas.fee.tche.br/index.php/ensaios/article/view/2213/2731>
- Tickell, J. (2006). *Biodiesel America: How to achieve energy security, Free America from middle-east oil dependence and make money growing fuel*. ISBN 9780970722744, Yorkshire Press, USA
- Tomasevic, A. V. & Siler-Marinkovic, S. S. (2003). Methanolysis of used frying oil. *Fuel Processing Technology*, Vol.81, No.1, (April 2003), pp. 1-6, ISSN 0378-3820
- UBABEF. Brazilian Poultry Union. Meat production in Brazil. May 27 2011, Available from: <<http://www.brazilianchicken.com.br/english/the-poultry-industry/the-world-of-chicken.php>>
- USDA. United States Department of Agriculture. Livestock and poultry: World markets and trade. October 2010. May 23 2011, Available from:
<http://www.fas.usda.gov/psdonline/circulars/livestock_poultry.pdf>
- USDA. Foreign Agricultural Service, March 18 2010, Available from:
<<http://www.fas.usda.gov/psdonline/>>
- van Gerpen, J. & Knothe, G. (2005). Basics of the transesterification reaction. In: Knothe G, Van Gerpen J. H. and Krahl, J., editors. *The Biodiesel Handbook*. Illinois: AOCS Press; 302 p, ISBN 0-000000-00-00
- Van Gerpen, J. (2005). Biodiesel processing and production. *Fuel Processing Technology*, Vol. 86, No.10, (June 2005), pp. 1097-1107, ISSN 0378-3820
- Vasudevan, P. T. & Briggs, M. (2008). Biodiesel production—current state of the art and challenges. *Journal of Industrial Microbiology and Biotechnology*, Vol.1, No.1, (March 2010), pp. 47-63, ISSN 1367-5435
- Vasudevan, P. T. & Fu, B. (2010). Environmentally Sustainable Biofuels: Advances in Biodiesel Research. *Waste Biomass Valorization*, Vol.35, No.5, (May 2008), pp. 421-430, ISSN 1877-2641

- Vicente, G., Martínez, M., & Aracil, J. (2004). Integrated biodiesel production: a comparison of different homogeneous catalysts systems. *Bioresource Technology*, Vol.92, No.3, (May 2004), pp. 297-305, ISSN 0960-8524
- Wang, L. (2009). *Biodiesel production from waste oils and fats*, CRC Press, ISBN 978-1-4200-6339-4
- Wu, W. H., Foglia, T. A., Marmer, W. N., & Phillips, J. G. (1999). Optimizing production of ethyl esters of grease using 95% ethanol by response surface methodology. *Journal of the American Oil Chemists' Society*, Vol.76, No.4, (April 1999), pp. 517-521, ISSN 0003-021X
- Xu, X. (2003). Engineering of enzymatic reactions and reactors for lipid modification and synthesis. *European Journal of Lipid Science and Technology*, Vol.105, No.6, (June 2003), pp. 289-304, ISSN 1438-7697
- Zhang, Y. Dubé, M. A., McLean, D. D., & Kates, M. (2003a). Biodiesel production from waste cooking oil: 1. Process design and technological assessment. *Bioresource Technology*, Vol.89, No.1, (August 2003), pp. 1-16, ISSN 0960-8524
- Zhang, Y. Dubé, M. A., McLean, D. D., & Kates, M. (2003b). Biodiesel production from waste cooking oil: 2. Economic assessment and sensitivity analysis. *Bioresource Technology*, Vol.90, No.3, (December 2003), pp. 229-240, ISSN 0960-8524
- Zheng, D. & Hanna, M. A. (1996). Preparation and properties of methyl esters of beef tallow. *Bioresource Technology*, Vol.57, No.2, (August 1996), pp. 137-142, ISSN 0960-8524

Getting Lipids for Biodiesel Production from Oleaginous Fungi

Maddalena Rossi, Alberto Amaretti, Stefano Raimondi and Alan Leonardi
*University of Modena and Reggio Emilia,
Italy*

1. Introduction

Biomass-based biofuel production represents a pivotal approach to face high energy prices and potential depletion of crude oils reservoirs, to reduce greenhouse gas emissions, and to enhance a sustainable economy (Zinoviev et al., 2010). Microbial lipids can represent a valuable alternative feedstock for biodiesel production, and a potential solution for a bio-based economy.

Nowadays, the production of biodiesel is based mostly on plant oils, even though animal fats, and algal oils can also be used. In particular, soybean, rapeseed, and palm oils are adopted as the major feedstock for biodiesel production. They are produced on agricultural land, opening the debate on the impact of the expansion of bioenergy crop cultures, which displace land from food production. Furthermore, their price restricts the large-scale development of biodiesel to some extent.

In order to meet the increasing demand of biodiesel production, other oil sources have been explored. Recently, the development of processes to produce single cell oil (SCO) by using heterotrophic oleaginous microorganisms has triggered significant attention (Azocar et al., 2010). These organisms accumulate lipids, mostly consisting of triacylglycerols (TAG), that form the storage fraction of the cell. The occurrence of TAG as reserve compounds is widespread among all eukaryotic organisms such as fungi, plants and animals, whereas it has only rarely been described in bacteria (Meng et al., 2009). In fact, bacteria generally accumulate polyhydroxyalkanoates as storage compound and only few bacterial species, belonging to the actinobacterial genera *Mycobacterium*, *Streptomyces*, *Rhodococcus* and *Nocardia* produce relevant amounts of lipids (Alvarez & Steinbuechel, 2002).

Among heterotrophic microorganisms, oleaginous fungi, including both molds and yeasts, are increasingly being reported as good TAG producers. This chapter will focus on current knowledge advances in their metabolism, physiology, and in the result achieved in strain improvement, process engineering and raw material exploitation.

2. Ecology of oleaginous fungi

Oleaginous microorganisms are able to accumulate lipids above the 20% of their biomass, on dry basis. Several species of yeasts and filamentous fungi are regarded as oleaginous, since they have the capability to synthesize and accumulate high amounts of TAG within their cells, up to 70% of the biomass weight. These lipids have similar composition and energy

value to plant and animal oils, but their production do not compete for food resources, in particular if it is based on inexpensive carbon sources, such as raw materials, by-products, and surplus. Furthermore, fungal SCO have a short process cycle, and their production is not subjected to seasonal and cyclical weather variations.

The study of oleaginous yeasts has a long history: their ability to accumulate lipids has been known from the 70s, but only in the last years the attention has been focused on exploitation of SCO for biodiesel production. The yeasts represent a part of the microbiota in all natural ecosystems, such as soils, freshwaters and marine waters, from the ocean surface to the deep sea. Widely distributed in the natural environment, they colonize also more extreme environments, such as low temperatures, low oxygen availabilities, and oceanic waters (Butinar et al., 2007). Approximately 1500 species of yeasts belonging to over 100 genera have been described so far (Satyanarayana & Kunze, 2010). Although the vast majority of yeasts are beneficial to human life, only a few are opportunistic human pathogens. As a whole, they play a pivotal role in the food chain, and in the carbon, nitrogen and sulphur cycles. Among the huge number of species that have been described, only 30 are able to accumulate more than 25% of their dry weight as lipids (Beopoulos et al., 2009b).

Basidiomycetous yeasts strongly prevail among oleaginous yeasts, representing most of all the strains identified as lipid producers, even though some important oleaginous species have been identified among Ascomycota as well (e.g. *Yarrowia lipolytica*).

The most deeply investigated oleaginous yeasts belong to the genera *Yarrowia*, *Candida*, *Rhodotorula*, *Rhodospodidium*, *Cryptococcus*, and *Lipomyces* (Ageitos et al., 2011; Li et al., 2008; Rossi et al., 2009). *Yarrowia lipolytica*, previously referred to as *Candida lipolytica*, is a good candidate for single-cell oil production (Beopoulos et al., 2009a; Beopoulos et al., 2009b). *Yarrowia* are hemiascomycetous dimorphic fungi that belong to the order *Saccharomycetales*. They are able to degrade hydrophobic substrates such as n-paraffins and oils very efficiently and this physiological feature prompted the scientific community to explore several biotechnological applications (Bankar et al., 2009). The common habitats of these fungi are oil-polluted environments and foods such as cheese, yogurt, kefir, shoyu, meat, and poultry products. Despite *Y. Lipolytica* is distantly related to the conventional yeast *Saccharomyces cerevisiae*, the genome displays an expansion of protein families and genes involved in hydrophobic substrate (such as alkanes and lipids) utilization. Wild-type strains accumulate up to 38% of dry weight (DW) as lipids. Albeit the levels are lower than those of other oleaginous yeasts, it became a model organism because it can be subjected to genetic and metabolic engineering, having been developed a reliable and versatile system for disruption, cloning and expression of target genes.

Within the *Candida* genus, *Candida curvata* (Holdsworth & Ratledge, 1991) also referred as *Apiotrichum curvatum* and *Candida freyschussii* (Amaretti et al., 2011) synthesize and store significant amount of lipids. *Candida* comprises an extremely heterogeneous group of Ascomycota that can all grow with yeast morphology, classified in 150 heterogeneous species, among which only a minority have been implicated in human diseases, since approximately 65% of *Candida* species are unable to grow at 37°C, then they can not be successful pathogens or commensals of humans (Calderone, 2002). Therefore, most of the species can be exploited for biotechnological applications, despite of unwarranted negative public perceptions.

Lipomyces spp. present a great propensity to accumulate triacylglycerols. This genus belongs to the *Saccharomycetales* order and represents a unique branch in the evolution of the

ascomycetes (van der Walt, 1992). *Lipomyces* are true soil inhabitants and have a worldwide distribution. The oleaginous species *Lipomyces starkeyi* has the capability to accumulate over 70% of its cell biomass as lipid under defined culture conditions, and can produce lipid on xylose, ethanol, and L-arabinose, or using a mixture of glucose and xylose (Zhao et al., 2008), as well as other wastes (Angerbauer et al., 2008).

Cryptococcus curvatus is a yeast with industrial potential as single-cell oil because it can grow and accumulate lipid on a very broad range of substrates. It requires minimal nutrients for growth, accumulating up to 60% of its cellular dry weight (DW) as intracellular lipid (Meesters et al., 1996; Zhang et al., 2011). Yeasts of the *Cryptococcus* genus are widely distributed in nature and may be isolated from various substrates such as air, soil, bird excreta, water, animal surfaces and mucosae, leaves, flowers, and decomposing wood. Most species are considered as free-living (non-symbiotic) and only a few have medical importance being responsible for disease in man and animals (*C. neoformans* and *C. gattii*). *C. curvatus* is recognized as an opportunistic pathogen of animals, including humans (Findley et al., 2009).

Species belonging to the genus *Rhodospiridium*, and to its asexual counterpart *Rhodotorula*, have been claimed as oleaginous yeasts. They belong to one of the three main lineages of the *Basidiomycota*, the *Pucciniomycotina*. *Rhodotorula* is a common environmental inhabitant. The synthesis of different commercially important natural carotenoids by yeast species belonging to the genus *Rhodotorula* has led to consider these microorganisms as a potential pigment sources. Within this genus, the mesophilic red yeast *Rhodotorula glutinis* is able to synthesize and store lipids also growing on glycerol, whereas the psychrophilic species *Rhodotorula glacialis*, that are not red yeasts, accumulates lipids in a range of temperature between -3 and 20°C (Amaretti et al., 2010). The red yeast *Rhodospiridium toruloides* is an oleaginous mesophilic species. *Rhodospiridium* are able to carry out a number of diverse biochemical reactions such as biodegradation of epoxides, biphenyls and oxiranes (Smit, 2004), biosynthesis of carotenoids (de Miguel et al., 1997) and other types of biotransformations, but a major biotechnological exploitation is associated to their ability to convert glycerol and lignocellulosic biowastes into lipids (Hu et al., 2009; Yu et al., 2011). Among the oily yeasts, two novel species of the anamorphic basidiomycetous genus *Trichosporon* have been recently identified (*T. cacaoliposimilis* and *T. oleaginosus*) (Gujari et al., 2011), despite lipid accumulation has not yet explored in the perspective of biodiesel production. *Trichosporon* are basidiomycetous yeasts widely distributed in nature, consisting of soil- and water-associated species, predominantly found in environmental substrates, such as decomposing wood. They present distinct morphological characteristics of budding yeast cells and true mycelia that disarticulate to form arthroconidia. Some species are causative agents of diseases in man and cattle. They can occasionally belong to the gastrointestinal microbiota of humans as well as transiently colonize the skin and respiratory tract.

Exploitation of oleaginous filamentous fungi for biodiesel production has a more recent history, which, with few exceptions, derives from studies focused to poly-unsaturated fatty acid production (PUFA), such as arachidonic acid and γ -linolenic acid. The most relevant example of this biotechnological application is represented by exploitation of *Mortierella alpina* to produce oils containing n-1, n-3, n-4, n-6, n-7, and n-9 PUFAs (Sakuradani et al., 2009). Among the major lipid producers there is *Mucor circinelloides*, a zygomycete fungus, which is emerging as opportunistic pathogen in immunocompromised patients (Li et al., 2011). *M. circinelloides* has been used for the first

commercial production of microbial lipids (Ratledge, 2004). Lipid accumulation in *M. circinelloides* has been extensively studied (Wynn et al., 2001), and its TAG have been proposed as feedstock for producing biodiesel by direct transformation of its lipids (Vicente et al., 2009). *M. circinelloides* represents an outstanding model within the *Zygomycota* phylum, based on the availability of an efficient transformation procedure (Gutierrez et al., 2011) and on the whole sequence of genome (<http://genome.jgi-psf.org/Mucci2/Mucci2.home.html>). Also the phylogenetically related *Umbelopsis isabellina* has emerging as a promising species to convert biomass residues to biodiesel precursors (Meeuwse et al., 2011a). To the best of our knowledge, limited are the attempts to get lipids with *Aspergillus oryzae* that, conversely, is extensively studied as lipase producer to carry out transesterification of TAG (Adachi et al., 2011).

3. Biochemistry of lipid accumulation

Lipid accumulation in oleaginous yeasts and molds has been demonstrated to occur when a nutrient in the medium (e.g. the nitrogen or the phosphorus source) becomes limited and the carbon source is present in excess. Nitrogen limitation is the most efficient condition for inducing lipogenesis. During the growth phase, nitrogen is necessary for the synthesis of proteins and nucleic acids, while the carbon flux is distributed among energetic and anabolic processes yielding carbohydrates, lipids, nucleic acids and proteins. When nitrogen gets limited, the growth rate slows down and the synthesis of proteins and nucleic acids tends to cease. In non-oleaginous species, the carbon excess remains unutilized or is converted into storage polysaccharides, while, in oleaginous species, it is preferentially channeled toward lipid synthesis, leading to the accumulation of TAG within intracellular lipid bodies (Ratledge & Wynn, 2002; Granger et al., 1993).

The biochemical pathway of lipid biosynthesis is not very different among eukaryotic organisms and does not differ in oleaginous and non-oleaginous fungi. The ability to accumulate high amounts of lipid depends mostly on the regulation the biosynthetic pathway and the supply of the precursors (i.e. acetyl-CoA, malonyl-CoA, and glycerol-3-phosphate) and the cofactor NADPH.

Most information were obtained from the model yeast *Saccharomyces cerevisiae* (Kohlwein, 2010), that does not accumulate lipids, and *Yarrowia lipolytica*, that represent a model for bio-oil production and is suitable for genetic manipulation (Beopoulos et al., 2009b).

3.1 Fatty acids biosynthesis and modifications

De novo synthesis of fatty acids (FA), the first step of lipid accumulation, is carried out in the cytosol by fatty acids synthetase (FAS) complex. In yeasts, FAS bears phosphopantetheine transferase activity to activate its acyl carrier protein (ACP) by loading the coenzyme pantothenate. FAS is a multimer of 6 α and 6 β subunits encoded by *fas2* and *fas1*, respectively, each subunit containing four functional domains. Therefore, FAS consists in a $\alpha_6\beta_6$ molecular complex of 2.6 MDa with 48 functional centers that catalyze all reactions required for synthesis of fatty acids through cycles of multistep reactions. FAS firstly loads acetyl-CoA on its β -ketoacyl-ACP synthase (KS), then it exerts β -ketoacyl-ACP reductase (KR), β -hydroxyacyl-ACP dehydratase (DH), and enoyl-ACP reductase (EAR) activities. This set of reactions is repeated cyclically seven times to yield palmitoyl-ACP (Fig. 1) (Tehlivets et al, 2007).

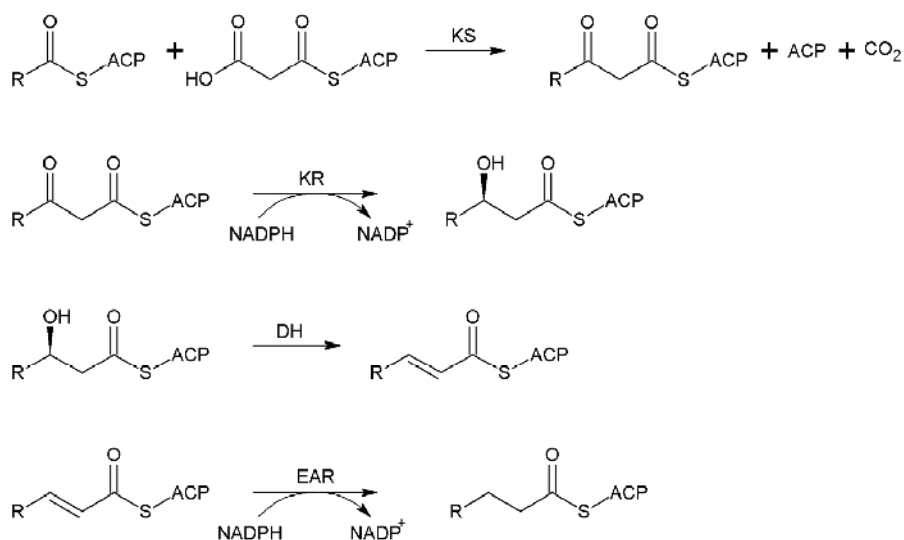



Fig. 1. Reactions occurring sequentially in fatty acid synthetase: condensation of acyl-ACP and malonyl-ACP mediated by KS, NADPH-dependent reduction of the keto group to a hydroxyl group by means of KR, dehydration to create a double bond with DH and reduction of the double bond by means of EAR. $R = H, CH_3(CH_2)_{2n}, n_{max}=7$.

The biosynthesis of FA requires the constant supply of acetyl-CoA as initial biosynthetic unit and of malonyl-CoA as the elongation unit, supplying two carbons at each step. Non-oleaginous yeasts receive acetyl-CoA mostly from glycolysis. In oleaginous yeasts, acetyl-CoA is mostly provided by the cleavage in the cytosol of citrate, which accumulated as a consequence of nitrogen limitation (Ratledge, 2002) (Fig. 2). In fact, lipid accumulation by oleaginous fungi does not occur under balanced nutrient conditions.

In oleaginous yeasts, nitrogen limitation activates AMP-deaminase (Ratledge & Wynn, 2002), which supply ammonium to the nitrogen-starved cell. As a consequence, mitochondrial AMP concentration decreases, causing isocitrate dehydrogenase activity to drop. The TCA cycle is then blocked at the level of isocitrate, which accumulates and equilibrates with citrate through aconitase. Excess of citrate from TCA cycle is exported out of the mitochondrion via the malate/citrate antiport. Cytosolic ATP-citrate lyase (ACL) cleaves citrate to give oxaloacetate and acetyl-CoA (Fig. 2).

ACL represents one of the key enzymes that contribute to the oleaginous trait of yeasts, whereas its activity is negligible in non-oleaginous species. ACL is composed of two subunits, encoded by *ACL1* and *ACL2* and is negatively regulated by exogenous FA.

Malonyl-CoA is produced from acetyl-CoA by acetyl-CoA carboxylase (ACC) that condensate an acetyl-CoA unit with bicarbonate:



ACC is also a key enzyme in *de novo* FA synthesis, since *ACC1* mutants became FA auxotrophs or maintain low levels of ACC activity (Tehlivets et al., 2007). *ACC1* undergoes allosteric activation by citrate. Furthermore the transcription of *FAS1*, *FAS2*, and *ACC1* is coordinately regulated, being negatively regulated by FA.





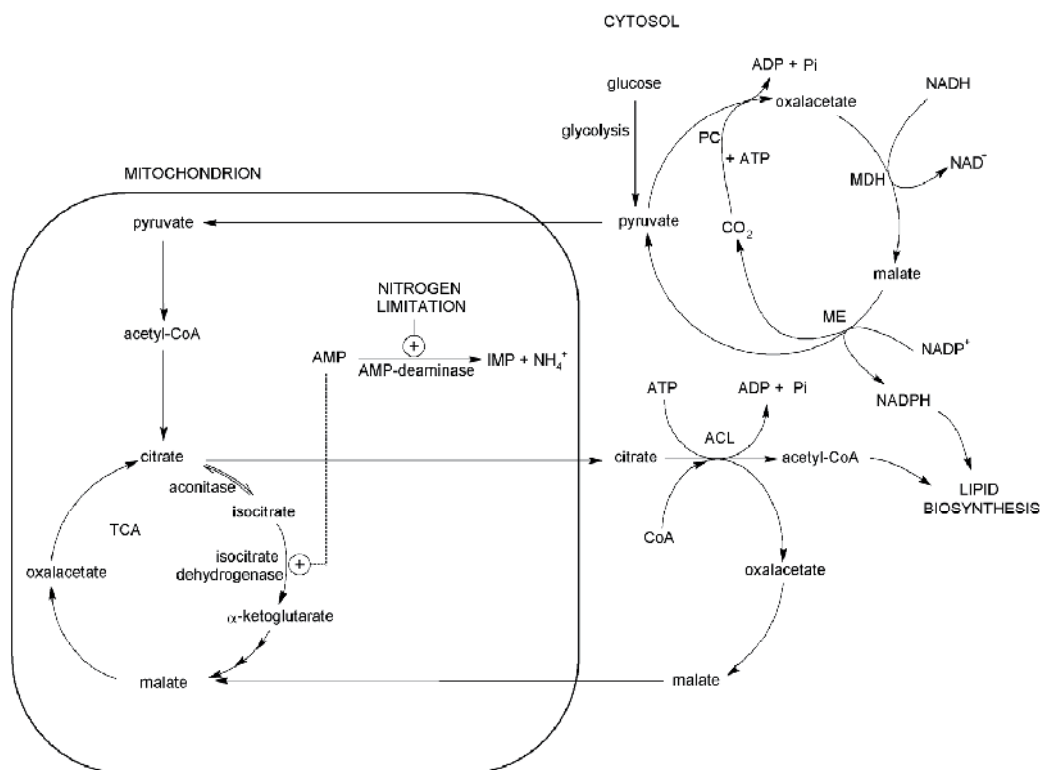


Fig. 2. Lipid biosynthesis from excess of citrate as a consequence of nitrogen limitation. Adapted from Ratledge, 2004.

Cytosolic NADPH is required for KR and EAR functions of FAS. For each elongation step of the acyl chain, two molecules of NADPH are required. One of the major sources of cytosolic NADPH are the pentose phosphate pathway and the transhydrogenase cycle, which transforms NADH into NADPH through the activity of pyruvate carboxylase (PC), malate dehydrogenase (MDH), and malic enzyme (ME), catalyzing the following reactions:



ME has been found in several oleaginous fungi and it has been regarded as a key enzyme involved in lipid accumulation (Ratledge, 2002). In *Mortierella circinelloides*, overexpression of ME enhanced lipid accumulation (Zhang et al., 2011), whereas overexpression of the ME homologous in *Yarrowia lipolytica* did not result in yield improvement.

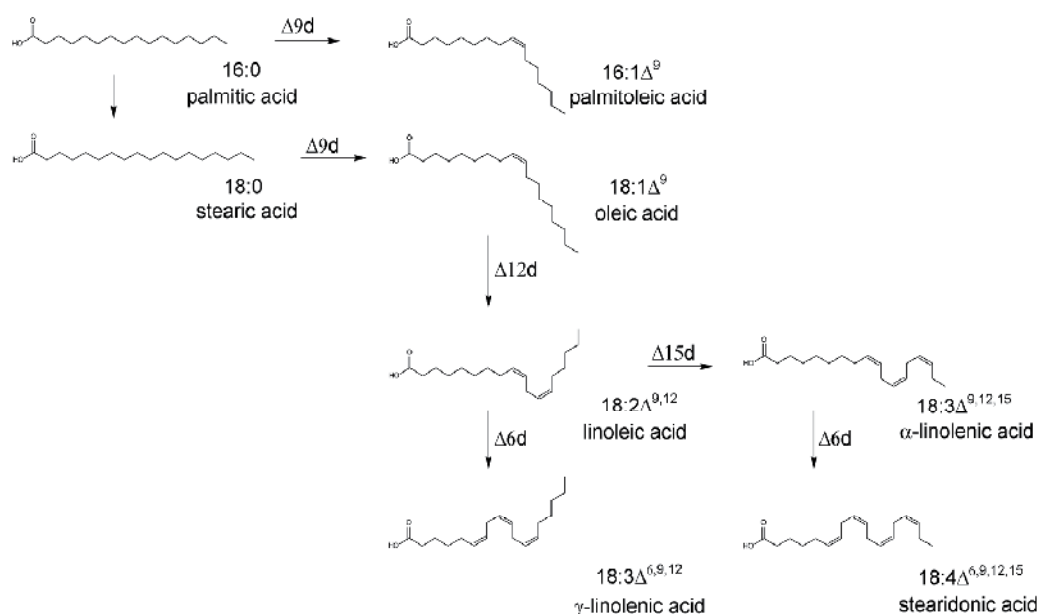


Fig. 3. Biosynthesis of poly-unsaturated fatty acid. Δ^9 d, Δ^{12} d and Δ^{15} d are the most common desaturases which are present in the endoplasmic reticulum (Ratledge 2004).

The final products of FAS are myristic or palmitic acids, depending on the yeast species. Reactions resulting in further elongation or desaturation occur in the endoplasmic reticulum (ER). Elongation reactions are catalyzed by elongases (such as malonyl-palmitoyl transacylase, MPT) organized in a complex that requires malonyl-CoA provided by ACC. Desaturations are introduced by ER desaturases, hydrophobic membrane-bound proteins. The most common desaturases are Δ^9 , which inserts the first double bond onto palmitic and/or stearic acids, and Δ^{12} , which catalyzes the insertion of the second unsaturation into oleic acid to produce linoleic acid. Δ^6 and Δ^{15} desaturase activities have been recently described in psychrophilic oleaginous yeasts, based on production of γ and α -linolenic acids, respectively (Fig. 3).

3.2 Biosynthesis of triacyl-glycerol

The fatty acyl-CoA produced by *de novo* synthesis are esterified with glycerol or sterols to produce triacyl-glycerol (TAG) and steryl-esters (SE), respectively. In oleaginous fungi, the neutral lipids SE and TAG are stored inside the lipid bodies (LB). TAG are mostly formed by consecutive acylation of glycerol-3-phosphate (G3P), carried out by diverse acyl transferases. G3P is formed from glycerol by glycerol kinase or can be synthesized from dihydroxyacetone phosphate (DHAP) by G3P dehydrogenase, in a reversible reaction. *S. cerevisiae* can use both G3P and DHAP as acyl-group acceptor. The addition of the first acyl group leads to 1-acyl G3P, also named lysophosphatidic acid (LPA). LPA can also be formed by reduction of acyl-DHAP, carried out by a NADPH dependent reductase. A second acyltransferase loads another acyl group, producing 1,2-diacyl G3P (phosphatidic acid, PA). Phosphate is removed from PA by phosphatidate phosphatase isoenzymes, generating diacylglycerol (DAG). DAG can be the direct precursor of TAG, or can be channeled toward phospholipids biosynthesis (Fig. 4).

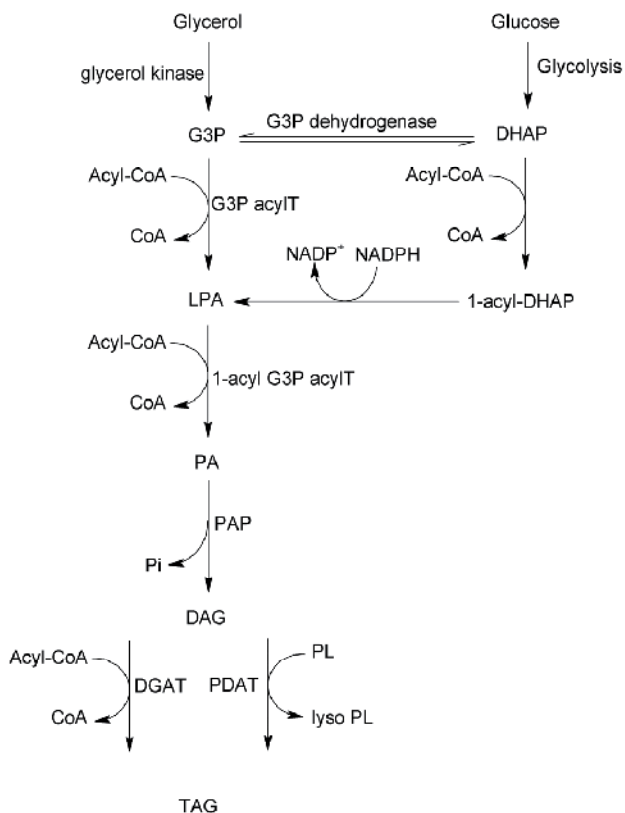


Fig. 4. *de novo* synthesis of TAG (adapted from Czabany et al., 2007)

The last step of *de novo* synthesis of TAG can be carried either by using diverse acyl donors, such as acyl-CoA or with phospholipids. In the former case, DAG acyl transferases (DGAT), which are integral proteins of the ER, can directly load the third Acyl-CoA. A DGAT enzyme is present in *S. cerevisiae* and *Y. lipolytica* and is mostly active during the stationary phase, although it is expressed also during the exponential phase. A second DGAT, more active during the exponential growth phase, has been identified in *Y. lipolytica*. In *S. cerevisiae* the phospholipid:DAG acyltransferase (PDAT) is localized in the ER, whereas in *Y. lipolytica* it is present both in the ER and in the surface of LB (Fig. 4).

3.3 Biogenesis of lipid bodies

In eukaryotes, neutral lipids are stored in specialized compartments known as lipid bodies (LB). They are assembled at a specialized subdomain of the ER where most biosynthetic enzymes and structural proteins are located (Waltermann et al., 2005). The neutral lipids do not fit among phospholipids and are thus deposited between the two leaflets of the membrane bilayer. However, substantial amounts of neutral lipids cannot be incorporated into membrane bilayer of ER and ongoing neutral lipid synthesis leads to the formation of a bud which buds off of the ER as a mature LB after reaching the critical size (Fig. 5).

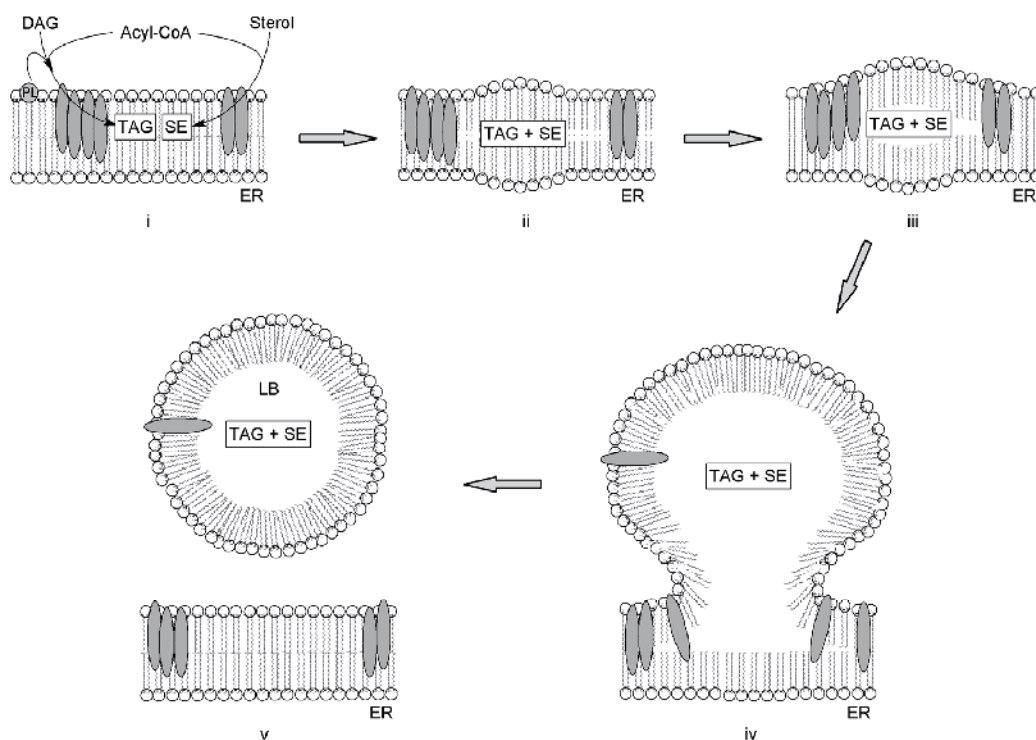


Fig. 5. Model of lipid bodies biogenesis from the membrane of the ER. TAG and SE accumulate between the two leaflets of the phospholipid bilayer (i to iii). The micro-droplet generated (iii, iv) evolve to lipid bodies (v) (Figure adapted from Czabany et al., 2007).

In most oleaginous yeasts, the neutral lipids of LB consist mostly of TAG (up to 90% or more) whereas a small fraction is represented by steryl esters. The presence of significant quantity of free fatty acids (FFA) within LP has been reported only for *Y. lipolytica*. In *S. cerevisiae*, which accumulates less than 15% lipids of its biomass, LB contain similar amounts of TAG and SE.

The core of LB, consisting of neutral lipids is surrounded by a phospholipid monolayer where several proteins are embedded. These proteins exert a key role in lipid metabolism, biosynthesis, and substrate trafficking. Upon requirement, storage lipids are mobilized from this compartment by triacylglycerol lipases and steryl ester hydrolases. The respective degradation products serve as energy sources and/or building blocks for membrane formation. In fact, FA hydrolyzed from TAG or SE are either channeled to the peroxisome, where β -oxidation takes place, or to phospholipid biosynthesis.

4. Metabolic engineering of oleaginous yeasts

The availability of genome data and genetic tools, such as the possibility to integrate homologous or heterologous genes, opened up the possibility to use metabolic engineering to understand the molecular mechanisms involved in lipid accumulation or to increase the yield of stored lipids in *S. cerevisiae* and *Y. lipolytica*. Whereas *S. cerevisiae*

has been used mostly as a model to investigate and understand the lipid metabolism, in *Y. lipolytica* several attempts have been done in order to address the carbon flux toward TAG production and accumulation. Similar approaches are precluded to other oleaginous fungi since they lack genome information and the necessary tools for gene manipulation and strain improvement.

In *Y. lipolytica*, the role of glycerol-3-phosphate (G3P) in triacylglycerol (TAG) biosynthesis and accumulation has been investigated (Beopoulos et al., 2008). In this yeast G3P is formed from glycerol by the glycerol kinase encoded by *GUT1*, or it is synthesized from dihydroxyacetone phosphate (DHAP) by the G3P dehydrogenase (*GPD1*). The antagonist reaction, which produces DHAP from G3P, is carried out in competition by a second isoform of the G3P dehydrogenase, encoded by *GUT2*. In order to force the conversion of DHAP into G3P, the gene *GPD1* was over-expressed and the gene *GUT2* was deleted.

A diverse strategy to increase lipid accumulation was based on the disruption of the β -oxidative metabolism, through the deletion of the 6 *POX* genes (*POX1* to *POX6*) that encode the peroxisomal acyl-coenzyme oxidases (Mlickowa et al., 2004a; Mlickowa et al., 2004b; Beopoulos et al., 2008). As a whole, the best results in terms of percentage of lipids per dry biomass, were reached coupling the increased level of G3P with the disactivation of the β -oxidation pathway (65%) (Dulermo et al., 2011).

Metabolic engineering strategies have been recently exploited to expand the range of substrates used by oleaginous fungi, also through functional expression of heterologous genes. Recently, it has been found that inulin is a good material for bio-productions (Chi et al., 2009). In order to make the oleaginous yeast *Y. lipolytica* able to accumulate lipids on inulin containing materials, the *Kluyveromyces marxianus* exo-inulinase gene (*INU1*) was heterologously expressed on a high copy plasmid (Zhao et al., 2010). The inulinase was efficiently secreted by *Y. lipolytica*, and inulin was hydrolyzed, assimilated and converted into TAG.

5. Cultivation condition of oleaginous yeasts

Lipid accumulation by oleaginous yeasts depends mostly on nutrient limitation conditions when excess carbon is present in the medium. Nutrient limitation prevents cells from being generated, while the carbon excess is converted into storage TAG. Published studies reports that phosphorus, magnesium, zinc, or iron limitation lead to lipid accumulation in model oleaginous yeasts (Hall & Ratledge, 1977; Beopoulos et al., 2009; Wu et al., 2010). However, nitrogen limitation is the most efficient form of nutrient limitation for lipogenesis induction, leading to the highest values of substrate/lipid conversion yield and lipid content within biomass (Hall & Ratledge, 1977; Wynn et al., 2001). Thus, nitrogen limitation is commonly used to induce lipogenesis in oleaginous fungi and the utilization of cultural media with appropriate C/N ratio is crucial to maximize lipid production.

Several studies focused on determining the optimal composition of cultural media for oleaginous fungi with the aim to optimize the performance of lipid-producing bioprocesses. The effect of the C/N ratio on lipid metabolism has been investigated for a number of oleaginous yeasts and molds, such as *Y. lipolytica* and many oleaginous species of *Rhodotorula*, *Candida*, *Apiotrichum*/*Cryptococcus*, *Mortierella* (Hall & Ratledge, 1977; Papanikolaou et al., 2003; Granger et al., 1992; Wu et al., 2010; Park et al., 1990; Jang et al., 2005; Amaretti et al., 2010), and has been mathematically modeled for some of these

organisms (Ykema et al., 1986; Granger et al., 1993; Economou et al., 2011). *Y. lipolytica* is the oleaginous microorganism for which information about the metabolic response to different C/N ratios is most abundant (Beopoulos et al., 2009a), particularly due to the availability of molecular tools for genetic engineering of this organism. Therefore, *Y. lipolytica* is regarded as a model organism for microbial oil production and the main traits of its metabolism can be used to give a general description of the metabolic response to different C/N ratios in the majority of oleaginous yeasts. With the increase of the C/N ratio, different metabolic behaviors were observed in *Y. lipolytica*: i) growth with mobilization of storage lipids, ii) growth of fat-free biomass, iii) growth with accumulation of lipids, and iv) growth with lipid accumulation and production of organic acids (Fig. 6).

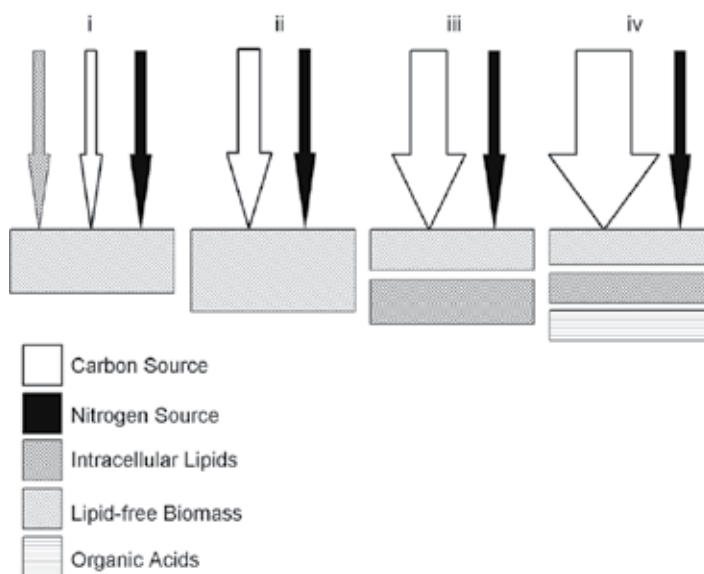


Fig. 6. Metabolic activity of oleaginous fungi (e.g. *Y. lipolytica*) as a function of carbon flow rate for a fixed nitrogen flow rate. Arrows indicate the consumption of nitrogen and carbon sources by the cells; squares indicate production rate. The dimension of arrows and squares is proportional to flow. (adapted from Beopoulos et al., 2009a)

If the medium is carbon limited or when the extracellular carbon supply gets exhausted, previously stored intracellular lipid can be mobilized and utilized by oleaginous microorganisms to sustain cells generation and production of lipid-free biomass (Park et al., 1990) (Fig. 6, i). If the medium is balanced and/or furnishes just the right amount of carbon flow to satisfy the growth need, balanced growth occurs without any accumulation of storage lipids (Fig. 6, ii). In conditions of carbon excess, a part of the carbon flow, which is proportional to nitrogen availability (Granger et al., 1993), is directed toward cells generation, whereas the carbon exceeding growth needs is channeled to the production of storage lipids (Fig. 6, iii). In some oleaginous fungi, the presence of a large carbon excess leads to the production of great amounts of organic acids, such as pyruvic acid and diverse TCA-cycle intermediates, at the expenses of lipid accumulation (Fig. 6, iv). In these latter conditions, *Y. lipolytica* produces citric acid (Levinson et al., 2007) but other oleaginous yeasts have never been reported to behave this way.

6. Batch, fed-batch and fermentation processes

Batch, fed batch, and continuous modes of culture have been developed to culture oleaginous microorganisms. Lipid production in batch cultures is carried out in a cultural medium with a high initial C/N ratio, the carbon source being present in an adequate excess with respect to the nitrogen source. In fact, in this condition, the flow of carbon utilization is limited only by the substrate uptake system of the cell, while the changes in nitrogen concentration determine the passage from a phase of balanced growth to a phase of lipid accumulation, causing the process to proceed through two phases. As nitrogen is consumed from the culture the C/N ratio tends to increase, but growth remains exponential and balanced until nitrogen is not the limiting substrate. During the growth phase, the carbon flow is mostly channeled to satisfy the growth need, therefore growth is balanced and lipid-free biomass is mostly produced (Fig. 6 ii). As nitrogen concentration becomes limiting, the growth rate and the carbon flow toward biomass generation decrease, while lipid production is triggered, resulting in a shift of microbial metabolism into the lipogenic phase (Fig. 6 iii, Fig. 7).

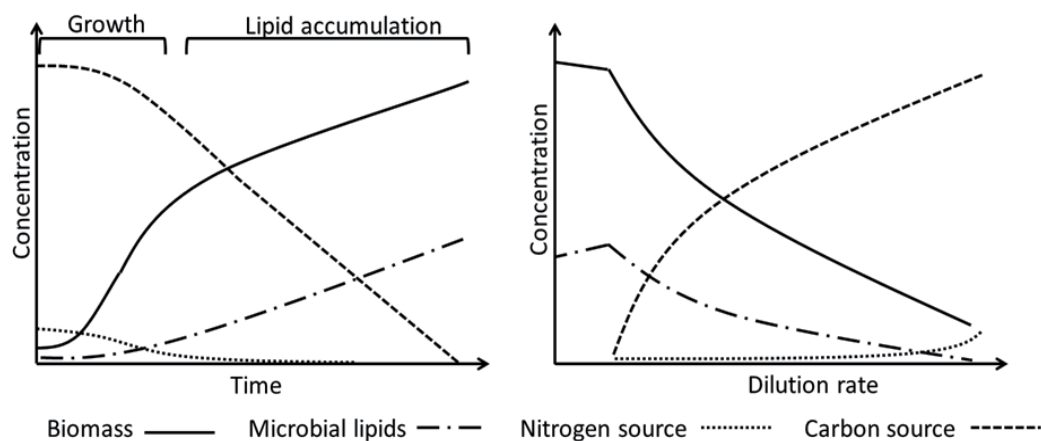


Fig. 7. Modeling and prediction of the timecourse of a batch fermentation (left) and the steady-state values of a continuous process (right) for microbial production of lipids. Axis are in arbitrary scales.

In batch cultures the initial C/N ratio of the cultural medium has a pivotal role in determining the bioprocess performance. In fact, both the rate and the yield of lipid production depend by the C/N ratio, which affects the duration of the exponential phase and the amount of biomass produced during growth. With a fixed carbon concentration, higher amounts of lipid-free biomass produced during the growth phase correspond to higher lipid production rates during the lipogenic phase, but to lower amounts of lipid content within cells and lipid/substrate conversion yields. Therefore, the initial C/N ratio needs to be optimized to maximize lipid productivity in batch cultures. The optimal C/N value is always high (e.g. in the range between 80 and 350 mol/mol) and strongly depends on the microorganism, the medium composition, the carbon source (e.g. glucose, glycerol, etc.), and the nitrogen source (e.g. diverse organic or inorganic sources). The minimal C/N ratio suitable for lipid accumulation can be estimated as $(Y_{X/S} \cdot q)^{-1}$, where $Y_{X/S}$ is the biomass/carbon source yield coefficient under conditions of carbon limitations (C-mol/C-

mol) and q is the nitrogen/carbon content of biomass (N-mol/C-mol) (Ykema et al., 1986). However, it should be considered that extremely high C/N ratios may cause the production of unwanted byproducts, such as organic acids (Fig. 6 iv), or may lead to severe nitrogen deficiency, causing a rapid decrease in cells viability.

Unlike batch processes, in fed-batch mode, nutrients are fed into the bioreactor in a controlled manner, with the purpose to monitor and control the specific growth rate and the flows of nitrogen and carbon utilization. Through the judicious management of the feeding rate and composition, it is possible to control the C/N ratio within the culture and maintain the oleaginous microorganism in the optimal metabolic status, as appropriate, first for the growth phase, and later for the lipogenic phase. The lipogenic phase is the most extensive, corresponding to lipid production under nitrogen limitation, with constant C/N ratio, preventing loss of viability and acids production (Beopoulos et al., 2009a).

In continuous cultures, at the steady state, the assimilation of C and N sources and the microbial growth occur at constant rates, which ultimately depend by the dilution rate (D). The concentration of the substrates within the bioreactor is steady and depends by the dilution rate as well, the actual C/N ratio of the culture remaining constant unlike in batch cultures. Likewise in batch cultures, in continuous cultures the C/N ratio of the fresh medium needs to be higher than $(Y_{X/S} \cdot q)^{-1}$ to obtain some lipid accumulation (Ykema et al., 1986). However, at the steady-state with this medium, the C/N ratio within the culture is higher than in the fresh medium, due to nitrogen consumption. The extent of substrates utilization, and also the biomass and lipid concentrations are the highest at low D values and decrease with the increase of D (Fig. 7). While low D values promote lipid production and a more complete substrate utilization, on the contrary, the volumetric productivity of continuous processes is positively affected by the increase of the dilution rate (Ykema et al., 1986; Meeuwse et al., 2011b). Therefore, both the C/N content of the medium and the dilution rate need to be thoroughly tuned to maximize lipid productivity of continuous processes.

7. Substrates and raw material

The demand for the inexpensive production of biofuels has intensified due to increasing concerns of climate change, depletion of petroleum-based fuels, and environmental problems. In a market economy, corporations aim to maximize profit, seeking the most competitive feedstock. To produce single-cell oils for biodiesel production, the carbon source has necessarily to be cheap and available in large quantities. Therefore, while the first investigations on oleaginous fungi most commonly employed glucose as carbon source, nowadays the production of single-cell oils is predominantly addressed to transformation of raw materials, by-products and surplus.

Glucose is the carbon source most commonly employed for growth of oleaginous fungi and lipid production (Boulton & Ratledge, 1984; Hansson & Dostalek, 1986; Hassan et al., 1993; Heredia & Ratledge, 1988; Jacob, 1991; Jacob, 1992; Johnson et al., 1992; Li et al., 2007; Pan et al., 1986; Ratledge, 2004; Rau et al., 2005; Saxena et al., 2008; Zhao et al., 2008). High glucose concentrations enhance the carbon flow that is directed toward TAG production, thus improving lipid production in several yeasts. However, growth of some yeasts (e.g. *R. toruloides*) is inhibited by high concentration of glucose, (Li et al., 2007). Furthermore, in batch cultures, initial glucose concentration also affects the fatty acids composition of the lipids (Amaretti et al., 2010).

Carbon sources other than glucose, such as xylose (Christopher et al., 1983; Heredia & Ratledge, 1988;), lactose (Christopher et al., 1983; Daniel et al., 1999;), arabinose, mannose (Hansson & Dostalek, 1986), mannitol (Hansson & Dostalek, 1986), ethanol (Christopher et al., 1983; Eroshin & Krylova, 1983), have been also investigated in the 80s and 90s for the production of microbial lipids.

Albeit glucose is a very good carbon source for lipid production with oleaginous fungi, molasses, which carbohydrate fraction is mainly composed of sucrose, glucose, and fructose, do not represent a promising raw material for lipid production, since they are characterized by a high nitrogen content which delays the unbalanced growth, where number of cells can not augment anymore and lipids are accumulated (Johnson et al., 1995).

Carbons sources obtained from ligno-cellulosic biomasses represent one of the most important potential to produce biodiesel. In fact, several waste biomasses containing forest residues, agricultural residues, food wastes, municipal wastes, and animal wastes can be utilized for the production of lignocellulosic based microbial lipids. Microbial oil production from sulphuric acid treated rice straw hydrolysate (SARSH) by the yeast *Trichosporon fermentans* pointed out the difficulty to perform the process of lipid accumulation in presence of the inhibitory compounds released during hydrolysis, such as acetic acid, furfural, 5-hydroxymethylfurfural, and water soluble lignin (Huang et al., 2009). Selected strains were able to grow on xylose and glucose (Zhu et al., 2008), but the crude hydrolyzate did not result an optimal substrate for a high yield process of lipid production. Cellulose and hemicellulose are generally hardly hydrolyzed and assimilated by yeasts, while they can be degraded and used as carbon source by filamentous fungi. A screening of endophytic fungi from the oleaginous plants was the selection of strains belonging to the genera *Microspheeropsis*, *Phomopsis*, *Cephalosporium*, *Sclerocystis* and *Nigrospora* that simultaneously accumulated lipids (21.3 to 35.0% of dry weight) and produced cellulase (Peng & Chen, 2007). Albeit these strains could be exploited as microbial oil producers by utilising straw as substrate, they have never been claimed again as a SCO producers on lingo-cellulosic biomass. Attempts to carry out lipid production in Solid State Fermentation (SSF) on wheat straw have been performed exploiting a cellulolytic strain of *Aspergillus oryzae* (Lin et al., 2010). This strain is able to use cellulose as substrate and accumulate lipids in a low cost fermentation system on this abundant cellulosic by-product.

Other complex matrices have been used, such as solids from wheat bran fermentation (Jacob 1991), sewage sludge (Angerbauer et al., 2008), wastewaters of animal fat treatment (Papanikolaou et al., 2002), whey derivatives (Ykema et al., 1989; Vamvakaki et al., 2010), olive oil mill wastewaters (Yousuf et al., 2010), and tomato waste hydrolysate (Fakas et al., 2008).

Nowadays, lipid production with oleaginous yeasts is focused on selection and development of yeasts as converters of glycerol into lipid for biodiesel production, since it is the major side-product of the biodiesel production process. The biotransformation of glycerol into TAG is therefore regarded as a promising way to decrease the cost of biodiesel process through simultaneous reutilization of its major byproduct. In general, for every 100 kg of biodiesel produced, approximately 10 kg of crude glycerol are created. Crude glycerol is a mixture of glycerol (65–85%, w/w), methanol, and soap, and contains macro elements such as calcium, potassium, magnesium, sulfur and sodium. In order to minimize unknown variables introduced through the use of crude glycerol, several studies to determine whether or not glycerol could be used as substrate or co-substrate for growth have been conducted using purified glycerol.

A deep characterization of lipid accumulation on glycerol has been carried out with *Yarrowia lipolytica*, that is able to metabolize several important industrial and agro-industrial

by-products such as raw glycerol, producing large amounts of SCO and organic acids (Papanikolaou et al., 2003; Papanikolaou & Aggelis, 2002; Rymowicz et al., 2010; Rywinska et al., 2009). Biochemistry of lipid production on glycerol has been investigated in this organism: glycerol passes into the microbial cell by facilitated diffusion and the conversion is carried out via phosphorylation pathway, with direct phosphorylation to G3P and subsequent dehydrogenation. Recently, *Y. lipolytica* has been subjected to targeted and purposeful alteration of G3P shuttle pathway to better utilize glycerol for lipid production. In the genetically manipulated strains, lipid accumulation resulted from a complex interrelation between different processes in diverse cell compartments, such as lipid synthesis in the cytosol, location and storage in ER and LB, mobilization and degradation processes (Dulermo & Nicaud, 2011).

Pure glycerol supported growth and lipid accumulation of *Rhodotorula glutinis* and *Candida freyschussii* (Easterling et al., 2009; Amaretti et al., 2011), being used as sole carbon and energy source or in addition to xylose or glucose. The diverse composition of the medium affected not only the lipid/biomass yield, but also the TAG composition, in terms of ration of saturated, monounsaturated, and polyunsaturated fatty acids (Easterling et al., 2009).

Attempts to convert crude glycerol into lipids have been successfully performed exploiting the oleaginous yeast *Cryptococcus curvatus* (Liang et al., 2010). Different processes have been developed with very efficient yields and productivities. In a 12 days two-stage fed-batch where raw glycerol was fed, the biomass density and the lipid content reached 32.9 g/l and 52%, respectively. Methanol of crude glycerol did not pose a significant inhibitory effect even though it was existent in the bioreactor. Lipid accumulated by *C. curvatus* on glycerol presented high amount of monounsaturated fatty acid, turning out as excellent substrate for transformation into biodiesel.

8. Conclusions and perspectives

Oleaginous fungi, and particularly yeasts, are very efficient in the accumulation of intracellular TAG and it is expected that they will be exploited by the biofuel industry in the future. Nonetheless, the costs of microbial lipids are still too high in order to compete with plant oils for biodiesel manufacturing. Cheap carbon sources have necessarily to be used as carbon sources for the cultivation of these microorganisms and the performance of the bioprocess has to be further improved in terms of both the yield and the productivity. The exploration of the natural biodiversity is a promising strategy to identify novel oleaginous species that assimilate and get fat on agro-industrial residues, particularly the lingo-cellulosic biomass and crude glycerol from biodiesel industry. Further approaches combining genomic, transcriptomic, metabolomics, and lipidomic techniques will undoubtedly provide deeper information of lipid production by oleaginous fungi. A metabolic engineering approach is very promising, but it is still precluded for the most oleaginous species, for which genome disclosure has not been accomplished and genetic tools are not available yet.

9. References

- Adachi, D., Hama, S., Numata, T., Nakashima, K., Ogino, C., Fukuda, H., & Kondo, A., (2011) Development of an *Aspergillus oryzae* whole-cell biocatalyst coexpressing triglyceride and partial glyceride lipases for biodiesel production. *Bioresource Technology*. Vol. 102, No. 12, pp. 6723-6729, ISSN 0960-8524.

- Ageitos, J. M., Vallejo, J. A., Veiga-Crespo, P., & Villa TG. (2011) Oily yeasts as oleaginous cell factories. *Applied Microbiology and Biotechnology*. Vol. 90, No. 4, pp. 1219-1227, ISSN 0175-7598.
- Alvarez, H. M. & Steinbuchel, A. (2002) Triacylglycerols in prokaryotic microorganisms. *Applied Microbiology and Biotechnology*. Vol. 60, No. 4, pp. 367-376, ISSN 0175-7598.
- Amaretti, A., Raimondi, S., Sala, M., Roncaglia, L., De Lucia, M., Leonardi, A., & Rossi, M. (2010) Single cell oils of the cold-adapted oleaginous yeast *Rhodotorula glacialis* DBVPG 4785. *Microbial Cell Factories*. Vol. 23, No. 9, pp. 73, ISSN 1475-2859.
- Amaretti, A., Raimondi, S., Leonardi, A., & Rossi, M. (2011) Lipid production from glycerol by *Candida Freyschusii*. *Proceedings of FEMS 2011 14th Congress of European Microbiologists*, pp. 126, Geneva, Switzerland, June 26-30, 2011
- Angerbauer C, Siebenhofer M, Mittelbach M, Guebitz GM (2008) Conversion of sewage sludge into lipids by *Lipomyces starkeyi* for biodiesel production. *Bioresource Technology*. Vol. 99, No. 8, pp. 3051-3056, ISSN 0960-8524.
- Azócar, L., Ciudad, G., Heipieper, H. J., & Navia, R. (2010) Biotechnological processes for biodiesel production using alternative oils. *Applied Microbiology and Biotechnology*. Vol. 88, No. 3, pp. 621-636, ISSN 0175-7598.
- Bankar, A. V., Kumar, A. R., & Zinjarde, S. S. (2009) Environmental and industrial applications of *Yarrowia lipolytica*. *Applied Microbiology and Biotechnology*. Vol. 84, No. 5, pp. 847-865, ISSN 0175-7598.
- Beopoulos, A., Mrozova, Z., Thevenieau, F., Le Dall, M. T., Hapala, I., Papanikolaou, S., Chardot, T., & Nicaud, J. M. (2008) Control of lipid accumulation in the yeast *Yarrowia lipolytica*. *Applied and Environmental Microbiology*. Vol. 74, No. 24, pp. 7779-7789, ISSN 0099-2240.
- Beopoulos, A., Cescut, J., Haddouche, R., Uribelarrea, J. L., Molina-Jouve, C., & Nicaud, J. M. (2009a) *Yarrowia lipolytica* as a model for bio-oil production. *Progress in Lipid Research*. Vol. 48, No. 6, pp. 375-387, ISSN 0163-7827.
- Beopoulos, A., Chardot, T., & Nicaud, J.M. (2009b) *Yarrowia lipolytica*: a model and a tool to understand the mechanisms implicated in lipid accumulation. *Biochimie*. Vol. 91, No. 6, pp. 692-696, ISSN 0300-9084.
- Boulton, C. A. & Ratledge, C. (1984) *Cryptococcus terricolus*, an oleaginous yeast re-appraised. *Applied Microbiology and Biotechnology*. Vol. 20, No. 1, pp. 72-76, ISSN 0175-7598.
- Butinar, L., Spencer-Martins, I., & Gunde-Cimerman, N. (2007) Yeasts in high Arctic glaciers: the discovery of a new habitat for eukaryotic microorganisms. *Antonie Van Leeuwenhoek*. Vol. 91, No. 3, pp. 277-289, ISSN 1572-9699.
- Calderone, R. A. (2002) *Candida and Candidiasis*. Edited by R. A. Calderone, *American Society of Microbiology Press*. ISSN 1058-4838, Washington, DC, USA.
- Chi, Z. M., Chi, Z., Zhang, T., Liu, G. L., & Yue, L. X. (2009) Inulinase expressing microorganisms and applications of inulinases. *Applied Microbiology and Biotechnology*. Vol. 82, No. 2, pp. 211-220, ISSN 0175-7598.
- Christopher, T., Scragg, A. H., & Ratledge, C. (1983) A comparative study of citrate efflux from mitochondria of oleaginous and non oleaginous yeasts. *European Journal of Biochemistry* Vol. 130, No. 1, pp. 195-204, ISSN 0014-2956
- Czabany, T., Athenstaedt, K., & Daum, G. (2007) Synthesis, storage and degradation of neutral lipids in yeast. *Biochimica et Biophysica Acta*. Vol. 1771, pp. 299-309. ISSN 0006-3002

- Dahlqvist, A., Stahl, U., Lenman, M., Banas, A., Lee, M., Sandager, L., Ronne, H., & Stymne, S. (2009) Phospholipid:diacylglycerol acyltransferase: an enzyme that catalyzes the acyl-CoA-independent formation of triacylglycerol in yeast and plants. *Proceeding of the National Accademy of Science USA*. Vol. 6, No. 12, pp. 6487-6492, ISSN 0027-8424
- Daniel, H. J., Otto, R. T., Binder, M., Reuss, M., & Syltatk, C. (1999) Production of sophorolipids from whey: development of a two-stage process with *Cryptococcus curvatus* ATCC 20509 and *Candida bombicola* ATCC 22214 using deproteinized whey concentrates as substrate. *Applied Microbiology and Biotechnology*. Vol. 51, No. 1, pp. 40-45, ISSN 0175-7598
- de Miguel, T., Calo, P., Díaz, A., & Villa, T. G. (1997) The genus *Rhodospordium*: a potential source of beta-carotene. *Microbiologia*. Vol. 13, No. 1, pp. 67-70, ISSN 0213-4101
- Dulermo, T. & Nicaud, J. M. (2011) Involvement of the G3P shuttle and β -oxidation pathway in the control of TAG synthesis and lipid accumulation in *Yarrowia lipolytica*. *Metabolic engineering*. Vol. 40, No. 4, pp. 483-488, ISSN 1096-7176
- Easterling, E. R., French, W. T., Hernandez, R., & Licha, M. (2009) The effect of glycerol as a sole and secondary substrate on the growth and fatty acid composition of *Rhodotorula glutinis*. *Bioresource Technology*. Vol. 100, No. 1, pp. 356-361. ISSN 0960-8524
- Economou, C.N., Aggelis, G., Pavlou, S., & Vayenas, D.V. (2011) Modeling of single-cell oil production under nitrogen-limited and substrate inhibition conditions. *Biotechnology and Bioengineering*. Vol. 108, No. 5, pp. 1049-1055, ISSN 0006-3592.
- Fakas, S., Certik, M., Papanikolaou, S., Aggelis, G., Komaitis, M., & Galiotou-Panayotou, M. (2008) Gamma-linolenic acid production by *Cunninghamella echinulata* growing on complex organic nitrogen sources. *Bioresource Technology*. Vol. 99, No. 13, pp. 5986-5990, ISSN 0960-8524
- Findley, K., Rodriguez-Carres, M., Metin, B., Kroiss, J., Fonseca, A., Vilgalys, R., & Heitman, J. (2009) Phylogeny and phenotypic characterization of pathogenic *Cryptococcus* species and closely related saprobic taxa in the Tremellales. *Eukaryotic Cell*. Vol. 8, No. 3, pp. 353-361, ISSN 1535-9786
- Gujjari, P., Suh, S. O., Coumes, K., Zhou, J. J. (2011) Characterization of oleaginous yeasts revealed two novel species: *Trichosporon cacaoliposimilis* sp. nov. and *Trichosporon oleaginosus* sp. nov. *Mycologia*. in press, ISSN 1557-2536.
- Granger, L.M., Perlot, P., Goma, G., & Pareilleux, A. (1992) Kinetics of growth and fatty acid production of *Rhodotorula glutinis*. *Applied Microbiology and Biotechnology*. Vol. 37, No. 1, pp. 13-17, ISSN 0175-7598.
- Granger, L.M., Perlot, P., Goma, G., & Pareilleux, A. (1993) Efficiency of fatty acid synthesis by oleaginous yeasts: Prediction of yield and fatty acid cell content from consumed C/N ratio by a simple method. *Journal of biochemical and microbiological technology and engineering*. Vol. 42, No. 10, pp. 1151-1156, ISSN 0006-3592.
- Gutiérrez, A., López-García, S., & Garre, V. (2011) High reliability transformation of the basal fungus *Mucor circinelloides* by electroporation. *Journal of Microbiological Methods*. Vol. 84, No. 3, pp. 442-446, ISSN 0167-7012
- Hall, M. J., & Ratledge, C. (1977) Lipid accumulation in an oleaginous yeast (*Candida* 107) growing on glucose under various conditions in a one- and two-stage continuous

- culture. *Applied and Environmental Microbiology*. Vol. 33, No. 3, pp. 577-584, ISSN 0099-2240.
- Hansson, L. & Dostalek, M. (1986) Influence of cultivation conditions on lipid production by *Cryptococcus albidus*. *Applied Microbiology and Biotechnology*. Vol. 24, No. 1, pp. 12-18, ISSN 0175-7598.
- Hassan, M., Blanc, P. J., Granger, L. M., Pareilleux, A., & Goma, G. (1993) Lipid production by an unsaturated fatty acid auxotroph of the oleaginous yeast *Apiotrichum curvatum* grown in single-stated continuous culture. *Applied Microbiology and Biotechnology*. Vol. 40, No. 4, pp. 483-488, ISSN 0175-7598.
- Heredia, L. & Ratledge, C. (1988) Simultaneous utilization of glucose and xylose by *Candida curvata* D in continuous culture. *Biotechnology Letters*. Vol. 10, No. 1, pp. 25-30, ISSN 0141-5492.
- Holdsworth, J. E. & Ratledge, C. (1991) Triacylglycerol synthesis in the oleaginous yeast *Candida curvata* D. *Lipids*. Vol. 26, No. 2, pp. 111-118, ISSN 0024-4201.
- Hu, C., Zhao, X., Zhao, J., Wu, S., & Zhao, Z. K. (2009) Effects of biomass hydrolysis by-products on oleaginous yeast *Rhodospiridium toruloides*. *Bioresource Technology*. Vol. 100, No. 20, pp. 4843-4847, ISSN 0960-8524.
- Huang, C., Zong, M. H., Wu, H., & Liu, Q. P. (2009). Microbial oil production from rice straw hydrolysate by *Trichosporon fermentans*. *Bioresource Technology*. Vol. 100, No. 19, pp. 4535-4538, ISSN 0960-8524
- Jacob Z. (1991) Enrichment of wheat bran by *Rhodotorula gracilis* through solid-state fermentation. *Folia Microbiologica*. Vol. 36, No. 1, pp. 86-91, ISSN 1874-9356.
- Jacob, Z. (1992) Linear growth and lipid synthesis in the oleaginous yeast *Rhodotorula gracilis*. *Folia Microbiologica*. Vol. 37, No. 2, pp. 117-121, ISSN 1874-9356.
- Jang, H.D., Lin, Y.Y., & Yang, S.S. (2005) Effect of culture media and conditions on polyunsaturated fatty acids production by *Mortierella alpina*. *Bioresource Technology*. Vol. 96, No. 15, pp. 1633-1644, ISSN 0960-8524.
- Johnson, V. W., Singh, M., Saini, V. S., Adhikari, D. K., Sista, V. R., & Yadav, N. K. (1992) Effect of pH on lipid accumulation by an oleaginous yeast: *Rhodotorula glutinis* IIP-30. *World Journal of Microbiology and Biotechnology* Vol. 8, pp. 382-384, ISSN 0959-3993.
- Johnson, V. W., Sigh, M., Saini V. S., Adhikari, D. K., Sista, V., & Yadav, N. K. (1995) Utilization of molasses for the production of fat by an oleaginous yeast, *Rhodotorula glutinis* IIP-30. *Journal of Industrial Microbiology and Biotechnology* Vol. 14, No. 1 pp. 1-4, ISSN 1476-5535
- Kohlwein, S. D. (2010) Triacylglycerol homeostasis: insights from yeast. *Journal of Biological Chemistry*. Vol. 285, No. 21, pp. 15663-15667, ISSN 0021-9258.
- Levinson, W.E., Kurtzman, C.P., & Min, T. (2007) Characterization of *Yarrowia lipolytica* and related species for citric acid production from glycerol. *Enzyme and Microbial Technology*. Vol. 41, No. 3, pp. 292-295, ISSN 0141-0229.
- Liang, Y., Cui, Y., Trushenski, J., & Blackburn, J. W. (2010) Converting crude glycerol derived from yellow grease to lipids through yeast fermentation. *Bioresource Technology*. Vol. 101, No. 19, pp. 7581-7586, ISSN 0960-8524
- Li, C. H., Cervantes, M., Springer, D. J., Boekhout, T., Ruiz-Vazquez, R. M., Torres-Martinez, S. R., Heitman, J., & Lee, S. C. (2011) Sporangiospore Size Dimorphism Is Linked to

- Virulence of *Mucor circinelloides*. *PLoS Pathogen*. Vol. 7, No. 6, e1002086, ISSN 1553-7366
- Li, Q., Du, W., & Liu D. (2008) Perspectives of microbial oils for biodiesel production. *Applied Microbiology and Biotechnology*. Vol. 80, No. 5, pp. 749-756, ISSN 0175-7598.
- Li, Y., Zhao, Z., & Bai, F. (2007) High-density cultivation of oleaginous yeast *Rhodospiridium toruloides* Y4 in fed-batch culture. *Enzyme and Microbial Technology*. Vol. 41, No. 3, pp. 312-317, ISSN 0141-0229.
- Lin, H., Cheng, W., Ding, H. T., Chen, X. Zhou, Q. F., Zhao, Y. H. (2010) Direct microbial conversion of wheat straw into lipid by a cellulolytic fungus of *Aspergillus oryzae* A-4 in solid-state fermentation. *Bioresource technology*. Vol. 101, No. 19, pp. 7556-7562, ISSN 0960-8524
- Meesters, P. A. E. P., Huijberts, G. N. M., & Eggink, G. (1996) High-cell-density cultivation of the lipid accumulating yeast *Cryptococcus curvatus* using glycerol as a carbon source. *Applied Microbiology and Biotechnology*. Vol. 45, No. 5, pp. 749-756, ISSN 0175-7598.
- Meeuwse, P., Tramper, J., & Rinzema, A. (2011a) Modeling lipid accumulation in oleaginous fungi in chemostat cultures: I. Development and validation of a chemostat model for *Umbelopsis isabellina*. *Bioprocess and Biosystems Engineering*. Epub ahead of print, ISSN 1615-7591.
- Meeuwse, P., Tramper, J., & Rinzema A. (2011b) Modeling lipid accumulation in oleaginous fungi in chemostat cultures. II: Validation of the chemostat model using yeast culture data from literature. *Bioprocess and biosystems Engineering*. Epub ahead of print, ISSN 1615-7591.
- Meng, X., , Yang, J., Xu, X., Zhang, L., Nie, Q., & Xian, M. (2009) Biodiesel production from oleaginous microorganisms. *Renewable Energy*. Vol. 34, No. 1, pp. 1-5, ISSN 0960-1481.
- Mlickova, K., Luo, Y., d'Andrea, S., Pec, P., Chardot, T., & Nicaud, J.-M. (2004a). Acyl-CoA oxidase, a key step for lipid accumulation in the yeast *Yarrowia lipolytica*. *Journal of molecular catalysis. B, Enzymatic*. Vol. 28, No. 2-3, pp. 81-85 ISSN 1381-1177
- Mlíckova, K., Roux, E., Athenstaedt, K., d'Andrea, S., Daum, G., Chardot, T., & Nicaud, J.-M. (2004b). Lipid accumulation, lipid body formation, and acyl coenzyme A oxidases of the yeast *Yarrowia lipolytica*. *Applied and Environmental Microbiology*. Vol. 70, No. 7, pp. 3918-3924 ISSN 0099-2240
- Pan, J. G., Kwak, N. Y., & Rhee, J. S. (1986) High density cell culture of *Rhodotorula glutinis* using oxygen-enriched air. *Biotechnology Letters*. Vol. 8, No. 10, pp. 715-718, ISSN 0141-5492
- Papanikolaou, S., & Aggelis, G. (2002) Lipid production by *Yarrowia lipolytica* growing on industrial glycerol in a single-stage continuous culture. *Bioresource technology*. Vol 82, No. 1, pp. 43-49, ISSN 0960-8524
- Papanikolaou, S., Chevalot, I., Komaitis, M., Marc, I., & Aggelis, G. (2002) Single cell oil production by *Yarrowia lipolytica* growing on an industrial derivative of animal fat in batch cultures. *Applied Microbiology and Biotechnology* Vol. 58, No. 3, pp. 308-312, ISSN 0175-7598
- Papanikolaou, S., Muniglia, L., Chevalot, I., Aggelis, G., & Marc, I. (2003) Accumulation of a cocoa-butter-like lipid by *Yarrowia lipolytica* cultivated on agro-industrial residues. *Current Microbiology*. Vol. 46, No. 2, pp.124-130, ISSN 0343-8651.

- Park, W.S., Murphy, P.A., & Glatz, B.A. (1990) Lipid metabolism and cell composition of the oleaginous yeast *Apiotrichum curvatum* grown at different carbon to nitrogen ratios. *Canadian Journal of Microbiology*. Vol. 36, No. 5, pp. 318-326, ISSN 0008-4166.
- Peng, X. W. & Chen, H. Z. (2007) Microbial oil accumulation and cellulase secretion of the endophytic fungi from oleaginous plants. *Annals of Microbiology*. 57 Sakai, 239-242, ISSN 1590-4261
- Rajakumari, S., Grillitsch, K., & Daum, G. (2008) Synthesis and turnover of non-polar lipids in yeast. *Progress in Lipid Research*. Vol. 47, No. 3, pp. 157-171, ISSN 0163-7827
- Ratledge, C. (2002) Regulation of lipid accumulation in oleaginous micro-organisms. *Biochemical Society Transactions*. Vol. 30, No. 6, pp. 1047-1050, ISSN 0300-5127
- Ratledge, C., (2004) Fatty acid biosynthesis in microorganisms being used for single cell oil production. *Biochimie*. Vol. 86, No. 11, pp. 807-815, ISSN 0300-9084.
- Ratledge, C. & Wynn, J. P. (2002) The biochemistry and molecular biology of lipid accumulation in oleaginous microorganisms. *Advances in Applied Microbiology*. Vol. 51, No. 1, pp. 1-44, ISSN 0065-2164.
- Rymowicz, W., Fatykhova, A. R., Kamzolova, S. V., Rywińska, A., & Morgunov, I.G. (2010) Citric acid production from glycerol-containing waste of biodiesel industry by *Yarrowia lipolytica* in batch, repeated batch, and cell recycle regimes. *Applied Microbiology and Biotechnology*. Vol 87, No. 3, pp. 971-979. ISSN 0175-7598
- Rywinska, A., Rymowicz, W., & Marcinkiewicz, M. (2010) Valorization of raw glycerol for citric acid production by *Yarrowia lipolytica* yeast. *Electronic Journal of Biotechnology*. Vol. 13, No. 4, ISSN 0717-3458
- Rau, U., Nguyen, L. A., Roeper, H., Koch, H., & Lang, S. (2005) Fed-batch bioreactor production of mannosylerythritol lipids secreted by *Pseudozyma aphidis*. *Applied Microbiology and Biotechnology*. Vol. 80, No. :607-613, ISSN 0175-7598
- Rossi, M., Buzzini, P., Cordisco, L., Amaretti, A., Sala, M., Raimondi, S., Ponzoni, C., Pagnoni, U. M., & Matteuzzi, D. (2009) Growth, lipid accumulation, and fatty acid composition in obligate psychrophilic, facultative psychrophilic, and mesophilic yeasts. *FEMS microbiology ecology*. Vol. 69, No. 3, pp. 363-372, ISSN 0168-6496
- Sakuradani, E., Ando, A., Ogawa, J., & Shimizu, S. (2009) Improved production of various polyunsaturated fatty acids through filamentous fungus *Mortierella alpina* breeding. *Applied Microbiology and Biotechnology*. Vol. 84, No. 1, pp. 1-10. ISSN 0175-7598
- Satyanarayana, T., & Kunze, G. (2010) Gatersleben, Germany (Eds.) *Yeast Biotechnology: Diversity and Applications* 746 pages ISBN: 1402082916
- Saxena, V., Sharma, C. D., Bhagat, S. D., Saini, V. S., & Adhikari, D. K. (2008) Lipid and fatty acid biosynthesis by *Rhodotorula minuta*. *Journal of the American Oil Chemists Society*. Vol. 75, No. 4, pp. 501-505, ISSN 0003-021X.
- Smit, M. S. (2004) Fungal epoxide hydrolases: new landmarks in sequence-activity space. *Trends in biotechnology*. Vol. 22, No. 3, pp. 123-129, ISSN 0167-7799
- Tehlivets, O., Scheuringer, K., & Kohlwein, S. D. (2007) Fatty acid synthesis and elongation in yeast. *Biochimica et Biophysica Acta*. Vol. 1171, No. 3, pp. 255-270, ISSN 0006-3002
- van der Walt, J. P. (1992) The Lipomycetaceae, a model family for phylogenetic studies. *Antonie Van Leeuwenhoek*. Vol. 62, No. 4, pp. 247-250, ISSN 0003-6072.
- Vamvakaki, A. N., Kandarakis, I., Kaminarides, S., Komaitis, M. & Papanikolaou, S. (2010) Cheese whey as a renewable substrate for microbial lipid and biomass production

- by Zygomycetes *Engineering in Life Sciences* Vol. 10, No. 4, pp. 348–360, ISSN 1618-0240
- Vicente, G., Bautista, L. F., Rodríguez, R., Gutiérrez, F. J., Sádaba, I., Ruiz-Vázquez, R. M., Torres-Martínez, S., & Garre, V. (2009) Biodiesel production from biomass of an oleaginous fungus. *Biochemical Engineering Journal*. Vol. 48, No. 1, pp. 22–27, ISSN 1369-703X
- Wang, S. L., Sun, J. S., Han, B. Z., & Wu, X. Z. (2007) Optimization of beta-carotene production by *Rhodotorula glutinis* using high hydrostatic pressure and response surface methodology. *Journal of Food Science*. Vol. 72, No. 8, pp. M325-329, 1911, ISSN 0022-1147
- Wu, S., Hu, C., Jin, G., Zhao, X., & Zhao, Z.K. (2010) Phosphate-limitation mediated lipid production by *Rhodospiridium toruloides*. *Bioresource Technology*. Vol. 101, No. 15, pp. 6124-6129, ISSN 0960-8524
- Wynn, J.P., Hamid, A. A., Li, Y., & Ratledge, C. (2001) Biochemical events leading to the diversion of carbon into storage lipids in the oleaginous fungi *Mucor circinelloides* and *Mortierella alpina*. *Microbiology*. Vol. 147, No. 10, pp. 2857-2864, ISSN 1350-0872.
- Ykema, A., Verbree, E.C., Verseveld, H.W., & Smit, H. (1986) Mathematical modelling of lipid production by oleaginous yeasts in continuous cultures. *Antonie van Leeuwenhoek*. Vol. 52, No. 6, pp. 491-506, ISSN:1572-9699
- Ykema, A., Kater, M. M. & Smit H. (1989) Lipid production in whey permeate by an unsaturated fatty acid mutant of the oleaginous yeast *Apiotrichum curvatum*. *Biotechnology Letters*. Vol.11, No. 7, pp. 477-482, ISSN 0141-5492
- Yousuf, A., Sannino, F., Addorisio, V., Pirozzi, D. (2010) Microbial conversion of olive oil mill wastewaters into lipids suitable for biodiesel production. *Journal of agricultural and food chemistry*. Vol. 11 No. 58(15), pp. 8630-8635, ISSN 0021-8561
- Yu, X., Zheng, Y., Dorgan, K. M., Chen, S. (2011) Oil production by oleaginous yeasts using the hydrolysate from pretreatment of wheat straw with dilute sulfuric acid. *Bioresource Technology*. Vol. 102, No. 10, pp. 6134-6140, ISSN 0960-8524
- Zhang, Y., Adams, I. P., & Ratledge, C. (2007) Malic enzyme: the controlling activity for lipid production? Overexpression of malic enzyme in *Mucor circinelloides* leads to a 2.5-fold increase in lipid accumulation. *Microbiology*. Vol. 153, No. 7, pp. 2013-2025, ISSN 1350-0872
- Zhang, J., Fang, X., Zhu, X. L., Li, Y., Xu, H. P., Zhao, B. F., Chen, L. & Zhang, X. D. (2011) Microbial lipid production by the oleaginous yeast *Cryptococcus curvatus* O3 grown in fed-batch culture. *Biomass and Bioenergy*. Vol. 35, No. 5, pp. 1906-1911, ISSN 0961-9534
- Zhao, C. H., Cuim W., Lium X. Y., Chi, Z. M., & Madzak, C. (2010) Expression of inulinase gene in the oleaginous yeast *Yarrowia lipolytica* and single cell oil production from inulin-containing materials. *Metabolic engineering*. Vol. 12, No. 6, pp. 510-517, ISSN 1096-7176
- Zhao, X., Kong, X., Hua, Y., Feng, B., Zhao, Z. K. (2008) Medium optimization for lipid production through co-fermentation of glucose and xylose by the oleaginous yeast *Lipomyces starkeyi*. *European Journal of Lipid Science and Technology*. Vol. 110, No. 5, pp. 405–412, ISSN 1438-9312

- Zhu, L. Y., Zong, M. H., & Wu, H. (2008) Efficient lipid production with *Trichosporon fermentans* and its use for biodiesel preparation. *Bioresource Technology*. Vol. 99, No. 16, pp. 7881-7885, ISSN 0960-8524
- Zinoviev, S., Müller-Langer, F., Das, P., Bertero, N., Fornasiero, P., Kaltschmitt, M., Centi, G., & Miertus, S. (2010) Next-generation biofuels: Survey of emerging technologies and sustainability issues. *Chemistry & sustainability, energy & materials*. Vol. 3, No. 10, pp. 1106-1133, ISSN 1864-564X

Microbial Biodiesel Production - Oil Feedstocks Produced from Microbial Cell Cultivations

Jianguo Zhang and Bo Hu
*University of Minnesota,
USA*

1. Introduction

Crude oil price has increased to over \$100 per barrel, which is causing serious negative impact on the global and national economy. In 2005, the United States produced 8.3 million bbl/day, but consumed 20.8 million bbl/day, the balance of which was imported from other countries. For these fossil fuels, the U.S. used about 138 billion gallons of gasoline in 2006, accounting for about 44 percent of the world's gasoline consumption (EarthTrends, 2008). The annual U.S. usage of jet fuel was 21 billion gallons in 2006 (Energy Information Administration, 2008). The U.S. annual consumption of diesel fuel in 2006 was about 50 billion gallons (Energy Information Administration, 2008). Massive consumption of fossil fuels has already caused serious concern over global warming caused by greenhouse gases.

Biofuel offers an alternative to fossil fuels. It provides several benefits, such as alleviation from foreign oil dependence, carbon neutral process without greenhouse emission, and profits to local farmers. Bioethanol production from starch and lignocellulosic materials is a kind of an alternative to fossil fuels. It can be blended with gasoline in varying quantities up to pure ethanol (E100). The first generation of ethanol biofuel has been massively commercialized and dominated by the U.S. and Brazil. Fuel ethanol in the U.S. is primarily produced from corn, while Brazilian ethanol is produced mainly from sugarcane. These raw materials are in direct competition with human diet or the land to produce food, which triggers the controversy of food versus fuel. The second generation of ethanol is proposed to be produced from lignocellulosic biomass, which can be obtained from agricultural residue or other woody and herbal biomass from marginal land. Intense scientific research has been carried out over the past decade, focusing on this route in order to decrease the overall process cost and this process is gradually focusing on commercialization.

2. Biodiesel and current feedstocks

2.1 Biodiesel production

Another approach for alternative biofuels is biodiesel. The most common type of biodiesel is the methyl esters of fatty acid (FAME), obtained by transesterification of lipid with methanol or ethanol. It can be used in pure form (B100) or may be blended with fossil diesel at any rate. The commonly used biodiesel is B99 because 1% of fossil fuel is applied to

inhibit mold growth, which shortens its shelf life. Biodiesel is around 5-8% less efficient than conventional fossil diesel; yet, biodiesel has potential as a total or partial (in the cold regions) replacement to the fossil diesel, compatible to the current diesel engine. There are numerous environmental benefits to replace fossil diesel to biodiesel since combustion of biodiesel emits far less pollutants comparing to fossil diesel (except the NO_x emission) and the entire process is close to carbon neutral considering that the plant oil used to produce biodiesel is synthesized in the agriculture from CO₂ in the air. The production and utilization of biodiesel are significant in many aspects, for instance, increasing oilseed crop market, providing domestic job opportunities to the rural community, and decreasing the dependence on imported oil; therefore biodiesel has been commercialized around the globe. Another type of biodiesel is the hydrocarbon generated with direct decarboxylation of fatty acid or lipid. Although it shows superior features than current FAME biodiesel in many aspects, the chemical decarboxylation process to produce diesel still needs further development compared to the transesterification process for biodiesel production.

2.2 Agricultural feedstocks: Vegetable oil, animal fat and recycled grease

The biodiesel industry suffered due to limited raw materials such as soybean oil or vegetable oil. Although there are numerous potential renewable and carbon neutral feedstocks for the production of biodiesel, none seems capable of displacing fossil diesel. Table 1 shows a comparison of the oil yields of some sources of biodiesel, the land area for their cultivation, and the percentage of existing United States (U.S.) cropping area to meet half of the transport fuel needs. Using soybean as feedstock for the production of biodiesel requires 326% of the U.S. cropping area to meet the 50% of all U.S. transport fuel needs. Based on this rough estimation, none of the terrestrial crops is able to completely substitute crude oil.

Crop	Oil yield [Liters per hectare]	Land area needed [Mha] ^a	Percent of existing US cropping area ^a
Corn	172	1540	846
Soybean	446	594	326
Canola	1190	223	122
Jatropha	1892	140	77
Coconut	2689	99	54
Oil palm	5950	45	24
Microalgae ^a	136,900	2	1.1
Microalgae ^c	58,700	4.5	2.5

^a For meeting 50% of all transport fuel needs of the U.S.

^b 70% oil (by wt) in biomass.

^c 30% oil (by wt) in biomass.

Table 1. Comparison of some sources of biodiesel (Chisti 2007)

Various raw materials are proposed to produce biodiesel, including waste cooking oil and various oil-accumulating plants, which could help solve the shortage for raw materials but are not sufficiently available. New approaches need to be developed to use an alternative biomass as the substrate for biofuel production, for example, biomass leftover from agricultural harvest or the biomass produced in non-traditional agricultural land as the

source of sugars for biofuel and bioproducts. This potential has been gaining much attention recently as it is been defined as "second generation of bioenergy", compared to current technologies that primarily are limited to food materials. Oil accumulation with microalgae and other similar technologies started to show some potential to produce biofuel products with massive scales (Benemann, 1996; Chisti, 2007; Jarvis et al., 1994).

3. Microorganisms for microbial lipid production

3.1 Microalgae

Algae oil is being seriously considered because of the large oil yields it shows compared with other oilseeds. The Office of Fuels Development, a division of the Department of Energy, funded a program from 1978 through 1996 under the National Renewable Energy Laboratory known as the "Aquatic Species Program". The focus of this program was to investigate high-oil algae that could be grown specifically for the purpose of widescale biodiesel production. NREL's research showed that one quad (7.5 billion gallons) of biodiesel could be produced from 200,000 hectares of desert land (200,000 hectares is equivalent to 780 square miles, roughly 500,000 acres). It would be preferable to spread the algae production around the country, to lessen the cost and energy used in transporting the feedstocks. Algae farms could also be constructed to use waste streams (either human waste or animal waste from animal farms) as a food source, which would spread algae production around the country. Nutrients can also be extracted from the algae for the production of a fertilizer high in nitrogen and phosphorous. By using waste streams (agricultural, farm animal waste, and human sewage) as the nutrient source, these farms essentially also provide a means of recycling nutrients from fertilizer to food to waste and back to fertilizer. Microalgae are generally autotrophic eukaryotic cells, and contain one or more types of chlorophyll plus additional pigments known as carotenoids and biloproteins (also called phycobilins). Carotenoids are yellow, orange, or red water-insoluble linear hydrocarbons; biloproteins are blue or red water-soluble pigment-protein complexes. The color of the different groups of algae depends on the ratio of these pigments. Almost all the microalgae cells contain chlorophyll, but the green color can be masked by the carotenoids, giving them a brown or red color. Microalgae cells are mostly unicellular, but some species are colonial or filamentous. They can grow autotrophically and/or heterotrophically, with a wide range of tolerance to different temperature, salinity, pH and nutrient availabilities. Cyanobacteria, although sometimes also referred as algae, specifically as blue-green algae, are by definition prokaryotic bacteria, instead of microalgae. The eukaryotes microalgae we are referring to include green algae, diatoms, yellow-green algae, golden algae, red algae, brown algae, dinoflagellates and others; and only limited species have the capability to accumulate high content of lipids in their cell biomass. Microbial species that can accumulate over 20% of lipids in their cell biomass are considered oleaginous species.

One of the characteristics of algae that separate them from other oilseeds is the quantity of lipids and fatty acids algae have as membrane components; some algae have been found to contain over 80% of lipids, which is of great interest for a sustainable feedstock for biodiesel production. Different microalgae species are listed in Table 2 as examples of lipid accumulation research. For example, *Chlorella vulgaris* is a commercially important green microalgae because it has the potential to serve as a food and energy source due to its high photosynthetic efficiency, which can, in theory, reach 8%. It can grow with both autotrophic and heterotrophic modes, and its mixotrophic growth rate is the sum of its autotrophic

growth rate and heterotrophic growth rate, separately. *Chlorella protothecoides* is another single-cell green microalgae, which has high potential for the energy and food production. Heterotrophic growth of *C. protothecoides* supplied with acetate, glucose, or other organic compounds as carbon source, results in high biomass and high content of lipid in cells.

Microalgae	Cultures			Substrates	Growth Rate	Lipid Content
	AC	MC	HC			
<i>Chlorella protothecoides</i>	X		X	glucose, acetate / CO ₂	3.74g/L - 144h	55.2%
<i>Chlorella vulgaris</i>	X	X	X	glucose, acetate, lactate / CO ₂	0.098/h	
<i>Cryptocodinium cohnii</i>			X	glucose/ CO ₂	40g/L - 60-90h	15-30%
<i>Scenedesmus obliquus</i>	X		X	glucose/ CO ₂	double in 14h after adaptation	14-22%
<i>Chlamydomonas reinhardtii</i>	X	x	X	acetate/ CO ₂	exponential during the first 20 Hr	21%
<i>Micractinium pusillum</i>		x	X	CO ₂	0.94g/L - 24h	
<i>Euglena Gracilis</i>			X	CO ₂		14-20%
<i>Schizochytrium sp</i>				glycerol/ CO ₂	130 -140h (28°C)	55%
<i>Spirulina platensis</i>	X		X	glucose/ CO ₂	0.008 /h	
<i>Botryococcus Braunii</i>			X	CO ₂	low growth rate	20 - 86%
<i>Dunaliella salina</i>	X	x		CO ₂		~70%

AC: autotrophic cultures; MC: mixotrophic cultures; HC: heterotrophic cultures

Table 2. Some examples of microalgae cultivation for oil accumulation

Lipid accumulation occurs within the microalgae cells and it varies from strain and growth conditions. There are many nutritional and environmental factors controlling the cell growth and lipid contents, such as organic and inorganic carbon sources, nitrogen source, and other essential macro- and micro-nutrients like magnesium and copper, temperature, pH level, salinity, agitation speed (dissolved oxygen). Many microalgae species, for example, *C. protothecoides*, accumulated a higher content of lipids in cells and achieved higher growth rate when the culture was under heterotrophic mode. Like yeast and fungi, heterotrophic algae can accumulate biomass and lipids using organic carbon as its source instead of carbon dioxide and sunlight. Compared with autotrophic algae, the heterotrophic growth process has the advantages of no light limitation, a high degree of process control, higher productivity, and low costs for biomass harvesting (Barclay, Meager et al. 1994). Table 2 shows the oil production of autotrophically and heterotrophically cultured microalgae. Most heterotrophically cultured algae have greater than ten times the biomass concentration, while the lipid productivity is also significantly higher than the theoretical data for autotrophic cultivation. For certain algae strains, it was suggested the

heterotrophically cultured cells exhibited better capability for biomass and lipid production. Miao and Wu (2006) reported that the oil content of heterotrophically cultured *C. protothecoides* was approximately four times greater than that in the corresponding autotrophic culture. Liu et al. (2010) demonstrated that the heterotrophically cultured cells of *Chlorella zofingiensis* showed 411% and 900% increases in dry cell weight and lipid yield, respectively, compared to autotrophically cultured cells. Moreover, biodiesel produced from heterotrophically cultured algae oils had similar properties to diesel fuel in terms of density, viscosity, heating value, and H/C ratio (Xu, Miao et al. 2006). In addition to lipid production, high value byproducts can be obtained from heterotrophically cultured microalgae, including polyunsaturated fatty acids and carotenoids (Chen and Chen 2006).

3.2 Yeast and fungi

Besides microalgae, many yeast and fungi species (e.g., *Mucor circillienus* or *Mortierella isabellina*) also can accumulate a high content of lipids (Xia 2011; Heredia-Arroyo, Wei et al. 2011). Many oleaginous yeasts were studied for lipid accumulation on different substrates, such as industrial glycerol (Meesters, Huijberts et al. 1996; Papanikolaou and Aggelis 2002), sewage sludge (Angerbauer, Siebenhofer et al. 2008), whey permeate (Ykema, Verbree et al. 1988; Akhtar, Gray et al. 1998), sugar cane molasses (Alvarez, Rodriguez et al. 1992), and rice straw hydrolysate (Huang, Zong et al. 2009). The use of non-starch biomass is critical so that lignocelluloses can be used for organic carbon supply without concern of using food crops for fuel sources. Recent studies detailed conversion of hemicellulose hydrolysate into lipids by oleaginous yeast strains and their tolerance degrees to lignocellulose degradation compounds (Chen, Li et al. 2009; Hu, Zhao et al. 2009; Huang, Zong et al. 2009). However, these strains were unable to efficiently produce lipids in the presence of inhibitors in the hydrolysate, necessitating detoxification treatment prior to fermentation, which increases the cost of the process. Thus, using strains capable of growing in the non-detoxified hydrolysate is necessary for viable microbial lipid production in an industrial context. In addition, previous reports indicate that temperature is an key factor in regulating the fatty acid composition in fungi (Kendrick and Ratledge 1992; Weinstein, Montiel et al. 2000).

Similarly, some oleaginous filamentous fungi can also produce lipids by utilizing glycerol, acetic acid, soluble starch, wheat straw, and wheat bran. Dey et al screening two endophytic oleaginous fungi *Colletotrichum sp.* and *Alternaria sp.* with lipid content 30% and 58% respectively (Dey, Banerjee et al. 2011). Fifteen eukaryotic microorganism were tested for waste glycerol assimilation to produce lipid. Fungi accumulated lipid inside their mycelia (lipid content ranging between 18.1 and 42.6%) (Chatzifragkou, Makri et al. 2011). Such capabilities provide potential to utilize sugars in the pretreated lignocellulosic materials hydrolysate. Moreover, because the fatty acid profile of microbial oils is quite similar to that of conventional vegetable oils, oleaginous filamentous fungi are suggested as a favorable feedstock for a sustainable biodiesel industry (Peng and Chen 2008; Zhao, Hu et al. 2010).

4. Feedstocks for microbial lipid production

4.1 Light and carbon dioxide

Microalgae cells can generally utilize sunlight, carbon dioxide and nutrients from waste water for their cell growth (Brennan and Owende 2010). Lipid accumulation with microalgae cultivation is relatively efficient due to its high production efficiency and less

demand of agricultural land. Most microalgal ponds have a solar energy conversion efficiency of 1–4% under normal operating conditions and higher efficiencies can be achieved with closed photo-bioreactor systems. There is a considerable margin for improvement, which is being targeted through accelerated breeding programs and genetic modification. Autotrophic microalgae cells also absorb CO₂ as their carbon source to support their cell growth, which makes the microalgae an attractive option for the biological CO₂ fixation. Atmospheric CO₂ accumulation, derived mainly from fossil fuel combustion, is proved as the leading cause of global warming. Current mitigation methods such as physicochemical adsorption, injection into deep oceans and geological formations are not economically feasible due to the high cost of implementing these methods and possible CO₂ leakage. After CO₂ is fixed via microalgae assimilation, the cell biomass can be utilized to generate methane gas, biochar, or the oil can be extracted to generate biodiesel. Microalgae can fix not only atmospheric CO₂, but also the CO₂ from industrial exhaust gases and from the carbonate salt, which are chemically fixed. Atmospheric CO₂ levels (0.0387%) are not sufficient to support the high microalgae growth rates and productivities needed for commercial biofuel production, adding CO₂ into autotrophic microalgae culture is an effective method to accelerate the microalgae growth rate. Utilization of CO₂, for example, flue gas from electrical plant, by means of microalgae alleviates the impact of CO₂ on the environment (greenhouse effect) and renders algal biomass production less expensive. It was also reported that the CO₂ content was reduced from 44–48% to 2.5–11% when the microalgae cultivation was integrated with anaerobic digestion to remove impurities of biogas produced from anaerobic digestion. Microalgae also assimilated other impurities such as ammonia and hydrogen sulfide; and the gas leaving the algae pond had 88–97% by volume of methane²³. Although there are conflicting results from different references about the toxicity of ammonia, hydrogen sulfide and other impurities on the growth of microalgae cells, integration of microalgae cultivation together with this industrial processes can be more sustainable and economically feasible than the individual microalgae cultivation process to generate oil for biodiesel production.

4.2 Wastewater

Culturing microalgae with nutrients from wastewater, such as nitrogen and phosphate, can decrease the cost of the raw materials and also provide some environmental benefits. Agricultural effluent and municipal wastewater, even after treated with anaerobic digestion (AD), cannot be disposed directly because of their high nutrient level (Levine, Costanza-Robinson et al. 2011). In contrast, these wastewater can be considered as a cost-effective candidate of raw materials for biodiesel production (Siddiquee and Rohani 2011). Cultivation of microalgae, yeast, or fungi can be integrated with AD system to reduce the remaining COD, phosphate, and ammonia. Microalgae were also studied to absorb metal ion, waste pharmaceutical chemicals and dye into their cell biomass in order to remove the pollutants from wastewater once their cell biomass were stabilized and harvested. A typical example is the recently developed high-rate algae pond (HRAP) in the tertiary wastewater treatment facility (El Hamouri 2009). HRAP functions behind a two-step upflow anaerobic reactor (pre-treatment) and was followed by one maturation pond (MP) for polishing. The HRAP was revealed to have no activity for removing the COD from the wastewater; however, it removed 85% of total N and 63% of total P. Nitrogen removal was discovered due to the assimilation of microalgae for their growth, and denitrification did not play any role in removing the nitrogen in this process. Phosphorus removal in this process was

attributed to chemical precipitation and biological assimilation (around 50% each). In removing ammonia, the HRAP is superior to the traditional bacterial nitrification-denitrification process, which requires the assimilation of extra-organic carbon as a carbon source. Phosphorus removal by microalgae is largely thought to be due to its uptake for normal growth, as an essential element required for making cellular constituents such as phospholipids, nucleotides, and nucleic acids. Under certain conditions microalgae can be triggered to uptake more phosphorus than is necessary for survival, in the form of polyphosphate (Powell, Shilton et al. 2011). Phosphorus removal by luxury uptake (amount of P uptake more than growth required) was confirmed to occur in the microalgae growing in the wastewater treatment facility; further research is needed in this prosperous field about the detailed mechanism and applications.

4.3 Lignocellulosic biomass

Several research studies revealed that organic carbon sources, if the algae have the capability to grow on heterotrophic mode, can significantly increase the cell growth rate and dramatically enhance the lipid content of the biomass. For example, *Chlorella protothecoides* can only accumulate 18-25% lipid in the autotrophic culture, while the lipid content can reach to 55.2% dry cell biomass if cultured with addition of organic carbons (Xiong, Li et al. 2008). However, the heterotrophic cultivation of microalgae mostly request pure mono-sugars, which are usually costly and limited. Alternative materials with relative abundance and zero or negative valued organic materials, such as lignocellulosic biomass from agriculture, are the only choice for this route. Agricultural feedstocks contribute a large part of renewable resource for biodiesel production, which are the target of biodiesel resource of cost reduction of biodiesel and non-human food resource discovery. Most of these substrates are locally available and thus are expected to support mainly small production facilities. Lignocellulosic materials are mainly composed of cellulose, hemicellulose, and lignin, which make up approximately 90% of the dry weight of most plant materials (Kumar, Barrett et al. 2009). Cellulose and hemicellulose can be converted to fermentable sugars for microbial lipid production. However, the direct enzymatic hydrolysis of cellulose and hemicellulose to sugars is impeded by the cell wall physico-chemical and structural composition. Thus, biomass pretreatment prior to enzymatic hydrolysis is essential to enhance enzymatic digestibility. Distinctly different from autotrophic microalgae cultures, this process is more similar to cellulosic ethanol production, where hydrolysis and fermentation are needed for conversion.

5. Conversion processes for microbial lipid production

5.1 Autotrophic microalgae cultivation and lipid accumulation

Three cultivation processes were designed to culture microalgae and other oleaginous cells, including open-pond system, photobioreactor, and fermentation. The open-pond system is typically a closed loop with a pump to create microalgae flow in the channel. The channel is 0.2-0.5 meter deep, and the pump keeps the microalgae cell well mixed for continuous growth. This type of open-pond system has been used for several years because it is easy to operate and inexpensive to maintain. The open-pond system also can be upgraded to large-scale microalgae production. On the other hand, a high cell density of microalgae cannot be reached because of limited capability to assimilate the sun light and low carbon dioxide concentration of air. Increasing the CO₂ concentration by using

flue gas instead of air can increase the microalgae cell concentrations, but the final cell density is still limited to the mutual shading effects where light cannot penetrate through dense microalgae cell broth. Another problem is biological contamination during the long period of cultivation. The bacteria contamination or other non-oleaginous microalgae invasion can occur in stressed cultural conditions, where lipid accumulation usually is stimulated, such as nitrogen depletion or other nutrient imbalance. There is now extensive evidence that open-pond systems can operate for more than six months without significant contamination using a wide range of microalgae. Prolific strains of *Chlorella*, for example, are often dominant because they outgrow their competitors (and indeed can often be contaminants themselves in *Arthrospira* cultures or other microalgal strains). Extreme halophiles, such as *Dunaliella salina*, are also dominant in their optimal environments because they do not encounter much competition at high salinities. However, in the context of the wider microalgal industry, contamination issues are still of significant interest.

To enhance the productivity of microalgae, closed photobioreactor systems (tubular flat plate, Orccolumn) are designed to increase the surface of microalgae broth exposed to sunlight. Closed photobioreactors are more costly than open-pond systems, but they have potential for higher productivity of cell biomass with less chance of contamination. The flat plate photobioreactors can receive greater sunlight for microalgae growth although there is potential for cell mixing. The microalgae cell density could reach up to 80g/L dry cell weight, significantly higher than the cell density of a pond system, which ranges within several g/L (Hu, 1998). Another design for the photoreactor is the tubular photoreactor, made with a diameter less than 0.1 m to maximize the sunlight harvest by microalgae. The tubular reactor can also expose the microalgae cells to sunlight from all the directions (Miron, Gomez et al. 1999; Ugwu, Ogbonna et al. 2002). There are a few reports about scale-up test of tubular photoreactor, such as the one in Hawaii with a size of 25M³ (Olaizola 2000), and 700 M³ in Germany (Pulz 2001). However, the tubular photobioreactors cannot scale-up indefinitely because of oxygen accumulation, carbon dioxide limitation, and pH changes (Eriksen 2008). The third type of photoreactor is the column photoreactor, the most controllable type among three because it most closely resembles the traditional bioreactor. The column containing microalgae is vertical, and the air is bubbled from the bottom. Sunlight is provided horizontally (Eriksen 2008).

In addition to individual open-pond system and closed photobioreactor, the hybrid system of microalgae cultivation is currently under intense investigation because it combines the open-pond system and closed photobioreactor to increase the cell productivity and reduce the cost. The first stage is autotrophy to avoid biological contamination, and the second stage is heterotrophy, which provides the stress condition for lipid accumulation.

5.2 Oleaginous microbial fermentation and lipid accumulation

Besides the pond system and photobioreactor, heterotrophic cell cultivation, including heterotrophic microalgae, oleaginous yeast and fungi, is usually limited to industrial fermentation tanks. These cells can be cultured in a dark fermentor with optional sunlight, and can usually reach a very high cell density (up to 200g/L). Due to its excellent controllability of all operation parameters, most of the industrial microalgae cultivations for nutraceutical production (e.g., polyunsaturated fatty acid) have been switched to the heterotrophic fermentations where sugar is provided to produce high-valued products, such as Docosahexaenoic acid (DHA).

Factor	Raceway	Photobioreactor	Fermenter
Cell density in culture	Low	Medium	High
Limiting factor for growth	Light	Light	Oxygen
Culture volume necessary to harvest a unit weight of cells	High	Medium	Low
Surface area-to-volume ratio	High	Very high	Not applicable
Control over parameters	Low	Medium	Very high
Commercial availability	Readily available	Usually custom built	Readily available
Construction costs per unit volume produced	Medium	High	Low
Operating costs	Medium	High	Low
Technology base	Readily available	Under development	Readily available
Risk of contamination	High	Medium	Low
Evaporative water losses	High	High ³³	Low
Weather dependence	High	Medium	Low
Maintenance	Easy to maintain	Difficult to maintain	Requires specialized maintenance
Susceptibility to overheating	Low	High	N/A
Susceptibility to excessive O ₂ levels	Low	High ³⁴	N/A
Ease of cleaning	Very easy	Difficult	Difficult (must be sterilized)
Ease of Scale-up	High	Variable ³⁵	High
Land requirement	High	Variable	Low
Applicability to different species	Low	High	Low

Table 3. Comparison of different algae cultivation systems (Alabi. 2009)

Table 3 compares three cultivation methods and shows that the process cost of fermentation can be high due to its requirement of raw materials and oxygen, and sterilization of culture media during the cell growth. It is readily available both in the lab and in the industry, but is only suitable to produce high-valued products, of which biofuel products are not. The key barriers to apply this technology to biofuel production is the cost and availability of raw materials. Considering the competition with human diet, sugars cannot serve as the raw material for biofuel production; and alternative materials such as lignocellulosic materials should be used for the heterotrophic oil production. If the oleaginous cells are capable of generating the hydrolytic enzymes for lignocelluloses degradation, it will be the big plus for biodiesel production via oleaginous fermentation the overall system. Otherwise, external hydrolytic enzymes have to be used to release the monosugar, followed by lipid accumulation via oleaginous microorganisms. Separated hydrolysis and fermentation (SHF) is a common working model to have these two steps separated. Two bioreactors will be necessary because the hydrolytic degradation of lignocellulose is preferred at 50°C, while the oleaginous microorganisms grow at much lower temperature (28°C to 30°C for most of the fungus). Simultaneous saccharification and fermentation is another working model currently under intense investigation, in which two steps are integrated into one.

Different fermentation processes are applied to obtain high productivity of lipids and high conversion ratio of substrate for the fermentation, such as batch cultivation, fed-batch cultivation, and continuous cultivation. Fed-batch cultivation is a modified batch model that can reach high cell density and it has many applications in the fermentative lipid accumulation process. For example, *Rhodosporidium toruloides* reach much higher cell density with 48% lipid compared to its batch cultivation (Li, Zhao et al. 2007). The high productivity of fed-batch cultivation was conformed by *Phodotorula glutinis* (Xue, Miao et al. 2008), *C. curvatus* (Meesters, Huijberts et al. 1996), and *L. starkeyi* (Yamauchi, Mori et al. 1983). Continuous cultivation has advantages of easy maintenance and time-saving, although it is difficult to control the contamination. It has limited applications in the fermentative lipid accumulation.

Besides the commonly used submerged cultivations, solid state fermentation, as a compact process for lipid production, showed many advantages, such as low requirements to the raw materials; low capital cost; low energy expenditure; less expensive downstream processing; less water usage and low water output; potential higher volumetric productivity; less fermentation space; easy operation and maintenance. The research for *Aspergillus oryzae* growing on rice bran and wheat bran through solid state fermentation resulted to the lipid content of cell biomass at about 10-11% (Da Silveira, Oliveira et al. 2010). The lipid yield reached 62.87 mg/gds in solid state fermentation on the 6th day after Plackett-Burman design (PBD) by *A. oryzae* A-4 (Lin, Cheng et al. 2010). Currently, the solid state fermentation research is still in its infancy and many barriers are hindering this process from commercialization. The lipid yield is relatively low compared to submerge cultivation. Modern biotechnological approaches, such as heterogenous expression of hydrolytic enzymes and UV radiation, are available to enhance the hydrolytic enzymes production (Li, Yang et al. 2010; Awan, Tabbasam et al. 2011). Semi-solid state fermentation is used to avoid high sugar concentration on the surface of lignocellulose. An oleaginous fungus *M. isabellina* was cultured at semi-solid state fermentation with the results of 11g oil per 100g sweet sorghum (Economou, Makri et al. 2010).

6. Cell harvest and lipid extraction

6.1 Cell harvest methods

The algae cell harvest from pond water and the subsequent water reuse have been one of the major obstacles for the algae-to-fuel approach. Microalgae cell harvest is technically challenging, especially considering the low cell densities (typically in the range of 0.3–5 g/L) of autotrophic microalgae due to limited light penetration, the small size of the oleaginous algal cells (typically in the range of 2–40 μm), and their similar density to water (Li, Horsman et al. 2008). Oleaginous microalgae cells are usually suspended in the water and are hard to settle by natural gravity force due to their negative charges. The recovery of microalgae biomass generally requires one or more solid-liquid separation steps, and usually accounts for 20–30% of the total costs of production, according to one source (Uduman, Qi et al. 2010).

How to harvest microalgae cells is dependent on the characteristics of the microalgae, such as size and density (Olaizola 2003). All of the available harvest approaches, which include flocculation, flotation, centrifugal sedimentation, and filtration, have limitations for effective, cost-efficient production of biofuel (Shelef, Sukenik et al. 1984). For instance, flotation methods, based on the trapping of algae cells using dispersed micro-air bubbles, is

very limited in its technical and economic viability. Most conventional and economical separation methods such as filtration and gravitational sedimentation are widely applied in wastewater treatment facilities to harvest relatively large (>70 μm) microalgae such as *Coelastrum* and *Spirulina*. However, they cannot be used to harvest algae species approaching bacterial dimensions (<30 μm) like *Scenedesmus*, *Dunaliella*, and *Chlorella* (Brennan and Owende 2010), to which most oleaginous microalgae species belong. Centrifugation is a method widely used to recover microalgae biomass, especially small-sized algae cells; however, its application is restricted to algae cultures for high-value metabolites due to intensive energy needs and high equipment maintenance requirements. While flocculation is used to harvest small-sized microalgae cells, it is a preparatory step to aggregate the microalgae cells and increase the particle size so that other harvesting methods such as filtration, centrifugation, or gravity sedimentation can be applied (Molina Grima, Belarbi et al. 2003). Several flocculants have been developed to facilitate the aggregation of microalgae cells, including multivalent metal salts like ferric chloride (FeCl_3), aluminium sulphate ($\text{Al}_2(\text{SO}_4)_3$), and ferric sulphate ($\text{Fe}_2(\text{SO}_4)_3$), and organic polymers such as Chitosan (Li, Horsman et al. 2008). Chemical flocculation can be reliably used to remove small algae cells from pond water by forming large-sized (1–5 mm) flocs (Sharma, Dhuldhoya et al. 2006). However, the chemical reactions are highly sensitive to pH and the high doses of flocculants required produce large amounts of sludge and may leave a residue in the treated effluent. In summary, most technologies including chemical and mechanical methods greatly increase operational costs for algal production and are only economically feasible for production of high-value products (Park, Craggs et al. 2011).

Besides traditional methods mentioned above, there are several new technology developments in this field. DOE-ARPA-E recently funded a research project for Algae Venture Systems (AVS) to develop a Harvesting, Dewatering, and Drying (AVS-HDD) technology by using the principles of liquid adhesion and capillary action to extract water from dilute microalgae solutions. Attached algal culture systems have been developed for growing microalgae on the surface of polystyrene foam (Wilkie and Mulbry 2002) (Johnson and Wen 2010) to simplify the cell harvest. New bioflocculants, which are more environmentally friendly, are also proposed to address the cost and environmental concerns for current flocculation method (Uduman, Qi et al. 2010). All these methods are innovative and will decrease the harvest cost to some extent if developed successfully, but heavy investments on equipment and chemical supplies are still needed.

Dr. Bo Hu's research group at University of Minnesota developed an innovative approach to enhance natural algae aggregation and to encourage simple gravity settling or filtration by co-culturing filamentous fungal cells at the end of the microalgae cultures. Instead of suspended culture, this approach uses pelletized or granulated culture where cells form pellets in culture medium. In submerged cultures, many filamentous microorganisms tend to aggregate and grow as pellets/granules. They are spherical or ellipsoidal masses of hyphae with variable internal structure, ranging from loosely packed hyphae, forming "fluffy" pellets, to tightly packed, compact, dense granules (Hu and Chen 2007; Hu and Chen 2008; Hu, Zhou et al. 2009; Chunjie Xia 2011). Besides merits from the cell immobilization, there are several other advantages, especially for the micro-oil production: a). easy to harvest cells, and b). easy to re-use pond water (Johnson and Wen 2010; Xia 2011). As the first research group to introduce pelletized liquid fermentation (PLF) into biofuel production, this research group at University of Minnesota found key operational conditions that induce the fungal pelletization. They discovered that changing conditions

during cell cultivation can force fungal cells to aggregate and form pellets. This method avoids traditional approaches that use CaCO_3 powder to induce the fungal pelletization (Liao, Liu et al. 2007; Liu, Liao et al. 2008), which are costly and cause solid waste disposal issues. Self aggregated pelletization/granulation dramatically improves mass transfer and cell cultivation performance and facilitates cell harvest and separation. A simple filtration can be used to separate the cell biomass from the fermentation broth. This approach brings tremendous advantages to decrease the harvest cost of biofuel production, especially when the raw materials only contain very diluted sugar, (which are the cases for many agricultural waste). This would appear to be the most promising option to achieve both a high-quality treated effluent in terms of total suspended solids and economically recovering algal biomass for biofuel use (Uduman, Qi et al. 2010). It will also be more environmentally sound than current procedures which may need chemical addition.

6.2 Lipid extraction methods

Oil extraction also contributes a large part of the cost in the process to generate microbial biodiesel. Several oil extraction technologies are currently available to process the microbial biomass in order to meet the requirement of being low cost, easy and safe to operate, and environmentally friendly.

6.2.1 Mechanical methods

Mechanical methods include pressing, bead milling, and homogenization. Pressing is a technology to harvest lipids out of cells by high pressure. Bead milling works in a container to destruct the cell wall by high speed small beads. Homogenization provides a sudden pressure change when cells go through an orifice. The mechanical technologies are often used in combination with solvent methods to separate the lipid from the cell biomass. The mechanical methods are energy intensive and better operated at the high cell density condition; in addition, pretreatments are necessary to obtain high recovery ratio (Greenwell, Laurens et al. 2010).

6.2.2 Solvent extraction methods

Solvent extraction is a commonly used method for soybean processing, and it is also used to extract lipids from microbial cells. Organic solvents should be insoluble in water, be easy to obtain, have a low boiling point, and be reusable. Current industrial solvents for microlipids accumulation include hexane, chloroform, acetone, benzene, and cyclohexane, can dissolve lipid without residual cell. The extraction process is significantly affected by operation condition, such as temperature and pressure. Accelerated solvent extraction (ASE) is named when the operation temperature is higher than that of solvent boiling point, which can be used for oil extraction from dry biomass (Cooney, Young et al. 2009). Mixture chloroform and methanol (Bligh and Hyer method) is the most common organic solvent to extract oil from biomass. This organic mixture can extract oil not only from dry biomass but also from wet biomass. However, the efficiency is different at certain condition (Zhu, Zhou et al. 2002). The efficiency of oil extraction was not working well at wet *Mortierella alpina* biomass. The process generated large amounts of wastewater and solvent often contaminated the final products. Simultaneous extraction and tranesterification is more efficient (15-20%) than the separate process (Belarbi, Molina et al. 2000); however, the important point of the simultaneous process is to balance the reaction time for the best components of product (Lewis, Nichols et al. 2000).

6.2.3 Supercritical fluid extraction

Supercritical fluid extraction takes advantage that some chemicals behave as both a liquid and a gas, and have increasing solvating power when they are raised above their critical temperature and pressure points. Carbon dioxide is the most commonly used supercritical fluid, sometimes modified by co-solvents such as ethanol or methanol. Critical temperature and critical pressure of carbon dioxide is at 31°C and 74 bar, respectively (Cooney, Young et al. 2009). Supercritical fluids produce highly purified extracts without using toxic solvent; and the process is fast and safe for thermally sensitive products. Supercritical CO₂ extraction efficiency is affected by four main factors: pressure, temperature, CO₂ flow rate, and extraction time. Ethanol (10 -15%), co-solvent, lead to similar results of Bligh and Hyer method at extracting oil from *Arthrospira maxima* and *Spirulina platensis* (Mendes, Reis et al. 2006; Sajilata, Singhal et al. 2008). The limitation of supercritical fluid extraction is high capital cost and high cost for maintenance.

6.2.4 Other methods

Besides the methods mentioned above, numerous technologies are being tested at different labs to harvest lipids from cells. Genetic engineering has been applied to improve the porosity of the cell membranes in order to increase the release of lipids directly from the cells (Greenwell, Laurens et al. 2010). Enzymes treatment and pulsed electric field technology are other effective methods to break the cell wall and membrane and enhance the mass transfer across the cell membrane for oil extraction (Shah, Sharma et al. 2004; Guderjan, Elez-Martinez et al. 2007). Microwave technology is a potential pretreatment method, which heats the cell components in order to increase the release of oil. Oil yield increased from 4.8% to 17.7% from microalgae *Cryptocodinium chnii* when microwave was applied (Cravotto, Boffa et al. 2008). Microwave technology is featured for its time-savings, but its disadvantages include the oxidative damage to products and its intense energy need. Sonication is a timely and efficient method, free of toxic materials. Cavitation occurs when high voltage is applied into cell lipids. Vapour bubbles form with negative pressure and cause a violent collapse when compressed under positive pressure while growing; then the cell contents are released (Wei, Gao et al. 2008). The sonication is, however, difficult to scale-up.

7. Techno-economic analysis and life cycle assessment

A complete techno-economic analysis for the microbial biodiesel production is difficult, especially considering that most of the technologies are still in the early research stage. Initial investment into microalgal biofuels has mostly failed and several early start-up companies have closed. Different versions of economic analysis for microalgae biofuel production have been published recently, and Table 4 lists an analysis conducted by Seed Science Ltd, sponsored by the British Columbia Innovation Council in Canada.

Table 4 shows that although photobioreactor has a higher cell concentration and utilizes CO₂, its cost to produce lipid is the highest of all methods. Heterotrophic fermentation, however, appears to be the most economically feasible route to produce microbial biodiesel. Techno-economic analyses may vary from different research group, but their conclusions are similar. The biomass and oil generated from heterotrophic fermentation are more close to current fossil fuel cost. Heterotrophic fermentation relies less on local climate conditions and can be carried out in close fermentors, which may facilitate their commercialization.

More effective, cost-efficient, and environmentally sound fermentation means to produce lipids are urgently needed, as well as adaptation of the fermentation cells to utilize lignocellulosic biomass. It is also widely indicated that currently microalgal biofuel systems are dependent on the production of coproducts (e.g., biochar, pigments, and nutraceuticals) for profitability. Considering the large scale of biofuel production, the market of the valuable byproducts will be the primary concern.

	Raceway		Photobioreactor		Fermentor	
Initial investment (\$/L)	52		111		2	
Production cost						
Labor cost	\$4.03	26.69%	\$2.96	11.90%	\$0.29	10.88%
Other production cost	\$3.71	24.59%	\$6.37	25.59%	\$2.07	78.45%
Capital cost	\$7.35	48.71%	\$15.56	62.50%	\$0.28	10.66%
Total cost	\$15.09		\$24.89		\$2.63	
Credit from sale of algae cake*	\$0.65		0.29		\$0.05	
Net total cost	\$14.44		\$24.60		\$2.58	
Lipid content	15%		25%		50%	
Cost per kg of algae	\$2.66		\$7.32		\$1.54	

*Assumes that the algae cake is sold to an ethanol producer for its carbohydrate content

Table 4. Cost comparison among different microalgal cultivation methods (Alabi. 2009)

8. Conclusions

Although microalgal biofuel systems theoretically have the potential to address both the food versus fuel challenges, to date no microbial biofuel system has achieved economic viability. Microbial lipid productivity must increase tremendously and the overall cost must significantly decrease before this approach can be commercially available.

9. References

- Akhtar, P., Gray, J.I.; et al. (1998). "Synthesis of lipids by certain yeast strains grown on whey permeate." *Journal of Food Lipids* 5(4): 283-297.
- Alabi, A. O. (2009). "Microalgae technologies and processes for biofuels/bioenergy production in British Columbia."
- Alvarez, R. M., B. Rodriguez, et al. (1992). "Lipid accumulation in *Rhodotorula glutinis* on sugar cane molasses in single-stage continuous culture." *World Journal of Microbiology & Biotechnology* 8(2): 214-215.
- Angerbauer, C., M. Siebenhofer, et al. (2008). "Conversion of sewage sludge into lipids by *Lipomyces starkeyi* for biodiesel production." *Bioresource Technology* 99(8): 3051-3056.
- Awan, M. S., N. Tabbasam, et al. (2011). "Gamma radiation induced mutagenesis in *Aspergillus niger* to enhance its microbial fermentation activity for industrial enzyme production." *Molecular Biology Reports* 38(2): 1367-1374.
- Barclay, W., K. Meager, et al. (1994). "Heterotrophic production of long chain omega-3 fatty acids utilizing algae and algae-like microorganisms." *J. Appl. Phycol.* 6(2): 123-129.

- Belarbi, E. H., E. Molina, et al. (2000). "A process for high yield and scaleable recovery of high purity eicosapentaenoic acid esters from microalgae and fish oil." *Enzyme and Microbial Technology* 26(7): 516-529.
- Brennan, L. and P. Owende (2010). "Biofuels from microalgae--A review of technologies for production, processing, and extractions of biofuels and co-products." *Renewable and Sustainable Energy Reviews* 14(2): 557-577.
- Chatzifragkou, A., A. Makri, et al. (2011). "Biotechnological conversions of biodiesel derived waste glycerol by yeast and fungal species." *Energy* 36(2): 1097-1108.
- Chen, G.-Q. and F. Chen (2006). "Growing Phototrophic Cells without Light." *Biotechnology Letters* 28(9): 607-616.
- Chen, X., Z. Li, et al. (2009). "Screening of oleaginous yeast strains tolerant to lignocellulose degradation compounds." *Applied Biochemistry and Biotechnology* 159(3): 591-604.
- Chisti, Y. (2007). "Biodiesel from microalgae." *Biotechnol Adv* 25(3): 294-306.
- Cooney, M., G. Young, et al. (2009). "Extraction of Bio-oils from Microalgae." *Separation and Purification Reviews* 38(4): 291-325.
- Cravotto, G., L. Boffa, et al. (2008). "Improved extraction of vegetable oils under high-intensity ultrasound and/or microwaves." *Ultrasonics Sonochemistry* 15(5): 898-902.
- Da Silveira, C. M., M. D. Oliveira, et al. (2010). "Lipid content and fatty acid profile of defatted rice bran and wheat bran submitted to solid state fermentation by *Aspergillus oryzae*." *Boletim Do Centro De Pesquisa De Processamento De Alimentos* 28(1): 133-140.
- Dey, P., J. Banerjee, et al. (2011). "Comparative lipid profiling of two endophytic fungal isolates - *Colletotrichum* sp. and *Alternaria* sp. having potential utilities as biodiesel feedstock." *Bioresource technology* 102(10): 5815-5823.
- Economou, C. N., A. Makri, et al. (2010). "Semi-solid state fermentation of sweet sorghum for the biotechnological production of single cell oil." *Bioresource technology* 101(4): 1385-1388.
- El Hamouri, B. (2009). "Rethinking natural, extensive systems for tertiary treatment purposes: The high-rate algae pond as an example." *Desalination and Water Treatment* 4(1-3): 128-134.
- Eriksen, N. T. (2008). "The technology of microalgal culturing." *Biotechnology Letters* 30(9): 1525-1536.
- Greenwell, H. C., L. M. L. Laurens, et al. (2010). "Placing microalgae on the biofuels priority list: a review of the technological challenges." *Journal of the Royal Society Interface* 7(46): 703-726.
- Guderjan, M., P. Elez-Martinez, et al. (2007). "Application of pulsed electric fields at oil yield and content of functional food ingredients at the production of rapeseed oil." *Innovative Food Science & Emerging Technologies* 8(1): 55-62.
- Heredia-Arroyo, T., W. Wei, et al. (2011). "Mixotrophic cultivation of *Chlorella vulgaris* and its potential application for the oil accumulation from non-sugar materials." *Biomass & Bioenergy* 35(5): 2245-2253.
- Hu, B. and S. L. Chen (2007). "Pretreatment of methanogenic granules for immobilized hydrogen fermentation." *International Journal of Hydrogen Energy* 32(15): 3266-3273.
- Hu, B. and S. L. Chen (2008). "Biological hydrogen production using chloroform-treated methanogenic granules." *Applied Biochemistry and Biotechnology* 148(1-3): 83-95.

- Hu, B., X. Zhou, et al. (2009). "Changes in Microbial Community Composition Following Treatment of Methanogenic Granules with Chloroform." *Environmental Progress & Sustainable Energy* 28(1): 60-71.
- Hu, C., X. Zhao, et al. (2009). "Effects of biomass hydrolysis by-products on oleaginous yeast *Rhodospiridium toruloides*." *Bioresource Technology* 100(20): 4843-4847.
- Hu, Q., Kurano, N., Iwasaki, I., et al. (1998). Ultrahigh cell density culture of a marine green alga, *Chlorococcum littorale* in a flat plate photobioreactor. *Applied Microbiology Biotechnology* 49(6):655-662.
- Huang, C., M.-h. Zong, et al. (2009). "Microbial oil production from rice straw hydrolysate by *Trichosporon fermentans*." *Bioresource Technology* 100(19): 4535-4538.
- Johnson, M. B. and Z. Y. Wen (2010). "Development of an attached microalgal growth system for biofuel production." *Appl. Microbiol. Biotechnol.* 85(3): 525-534.
- Kendrick, A. and C. Ratledge (1992). "Lipid formation in the oleaginous mould *Entomophthora exitalis* grown in continuous culture: effects of growth rate, temperature and dissolved oxygen tension on polyunsaturated fatty acids." *Applied Microbiology and Biotechnology* 37(1): 18-22.
- Kumar, P., D. M. Barrett, et al. (2009). "Methods for Pretreatment of Lignocellulosic Biomass for Efficient Hydrolysis and Biofuel Production." *Industrial & Engineering Chemistry Research* 48(8): 3713-3729.
- Levine, R. B., M. S. Costanza-Robinson, et al. (2011). "Neochloris oleoabundans grown on anaerobically digested dairy manure for concomitant nutrient removal and biodiesel feedstock production." *Biomass & Bioenergy* 35(1): 40-49.
- Lewis, T., P. D. Nichols, et al. (2000). "Evaluation of extraction methods for recovery of fatty acids from lipid-producing microheterotrophs." *Journal of Microbiological Methods* 43(2): 107-116.
- Li, X. H., H. J. Yang, et al. (2010). "Enhanced cellulase production of the *Trichoderma viride* mutated by microwave and ultraviolet." *Microbiological Research* 165(3): 190-198.
- Li, Y. H., Z. B. Zhao, et al. (2007). "High-density cultivation of oleaginous yeast *Rhodospiridium toruloides* Y4 in fed-batch culture." *Enzyme and Microbial Technology* 41(3): 312-317.
- Li, Y., M. Horsman, et al. (2008). "Biofuels from microalgae." *Biotechnol Prog* 24(4): 815-820.
- Liao, W., Y. Liu, et al. (2007). "Studying pellet formation of a filamentous fungus *Rhizopus oryzae* to enhance organic acid production." *Applied Biochemistry and Biotechnology* 137: 689-701.
- Lin, H., W. Cheng, et al. (2010). "Direct microbial conversion of wheat straw into lipid by a cellulolytic fungus of *Aspergillus oryzae* A-4 in solid-state fermentation." *Bioresource technology* 101(19): 7556-7562.
- Liu, J., J. Huang, et al. (2010). "Differential lipid and fatty acid profiles of photoautotrophic and heterotrophic *Chlorella zofingiensis*: Assessment of algal oils for biodiesel production." *Bioresour. Technol.* 102(1): 106-110.
- Liu, Y., W. Liao, et al. (2008). "Co-production of lactic acid and chitin using a pelletized filamentous fungus *Rhizopus oryzae* cultured on cull potatoes and glucose." *Journal of Applied Microbiology* 105(5): 1521-1528.
- Meesters, P. A. E. P., G. N. M. Huijberts, et al. (1996). "High cell density cultivation of the lipid accumulation yeast *Cryptococcus curvatus* using glycerol as a carbon source." *Appl. Microbiol. Biotechnol.* 45(5): 575-579.

- Meesters, P. A. E. P., G. N. M. Huijberts, et al. (1996). "High cell density cultivation of the lipid accumulation yeast *Cryptococcus curvatus* using glycerol as a carbon source." *Applied Microbiology and Biotechnology* 45(5): 575-579.
- Mendes, R. L., A. D. Reis, et al. (2006). "Supercritical CO₂ extraction of gamma-linolenic acid and other lipids from *Arthrospira (Spirulina) maxima*: Comparison with organic solvent extraction." *Food Chemistry* 99(1): 57-63.
- Miao, X. and Q. Wu (2006). "Biodiesel production from heterotrophic microalgal oil." *Bioresour. Technol.* 97(6): 841-846.
- Miron, A. S., A. C. Gomez, et al. (1999). "Comparative evaluation of compact photobioreactors for large-scale monoculture of microalgae." *Journal of Biotechnology* 70(1-3): 249-270.
- Molina Grima, E., E. H. Belarbi, et al. (2003). "Recovery of microalgal biomass and metabolites: process options and economics." *Biotechnology Advances* 20(7-8): 491-515.
- Olaizola, M. (2000). "Commercial production of astaxanthin from *Haematococcus pluvialis* using 25,000-liter outdoor photobioreactors." *Journal of Applied Phycology* 12(3-5): 499-506.
- Olaizola, M. (2003). "Commercial development of microalgal biotechnology: from the test tube to the marketplace." *Biomolecular Engineering* 20(4-6): 459-466.
- Papanikolaou, S. and G. Aggelis (2002). "Lipid production by *Yarrowia lipolytica* growing on industrial glycerol in a single-stage continuous culture." *Bioresource Technology* 82(1): 43-49.
- Park, J. B. K., R. J. Craggs, et al. (2011). "Wastewater treatment high rate algal ponds for biofuel production." *Bioresource technology* 102(1): 35-42.
- Peng, X. and H. Chen (2008). "Single cell oil production in solid-state fermentation by *Microspheeropsis* sp. from steam-exploded wheat straw mixed with wheat bran." *Bioresource Technology* 99(9): 3885-3889.
- Powell, N., A. Shilton, et al. (2011). "Luxury uptake of phosphorus by microalgae in full-scale waste stabilisation ponds." *Water Science and Technology* 63(4): 704-709.
- Pulz, O. (2001). "Photobioreactors: production systems for phototrophic microorganisms." *Appl. Microbiol. Biotechnol.* 57(3): 287-293.
- Sajilata, M. G., R. S. Singhal, et al. (2008). "Supercritical CO₂ extraction of gamma-linolenic acid (GLA) from *Spirulina platensis* ARM 740 using response surface methodology." *Journal of Food Engineering* 84(2): 321-326.
- Samson, R. and A. Leduy (1985). "Multistage continuous cultivation of blue-green-alga *spirulina-maxima* in the flat tank photobioreactors with recycle." *Canadian Journal of Chemical Engineering* 63(1): 105-112.
- Shah, S., A. Sharma, et al. (2004). "Extraction of oil from *Jatropha curcas* L. seed kernels by enzyme assisted three phase partitioning." *Industrial Crops and Products* 20(3): 275-279.
- Sharma, B. R., N. C. Dhuldhoya, et al. (2006). "Flocculants—an Ecofriendly Approach." *Journal of Polymers and the Environment* 14(2): 195-202.
- Shelef, G., A. Sukenik, et al. (1984). Microalgae harvesting and processing: a literature review: Medium: ED; Size: Pages: 70.

- Siddiquee, M. N. and S. Rohani (2011). "Lipid extraction and biodiesel production from municipal sewage sludges: A review." *Renewable & Sustainable Energy Reviews* 15(2): 1067-1072.
- Uduman, N., Y. Qi, et al. (2010). "Dewatering of microalgal cultures: A major bottleneck to algae-based fuels." *Journal of Renewable and Sustainable Energy* 2(1).
- Ugwu, C. U., J. C. Ogbonna, et al. (2002). "Improvement of mass transfer characteristics and productivities of inclined tubular photobioreactors by installation of internal static mixers." *Appl. Microbiol. Biotechnol.* 58(5): 600-607.
- Wei, F., G. Z. Gao, et al. (2008). "Quantitative determination of oil content in small quantity of oilseed rape by ultrasound-assisted extraction combined with gas chromatography." *Ultrasonics Sonochemistry* 15(6): 938-942.
- Weinstein, R. N., P. O. Montiel, et al. (2000). "Influence of growth temperature on lipid and soluble carbohydrate synthesis by fungi isolated from fellfield soil in the maritime Antarctic." *Mycologia* 92(2): 222-229.
- Wilkie, A. C. and W. W. Mulbry (2002). "Recovery of dairy manure nutrients by benthic freshwater algae." *Bioresource Technology* 84(1): 81-91.
- Xia, C. J., J. G. Zhang, et al. (2011). "A new cultivation method for microbial oil production: cell pelletization and lipid accumulation by *Mucor circinelloides*." *Biotechnology for Biofuels* 4.
- Xiong, W., X. F. Li, et al. (2008). "High-density fermentation of microalga *Chlorella protothecoides* in bioreactor for microbio-diesel production." *Applied Microbiology and Biotechnology* 78(1): 29-36.
- Xu, H., X. Miao, et al. (2006). "High quality biodiesel production from a microalga *Chlorella protothecoides* by heterotrophic growth in fermenters." *J. Biotechnol.* 126(4): 499-507.
- Xue, F. Y., J. X. Miao, et al. (2008). "Studies on lipid production by *Rhodotorula glutinis* fermentation using monosodium glutamate wastewater as culture medium." *Bioresource technology* 99(13): 5923-5927.
- Yamauchi, H., H. Mori, et al. (1983). "Mass-production of lipids by *lipomyces-starkeyi* in microcomputer-aided fed-batch culture." *Journal of Fermentation Technology* 61(3): 275-280.
- Ykema, A., E. C. Verbree, et al. (1988). "Optimization of lipid production in the oleaginous yeast *Apiotrichum curvatum* in whey permeate." *Applied Microbiology and Biotechnology* 29(2-3): 211-218.
- Zhao, X., C. Hu, et al. (2010). "Lipid production by *Rhodospiridium toruloides* Y4 using different substrate feeding strategies." *Journal of Industrial Microbiology and Biotechnology*: 1-6.
- Zhu, M., P. P. Zhou, et al. (2002). "Extraction of lipids from *Mortierella alpina* and enrichment of arachidonic acid from the fungal lipids." *Bioresource technology* 84(1): 93-95.

Algal Biomass and Biodiesel Production

Emad A. Shalaby

*Biochemistry Dept., Facult. Of Agriculture, Cairo University
Egypt*

1. Introduction

Biodiesel has become more attractive recently because of its environmental benefits and the fact that it is made from renewable resources. The cost of biodiesel, however, is the main hurdle to commercialization of the product. The used cooking oil and algae are used as raw material, adaption of continuous transesterification process and recovery of high quality glycerol from biodiesel by-product (glycerol) are primary options to be considered to lower the cost of biodiesel. There are four primary ways to make biodiesel, direct use and blending, microemulsions, thermal cracking (pyrolysis) and transesterification. The most commonly used method is transesterification of vegetable oils and animal fats. The transesterification reaction is affected by molar ratio of glycerides to alcohol, catalysts, reaction temperature, reaction time and free fatty acids and water content of oils or fats. In the present chapter we will focus on how algae have high potentials in biodiesel production compared with other sources.

2. Algae as biological material

Microalgae are prokaryotic or eukaryotic photosynthetic microorganisms that can grow rapidly and live in harsh conditions due to their unicellular or simple multicellular structure. Examples of prokaryotic microorganisms are Cyanobacteria (Cyanophyceae) and eukaryotic microalgae are for example green algae (Chlorophyta) and diatoms (Bacillariophyta) [Richmond, 2004]. A more in depth description of microalgae is presented by Richmond [Richmond, 2004]. Microalgae are present in all existing earth ecosystems, not just aquatic but also terrestrial, representing a big variety of species living in a wide range of environmental conditions. It is estimated that more than 50,000 species exist, but only a limited number, of around 30,000, have been studied and analyzed [Richmond, 2004]. Algae are aquatic plants that lack the leaves, stem, roots, vascular systems, and sexual organs of the higher plants. They range in size from microscopic phytoplankton to giant kelp 200 feet long. They live in temperatures ranging from hot spring to arctic snows, and they come in various colors mostly green, brown and red. There are about 25,000 species of algae compared to 250,000 species of land plants. Algae make up in quantity what they lack in diversity for the biomass of algae is immensely greater than that of terrestrial plants (Lowenstein, 1986). Phytoplankton comprises organisms such as diatoms, dinoflagellates and macrophytes include: green, red and brown algae. As photosynthetic organisms, these groups play a key role in productivity of ocean and constitute the basis of marine food chain. On the other hand, the use of macroalgae as a potential source of high value chemicals and in therapeutic purpose has a long history.

Recently, macroalgae have been used as a novel food with potential nutritional benefits and in industry and medicine for various purposes.

Furthermore, macroalgae have shown to provide a rich source of natural bioactive compounds with antiviral, antifungal, antibacterial, antioxidant, anti-inflammatory, hypercholesterolemia, and hypolipidemic and antineoplastic properties. Thus, there is a growing interest in the area of research on the positive effect of macroalgae on human health and other benefits. In Egypt, the macroalgae self grown on the craggy surface near to the seashore of the Mediterranean and Red Seas. Macroalgae have not used as healthy food, while in Japan and China the macroalgae are traditionally used in folk medicine and as a healthy food in addition to, biofuel production (Lee-Saung *et al.*, 2003). The present study was conducted to evaluate the potentialities of micro and macroalgae species for biodiesel production and study the effect of biotic and a biotic stress on biodiesel percentage and the difference between biodiesel production from vegetable sources and algae.

Algae were promising organisms for providing both novel biologically active substances and essential compounds for human nutrition (Mayer and Hamann, 2004). Therefore, an increasing supply for algal extracts, fractions or pure compounds for the economical sector was needed (Dos Santos *et al.*, 2005). In this regard, both secondary and primary metabolisms were studied as a prelude to future rational economic exploitation as show in Fig. 1.

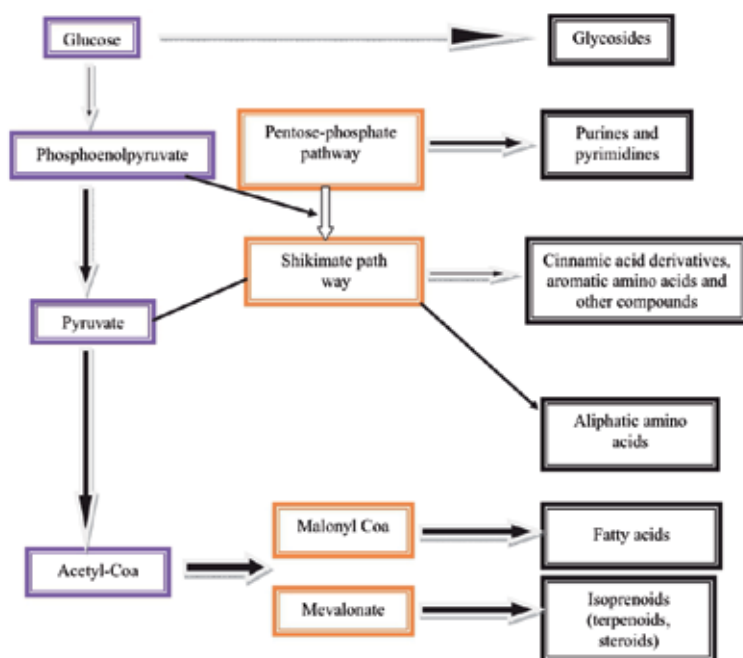


Fig. 1. Secondary and primary metabolites produced from algal cell

3. Diesel production problems

The transportation and energy sectors are the major anthropogenic sources, responsible in European Union (EU) for more than 20% and 60% of greenhouse gas (GHG) emissions, respectively [European Environmental Agency, 2004]. Agriculture is the third largest

anthropogenic source, representing about 9% of GHG emissions, where the most important gases are nitrous oxide (N₂O) and methane (CH₄) [European Environmental Agency, 2007]. It is expected that with the development of new growing economies, such as India and China, the global consumption of energy will raise and lead to more environmental damage [International Energy Agency, 2007].

GHG contributes not only to global warming (GW) but also to other impacts on the environment and human life. Oceans absorb approximately one-third of the CO₂ emitted each year by human activities and as its levels increase in the atmosphere, the amount dissolved in oceans will also increase turning the water pH gradually to more acidic. This pH decrease may cause the quick loss of coral reefs and of marine ecosystem biodiversity with huge implications in ocean life and consequently in earth life [Ormerod *et al.*, 2002].

As GW is a problem affecting different aspects of human life and the global environment, not only a single but a host of solutions is needed to address it. One side of the problem concerns the reduction of crude oil reserves and difficulties in their extraction and processing, leading to an increase of its cost [Laherrere, 2005]. This situation is particularly acute in the transportation sector, where currently there are no relevant alternatives to fossil fuels. To find clean and renewable energy sources ranks as one of the most challenging problems facing mankind in the medium to long term. The associated issues are intimately connected with economic development and prosperity, quality of life, global stability, and require from all stakeholders tough decisions and long term strategies. For example, many countries and regions around the world established targets for CO₂ reduction in order to meet the sustainability goals agreed under the Kyoto Protocol. Presently many options are being studied and implemented in practice, with different degrees of success, and in different phases of study and implementation. Examples include solar energy, either thermal or photovoltaic, hydroelectric, geothermal, wind, biofuels, and carbon sequestration, among others [Dewulf *et al.*, 2006]. Each one has its own advantages and problems and, depending on the area of application.

4. Biodiesel instead of diesel

One important goal is to take measures for transportation emissions reduction, such as the gradual replacement of fossil fuels by renewable energy sources, where biofuels are seen as real contributors to reach those goals, particularly in the short term. Biofuels production is expected to offer new opportunities to diversify income and fuel supply sources, to promote employment in rural areas, to develop long term replacement of fossil fuels, and to reduce GHG emissions, boosting the decarbonisation of transportation fuels and increasing the security of energy supply. The most common biofuels are biodiesel and bio-ethanol, which can replace diesel and gasoline, respectively, in today cars with little or none modifications of vehicle engines. They are mainly produced from biomass or renewable energy sources and contribute to lower combustion emissions than fossil fuels per equivalent power output. They can be produced using existing technologies and be distributed through the available distribution system. For this reason biofuels are currently pursued as a fuel alternative that can be easily applied until other options harder to implement, such as hydrogen, are available.

Although biofuels are still more expensive than fossil fuels their production is increasing in countries around the world. Encouraged by policy measures and biofuels targets for transport, its global production is estimated to be over 35 billion liters [COM, 2006]. The

main alternative to diesel fuel in EU is biodiesel, representing 82% of total biofuels production and is still growing in Europe, Brazil, and United States, based on political and economic objectives. Biodiesel is produced from vegetable oils (edible or non-edible) or animal fats. Since vegetable oils may also be used for human consumption, it can lead to an increase in price of food-grade oils, causing the cost of biodiesel to increase and preventing its usage, even if it has advantages comparing with diesel fuel.

The potential market for biodiesel far surpasses the availability of plant oils not designated for other markets. For example, to fulfill a 10% target in EU from domestic production, the actual feedstocks supply is not enough to meet the current demand and the land requirements for biofuels production, would be more than the potential available arable land for bio-energy crops [Scarlat *et al.*, 2008]. The extensive plantation and pressure for land use change and increase of cultivated fields may lead to land competition and biodiversity loss, due to the cutting of existing forests and the utilization of ecological importance areas [Renewable Fuel Agency, 200]. Biodiesel may also be disadvantageous when replacing crops used for human consumption or if its feedstocks are cultivated in forests and other critical habitats with associated biological diversity. The negative impacts of global warming, now accepted as a serious problem by many people, have clearly been observed for past decade and seem to intensify every year. The release of the carbon oxides and related inorganic oxides are more than the amount that could be absorbed by the natural sinks in the world since 88% of the world energy demand is provided by carbon based non-renewable fuels (Baruch, 2008). It is vital to develop solutions to prevent and/or reduce the emission of greenhouse gases, such as carbon dioxide, to the atmosphere. Carbon dioxide neutral fuels like biodiesel could replace fossil fuels.

Biodiesel, an alternative diesel fuel, is made from renewable biological sources such as vegetable oils and animal fats. It is biodegradable and nontoxic, has low emission profiles and so is environmentally beneficial (Krawczyk, 1996). One hundred years ago, Rudolf Diesel tested vegetable oil as fuel for his engine (Shay, 1993). With the advent of cheap petroleum, appropriate crude oil fractions were refined to serve as fuel and diesel fuels and diesel engines evolved together. In the 1930s and 1940s vegetable oils were used as diesel fuels from time to time, but usually only in emergency situations. Recently, because of increases in crude oil prices, limited resources of fossil oil and environmental concerns there has been a renewed focus on vegetable oils and animal fats to make biodiesel fuels. Continued and increasing use of petroleum will intensify local air pollution and magnify the global warming problems caused by CO₂ (Shay, 1993). In a particular case, such as the emission of pollutants in the closed environments of underground mines, biodiesel fuel has the potential to reduce the level of pollutants and the level of potential or probable carcinogens (Krawczyk, 1996). Edible vegetable oils such as canola, soybean, and corn have been used for biodiesel production and found to be a diesel substitute [Lang *et al.*, 2002]. However, a major obstacle in the commercialization of biodiesel production from edible vegetable oil is its high production cost, which is due to the higher cost of edible oil. Waste cooking oil, which is much less expensive than edible vegetable oil, is a promising alternative to edible vegetable oil [Canakci *et al.*, 2003]. Waste cooking oil and fats set forth significant disposal problems in many parts of the world. This environmental problem could be solved by proper utilization and management of waste cooking oil as a fuel. Many developed countries have set policies that penalize the disposal of waste cooking oil the waste drainage [Kulkarni *et al.*, 2006]. The Energy Information Administration in the United States estimated that around 100 million gallons of waste cooking oil is produced per day in

USA, where the average per capita waste cooking oil was reported to be 9 pounds [Radich *et al.*, 2006]. The estimated amount of waste cooking oil collected in Europe is about 700,000–100,000 tons/year [Supple *et al.*, 2002]

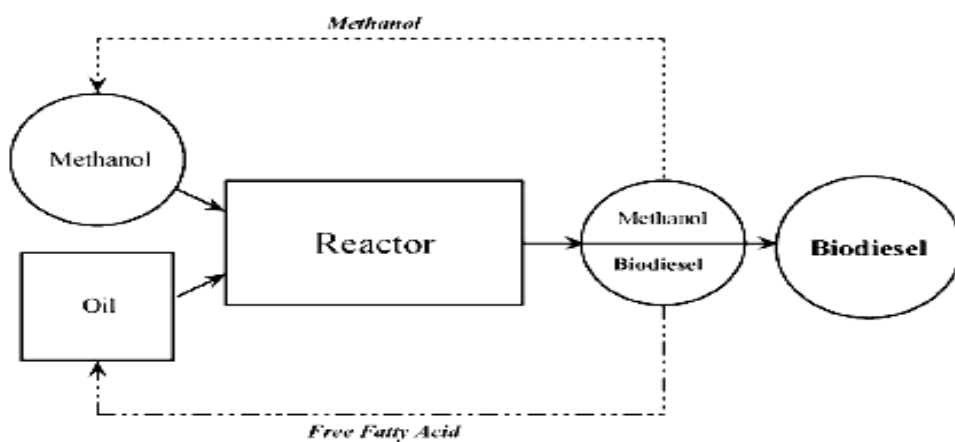


Fig. 2. Biodiesel production process

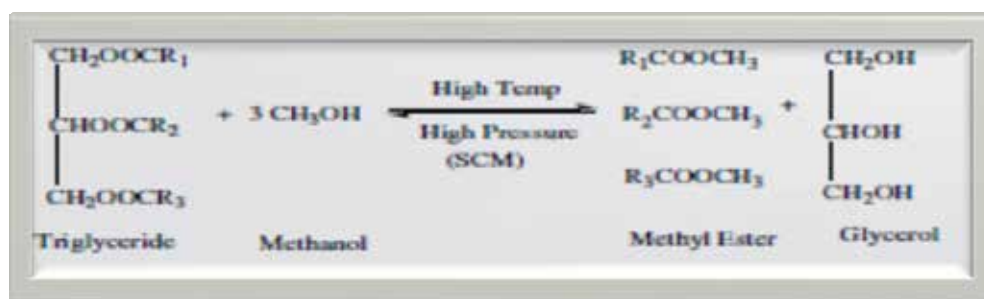


Fig. 3. Transesterification of triglycerides

Biodiesel is made from biomass oils, mostly from vegetable oils. Biodiesel appears to be an attractive energy resource for several reasons. First, biodiesel is a renewable resource of energy that could be sustainably supplied. It is understood that the petroleum reserves are to be depleted in less than 50 years at the present rate of consumption [Sheehan *et al.*, 1998]. Second, biodiesel appears to have several favorable environmental properties resulting in no net increased release of carbon dioxide and very low sulfur content [Antolin *et al.*, 2002]. The release of sulfur content and carbon monoxide would be cut down by 30% and 10%, respectively, by using biodiesel as energy source. Using biodiesel as energy source, the gas generated during combustion could be reduced, and the decrease in carbon monoxide is owing to the relatively high oxygen content in biodiesel. Moreover, biodiesel contains no aromatic compounds and other chemical substances which are harmful to the environment. Recent investigation has indicated that the use of biodiesel can decrease 90% of air toxicity and 95% of cancers compared to common diesel source. Third, biodiesel appears to have

significant economic potential because as a non-renewable fuel that fossil fuel prices will increase inescapably further in the future. Finally, biodiesel is better than diesel fuel in terms of flash point and biodegradability [Ma *et al.*, 1999].

5. Algae as potentials for biodiesel production

5.1 Separation of biodiesel from algae

5.1.1 Extraction of oil

Extraction of oil was carried out using two extraction solvent systems to compare the oil content in each case and select the most suitable solvent system for the highest biodiesel yield (Afify *et al.*, 2010).

5.1.1.1 Chloroform/methanol (2:1, v/v) method

A known weight of each ground dried algal species (10 g dry weight) was mixed separately with the extraction solvent mixture; chloroform/methanol (100 ml, 2:1, v/v) for 20 min. using shaker, followed by the addition of mixture of chloroform/water (50 ml, 1:1, v/v) for 10 min. filter and the algal residue was extracted three times by 100 ml chloroform followed by filtration (Fig.1) according to Bligh and Dayer (1959).

5.1.1.2 Hexane/ether (1:1, v/v) method

A known weight of each ground dried algal species (10 g dry weight) was mixed with the extraction solvent mixture, hexane/ether (100 ml, 1:1, v/v), kept to settle for 24 hrs, followed by filtration (Fig. 1) according to Hossain and Salleh (2008).

5.1.2 Transesterification and biodiesel production

The extracted oil was evaporated under vacuum to release the solvent mixture solutions using rotary evaporator at 40- 45 °C. Then, the oil produced from each algal species was mixed with a mixture of catalyst (0.25g NaOH) and 24 ml methanol, a process called transesterification (Fig. 2, 3,4, 5 and Table 2), with stirring properly for 20 min. The Mixture was kept for 3hrs in electric shaker at 3000 rpm. (National Biodiesel Board, 2002). After shaking the solution was kept for 16 hrs to settle the biodiesel and the sediment layers clearly. The biodiesel layer was separated from sedimentation by flask separator carefully. Quantity of sediments (glycerin, pigments, etc) was measured. Biodiesel (Fig. 6) was washed by 5% water many times until it becomes clear then Biodiesel was dried by using dryer and finally kept under the running fan for 12 h. the produced biodiesel was measured (using measuring cylinder), pH was recorded and stored for analysis.

6. Biodiesel from algae

Sustainable production of renewable energy is being hotly debated globally since it is increasingly understood that first generation biofuels, primarily produced from food crops and mostly oil seeds are limited in their ability to achieve targets for biofuel production, climate changemitigation and economic growth. These concerns have increased the interest in developing second generation biofuels produced from non-food feedstocks such as microalgae, which potentially offer greatest opportunities in the longer term. This paper reviews the current status of microalgae use for biodiesel production, including their cultivation, harvesting, and processing. The microalgae species most used for biodiesel production are presented and their main advantages described in comparison with other

available biodiesel feedstocks. The various aspects associated with the design of microalgae production units are described, giving an overview of the current state of development of algae cultivation systems (photo-bioreactors and open ponds). Other potential applications and products from microalgae are also presented such as for biological sequestration of CO₂, wastewater treatment, in human health, as food additive, and for aquaculture (Mata *et al.*, 2010).

Biodiesel seem to be a viable choice but its most significant drawback is the cost of crop oils, such as canola oil, that accounts for 80% of total operating cost, used to produce biodiesel (Demirbas, 2007). Besides, the availability of the oil crop for the biodiesel production is limited (Chisti, 2008). Therefore, it is necessary to find new feedstock suitable for biodiesel production, which does not drain on the edible vegetable oil supply. One alternative to oil crops is the algae because they contain lipids suitable for esterification/ transesterification. Among many types of algae, microalgae seem to be promising (Table 1) because:

1. They have high growth rates; e.g., doubling in 24 h (Rittmann, 2008).
2. Their lipid content could be adjusted through changing growth medium composition (Naik *et al.*, 2006).
3. They could be harvested more than once in a year (Schenk *et al.*, 2008).
4. Salty or waste water could be used (Schenk *et al.*, 2008).
5. Atmospheric carbon dioxide is the carbon source for growth of microalgae (Schenk *et al.*, 2008).
6. Biodiesel from algal lipid is non-toxic and highly biodegradable (Schenk *et al.*, 2008).
7. Microalgae produce 15–300 times more oil for biodiesel production than traditional crops on an area basis (Chisti, 2007).

Strain	Protein	Carbohydrates	Lipid	Nucleic acid
<i>Scenedesmus rubiginos</i>	50-56	10-17	12-14	3-6
<i>Scenedesmus quadricauda</i>	47	-	1.9	-
<i>Scenedesmus dimorphus</i>	8-18	21-52	16-40	-
<i>Chlamydomonas reinhardtii</i>	48	17	21	-
<i>Chlorella vulgaris</i>	51-58	12-17	14-22	4-5
<i>Chlorella pyrenoidosa</i>	57	26	2	-
<i>Spingyru sp.</i>	6-20	33-64	11-21	-
<i>Dunaliella bicristata</i>	49	4	8	-
<i>Dunaliella salina</i>	57	32	6	-
<i>Euglena gracilis</i>	39-61	14-18	14-20	-
<i>Pyrenococcus parvum</i>	28-45	25-33	22-39	1-2
<i>Tetraselmis maculata</i>	52	15	3	-
<i>Porphyridium cruentum</i>	28-39	40-57	9-14	-
<i>Spinalina platensis</i>	46-63	8-14	4-9	2-5
<i>Spinalina maxima</i>	60-71	13-16	6-7	3-4.5
<i>Synechococcus sp.</i>	63	15	11	5
<i>Anabaena cylindrica</i>	43-56	25-30	4-7	-

Note: Algal-oil is very high in unsaturated fatty acids. Some UFA's found in different algal-species include: Arachidonic acid (AA), Eicosapentaenoic acid (EPA), Docosahexaenoic acid (DHA), Gamma-linolenic acid (GLA) Linoleic acid (LA).

Table 1. Biochemical composition of algae expressed on a dry matter basis (Becker, 1994)

Algae are made up of eukaryotic cells. These are cells with nuclei and organelles. All algae have plastids, the bodies with chlorophyll that carry out photosynthesis. But the various strains of algae have different combinations of chlorophyll molecules. Some have only Chlorophyll A, some A and B, while other strains, A and C [Benemann *et al.*, 1978]. Algae biomass contains three main components: proteins, carbohydrates, and natural oil. The

chemical compositions of various microalgae are shown in Table 1. While the percentages vary with the type of algae, there are algae types that are comprised of up to 40% of their overall mass by fatty acids [Becker, 1994]. It is this fatty acid (oil) that can be extracted and converted into biodiesel.

Type of transesterification	Advantage	Disadvantage
Chemical catalysis	1-reaction condition can be well controlled	1-reaction temperature is relative high and the process is complex
	2-Large scale production	2-The later disposal process is complex
	3-The cost of the production process is cheap	3-The process need much energy
	4-The methanol produced in the process can be recycled	4-Need a installation for methanol recycle
	5-high conversion of the production	5-the waste water pollute the environment
Enzymatic catalyst	1-Moderate reaction condition	1-Limitation of enzyme in the conversion of short chain fatty acids
	2-The small amount of methanol required in the reaction	2-Chemicals arise in the process of production are poisons to enzyme
	3-Have no pollution to natural environment	
Supercritical fluid techniques	1-Easy to be controlled	1-High temperature and high pressure in the reaction condition leads to high coast for production and waste energy
	2-It is safe and fast	
	3-friendly to environment	

Table. 2. Types of transesterification catalysts



Fig. 4. Biodiesel from algae

Fig. 5 shows a schematic representation of the algal biodiesel value chain stages, starting with the selection of microalgae species depending on local specific conditions and the design and implementation of cultivation system for microalgae growth. Then, it follows the biomass harvesting, processing and oil extraction to supply the biodiesel production unit.

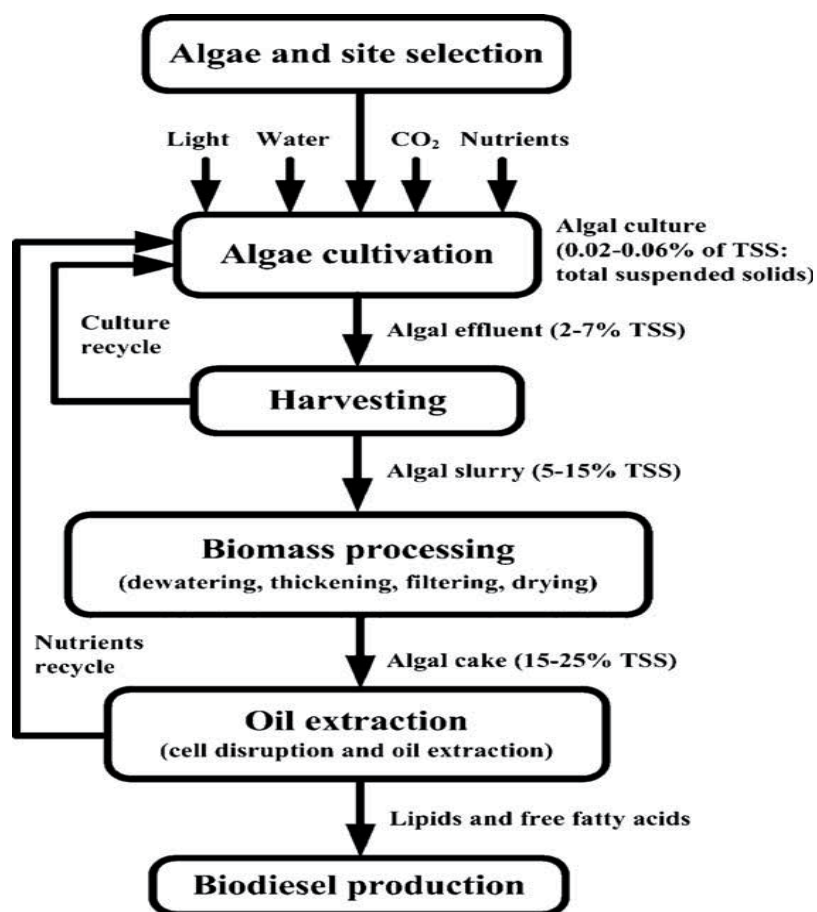


Fig. 5. Microalgae biodiesel value chain stages.

Algae's potential as a feedstock is dramatically growing in the biofuel market. Microalgae (to distinguish it from such macroalgae species as seaweed) have many desirable attributes as energy producers [Choe *et al.*, 2002]:

- Algae is the most promising non-food source of biofuels,
- Algae has a simple cellular structure,
- a lipid-rich composition (40-80% in dry weight),
- a rapid reproduction rate,
- Algae can grow in salt water and harsh conditions,
- Algae thrive on carbon dioxide from gas- and coal-fired power Plants,
- Algae biofuel contains no sulfur, is non-toxic and highly biodegradable.

- The utilization of microalgae for biofuels production can also serve other purposes. Some possibilities currently being considered are listed below.
- Removal of CO₂ from industrial flue gases by algae bio-fixation [Wang *et al.*, 2008], reducing the GHG emissions of a company or process while producing biodiesel. Wastewater treatment by removal of NH₄⁺, NO₃⁻, PO₄⁻³, making algae to grow using these water contaminants as nutrients [Wang *et al.*, 2008].
- After oil extraction the resulting algae biomass can be processed into ethanol, methane, livestock feed, used as organic fertilizer due to its high N:P ratio, or simply burned for energy cogeneration (electricity and heat) [Wang *et al.*, 2008];
- Combined with their ability to grow under harsher conditions, and their reduced needs for nutrients, they can be grown in areas unsuitable for agricultural purposes independently of the seasonal weather changes, thus not competing for arable land use, and can use wastewaters as the culture medium, not requiring the use of freshwater.
- Depending on the microalgae species other compounds may also be extracted, with valuable applications in different industrial sectors, including a large range of fine chemicals and bulk products, such as fats, polyunsaturated fatty acids, oil, natural dyes, sugars, pigments, antioxidants, high-value bioactive compounds, and other fine chemicals and biomass [Raja *et al.*, 2008].
- Because of this variety of high-value biological derivatives, with many possible commercial applications, microalgae can potentially revolutionize a large number of biotechnology areas including biofuels, cosmetics, pharmaceuticals, nutrition and food additives, aquaculture, and pollution prevention [Raja *et al.*, 2008].

7. Environmental advantages of algal biofuels

In order to be a viable alternative energy source, a biofuel should provide a net energy gain, have environmental benefits, be economically competitive and be producible in large quantities without reducing food supplies [Hill, 2006]. In the subsections below we illustrate how the use of microalgae as feedstocks for biodiesel production can provide significant environmental benefits by reducing the land, pollutant and water footprints of biofuel production.

7.1 Advantages of biodiesel from algae oil (Table 3)

- Rapid growth rates
- Grows practically anywhere
- A high per-acre yield (7–31 times greater than the next best crop – palm oil)-
- No need to use crops such as palms to produce oil
- A certain species of algae can be harvested daily
- Algae biofuel contains no sulfur
- Algae biofuel is non-toxic
- Algae biofuel is highly bio-degradable
- Algae oil extracts can be used as livestock feed and even processed into ethanol
- High levels of polyunsaturates in algae biodiesel is suitable for cold weather climates
- Can reduce carbon emissions based on where it's grown

7.2 Disadvantages of biodiesel from algae oil

- Produces unstable biodiesel with many polyunsaturates
- Biodiesel performs poorly compared to it's mainstream alternative
- Relatively new technology

Type of organism	Advantage	Disadvantage
Microalgal oil	1-Fatty acid profile similar to vegetable oil	1-Most algal lipid have lower fuel value than diesel fuel
	2-Under certain condition it may be as high as 85% of the dry weight	2-The cost of cultivation is higher compared to common crop oil currently
	3-Short-time growth cycle	
	4-Composition is relative single in microalgae	
Bacteria oil	1-Fast growth rate	1-Most of bacteria can not yield lipids but complicated lipoid
Oleaginous yeast and mildews	1-Resource are abundant in the nature	1-Filtration and cultivation of yeasts and mildews with high-content are required
	2-High oil content in some species	2-Process of oils extracted is complex and new technology
	3-Short time growth cycle	3-The cost of cultivation is also higher compared to common crops currently
	4-Strong capability of growth in different cultivation on conditions	
Waste oils	1-The waste oil is cheap compared to crop oils	1-Conataing a lot of saturated fatty acids which is hard to converted to biodiesel by catalyst

Table 3. Advantage and disadvantage of algae as biodiesel source compared with bacteria, yeast and waste oils

8. Comparison between biodiesel production from algae and vegetables

Quantifying the land use changes associated with intensive biofuel feedstock production relies upon many assumptions [Chisti., 2007], but it is clear that the accelerated cultivation of terrestrial plant biomass for biofuels will have an exceptionally large land footprint (Table 4). For example, the United States has the fourth largest absolute biodiesel potential of the 119 countries studied by Johnston and Holloway [Johnston, M. and Holloway, 2007]. However, recent work has suggested that the projected year 2016 demand for corn ethanol alone would require 43% of all U.S. land used for corn production in 2004 [Chisti., 2007]. A related study concluded that the annual corn production needed to satisfy one half of all U.S. transportation fuel needs would require an area equivalent to more than eight times the U.S. land area that is presently used for crop production [Chisti., 2007]. Other land-based crops would require less cropland, based on their oil content: oil palm (24% of current cropland area), coconut (54%), jatropha (77%), canola (122%) and soybean (326%) [Chisti., 2007]. Moreover, recent work indicates that the ability of countries to grow terrestrial crops explicitly for the production of biofuels such as ethanol and biodiesel is significantly overestimated [Johnston, M. and Holloway, 2007], contributing to concerns that these biofuels are not feasible options for providing a significant fraction of global fuel demand.

Biodiesel feedstock	Area needed to meet global oil demand (10 ⁶ hectans)	Area required as a percent of total global land	Area required as a percent of total arable global land
Cotton	15000	101	757
Soybean	10900	73	552
Mastard seed	8500	57	430
Sunflower	5100	34	258
Rapeseed/Canola	4100	27	207
Jatropha	2600	17	130 ^b
Oil palm	820	5.5	41
Microalgae (10 g/m ³ /day, 30%TAG)	410	2.7	21 ^c
Microalgae (50 g/m ³ /day, 50%TAG)	49	0.3	25 ^c

^bJatropha is mainly grown on marginal land

^cAssuring that microalgal ponds and bioreactors are located on non-arable land

Table 4. Comparison of estimated biodiesel production efficiencies from vascular plants and microalgae

9. The physical and chemical properties of biodiesel produced from algal cell

Analysis of the produced biodiesel from the promising alga *Dictyochloropsis splendida* (Table 5). showed that the unsaturated fatty acids percentage was increased in alga cultivated in nitrogen free media (0.0g/l N) two times more than normal conditions (13.67, 4.81% respectively). However, the composition of fatty acids was different in these algae depending on its growth condition as showed in table 3. These results were in agreements with those reported by Wood (1974) relative to *Chlorophyceae* species. Furthermore Ramos *et al.* (2009) reported that monounsaturated, polyunsaturated and saturated methyl esters were built in order to predict the critical parameters of European standard for any biodiesel, composition. The extent of unsaturation of microalgae oil and its content of fatty acids with more than four double bonds can be reduced easily by partial catalytic hydrogenation of the oil (Jang *et al.*, 2005, Dijkstra, 2006). Concerning the fatty acids contents of the produced biodiesel from microalgae, Chisti (2007) reported in his review that, microalgal oils differ from vegetable oils in being quite rich in polyunsaturated fatty acids with four or more double bands (Belarbi *et al.*, 2000) as eicosapentanoic acid (C20:5n-3) and docosahexaenoic acid (C22:6n-3) which occurred commonly in algal oils. The author added that, fatty acids and fatty acid methyl esters with four and more double bands are susceptible to oxidation during storage and this reduces their acceptability for use in biodiesel especially for vehicle use (European standard EN 14214 limits to 12%) while no such limitation exists for biodiesel intended for use as heating oil. In addition to the content of unsaturated fatty acids in the biodiesel also its iodine value (represented total unsaturation) must be taken in consideration (not exceeded 120 g iodine/100g biodiesel according to the European standard).

Fatty acids	RT	Fatty acids percentage	
		Algae cultivated under normal conditions	Algae cultivated under free nitrogen media
C10:0 (Capric acid)	1.223	0.0	1.26
C14:0 (Myristic acid)	2.437	13.04	13.88
C16:0 (Palmitic acid)	2.860	81.14	69.59
C17:0 (Margaric acid)	3.240	1.01	1.21
C18:0 (stearic acid)	4.335	0.0	0.38
C18:1 (Oleic acid)	4.667	0.26	1.11
C18:2 (Linoleic acid)	5.333	4.39	12.14
C18:3 (linolenic acid)	6.948	0.15	0.42
Total saturated fatty acids		95.19	86.33
Total unsaturated fatty acids		4.81	13.67
TU/TS		0.05	0.16

*Retention time; TU/TS: total unsaturated/ total saturated fatty acids ratio.

Table 5. Analysis of fatty acids of the obtained biodiesel from the promising green microalgae *Dictyochloropsis* sp

10. Enhancement the biodiesel production from algae

Lipid productivity, the mass of lipid that can be produced per day, is dependent upon plant biomass production as well as the lipid content of this biomass. Algal biodiesel production will therefore be limited not only by the standing crop of microalgae, but also by its lipid content, which can vary from <1% to >50% dry weight [Shifrin, N.S. and Chisholm, 1980]. Given that a strong and predictable response of microalgal biomass to phosphorus enrichment has consistently been exhibited by freshwater ecosystems worldwide (Box 2), it can be expected that the volumetric lipid content (in mg L⁻¹) of water contained in algal bioreactors should also in general increase with an increase in the total phosphorus content of the system, as has been reported for lakes by Berglund *et al.* [Berglund, 2001]. However, both the quantity and the quality of lipids produced will vary with the identity of the algal species that are present in the water, as well as with site-specific growth conditions. This variability probably reflects modifications in the properties of cellular membranes, and alterations in the relative rates of production and utilization of storage lipids [Roessler, 1990]. In the presence of moderate temperatures and sufficient light, many dozens of studies during the past several decades have revealed that algal lipid content is particularly sensitive to conditions of nutrient limitation. For example, silicon-starved diatoms can contain almost 90% more lipids than silicon-sufficient cells [Shifrin, N.S. and Chisholm, 1980]. However, silicon will be a growth-limiting nutrient only for the limited subset of microalgal species that have an absolute requirement of this element for their cellular growth. A stronger stimulation of lipid production occurs in response to conditions of nitrogen limitation, which potentially can occur in all known microalgae. Nitrogen-starved cells can contain as much as four times the lipid content of N-sufficient cells [Shifrin, N.S. and Chisholm, 1980], and maximizing the lipid production of pond bioreactors should

therefore depend on their operators' ability to reliably and consistently induce N-limitation in the resident algal cells. Resource-ratio theory and the principles of ecological stoichiometry, provide additional new insights into the control of algal biomass and lipid production in pond bioreactors. the nutrient limitation status of microalgae can be directly controlled by regulating the ratio of nitrogen and phosphorus (N:P) supplied in the incoming nutrient feed: nitrogen limitation occurs at N:P supply ratios that lie below the optimal N:P ratio for microalgal growth, whereas phosphorus limitation occurs at ratios that exceed this ratio. A transition between N- and P-limitation of phytoplankton growth typically occurs in the range of N:P supply ratios between ca. 20:1 to ca. 50:1 by moles . Such shifts between N- and P-limitation have extremely important implications for algal biofuel production because diverse species of microalgae grown under nitrogen-limited conditions (i.e. low N:P supply ratios) can exhibit as much as three times the lipid content of cells grown under conditions of phosphorus limitation (high N:P supply ratios) . Both the total phosphorus concentration as well as the total nitrogen concentration in the nutrient feeds to pond bioreactors should therefore impact algal biodiesel production, because the N:P ratio of incoming nutrients will strongly influence algal biomass production as well as the cellular lipid content. Given the inverse relationship observed between N:P and cellular lipids , and the positive, hyperbolic relationship observed between N:P and microalgal biomass , we conclude that optimal lipid yields (in terms of mass of lipid produced per unit bioreactor volume per day) should occur at intermediate values of the N:P supply ratio. From the strong apparent interactions between the effects of nitrogen and carbon dioxide availability on microalgal lipids, we also conclude that the effects of N:P supply ratios on volumetric lipid production might be even greater if the bioreactors are simultaneously provided with supplemental CO₂ (cf. Figure 2).

Algal species	Chloroform/methanol (2:1, v/v)	Hexane/ether (1:1, v/v)
<i>Jania rubens</i>	4.4±0.12	2.8±0.04
<i>Galaxaura oblongata</i>	2.5±0.09	2.4±0.01
<i>Gelidium latifolium</i>	3.0±0.0	3.1±0.02
<i>Asporagopsis taxiformis</i>	4.1±0.08	3.4±0.05
<i>Ulva lactuca</i>	4.2±0.1	3.5±0.1
<i>Colpomenia sinuosa</i>	3.5±0.05	2.3±0.03
<i>Dictyochloropsis splendida</i>	12.5±0.23	2.4±0.14
<i>Spirulina platensis</i>	9.2±0.25	3.0±0.10
LSD	0.3261	0.3261

Each value is presented as mean of triplet treatments, LSD: Least different significantly at $P \leq 0.05$ according to Duncan's multiple range test.

Table 6. Comparison between lipid percentage (%) produced by eight algal species using two different extraction system.

Eight algal species (4 *Rhodo*, 1 *chloro* and 1 *phaeophycean* macroalgae, 1 *cyanobacterium* and 1 green microalga) were used for the production of biodiesel using two extraction solvent systems (Hexane/ether (1:1, v/v)) and (Chloroform/ methanol (2:1, v/v)) Table 6. Biochemical evaluations of algal species were carried out by estimating biomass, lipid,

biodiesel and sediment (glycerin and pigments) percentages. Hexane/ ether (1:1, v/v) extraction solvent system resulted in low lipid recoveries (2.3-3.5% dry weight) while; chloroform/methanol (2: 1, v/v) extraction solvent system was proved to be more efficient for lipid and biodiesel extraction (2.5 - 12.5% dry weight) depending on algae species (Table 7). The green microalga *Dictyochloropsis splendida* extract produced the highest lipid and biodiesel yield (12.5 and 8.75% respectively) followed by the cyanobacterium *Spirulina maxima* (9.2 and 7.5 % respectively). On the other hand, the macroalga (red, brown and green) produced the lowest biodieselyield. The fatty acids of *Dictyochloropsis splendida* Geitler biodiesel were determined using gas liquid chromatography. Lipids, biodiesel and glycerol production of *Dictyochloropsis splendida* Geitler (the promising alga) were markedly enhanced by either increasing salt concentration or by nitrogen deficiency (Table 8) with maximum production of (26.8, 18.9 and 7.9 % respectively) at nitrogen starvation condition. (Afify *et al.*, 2010)

Algal sp.	Lipid %	Biodiesel%	Sediment %	Biodiesel color
<i>Jania rubens</i>	4.4±0.12	0.25±0.01	4.2 ^a ± 0.05	Light brown
<i>Galaxaura oblongata</i>	2.5±0.09	2.06±0.02	0.08±0.0	Light green
<i>Gelidium latifolium</i>	3.0±0.0	1.3±0.0	1.6±0.01	yellow
<i>Asporagopsis taxiformis</i>	4.1±0.08	3.64 ^c ± 0.10	0.40±0.01	Dark green
<i>Ulva lactuca</i>	4.2±0.1	3.8±0.12	0.44±0.0	Light green
<i>Colpomenia sinuosa</i>	3.5±0.05	3.1±0.05	0.31±0.05	yellow
<i>Dictyochloropsis splendida</i>	12.5±0.23	8.75±0.24	3.75±0.08	colorless
<i>Spirulina platensis</i>	9.2±0.25	7.5±0.30	1.66±0.06	Light green
LSD	0.3261	0.3314	0.1786	

Each value is presented as mean of triplet treatments, LSD: Least different significantly at $P \leq 0.05$ according to Duncan's multiple range test.

Table 7. Total lipid, biodiesel, sediment percentage and biodiesel color of eight algal species

Natural biotic communities in outdoor bioreactors require the external provision of potentially growth-limiting resources (e.g. light, carbon dioxide and the essential mineral nutrients N and P). These resources act as "bottom-up" regulators of the potential microalgal biomass that can be produced. Once harvested, the cellular lipids in this microalgal biomass can be extracted and processed to create biodiesel fuels. The lipid content of microalgal biomass is not constant, however, and can be influenced by many factors, including nitrogen:phosphorus supply ratios, light, CO₂ and the hydraulic residence time of the bioreactor. Moreover, natural assemblages of microalgae are taxonomically diverse: some species are small and can easily be consumed by herbivorous zooplankton. Undesirable grazing losses of edible microalgae (and their cellular lipids) to large-bodied zooplankton can be reduced by adding zooplanktivorous fish, which can greatly restrict large-bodied zooplankton growth via sizeselective predation ("top-down" regulation).

Sample culture conditions	Lipid content (%)	Biodiesel content (%)	Glycerol+ pigments content (%)	Biodiesel color
Control (2.5 g/l NaCl and 25g/l NaNO ₃)	12.50±0.36	8.75±0.25	3.75±0.12	Colorless
<i>NaCl stress</i>				
5 g/l	14.50±1.2	8.90±0.62	5.60±0.18	Colorless
7.5 g/l	17.00±0.53	11.94±0.98	5.06±0.22	Light green
10 g/l	17.50±0.36	11.38±0.80	5.11±0.24	Light green
<i>Nitrogen stress</i>				
12.5 g/l	15.40±2.10	8.90±0.36	6.50±0.30	Yellowish green
6.25g/l	16.20±1.8	10.01±1.0	6.19±0.12	Light Yellow
0.0g/l	26.80± 2.12	18.90±1.2	7.9±0.50	Yellow
LSD	0.3643	0.1681	0.1431	

Each value is presented as mean of triplet treatments, LSD: Least different significantly at $P \leq 0.05$ according to Duncan's multiple range test.

Table 8. Total lipid, biodiesel, sediment percentage and biodiesel color of *Dictyochloropsis* sp cultivated under stress

11. Wastewater nitrogen and phosphorous as microalgae nutrients

There is a unique opportunity to both treat wastewater and provide nutrients to algae using nutrient-rich effluent streams. By cultivating microalgae, which consume polluting nutrients in municipal wastewater, and abstracting and processing this resource, then the goals of sustainable fuel production and wastewater treatment can be combined (Andersen, 2005). Treated wastewater is rich in nitrogen and phosphorus, which if left to flow into waterways, can spawn unwanted algae blooms and result in eutrophication (Sebnem Aslan, 2006). These nutrients can instead be utilized by algae, which provide the co-benefit of producing biofuels and removing nitrogen and phosphorus as well as organic carbon (Mostafa and Ali, 2009). Wastewater treatment using algae has many advantages. It offers the feasibility to recycle these nutrients into algae biomass as a fertilizer and thus can offset treatment cost. Oxygen rich effluent is released into water bodies after wastewater treatment using algae (Becker, 2004).

Cyanobacteria strains (*Anabaena flos aquae*, *Anabaena oryzae*, *Nostoc humifusum*, *Nostoc muscorum*, *Oscillatoria* sp., *Spirulina platensis*, *Phormedium fragile* and *Wollea saccata*) and the green alga strain *Chlorella vulgaris* were obtained from the Microbiology Department, Soils, Water and Environment Res. Inst. (SWERI), Agric. Res., Center (ARC). Cyanobacteria strains were maintained in BG11 medium (Rippka *et al.*, 1979) except *Spirulina platensis* which was cultivated in Zarrouk medium (Zarrouk, 1966). While, Bold medium (Nichols and Bold, 1965) was used for the green alga *Chlorella vulgaris*. Cultures were incubated in a growth chamber under continuous shaking (150 rpm) and illumination (2000 lux) at 25 ± 1 °C for 30 days. Shalaby *et al.* (2011). The effluent of the secondary treated sewage wastewater from Zenien Waste Water Treatment Plant (ZWWTP), Giza

Governorate, Egypt was used after filtered using glass microfiber filter to remove large particles and indigenous bacteria for the experiment and the chemical and physical parameters were analysis as reported by APHA (1998) Table (2). The supplementation of NaNO_3 , K_2HPO_4 and $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ in amounts equal to those of the standard BG11, Bold and Zarrouk were used as basal media. The algal strains were grown in 500 ml Erlenmeyer flasks containing 200 ml of 100% effluent supplemented with basal nutrients and 100% effluent without basal nutrients with/without sterilization and the synthetic media (BG11, Bold and Zarrouk) were used as control. Two per cent algal inoculums were added to each flask. The experiment was conducted in triplicates and cultures were incubated at $25 \text{ }^\circ\text{C} \pm 1^\circ\text{C}$, under continuous shaking (150 rpm) and illumination (2000 lux) for 15 days. This work aimed to evaluate the laboratory cultivation of nine algal strains belonging to Nostocales and Chlorellales in secondary treated municipal domestic wastewater for biomass and biodiesel production as shown in Table (9 and 10).

Algal species	Total lipids	Biodiesel content	Glycerin + pigments	Color	pH
<i>Nostoc muscorum</i>	16.80±3.62	12.52±1.74	4.28±1.74	Brown	7.4±0.33
<i>Anabaena flos aquae</i>	5.50±0.58	4.00±0.41	1.50±0.41	Red	6.9±0.95
<i>Chlorella vulgaris</i>	12.50±1.20	8.8±0.16	3.70±0.16	Green	8.1±1.0
<i>Oscillatoria sp</i>	8.00±0.58	4.30±0.32	3.70±0.32	Yellow	7.5±0.85
<i>Spirulina platensis</i>	10.0±0.11	7.80±0.17	2.20±0.17	Light green	8.0±0.32
<i>Anabaena oryzae</i>	7.40±0.90	4.50±0.10	2.90±0.10	Orange	7.3±0.96
<i>Wolleea sp</i>	6.30±1.31	3.90±0.60	2.40±0.60	Yellow	7.8±0.35
<i>Nostoc humifusum</i>	14.80±2.40	10.20±1.30	4.6±1.30	Yellowish brown	7.5±0.50
<i>Phormedium sp</i>	12.20±1.66	10.10±1.50	2.10±1.50	Dark brown	7.1±0.0
LSD	0.159	0.151	0.151		1.659

Each value is presented as mean of triplet treatments, LSD: Least different significantly at $P \leq 0.05$ according to Duncan's multiple range tests.

T1: waste water without treatment; T2: waste water after sterilization; T3: waste water+ nutrients with sterilization T4: waste water+ nutrients without sterilization

Table 9. Total lipids, biodiesel, glycerine+pigments percentage and color, pH of biodiesel from different microalgae species cultivated in different waste water

Algal species	Optimal waste water treatment	Total lipids	Biodiesel	Glycerin + pigments
<i>Nostoc muscorum</i>	T3	12.50±2.65	7.40±0.74	5.10±0.74
<i>Anabaena flos aquae</i>	T3	7.40±0.95	5.00±0.61	2.40±0.61
<i>Chlorella vulgaris</i>	T3	13.20±1.87	8.50±1.74	4.70±1.74
<i>Oscillatoria sp</i>	T2	6.80±0.65	3.80±0.32	3.00±0.32
<i>Spirulina platensis</i>	T3	7.30±0.44	5.00±0.51	2.30±0.51
<i>Anabaena oryzae</i>	T4	8.00±0.16	4.70±0.12	3.30±0.12
<i>Wollea sp</i>	T3	7.20±1.32	4.00±0.22	3.23±0.22
<i>Nostoc humifusum</i>	T1	15.50±1.65	11.80±1.52	3.70±1.52
<i>Phormedium sp</i>	T2	11.60±0.88	8.40±0.65	3.20±0.65
LSD		0.159	0.159	0.152

Each value is presented as mean of triplet treatments, LSD: Least different significantly at $P \leq 0.05$ according to Duncan's multiple range tests.

T1: waste water without treatment; T2: waste water after sterilization; T3: waste water+ nutrients with sterilization T4: waste water+ nutrients without sterilization

Table 10. Total lipids, biodiesel, glycerine+pigments percentage and color, pH of biodiesel from different microalgae species cultivated in different waste water

12. Economic importance

Compared to biofuels from agricultural crops, the amount of land required would be minimal. Trials in ideal conditions show that fast-growing micro-algae can yield 1800–2000 gallons/(acre - year) of oil—compare this with 50 gallons for soybeans, 130 gallons for rapeseed and 650 gallons for palm oil. It can grow on fresh or brackish water on marginal land so that it does not compete with areas for agricultural cultivation. As Sean Milmo points out in his article in *Oils and Fats International* [Milmo, 2008]; oil from algae on 20–40 M acres of marginal land would replace the entire US supply of imported oil, leaving 450 M acres of fertile soil in the country entirely for food production. Biomass can also be harvested from marine algae blooms and algae can even be cultivated in sewage and water treatment plants. However, most estimates of algal fuel productivity estimate that with current production technologies algal diesel can be manufactured for, at best, \$4.54 per gallon using high density photobioreactors. In order to compete economically with petroleum diesel costs – and not accounting for any potential subsidy scheme, which is a likely possibility – requires the reduction of these costs to near \$1.81 per gallon relative to

2006 fuel prices. These cost reduction figures take into account the fact that materials input and refining of fuels (in this case the algae vegetable oil) account for roughly 71% of total at pump fuel cost [Chisti, 2007]. Algal biodiesel becomes even more plausible given the potential for GHG regulation in the near future. Since for every ton of algal biomass produced, approximately 1.83 tons of carbon dioxide is fixed while petroleum diesel carries a massive negat balance, the competitiveness of algae diesel increases as GHG externalities are taken into account. Given certain research objectives these cost reductions are achievable in the near future. The National Renewable Energy Laboratory (NREL) outlines many such research objects including: increasing photosynthetic efficiency of algae species for high lipid production, control of mechanisms of algae biofoculation, understanding the effects of non-steady-state operating conditions, and methods of species selection and control [Sheehan *et al.*, 1998].

13. The problems related with algae

Most problems with marine microalgae cultures are related to predation by various types of protozoans (e.g. zooflagellates, ciliates, and rhizopods). Other problem is the blooming of unwanted or toxic species such as the blue-green algae or dinoflagellates (red tides) that can result in high toxicity for consumers and even for humans. Examples are the massive development of green chlorococcalean algae, such as *Synechocystis* in freshwater, and also the development of *Phaeodactylum* in seawater that is undesirable for bivalve molluscs. [De Pauw *et al.*, 1984].

14. Other application of algae

Algae have mainly been used in west countries as raw material to extract alginates (from brown algae) and agar and carragenates (from red algae). Moreover, algae also contain multitude of bioactive compounds (phenolic compounds, alkaloids, plant acids, terpenoids and glycosides) that might have antioxidant, antibacterial, antiviral, anticarcinogenic, etc. properties. (Plaza, *et al.*, 2008).

15. References

- Afify, AMM.; Shanab, SM.; Shalaby, EA. (2010). Enhancement of biodiesel production from different species of algae, *grasas y aceites*, 61 (4), octubre-diciembre, 416-422.
- Antolin, G.; Tinaut, F. V.; Briceno, Y. (2002). Optimisation of biodiesel production by sunflower oil transesterification. *Bioresour Technol.*, 83:111-4.
- Baruch, J.J. (2008). Combating global warming while enhancing the future. *Technol. Soc.* 30, 111-121.
- Becker, E.W. in: J. Baddiley, *et al.* (Eds.), *Microalgae: Biotechnology and Microbiology*, Cambridge Univ. Press, Cambridge, NY, 1994, p. 178.
- Benemann, J.R.; Koopman, B.L.; Weissman, J.C.; Eisenberg, D.M.; Oswald, W.J. (1978). An Integrated System for the Conversion of Solar Energy with Sewage-grown Microalgae, Report, Contract D(0-3)-34, U.S. Dept. of Energy, SAN-003-4-2.

- Berglund, O. *et al.* (2001) The effect of lake trophy on lipid content and PCB concentrations in planktonic food webs. *Ecology* 82, 1078–1088.
- Bligh EG, Dayer WJ. 1959. A rapid method for total lipid extraction and purification. *Can. J. Biochem and Physiol.*, 37: 911-7.
- Canakci, M.; Van Gerpen, J. (2003). A pilot plant to produce biodiesel from high free fatty acid feedstocks. *Trans ASAE*, 46: 945–54.
- Chisti, Y. (2007). Biodiesel from microalgae. *Biotechnol. Adv.* 25, 294–306.
- Chisti, Y. (2008). Biodiesel from microalgae beats bioethanol. *Cell Press* 26, 126–131.
- Choe, S.H.; Jung, I.H. (2002). *J. Ind. Eng. Chem.* 8 (4): 297.
- COM (2006) 34 final. An EU strategy for biofuels. Commission of the European Communities, Brussels, 8.2.2006.
- Demirbas, A. (2007). Importance of biodiesel as transportation fuel. *Energy Policy* 35, 4661–4670.
- De Pauw, N.; Morales, J.; Persoone, G. (1984). Mass culture of microalgae in aquaculture systems: progress and constraints. *Hydrobiologia*, 116/117: 121–34.
- Dewulf J, Van Langenhove H. *Renewables-based technology: sustainability assessment*. John Wiley & Sons, Ltd; 2006.
- Dos Santos, M. D.; Guaratini, T.; Lopes, J. L. C.; Colepicolo, P. and Lopes, N. P. (2005). Plant cell and microalgae culture. In: *Modern Biotechnology in Medicinal Chemistry and Industry*. Research Signpost, Kerala, India.
- European Environmental Agency (EEA) Report N85. Copenhagen, Denmark; 2007.
- European Environmental Agency (EEA). Greenhouse gas emission trends and projections in Europe 2004: progress by the EU and its Member States towards achieving their Kyoto Protocol targets. Report N85. Copenhagen, Denmark; 2004.
- Johnston, M. and Holloway, T. (2007) A global comparison of national biodiesel production potentials. *Environ. Sci. Technol.*, 41: 7967–7973.
- Hill, J. *et al.* (2006) Environmental, economic, and energetic costs and benefits of biodiesel and ethanol biofuels. *Proc. Natl. Acad. Sci. U. S. A.*
- Hossain ABM, Salleh A. (2008). Biodiesel fuel production from algae as renewable energy. *Am. J. Biochem. and Biotechn.*, 4(3): 250-254.
- International Energy Agency (IEA). *World Energy Outlook 2007. China and India Insights*, Paris, France; 2007.
- Kulkarni, M. G.; Dalai, A. K. (2006). Waste cooking oil – an economical source for biodiesel: a review. *Ind Eng Chem Res.*, 45: 2901–13.
- Krawczyk, T. (1996). Biodiesel: Alternative fuel makes inroads but hurdles remain. *INFORM*, 7: 801-829.
- Laherrere J. *Forecasting production from discovery*. In: *ASPO*; 2005.
- Lang, X.; Dalai, A. K.; Bakhshi, N. N.; Reaney, M. J. (2002). Preparation and characterization of biodiesels from various bio-oils. *Biores Technol.*, 80: 53–62.
- Lee-Saung, H.; Lee-Yeon, S.; Jung-Sang, H.; Kang-Sam, S. and Shin-Kuk, H. (2003). Antioxidant activities of fucosterol from the marine algae *Pelvetia siliquosa*. *Archives of Pharmacal Research*, 26: 719-722.
- Lowenstein. J. (1986). The secret life of seaweeds. *Oceans*, 19: 72-75.

- Ma, F.; Hanna, M. A. (1999). Biodiesel production: a review. *Bioresour Technol.*, 70: 1-15.
- Mata, T. M.; Martins, A. A.; Caetano, N. S. (2010). Microalgae for biodiesel production and other applications: A review. *Renewable and Sustainable Energy Reviews* 14, 217-232.
- Mayer, A. M. S. and Hamann, M.T. (2004). Marine pharmacology in 2000: marine compounds with antibacterial, anticoagulant, antifungal, anti-inflammatory, antimalarial, antiplatelet, antituberculosis, and antiviral activities; affecting the cardiovascular, immune, and nervous system and other miscellaneous mechanisms of action. *Mar. Biotechnol.* 6: 37-52.
- Milmo, S. (2008). *Oil Fat Int.* 24 (2): 22.
- National Biodiesel Board. 2002. USA. Available in www.biodiesel.org/.
- Naik, S.N., Meher, L.C., Sagar, D.V. (2006). Technical aspects of biodiesel production by transesterification – a review. *Renew. Sust. Energy Rev.* 10, 248-268.
- Ormerod WG, Freund P, Smith A, Davison J. Ocean storage of CO₂. IEA greenhouse gas R&D programme. UK: International Energy Agency; 2002.
- Radich, A. (2006). Biodiesel performance, costs, and use. US Energy Information Administration.
<<http://www.eia.doe.gov/oiaf/analysispaper/biodiesel/index.html>>.
- Raja, R.; Hemaiswarya, S.; Kumar, N.A.; Sridhar, S.; Rengasamy, R. A. (2008). perspective on the biotechnological potential of microalgae. *Critical Reviews in Microbiology*, 34(2):77-88.
- Renewable Fuel Agency (RFA). The Gallagher review of the indirect effects of biofuels production; 2008.
- Richmond A. Handbook of microalgal culture: biotechnology and applied phycology. Blackwell Science Ltd; 2004.
- Rittmann, B.E. (2008). Opportunities for renewable bioenergy using microorganisms. *Biotechnol. Bioeng.* 100, 203-212.
- Roessler, P.G. (1990) Environmental control of glycerolipid metabolism in microalgae: commercial implications and future research directions. *J. Phycol.* 26, 393-399.
- Scarlat N, Dallemand JF, Pinilla FG. Impact on agricultural land resources of biofuels production and use in the European Union. In: *Bioenergy: challenges and opportunities. International conference and exhibition on bioenergy*; 2008.
- Schenk, P.M., Thomas-Hall, S.R., Stephens, E., Marx, U.C., Mussgnug, J.H., Posten, C., Kruse, O., Hankamer, B. (2008). Second generation biofuels: high-efficiency microalgae for biodiesel production. *Bioenergy Res.* 1, 20-43.
- Shay, E.G. (1993). Diesel fuel from vegetable oils: status and opportunities. *Biomass and Bioenergy*, 4: 227-242.
- Sheehan, J.; Cambreco, J.; Graboski, M.; Shapouri, H. (1998). An overview of biodiesel and petroleum diesel life cycles. US Department of agriculture and Energy Report, p. 1-35.
- Shifrin, N.S. and Chisholm, S.W. (1980) Phytoplankton lipids: environmental influences on production and possible commercial applications. In *Algae Biomass* (Shelef, G. and Soeder, C.J., eds), pp. 627-645, Elsevier

Wang, B.; Li, Y.; Wu, N.; Lan, CQ. (2008). CO₂ bio-mitigation using microalgae. *Applied Microbiology and Biotechnology*, 79(5):707–18.

Microalgae as Feedstocks for Biodiesel Production

Jin Liu¹, Junchao Huang^{2,3} and Feng Chen^{3,4}

¹*Department of Applied Sciences and Mathematics,
Arizona State University, Polytechnic Campus, Mesa,*

²*Kunming Institute of Botany, Chinese Academy of Sciences,*

³*School of Biological Science, The University of Hong Kong, Hong Kong,*

⁴*Institute for Food & Bioresource Engineering, College of Engineering,
Peking University, Beijing,*

¹USA

^{2,3,4}China

1. Introduction

Fossil-based fuels including oil, coal and gas play a pivotal role in modern world energy market. These fossil fuels, according to world energy outlook 2007, will remain the major sources of energy and are expected to meet about 84% of energy demand in 2030. However, fossil fuels are non-renewable and will be finally diminished. It has been recently estimated that the global oil, coal and gas last only approximately for 35, 100 and 37 years respectively, based on a modified Klass model (Shafiee & Topal, 2009). In order to sustain a stable energy supply in the future, it is necessary to develop other sources of energy, e.g., renewable energy. Renewable energy is derived from natural processes that are replenished constantly, including hydropower, wind power, solar energy, geothermal energy, biodiesel, etc. An estimated \$150 billion was invested in renewable energy worldwide in 2009, around 2.5 times of the 2006 investment (Figure 1).

It is well known that transport is almost totally dependent on petroleum-based fuels, which will be depleted within 40 years. An alternative fuel to petrodiesel must be technically feasible, easily available, economically competitive, and environmentally acceptable (Demirbas, 2008). Biodiesel is such a candidate fuel for powering the transport vehicles. Biodiesel refers to a biomass-based diesel fuel consisting of long-chain alkyl (methyl, propyl or ethyl) esters. In addition to being comparable to petrodiesel in most technical aspects, biodiesel has the following distinct advantages over petrodiesel (Knothe, 2005a):

1. derived from renewable domestic resources, thus reducing dependence on and preserving petroleum;
2. biodegradable and reduced exhaust emissions, being environment-friendly;
3. higher flash point, being safer for handling and storage; and
4. excellent lubricity.

Like petrodiesel, biodiesel operates in compression ignition engines. Biodiesel is miscible with petrodiesel in all ratios. Currently, the blends of biodiesel and petrodiesel instead of net biodiesel have been widely used in many countries and no engine modification is

required (Singhania et al., 2008). These blends of biodiesel with petrodiesel are usually denoted by acronyms, for example B20 which indicates a blend of 20% biodiesel with petrodiesel (Knothe, 2005a).

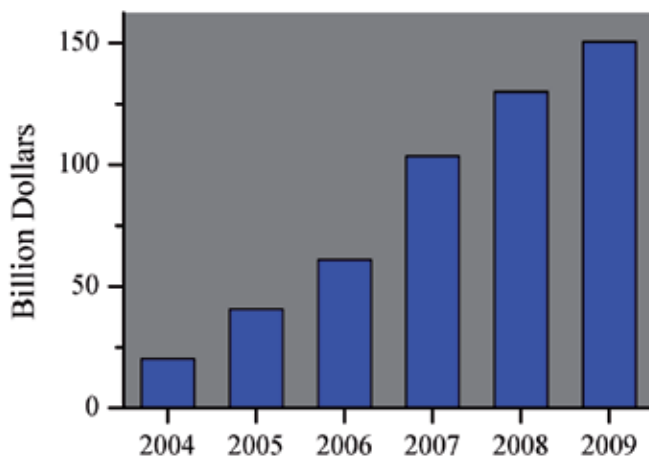


Fig. 1. Global investment in renewable energy, 2004-2009. Adapted from REN21 (2010)

The global markets for biodiesel are entering a period of rapid and transitional growth. In the year 2007, there were only 20 nations producing biodiesel for the needs of over 200 nations; by the year 2010, more than 200 nations become biodiesel producing nations and suppliers (Thurmond, 2008). Global biodiesel production has massively increased to 16.6 billion liters per year over the last nine years (Figure 2). Much of the growth is happening in just three countries: the United States, Brazil and Germany, which together account for over half of biodiesel (Checkbiotech, 2009). The International Energy Agency's report suggests that world production of biodiesel could top 25 million tons per year by 2012 if the recent trends continue.

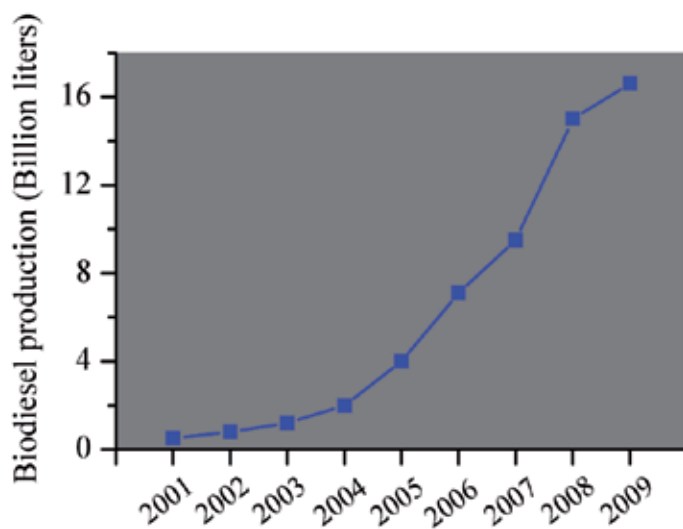


Fig. 2. Global biodiesel production, 2001-2009. Adapted from REN21 (2010)

Biodiesel can be produced from a variety of feedstocks, including plant oils, animal fats and waste oils as well as microalgae (Demiras, 2008). Each feedstock has its advantages and disadvantages in terms of oil content, fatty acid composition, biomass yield and geographic distribution. Depending on the origin and quality of feedstocks, changes may be required for the production process of biodiesel.

The use of plant oils as biodiesel feedstocks has been long recognized and well documented in numerous studies (Abdullah et al., 2009; de Oliveira et al., 2005; Graef et al., 2009; Hawash et al., 2009; Hill et al., 2006; Jain & Sharma, 2010; Nakpong & Wootthikanokkhan, 2010; Patil & Deng, 2009; Rashid & Anwar, 2008; Sahoo & Das, 2009; Saka & Kusdiana, 2001). These feedstocks include the oils from soybean, rapeseed, palm, canola, peanut, cottonseed, sunflower and safflower. Based on the geographic distribution, soybean is the primary source for biodiesel in USA, palm oil is used as a significant biodiesel feedstock in Malaysia and Indonesia, and rapeseed is the most common base oil used in Europe for biodiesel production (Demiras, 2008). The vast majority of these plants are also used for food and feed production, which means that possible food versus fuel conflicts are present. Thus, the use of these plant oils as feedstocks for biodiesel seems insignificant for the developing countries which are importers of edible oils (Meher et al., 2008). In addition to these edible oils, various non-edible, tree-borne oils from jatropha, karanja, jojoba and neem are the potential biodiesel feedstocks (Jain & Sharma, 2009; Meher et al., 2008; Sahoo & Das, 2009). Jatropha and karanja are two oilseed plants that are not widely exploited due to the presence of toxic components in the oils. In India, they are popularly used as biodiesel feedstocks.

In addition to the plant oils, animal fats and waste oils are the potential sources for commercial biodiesel production (Thompson et al., 2010). Among these feedstocks, tallow, lard, yellow grease and waste cooking oils have received most interest (Banerjee et al., 2009; Canakci, 2007; da Cunha et al., 2009; Dias et al., 2009; Diaz-Felix et al., 2009; Oner & Altun, 2009; Phan & Phan, 2008). However, animal fats and waste oils usually contain large amounts of free fatty acids, which can be as high as 41.8% (Canakci, 2007). Free fatty acids cannot be directly converted to biodiesel in alkali-catalyzed transesterification but react with alkali to form soaps that inhibit the separation of biodiesel from glycerin and wash water fraction (Huang et al., 2010). A two-step process was developed for these high fatty acid feedstocks: acid-catalyzed pretreatment and alkali-catalyzed transesterification. Because animal fats and waste oils have relatively high level of saturation (Canakci, 2007), the biodiesel from these sources exhibits poor cold flow properties.

Microalgae represent a wide variety of aquatic photosynthetic organisms with the potential of producing high biomass and accumulating high level of oil. The production of biodiesel from microalgal oil has long been recognized and been evaluated in response to the United States Department of Energy for research in alternative renewable energy (Sheehan et al., 1998). Currently, the commercialization of algae-derived biodiesel is still in its infancy stage. Using microalgae as biodiesel feedstocks has received unprecedentedly increasing interest, including but not restricted to microalgal strain selection and genetic engineering, mass cultivation for biomass production, lipid extraction and analysis, transesterification technologies, fuel properties and engine tests (Abou-Shanab et al., 2011; Brennan & Owende, 2010; Demirbas, 2009; Greenwell et al., 2010; Miao & Wu, 2006; Pruvost et al., 2011; Radakovits et al., 2010; Rodolfi et al., 2009; Ross et al., 2008; Sydney et al., 2011). Considering their unique characteristics, microalgae have been considered as the most promising feedstock of biodiesel that has the potential to displace fossil diesel (Chisti, 2007). This review mainly focuses on the potential of using microalgae as biodiesel feedstocks, biodiesel production pipeline, and possibility of employing genetic engineering for improving microalgal productivity.

2. Potential of using microalgae as biodiesel feedstocks

Microalgae represent a large and diverse group of prokaryotic or eukaryotic photosynthetic microorganisms that are in unicellular or multicellular form. Examples of prokaryotic microorganisms are cyanobacteria (commonly referred to as blue-green algae) that are closely related to Gram-negative bacteria and eukaryotic ones are for example green microalgae and diatoms (Graham et al., 2009). Microalgae can be found in a wide range of environmental conditions, including water, land, and even unusual environments such as snow and desert soils (Lee, 2008). It is estimated that there are more than 50,000 species around the world, among which only about 30,000 have been studied and analyzed (Mata et al., 2010). Extensive collections of microalgae have been established by researchers in different countries, including the Freshwater Microalgae Collection of University of Coimbra (Portugal), the Collection of the Goettingen University (Germany), the Provasoli-Guillard National Center for Culture of Marine Phytoplankton (CCMP, USA), the University of Texas Algal Culture Collection (USA), the CSIRO collection of Living Microalgae (CCLM, Australia), the National Institute for Environmental Studies Collection (NIES, Japan), the American Type Culture Collection (ATCC, USA), and the Freshwater Algae Culture Collection of Institute of Hydrobiology (China). Together more than 10,000 microalgal strains are available to be selected for use in a broad range of applications, for example, as biodiesel feedstocks.

The use of microalgae for biodiesel production has long been recognized and its potential has been widely reported by many research studies recently (Abou-Shanab et al., 2011; Afify et al., 2010; Ahmad et al., 2011; Cheng et al., 2009; Damiani et al., 2010; Gouveia et al., 2009; Liu et al., 2010; Rodolfi et al., 2009; Yoo et al., 2010). Microalgae reproduce themselves autotrophically using CO₂ from air and light through photosynthesis. Compared with higher plants, microalgae exhibit higher photosynthetic efficiency and grow much faster, finishing an entire growth cycle within a few days (Christi, 2007). Typical growth rates are presented in Figure 3 as the doubling time for each microalgal species. A low doubling time corresponds to a high specific growth rate. Microalgae double themselves with an average time of 26 h, and some can even reproduce within 8 h. Moreover, they can be adapted to grow in a broad range of environmental conditions, suggesting the possibility of finding species best suited to local environments which is not suitable for cultivating oil plants (e.g. palm, soybean and rapeseed).

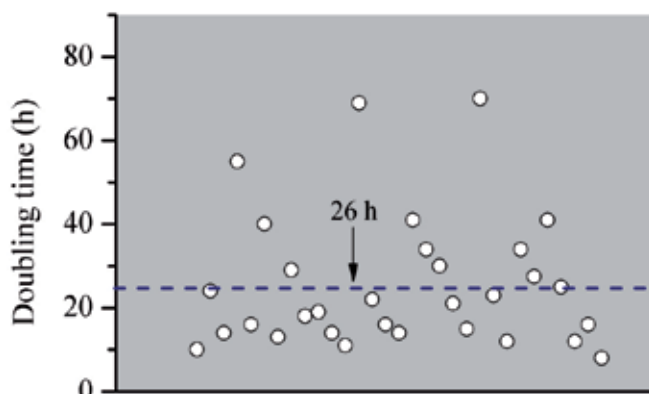


Fig. 3. Doubling time for some microalgal species. The dash line indicates the average value. $T_d = \ln(2)/\mu$, T_d , doubling time, μ , specific growth rate.

In addition to growth rate, lipid content is another important factor to assess the potential of microalgae for biodiesel production. Over the past few decades, thousands of algae and cyanobacterial species have been screened for high lipid production, and numerous oleaginous species have been isolated and characterized. The lipid contents of these oleaginous algae are species- and/or strains-dependent, vary greatly, and may reach as high as 68% of dry weight, as shown in Table 1. Generally, microalgae synthesize a low content of lipids under nutrient replete conditions (Figure 4), with membrane lipids (e.g., phospholipids and glycolipids) being the main components; whereas under stress conditions such as nitrogen deficiency, a great increase in total lipids was observed (Figure 4) with neutral lipids in particular triacylglycerols (TAGs) being the dominant components (Hu, 2004). TAGs are considered to be superior to phospholipids or glycolipids for biodiesel feedstocks because of their higher percentage of fatty acids and lack of phosphate (Pruvost et al., 2009). Unlike higher plants in which individual classes of lipids may be synthesized and localized in a specific cell, tissue or organ, algae produce these different lipids in a single cell (Hu et al., 2008b). The synthesized TAGs are deposited in lipid bodies located in cytoplasm of algal cells (Damiani et al., 2010; Rabbani et al., 1998).

Algal species	Culture conditions	Lipid content (%)	biomass productivity (g/L/day)	Lipid productivity (mg/L/day)	References
Chlorophyta					
<i>Botryococcus braunii</i>	Phototrophic	9.5-13.5	0.02-0.04	2.6-4.5	Chinnasamy et al., 2010
<i>Botryococcus braunii</i>	Phototrophic	17.85	0.346		Órpez et al., 2009
<i>Botryococcus braunii</i>	Phototrophic	24	0.077	21	Yoo et al., 2010
<i>Botryococcus</i> sp.	Phototrophic	15.8-35.9	0.14-0.22	21.3-46.9	Yeesang and Cheirsilp, 2011
<i>Chlamydomonas reinhardtii</i>	Mixotrophic	12.2-46	0.21-0.36	29-95	Li et al., 2010a
<i>Chlorella ellipsoidea</i>	Phototrophic	32	0.07	22.4	Abou-Shanab et al., 2011
<i>Chlorella ellipsoidea</i>	Phototrophic	15-43		11.4	Yang et al., 2011
<i>Chlorella protothecoides</i>	Heterotrophic	48.1-63.8	1.02-1.73	3432-6293	De la Hoz Siegler et al., 2011
<i>Chlorella protothecoides</i>	Heterotrophic	49	1.2	586.8	Gao et al., 2010
<i>Chlorella saccharophila</i>	Phototrophic	12.9-18.1	0.02	2.7-4.2	Chinnasamy et al., 2010
<i>Chlorella sorokiniana</i>	Phototrophic	19.3	0.23	44.7	Rodolfi et al., 2009
<i>Chlorella</i> sp.	Phototrophic	33.9	0.528	178.8	Chiu et al., 2008
<i>Chlorella</i> sp.	Phototrophic	22.4-66.1	0.08-0.34	51-124	Hsieh and Wu., 2009
<i>Chlorella</i> sp.	Phototrophic	34.1 ^a	0.053	22	Matsumoto et al., 2010
<i>Chlorella</i> sp.	Phototrophic	18.7	0.23	42.1	Rodolfi et al., 2009
<i>Chlorella vulgaris</i>	Phototrophic	20-42	0.21-0.35	44-147	Feng et al., 2011
<i>Chlorella vulgaris</i>	Phototrophic, Mixotrophic, heterotrophic	21-38	0.01-0.26	4-54	Liang et al., 2009
<i>Chlorella vulgaris</i>	Phototrophic	19.2	0.17	32.6	Rodolfi et al., 2009
<i>Chlorella vulgaris</i>	Phototrophic	26-52		11.6-13.2	Widjaja et al., 2009
<i>Chlorella vulgaris</i>	Phototrophic	35	0.117	41	Yeh et al., 2010
<i>Chlorella zofingiensis</i>	Heterotrophic	52	0.72	374.4	Liu et al., 2010

Algal species	Culture conditions	Lipid content (%)	biomass productivity (g/L/day)	Lipid productivity (mg/L/day)	References
<i>Chlorella zofingiensis</i>	Phototrophic	25.8	0.136	35.1	Liu et al., 2011
<i>Chlorococcum</i> sp.	Phototrophic	19.3	0.28	53.7	Rodolfi et al., 2009
<i>Choricystis minor</i>	Phototrophic	21-59.3	0.35	82	Sobczuk and Chisti, 2010
<i>Dunaliella tertiolecta</i>	Phototrophic	12.2-15.2	0.03-0.04	4.0-4.6	Chinnasamy et al., 2010
<i>Dunaliella tertiolecta</i>	Phototrophic	16.7	0.12	20	Gouveia and Oliveira, 2009
<i>Haematococcus pluvialis</i>	Phototrophic	15.6-34.9			Damiani et al., 2010
<i>Micractinium pusillum</i>	Phototrophic	24	0.108	25.7	Abou-Shanab et al., 2011
<i>Neochloris oleabundans</i>	Phototrophic	19-56	0.03-0.15	10.7-38.8	Gouveia et al., 2009
<i>Neochloris oleabundans</i>	Phototrophic	7-40.3	0.31-0.63	38-133	Li et al., 2008
<i>Ourococcus multisporus</i>	Phototrophic	52	0.045	23.3	Abou-Shanab et al., 2011
<i>Parietochloris incisa</i>	Phototrophic	18-34 ^a	0.23-0.47	46-160	Solovchenko et al., 2008
<i>Pseudochlorococcum</i> sp.	Phototrophic	24.6-52.1	0.234-0.76	53-350	Li et al., 2011a
<i>Scenedesmus obliquus</i>	Phototrophic	21-58	0.08-0.09	19-43.3	Abou-Shanab et al., 2011
<i>Scenedesmus obliquus</i>	Phototrophic	17.7	0.09	15.9	Gouveia and Oliveira, 2009
<i>Scenedesmus obliquus</i>	Phototrophic	12-38.9	0.20-0.29	35.1-78.7	Ho et al., 2010
<i>Scenedesmus obliquus</i>	Phototrophic, Mixotrophic	12.6-58.3	0.51	270	Mandal and Mallick, 2009
<i>Scenedesmus rubescens</i> like	Phototrophic	11.3-27 ^a	0.44-0.54	108-133	Lin and Lin, 2011
<i>Scenedesmus quadricauda</i>	Phototrophic	18.4	0.19	35.1	Rodolfi et al., 2009
<i>Scenedesmus</i> sp.	Phototrophic	22-53	0.08	20.3	Xin et al., 2010
<i>Scenedesmus</i> sp.	Phototrophic	18	0.203	39	Yoo et al., 2010
<i>Scenedesmus</i> sp.	Phototrophic	21.1	0.26	53.9	Rodolfi et al., 2009
<i>Tetraselmis chui</i>	Phototrophic	17.3-23.5	1-2.6	235-450	Araujo et al., 2011
<i>Tetraselmis</i> sp.	Phototrophic	8.7-33	0.21	22.86	Huerlimann et al., 2010
<i>Tetraselmis suecica</i>	Phototrophic	8.5-12.9	0.28-0.32	27-36.4	Rodolfi et al., 2009
<i>Tetraselmis tetrathele</i>	Phototrophic	29.2-30.3	3.1-4.4	905-1333	Araujo et al., 2011
Bacillariophyceae					
<i>Chaetoceros calcitrans</i>	Phototrophic	39.8	0.04	17.6	Rodolfi et al., 2009
<i>Chaetoceros gracilis</i>	Phototrophic	15.5-60.3	3.4-3.7	530-2210	Araujo et al., 2011
<i>Chaetoceros muelleri</i>	Phototrophic	11.7-25.3	1.2-2.7	1404-6831	Araujo et al., 2011
<i>Chaetoceros muelleri</i>	Phototrophic	33.6	0.07	21.8	Rodolfi et al., 2009
<i>Cylindrotheca closterium</i>	Phototrophic	17-30			Pruvost et al., 2011
<i>Navicula</i> sp.	Phototrophic	47.6 ^a	0.055	26.4	Matsumoto et al., 2010
<i>Nitzschia cf. pusilla</i>	Phototrophic	48	0.065	31.4	Abou-Shanab et al., 2011
<i>Nitzschia laevis</i>	Heterotrophic	12.8	2.02	258.6	Chen et al., 2008

Algal species	Culture conditions	Lipid content (%)	biomass productivity (g/L/day)	Lipid productivity (mg/L/day)	References
<i>Nitzschia</i> sp.	Phototrophic	32	0.013		Moazami et al., 2011
<i>Phaeodactylum tricornutum</i>	Phototrophic	18.7	0.24	44.8	Rodolfi et al., 2009
<i>Skeletonema costatum</i>	Phototrophic	21.1	0.08	17.4	Rodolfi et al., 2009
<i>Skeletonema</i> sp.	Phototrophic	31.8	0.09	27.3	Rodolfi et al., 2009
<i>Thalassiosira pseudonana</i>	Phototrophic	20.6	0.08	17.4	Rodolfi et al., 2009
Eustigmatophyceae					
<i>Ellipsoidion</i> sp.	Phototrophic	27.4	0.17	47.3	Rodolfi et al., 2009
<i>Monodus subterraneus</i>	Phototrophic	12.9-15 ^a	0.34-0.49	47.5-67.5	Khazin-Goldberg and Cohen, 2006
<i>Monodus subterraneus</i>	Phototrophic	16.1	0.19	30.4	Rodolfi et al., 2009
<i>Nannochloropsis oculata</i>	Phototrophic	22.8-23	2.4-3.4	547.2-782	Araujo et al., 2011
<i>Nannochloropsis oculata</i>	Phototrophic	26.2-30.7	0.37-0.50	84-151	Chiu et al., 2009
<i>Nannochloropsis oculata</i>	Phototrophic	7.9-15.9	0.06-0.13	9.1-16.4	Converti et al., 2009
<i>Nannochloropsis</i> sp.	Phototrophic	52	0.0465		Moazami et al., 2011
<i>Nannochloropsis</i> sp.	Phototrophic	23.1-37.8	0.06	20	Huerlimann et al., 2010
<i>Nannochloropsis</i> sp.	Phototrophic	28.7	0.09	25.8	Gouveia and Oliveira, 2009
<i>Nannochloropsis</i> sp.	Phototrophic	21.6-35.7	0.17-0.21	37.6-61	Rodolfi et al., 2009
Others					
<i>Aphanothece microscopica</i>	Heterotrophic	7.1-15.3	0.26-0.44	30-50	Queiroz et al., 2011
<i>Cryptocodinium Cohnii</i>	Heterotrophic	19.9	2.24	444.9	Couto et al., 2010
<i>Isochrysis galbana</i>	Phototrophic	24.6	0.057	14.02	Lin et al., 2007
<i>Isochrysis</i> sp.	Phototrophic	23.5-34.1	0.09	20.95	Huerlimann et al., 2010
<i>Isochrysis</i> sp.	Phototrophic	22.4-27.4	0.14-0.17	37.8	Rodolfi et al., 2009
<i>Pavlova lutheri</i>	Phototrophic	35.5	0.14	50.2	Rodolfi et al., 2009
<i>Pavlova salina</i>	Phototrophic	30.9	0.16	49.4	Rodolfi et al., 2009
<i>Pavlova viridis</i>	Phototrophic	24.8-32			Li et al., 2005
<i>Pleurochrysis carterae</i>	Phototrophic	9.7-12	0.03-0.04	2.7-4.4	Chinnasamy et al., 2010
<i>Porphyridium cruentum</i>	Phototrophic	9.5	0.37	34.8	Rodolfi et al., 2009
<i>Rhodomonas</i> sp.	Phototrophic	9.5-20.5	0.06	6.19	Huerlimann et al., 2010
<i>Schizochytrium limacinum</i>	Heterotrophic	50.3 ^a	3.48	1750	Ethier et al., 2011
<i>Schizochytrium mangrovei</i>	Heterotrophic	68 ^a	2.44	1659	Fan et al., 2007
<i>Spirulina maxima</i>	Phototrophic	4.1	0.21	8.6	Gouveia and Oliveira, 2009
<i>Thalassiosira weissflogii</i>	Phototrophic	6.3-13.2	0.5-1.5	31.5-198	Araujo et al., 2011

^a Total fatty acid content

Table 1. Lipid content and productivity of various microalgal species.

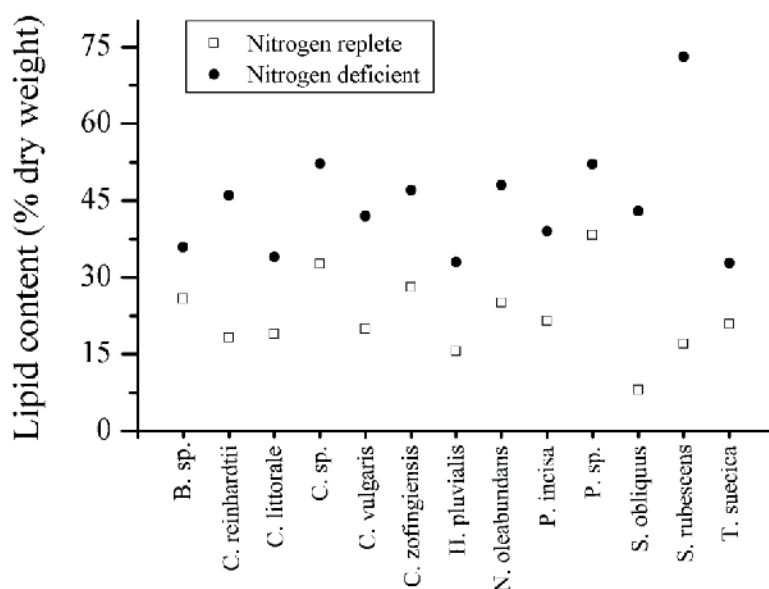


Fig. 4. Lipid content under nitrogen replete (open squares) and nitrogen deficient (filled circles) conditions for *Chlorophyta*. *B. sp.*, *Botryococcus sp.* (Yeesang and Cheirsilp, 2011); *C. reinhardtii*, *Chlamydomonas reinhardtii* (Li et al., 2010); *C. littorale*, *Chlorocuccum littorale* (Ota et al., 2009); *C. sp.*, *Chlorella sp.* (Hsieh and Wu, 2009); *C. vulgaris*, *Chlorella vulgaris* (Feng et al., 2011); *C. zofingiensis*, *Chlorella zofingiensis* (Liu et al., 2010); *H. pluviialis*, *Haematococcus pluviialis* (Damiani et al 2010); *N. oleabundans*, *Neochloris oleabundans* (Gouveia et al., 2009); *P. incisa*, *Parietochloris incisa* (Solovchenko et al., 2010); *P. sp.*, *Pseudochlorococcus sp.* (Li et al., 2011); *S. obliquus*, *Scenedesmus obliquus* (Mandal and Mallick, 2009); *S. rubescens*, *Scenedesmus rubescens* (Mandal and Mallick, 2009); *T. suecica*, *Tetraselmis suecica* (Rodolfi et al., 2009).

The important properties of biodiesel such as cetane number, viscosity, cold flow, oxidative stability, are largely determined by the composition and structure of fatty acid esters which in turn are determined by the characteristics of fatty acids of biodiesel feedstocks, for example carbon chain length and unsaturation degree (Knothe, 2005b). Fatty acids are either in saturated or unsaturated form, and the unsaturated fatty acids may vary in the number and position of double bonds on the acyl chain. Based on the number of double bonds, unsaturated fatty acids are clarified into monounsaturated fatty acids (MUFAs) and polyunsaturated fatty acids (PUFAs). The fatty acid profile of a great many algal species has been investigated and is shown in Table 2. The synthesized fatty acids in algae are commonly in medium length, ranging from 16 to 18 carbons, despite the great variation in fatty acid composition. Specifically, the major fatty acids are C16:0, C18:1 and C18:2 or C18:3 in green algae, C16:0 and C16:1 in diatoms and C16:0, C16:1, C18:1 and C18:2 in cyanobacteria. It is worthy to note that these data are obtained from algal species under specific conditions and vary greatly when algal cells are exposed to different environmental or nutritional conditions such as temperature, pH, light intensity, or nitrogen concentration (Guedes et al 2010; James et al., 2011; Sobczuk & Chisti, 2010; Tatsuzawa et al., 1996). Generally, saturated fatty esters possess high cetane number and superior oxidative stability; whereas unsaturated, especially

Fatty acids Algal species	C12:0	C14:0	C15:0	C16:0	C16:1	C16:2	C16:3	C16:4	C17:0	C18:0	C18:1	C18:2	C18:3	C18:4	C20:0	C20:4	C20:5	C22:5	C22:6	Refs
Chlorophyta																				
<i>Botryococcus braunii</i>				29.5	3.4					1	44.9	21.2								Yoo et al., 2010
<i>Botryococcus</i> sp.		3.95	1.56	30.04	0.94				1.54	12.02	37.68	5.01	7.35		0.63					Yeesang and Cheirsilp, 2011
<i>Chlamydomonas reinhardtii</i>				30.7	3	1.8	1.6	2.7		3.2	27.2	18.3	11		0.5					James et al., 2011
<i>Chlorella ellipsoidea</i>		2		26							4	40	23			5				Abou-Shanab et al 2011
<i>Chlorella protothecoides</i>				14.3	1				0.32	2.7	71.6	9.7								Cheng et al 2009
<i>Chlorella pyrenoidosa</i>		0.7		17.3	0.8	7	9.3			1.2	3.3	18.5	41.8							D'Oca et al 2011
<i>Chlorella sorokiniana</i>				25.4	3.1	10.7	4.1			1.4	12.4	34.4	7.1							Chen and Johns, 1991
<i>Chlorella</i> sp.	3.78		5.24	16.1	10.88	9.79			4.74	4.35	8.45	14.36	18.79							Li et al., 2011b
<i>Chlorella vulgaris</i>				24	2.1					1.3	24.8	47.8								Yoo et al., 2010
<i>Chlorella zofingiensis</i>				22.62	1.97	7.38	1.94	0.22		2.09	35.68	18.46	7.75	0.49						Liu et al., 2010
<i>Chlorococcum littorale</i>				20.9	5.6			14.4			29.7	7.2	22.2							Ota et al., 2009
<i>Choricystis minor</i>				36					0.4	12.3	31.2	9.9	3.8		1.9					Sobczuk and Chisti, 2010
<i>Dictyochloropsis splendida</i>		13.88		69.59					1.21	0.38	1.11	12.14	0.42							Afify et al 2010
<i>Dunaliella tertiolecta</i>				26.4		2.3	1.27			0.6	16.8	13.1	39.6							Chen et al 2011
<i>Haematococcus pluvialis</i>	0.21	1.25		22.5	0.64				0.19	3.15	19.36	26.9	17.04		0.2	0.89	0.57			Damiani et al 2010
<i>Micractinium pusillum</i>				33	1						31	17	18							Abou-Shanab et al 2011
<i>Neochloris oleabundans</i>				23.3	0.6	1.6	2.4		0.2	4.5	43	17.8	5.8							Levine et al., 2011
<i>Neochloris</i> sp.		5.22		29.4					5.2	6.6	17.5	23.6	12.6							Moazami et al., 2011
<i>Ourococcus multisporus</i>		2		19	1					5	26	11	36							Abou-Shanab et al 2011
<i>Parietochloris incise</i>				9.1	0.7	0.6				2.1	15.1	9.3	1.6	1.2		58.9				Khazin-Goldberg et al., 2002
<i>Scenedesmus obliquus</i>		1.48		21.8	5.95	3.96	0.68	0.43		0.45	17.93	21.74	3.76	0.21						Gouveia and Oliveira, 2009
<i>Scenedesmus</i> sp.				36.3	4					2.7	25.9	31.1								Yoo et al., 2010
<i>Tetraselmis</i> sp.		0.6		27.8						0.9	28.2	9.3	23.9	3.7		0.9	3.4			Huerlimann et al., 2010
Bacillariophyceae																				
<i>Chaetoceros</i> sp.		23.6		9.2	36.5	6.9	2.6		2		3		1.4	0.6		4.1	8		1	Renaud et al., 2002
<i>Cyclotella cryptica</i>		1.4		15.2	10.7						3.9	1.2	3.5				9.7		1.7	Pahl et al., 2010
<i>Navicula</i> sp.				45	52.7					0.6	1.1	0.6								Matsumoto et al., 2010
<i>Nitzschia cf. pusilla</i>		6		31	57	0.27							6							Abou-Shanab et al 2011
<i>Nitzschia laevis</i>		16.9		28.5	23.9					0.7	5.1	3.4	4.1		5	11.7				Chen et al 2008
<i>Nitzschia</i> sp.		9	3.5	37.4					4.6	5.3	16.9	11.6								Moazami et al., 2011
Cyanobacteria																				
<i>Nostoc commune</i>				23.5	22.5						5.6	21.1	14.1							Pushparaj et al., 2008
<i>Nostoc flagelliforme</i>		0.65		21.27	14.91					6.2	22.59	15.03	19.35							Liu et al., 2005
<i>Spirulina</i>				49.2	5.9					1.7	2.9	22.7	17.5							Chaiklahan et al 2008
<i>Spirulina maxima</i>		0.34		40.16	9.19		0.42	0.16		1.18	5.43	17.89	18.32	0.08	0.06					Gouveia and Oliveira, 2009
<i>Synechocystis PCC6803</i>				52	3				1		3	9	29	3						Wada and Murata, 1990
Eustigmatophyceae																				
<i>Monodus subterraneus</i>		3.3		19.8	34.3					9.7	9	0.8	0.7			2.8	15.5			Khazin-Goldberg and Cohen, 2006
<i>Nannochloropsis oculata</i>				62						11	5	8	15							Converiti et al 2009
<i>Nannochloropsis</i> sp.				23.4						7.14	45.4	11.7	12.2							Moazami et al., 2011

Fatty acids Algal species	C12:0	C14:0	C15:0	C16:0	C16:1	C16:2	C16:3	C16:4	C17:0	C18:0	C18:1	C18:2	C18:3	C18:4	C20:0	C20:4	C20:5	C22:5	C22:6	Refs	
<i>Prymnesiophyceae</i>																					
<i>Isochrysis galbana</i>		19.3		18.1							29.5	2.6	3.6	13.8				4.1	7.5	Lin et al., 2007	
<i>Isochrysis</i> sp.		8.9	0.4	13.7	5.1					0.2	22.8	2.3	4.8	22.5		0.1	0.6	1.7	12.7	Huerlimann et al., 2010	
<i>Paulova lutheri</i>		5.54		19	31.46					1.11	2.55	4.46	5.37	6.63			16.07		7.8	Guedes et al 2010	
<i>Paulova viridis</i>		19.9		13.9	16.1												21.2		8.7	Hu et al 2008a	
<i>Paulova viridis</i>		10.34		17.3	17.87					3.16	1.33	2.48	2.23				10.46		14.78	Li et al., 2005	
<i>Rhodophyta</i>																					
<i>Porphyridium cruentum</i>				14.5	8.5					10.5	14				10.8	6.1			10.5	Oh et al., 2009	
Others																					
<i>Cryptothecodinium colnii</i>	2.9	13.4		22.9	0.4					2.6	7.6							0.5	49.5	Couto et al., 2010	
<i>Glossomastrix chrysoplata</i>		22		4.4	4						6.6	3.9				5.5	39.2	13.3		Kawachi et al., 2002	
<i>Rhodomonas</i> sp.		7.8	0.4	19.7	1.5					3	8.4	3	29.8	11.7		0.6	8.6	1.7	3	Huerlimann et al., 2010	
<i>Schizochytrium limacinum</i>		3.96		54.61						3.86								6.47	31.09	Ethier et al 2011	

Table 2. Fatty acid composition of various algal species (% of total fatty acids)

polyunsaturated, fatty esters have improved low-temperature properties (Knothe, 2008). In this regard, it is suggested that the modification of fatty esters, for example the enhanced proportion of oleic acid (C18:1) ester, can provide a compromise solution between oxidative stability and low-temperature properties and therefore promote the quality of biodiesel (Knothe, 2009). Thus, microalgae with high oleic acid are suitable for biodiesel production.

Currently the commercial production of biodiesel is mainly from plant oils and animal fats. However, the plant oil derived biodiesel cannot realistically meet the demand of transport fuels because large arable lands are required for cultivation of oil plants, as demonstrated in Table 3. Based on the oil yield of different plants, the cropping area needed is calculated and expressed as a percentage of the total U.S. cropping area. If soybean, the popular oil crop in United States is used for biodiesel production to meet the existing transport fuel need, 5.2 times of U.S. cropland will need to be employed. Even the high-yielding oil plant palm is planted as the biodiesel feedstock, more than 50% of current U.S. arable lands have to be occupied. The requirement of huge arable lands and the resulted conflicts between food and oil make the biodiesel from plant oils unrealistic to completely replace the petroleum derived diesel in the foreseeable future. It is another case, however, if microalgae are used to produce biodiesel. As compared with the conventional oil plants, microalgae possess significant advantages in biomass production and oil yield and therefore the biodiesel productivity. In terms of land use, microalgae need much less than oil plants, thus eliminating the competition with food for arable lands (Table 3).

In addition to biodiesel, microalgae can serve as sources of other renewable fuels such as biogas, bioethanol, bio-oil and syngas (Chisti, 2008; Demirbas, 2010; Mussnug et al., 2010). Moreover, microalgal biomass contains significant amounts of proteins, carbohydrates and other high-value compounds that can be potentially used as feeds, foods and pharmaceuticals (Chisti, 2007). Thus, integrating the production of such co-products with biofuels will provide new insight into improving the production economics of microalgal biodiesel. Microalgae can

also be used for sequestration of carbon dioxide from industrial flue gases and wastewater treatment by removal of nutrients (Chinnasamy et al 2010; Fulke et al., 2010; Levine et al., 2011; Yang et al., 2011). Coupled with these environment-beneficial approaches, the production potential of microalgae derived biodiesel is desirable.

Feedstocks	Oil content (% dry weight)	Oil yeild (L/ha year)	Land area needed (M ha) ^a	Percentage of existing US cropping area ^a
Corn	44	172	3480	1912
Hemp	33	363	1650	906
Soybean	18	636	940	516
Jatropha	28	741	807	443
Camelina	42	915	650	357
Canola	41	974	610	335
Sunflower	40	1070	560	307
Castor	48	1307	450	247
Palm oil	36	5366	110	60.4
Microalgae (low oil content)	30	58,700	10.2	5.6
Microalgae (medium oil content)	50	97,800	6.1	3.4
Microalgae (high oil content)	70	136,900	4.4	2.4

^aFor meeting all transport fuel needs of the United States. Adapted from Chisti, 2007 and Mata et al., 2010.

Table 3. Comparison of microalgae with other biodiesel feedstocks.

3. Biodiesel production from microalgae

The biodiesel production from microalgal oil shares the same processes and technologies as those used for other feedstocks derived oils. However, microalgae are microorganisms living essentially in liquid environments and thus have particular cultivation, harvesting, and downstream processing techniques for efficient biodiesel production. The microalgal biodiesel production pipeline is schematically presented in Figure 5, including strain selection, mass culture, biomass harvesting and processing, oil extraction and transesterification.

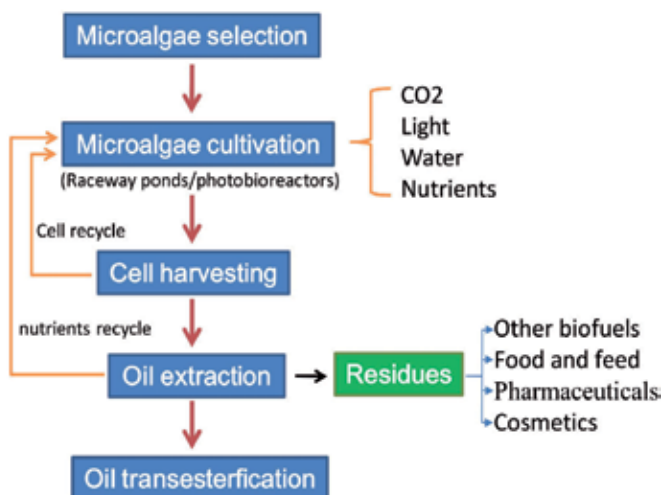


Fig. 5. Microalgal biodiesel production pipeline

3.1 Microalgae selection

There are more than 50,000 microalgal species around the world. Selection of an ideal species is of fundamental importance to the success of algal biodiesel production. Theoretically, an ideal species should own the following desirable characteristics: rapid growth rate, high oil content, wide tolerance of environmental conditions, CO₂ tolerance and uptake, large cell size, easy of disruption, etc. However, it is unlikely for a single species to excel in all above mentioned characteristics. Thus, prioritization is required. Commonly, fast-growing strains with high oil content are placed on the priority list for biodiesel production. Fast growth makes sure the high biomass productivity and reduces the contamination risk owing to out-competition of slower growers. High oil content helps increase the process yield coefficient and reduce the cost of downstream extraction and purification. The selected species should be suitable for mass cultivation under local geographic and climatic conditions, for example, the inland prefers freshwater algae while the coastal place desires marine algal species. Ease of harvesting is an often-overlooked criterion and should be taken into account. Algal biomass harvest requires significant capital and accounts for up to 30% of total biomass production cost (Molina Grima et al., 2003). Therefore, it is desirable to choose algal species with properties that simplify harvesting, including large cell size, high specific gravity and autoflocculation potential (Griffiths & Harrison, 2009). These properties can greatly influence the process economics for biodiesel production from algae. An additional algal characteristic is the suitability of lipids for biodiesel production; for example, neutral lipids in particular TAG are superior to polar lipids (phospholipids and glycolipids) for biodiesel and C18:1 has advantages over other fatty acids for improving biodiesel quality (Knothe, 2009).

3.2 Microalgae cultivation

3.2.1 Factors affecting algal lipids and fatty acids

Microalgae require several things to grow, including a light source, carbon dioxide, water, and inorganic salts. The lipid content and fatty acid composition are species/strain-specific and can be greatly affected by a variety of medium nutrients and environmental factors. Carbon is the main component of algal biomass and accounts for *ca* 50% of dry weight. CO₂ is the common carbon source for algal growth. But some algal species are also able to utilize organic carbon sources, for example sugars and glycerol (Easterling et al., 2009; Liu et al., 2010). Sugars particularly glucose are preferred and can be used to boost production of both algal biomass and lipids (Liu et al., 2010). Nitrogen is an important nutrient affecting lipid metabolism in algae. The influence of nitrogen concentration on lipid and fatty acid production has been investigated in numerous algal species. Nitrate was suggested to be superior to other nitrogen sources such as urea and ammonium for algal lipid production (Li et al., 2008). Generally, low concentration of nitrogen in the medium favors the accumulation of lipids particularly TAGs and total fatty acids. But in some cases, nitrogen starvation caused decreased synthesis of lipids and fatty acids (Saha et al., 2003). Nitrogen concentration also affects algal fatty acid composition. For example, in cyanobacteria, increased levels of C16:0 and C18:1 and decreased C18:2 levels were observed in response to nitrogen deprivation (Piorreck & Pohl, 1984). In the marine alga *Paolova viridis*, nitrogen depletion resulted in an increase in saturated, monounsaturated fatty acids and C22:6 (n-3) contents (Li et al., 2005). Nitrogen starvation brought about a strong increase in the proportion of C20:4 (n-6) in the green algal *Parietochloris incisa* (Solovchenko et al., 2008). Similar to nitrogen, silicon is a key

nutrient that affects lipid metabolism of diatoms, and can promote the accumulation of neutral lipids as well as of saturated and monounsaturated fatty acids when depleted from culture medium (Roessler, 1988). Other types of nutrient deficiency include phosphorus and sulfur limitations are also able to enhance lipid accumulation in algae (Khozin-Goldberg & Cohen, 2006; Li et al., 2010b; Sato et al., 2000). These types of nutrient deficiency, however, do not always lead to elevated overall lipid production, because they at the same time exert negative effect on algal growth and contribute to the reduced algal biomass production that compromises the enhanced lipid yield resulting from increased lipid content. Therefore, the manipulation of these nutrients needs to be optimized to induce lipid accumulation while maintaining algal growth for maximal production of lipids. Iron is a micro-nutrient required in a tiny amount for ensuring algal growth. Within a certain range of concentrations, high concentrations of iron benefit algal growth as well as cellular lipid accumulation and thus the overall lipid yield in the green alga *Chlorella vulgaris* (Liu et al., 2008).

Among the environmental factors, light is an important one that has a marked effect on the lipid production and fatty acid composition in algae (Brown et al., 1996; Damiani et al., 2010; Khotimchenko & Yakovleva, 2005; Napolitano, 1994; Sukenik et al., 1989; Zhekisheva et al., 2002, 2005). Generally, low light intensity favors the formation of polar lipids such as the membrane lipids associated with the chloroplast; whereas high light intensity benefits the accumulation of neutral storage lipids in particular TAGs. In *H. pluvialis*, for example, high light intensity resulted in a great increase of both neutral and polar lipids, but the increase extent of neutral lipids was much greater than that of polar lipids, leading to the dominant proportion of neutral lipids in the total lipids (Zhekisheva et al., 2002, 2005). Although the effect of light intensity on fatty acid composition differs among the algal species and/or strains, there is a general trend that the increase of light intensity contributes to the enhanced proportions of saturated and monounsaturated fatty acids and the concurrently the reduced proportion of polyunsaturated fatty acids (Damiani et al., 2010; Sukenik et al., 1989; Zhekisheva et al., 2002, 2005). Temperature is another important environmental factor that affects profiles of algal lipids and fatty acids. In response to temperature shift, algae commonly alter the physical properties and thermal responses of membrane lipids to maintain fluidity and function of membranes (Somerville, 1995). In general, increased temperature causes increased fatty acid saturation and at the same time decreased fatty acid unsaturation. For example, C14:0, C16:0, C18:0 and C18:2 increased and C18:3 (n-3), C18:4, C20:5 and C22:6 decreased in *Rhodomonas* sp., and C16:0 increased and C18:4 decreased in *Cryptomonas* sp. when temperature increased (Renaud et al., 2002). As for the effect of temperature on cellular lipid content, it differs in a species-dependent manner. In response to increased temperature, algae may show an increase (Boussiba et al., 1987), no significant change or even a decrease (Renaud et al., 2002) in lipid contents. Other environmental factors such as salinity, pH and dissolved O₂ are also important and able to affect algal lipid metabolism.

In addition to the nutritional and environmental factors, growth phase and aging of the culture affect algal lipids and fatty acids. Commonly, algae accumulate more lipids at stationary phase than at logarithmic phase (Bigogno et al., 2002; Mansour et al., 2003). Associated with the growth phase transition from logarithmic to stationary phase, increased proportions of C16:0 and C18:1 and decreased proportions of PUFAs are often observed. Besides, it is suggested that algal lipids and fatty acids can be greatly affected by cultivation modes. Algae growing under heterotrophic mode usually produce more

lipids in particular TAG and higher proportion of C18:1 than under photoautotrophic mode (Liu et al., 2011).

3.2.2 Raceway ponds and photobioreactors

Currently, the commonly used culture systems for large-scale production of algal biomass are open ponds and enclosed photobioreactors. An open pond culture system usually consists of a series of raceways-type of ponds placed outdoors. In this system, the shallow pond is usually about one foot deep; algae are cultured under conditions identical to their natural environment. The pond is designed in a raceway configuration, in which a paddle wheel provides circulation and mixing of the algal cells and nutrients (Chisti, 2007). The raceways are typically made from poured concrete, or they are simply dug into the earth and lined with a plastic liner to prevent the ground from soaking up the liquid. Compared with photobioreactors, open ponds cost less to build and operate, and are more durable with a large production capacity. However, the open pond system has its intrinsic disadvantages including rapid water loss due to evaporation, contamination with unwanted algal species as well as organisms that feed on algae, and low biomass productivity. In addition, optimal culture conditions are difficult to maintain in open ponds and recovering the biomass from such a dilute culture is expensive.

Unlike open ponds, enclosed photobioreactors are flexible systems that can be employed to overcome the problems of evaporation, contamination and low biomass productivity encountered in open ponds (Mata et al., 2010). These systems are made of transparent materials with a large surface area-to-volume ratio, and generally placed outdoors using natural light for illumination. The tubular photobioreactor is the most widely used one, which consists of an array of straight transparent tubes aligned with the sun's rays (Chisti, 2007). The tubes are generally no more than 10 cm in diameter to maximize sunlight penetration. The medium broth is circulated through a pump to the tubes, where it is exposed to light for photosynthesis, and then back to a reservoir. In some photobioreactors, the tubes are coiled to form what is known as a helical tubular photobioreactor. Artificial illumination can be used for photobioreactor. But it adds to the production cost and thus is used for the production of high value products instead of biodiesel feedstock. The algal biomass is prevented from settling by maintaining a highly turbulent flow within the reactor using either a mechanical pump or an airlift pump (Chisti, 2007). The result of photosynthesis will generate oxygen. The oxygen levels will accumulate in the closed photobioreactor and inhibit the growth of algae. Therefore, the culture must periodically be returned to a degassing zone, an area where the algal broth is bubbled with air to remove the excess oxygen. In addition, carbon dioxide must be fed into the system to provide carbon source and maintain culture pH for algal growth. Photobioreactors require cooling during daylight hours and temperature regulation in night hours. This may be done through heat exchangers located either in the tubes themselves or in the degassing column.

Table 4 shows the comparison between open ponds and photobioreactors for microalgae cultivation.

Photobioreactors have obvious advantages over open ponds: offer better control, prevent contamination and evaporation, reduce carbon dioxide losses and allow to achieve higher biomass productivities. However, enclosed photobioreactors cost high to build and operate and the scale-up is difficult, limiting the number of large-scale commercial systems operating globally to high-value production runs (Greenwell et al., 2010). In this context, a hybrid photobioreactor-open pond system is proposed: using photobioreactors to produce contaminant-free inoculants for large open ponds.

Culture systems	Open ponds	Enclosed bioreactors
Contamination control	Difficult	Easy
Contamination risk	High	Reduced
Sterility	None	Achievable
Process control	Difficult	Easy
Species control	Difficult	Easy
Mixing	Very poor	Uniform
Operation regime	Batch or semi-continuous	Batch or semi-continuous
Area/volume ration	Low	High
Algal cell density	Low	High
Investment	Low	High
Operation cost	Low	High
Light utilization efficiency	Poor	High
Temperature control	difficult	More uniform temperature
Productivity	Low	High
Hydrodynamic stress on algae	Very low	Low-high
Evaporation of growth medium	High	Low
Gas transfer control	Low	High
O ₂ inhibition	< bioreactors	Great problem
Scale-up	Difficult	Difficult

Table 4. Comparison of open ponds and photobioreactors for microalgae cultivation (Mata et al., 2010)

3.3 Biomass harvesting and concentration

Algal harvesting is the concentration of diluted algal suspension into a thick algal paste, with the aim of obtaining slurry with at least 2–7% algal suspension on dry matter basis. Biomass harvest is a very challenging process and may contribute to 20–30% of the total biomass production cost (Molina Grima et al., 2003). The most common harvesting methods include sedimentation, filtration, centrifugation, sometimes with a pre-step of flocculation or flocculation-flotation. Flocculation is employed to aggregate the microalgal cells into larger clumps to enhance the harvest efficiency by gravity sedimentation, filtration, or centrifugation (Molina Grima et al., 2003). The selection of a harvesting process for a particular strain depends on size and properties of the algal strain. The selected harvest method must be able to handle a large volume of algal culture broth.

Filtration is the most commonly used method for harvesting algal biomass. The process can range from micro-strainers to pressure filtration and ultra-filtration systems. Vacuum filtration is feasible for harvesting large microalgae such as *Coelastrum proboscideum* and *Spirulina platensis* but unsuitable for recovering small size algal cells such as *Scenedesmus*, *Dunaliella*, or *Chlorella* (Molina Grima et al., 2003). Membrane-based microfiltration and ultrafiltration have also been used for harvesting algal cells for some specific application purposes, but overall, they are more expensive. Centrifugation is an accelerated sedimentation process for algae harvesting. Generally, centrifugation has high capital and operation costs, but its efficiency is much higher than natural sedimentation. Because of its high cost, centrifugation as an algae harvesting method is usually considered only feasible for high value products rather than biofuels.

3.4 Biomass processing for oil extraction

After harvesting, chemicals in the biomass may be subject to degradation induced by the process itself and also by internal enzyme in the algal cells. For example, lipase contained in

the cells can rapidly hydrolyze cellular lipids into free fatty acids that are not suitable for biodiesel production. Therefore, the harvested biomass need be processed rapidly. Drying is a major step to keep the quality of the oil. In addition, the solvent-based oil extraction can be difficult when wet biomass is used. Various drying methods such as sun drying, spray drying, freeze drying, and drum drying can be used for drying algal biomass (Mata et al., 2010). Due to the high water content of algal biomass, sun-drying is not a very effective method for algal powder production. Spray drying and freeze drying are rapid and effective, but also expensive and not economically feasible for biofuel production. Because of the high energy required, drying is considered as one of the main economical bottlenecks in the entire process.

There are several approaches for extracting oil from the dry algal biomass, including solvent extraction, osmotic shock, ultrasonic extraction and supercritical CO₂ extraction. Oil extraction from dried biomass can be performed in two steps, mechanical crushing followed by solvent extraction in which hexane is the main solvent used. For example, after the oil extraction using an expeller, the leftover pulp can be mixed with cyclohexane to extract the remaining oil. The oil dissolves in the cyclohexane and the pulp is filtered out from the solution. These two stages are able to extract more than 95% of the total oil present in the algae. Oil extraction from algal cells can also be facilitated by osmotic shock or ultrasonic treatment to break the cells. Osmotic shock is a sudden reduction in osmotic pressure causing cells to rupture and release cellular components including oil. The algae lacking the cell wall are suitable for this process. In the ultrasonic treatment, the collapsing cavitation bubbles near to the cell walls cause cell walls to break and release the oil into the solvent. Supercritical CO₂ is another way for efficient extraction of algal oil, but the high energy demand is a limitation for commercialization of this technology (Herrero et al., 2010).

3.5 Oil transesterification

Algal oil contained in algal cells can be converted into biodiesel through transesterification. Transesterification is a chemical conversion process involving reacting triglycerides of vegetable oils or animal fats catalytically with a short-chain alcohol (typically methanol or ethanol) to form fatty acid esters and glycerol (Figure 6). This reaction occurs stepwise with the first conversion of triglycerides to diglycerides and then to monoglycerides and finally to glycerol. The complete transesterification of 1 mol of triglycerides requires 3 mol of alcohol, producing 1 mol of glycerol and 3 mol of fatty esters. Considering that the reaction is reversible, large excess of alcohol is used in industrial processes to ensure the direction of fatty acid esters. Methanol is the preferred alcohol for industrial use because of its low cost, although other alcohols like ethanol, propanol and butanol are also commonly used.

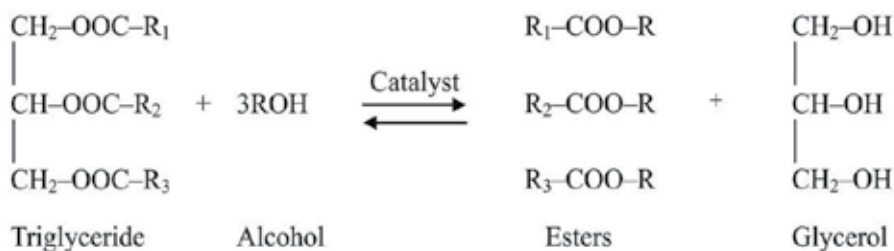


Fig. 6. Transesterification of oil to biodiesel. R₁₋₃ indicates hydrocarbon groups.

In addition to heat, a catalyst is needed to facilitate the transesterification. The transesterification of triglycerides can be catalyzed by acids, alkalis or enzymes. Acid transesterification is considered suitable for the conversion of feedstocks with high free fatty acids but its reaction rate is low (Gerpen, 2005). In contrast, alkali-catalyzed transesterification has a much higher reaction rate, approximately 4000 times faster than the acid-catalyzed one (Fukuda et al., 2001). In this context, alkalis (sodium hydroxide and potassium hydroxide) are preferred as catalysts for industrial production of biodiesel. The use of lipases as transesterification catalysts has also attracted much attention as it produces high purity product and enables easy separation from the byproduct glycerol (Ranganathan et al., 2008). However, the cost of enzyme is still relatively high and remains a barrier for its industrial implementation. In addition, it has been proposed that biodiesel can be prepared from oil via transesterification with supercritical methanol (Demirbas, 2002).

4. Genetic engineering of microalgae

4.1 Microalgal lipid biosynthesis

Although lipid metabolism, in particular the biosynthesis of fatty acids and TAG, is poorly understood in algae, it is generally recognized that the basic pathways for fatty acid and TAG biosynthesis are similar to those demonstrated in higher plants.

Algae synthesize the *de novo* fatty acids in the chloroplast using a single set of enzymes. A simplified schedule for saturated fatty acid biosynthesis is shown in Figure 7. Acetyl-CoA is the basic building block of the acyl chain and serves as a substrate for acetyl CoA

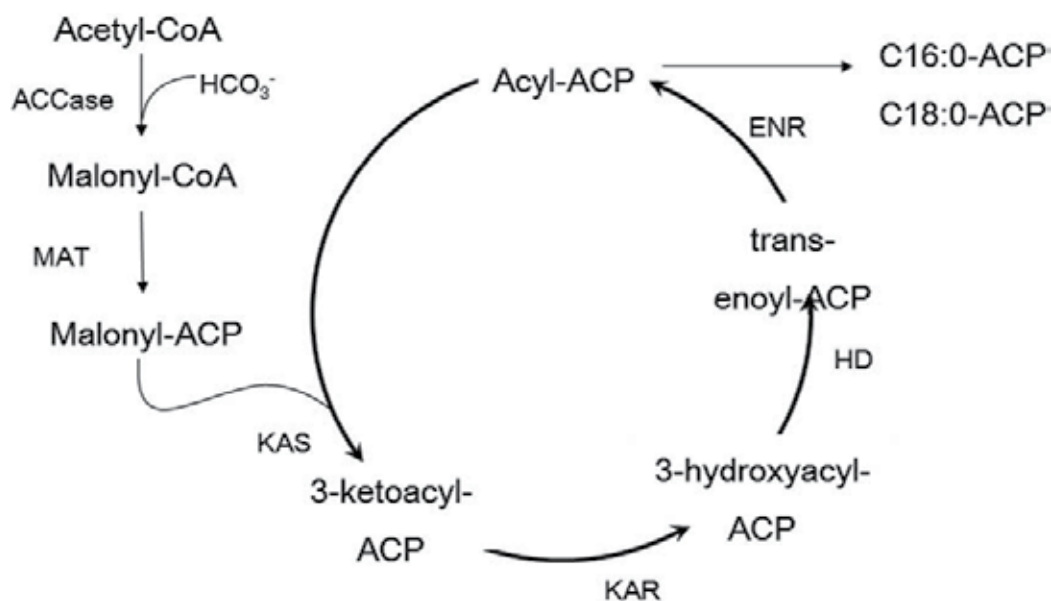


Fig. 7. Simplified overview of saturated fatty acid biosynthesis in algal chloroplast. ACCase, acetyl-CoA carboxylase; ACP, acyl carrier protein; CoA, coenzyme A; ENR, enoyl-ACP reductase; HD, 3-hydroxyacyl-ACP dehydratase; KAR, 3-ketoacyl-ACP reductase; KAS, 3-ketoacyl-ACP synthase; MAT, malonyl-CoA:ACP transacylase.

carboxylation and as well as a substrate for the initial condensation reaction. The formation of malonyl CoA from acetyl CoA is generally regarded as the first reaction of fatty acid biosynthesis, which is catalyzed by acetyl CoA carboxylase (ACCase). The malonyl group of malonyl CoA is transferred to a protein co-factor, acyl carrier protein (ACP), resulting in the formation of malonyl ACP that enters into a series of condensation reactions with acyl ACP (or acetyl CoA) acceptors. The first condensation reaction is catalyzed by 3-ketoacyl ACP synthase III (KAS III), forming a four-carbon product. KAS I and KAS II catalyze the subsequent condensations. After each condensation, the 3-ketoacyl-ACP product is reduced, dehydrated, and reduced again, by 3-ketoacyl-ACP reductase, 3-hydroxyacyl-ACP dehydratase, and enoyl-ACP reductase, respectively, to form a saturated fatty acid. To produce an unsaturated fatty acid, a double bond is introduced onto the acyl chain by the soluble enzyme stearoyl ACP desaturase (SAD). Unlike plants, some algae produce long-chain acyl ACPs (C₂₀-C₂₂) that derive from the further elongation and/or desaturation of C₁₈. The fatty acid elongation is terminated when the acyl group is released from ACP by an acyl-ACP thioesterase that hydrolyzes the acyl ACP and produces free fatty acids or by acyltransferases that transfer the fatty acid from ACP to glycerol-3-phosphate or monoacylglycerol-3-phosphate. These released fatty acids serve as precursors for the synthesis of cellular membranes and neutral storage lipids like TAG.

It has been proposed that the biosynthesis of TAG occurs in cytosol via the direct glycerol pathway (Figure 8). Generally, acyl-CoAs sequentially react with the hydroxyl groups in glycerol-3-phosphate to form phosphatidic acid via lysophosphatidic acid. These two reactions are catalyzed by glycerol-3-phosphate acyl transferase and lysophosphatidic acid acyl transferase respectively. Dephosphorylation of phosphatidic acid results in the release of DAG which accepts a third acyl from CoA to form TAG. This final step is catalyzed by diacylglycerol acyltransferase, an enzymatic reaction that is unique to TAG synthesis. In addition, an alternative pathway that is independent of acyl-CoA may also be present in algae for TAG biosynthesis (Dahlqvist et al., 2000). This pathway employs phospholipids as acyl donors and diacylglycerols as the acceptors and might be activated when algal cells are exposed to stress conditions, under which algae usually undergo rapid degradation of the photosynthetic membranes and concurrent accumulation of cytosolic TAG-enriched lipid bodies (Hu et al., 2008b).

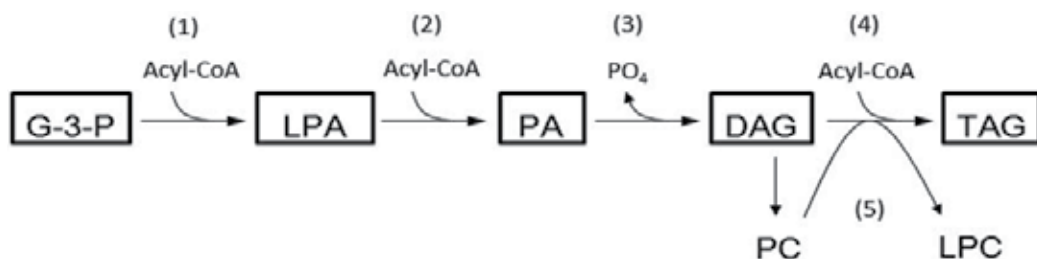


Fig. 8. Simplified illustration of the TAG biosynthesis in algae. DAG, diacylglycerol; LPA, lysophosphatidic acid; LPC, lysophosphatidylcholine; G-3-P, glycerol-3-phosphate; PA, phosphatidic acid; PC, phosphatidylcholine; TAG, triacylglycerol. (1) glycerol-3-phosphate acyl transferase, (2) lysophosphatidic acid acyl transferase, (3) phosphatidic acid phosphatase, (4) diacylglycerol acyl transferase, and (5) phospholipid:diacylglycerol acyltransferase.

4.2 Genetic engineering of microalgal lipids

Genetic engineering is a feasible and complimentary approach to increase algal productivity and improve the economics of algal biodiesel production. This has long been recognized but it seems that so far little progress has been made. The lack of full or near-full genome sequences and robust transformation systems makes genetic engineering of algae lag much behind that of bacteria, fungi and higher eukaryotes. Although certain algal species have been reported for efficient transformation, it proves to be difficult to produce stable transformants of algae. Currently, sophisticated genetic engineering whereby several genes are concurrently down-regulated or overexpressed is only really applicable to the green alga *Chlamydomonas reinhardtii*. This situation, however, is likely to change because of the growing scientific and commercial interest in other algal species that are of great potential for industrial applications.

Understanding the algal lipid biosynthesis is of great help to engineer algal lipid production. Although lipid metabolism in algae is not as fully understood as that in higher plants, they have similar lipid biosynthetic pathway as mentioned above. Theoretically, overexpression of the genes involved in fatty acid synthesis is able to increase lipid accumulation, in that fatty acids required as precursors for lipid biosynthesis are produced in excess. However, overexpression of the native ACCase, the rate-limiting enzyme catalyzing the first committed step of fatty acid biosynthesis in many organisms, could not increase the lipid production in diatom (Dunahay et al., 1995). It is possible that under high flux conditions through ACCase, the condensing enzymes or other factors may begin to limit fatty acid synthesis rate. Therefore, more complete control may come from certain transcription factors that can increase expression of the entire pathway. Another feasible approach of increasing cellular lipid contents is to inhibit metabolic pathways that lead to other carbon storage compounds, such as starch. Starch synthesis shares common carbon precursors with lipid synthesis in algae. Blocking starch synthesis is able to redirect carbon flux to lipid biosynthetic pathway, resulting in overproduction of fatty acids and thus total lipids (Li et al., 2010a). Neutral lipids in particular TAG surpass other lipids for biodiesel production, attracting the interest of enhancing cellular TAG contents through genetic engineering. Overexpression of genes involved in TAG assembly, e.g., glycerol-3-phosphate acyltransferase, lysophosphatidic acid acyltransferase, or diacylglycerol acyltransferase, all significantly increase TAG production in plants. Such strategies may also be applicable to algae for enhancing TAG levels. Commonly, algae produce larger amounts of lipids under unfavorable conditions than logarithmic growing condition. Enhancing lipid biosynthesis through genetic engineering, therefore, is likely to reduce algal proliferation and biomass production. In this context, the use of inducible promoters could overcome the problem because the transgenic expression can only be activated when a high cell density is achieved. The important properties of biodiesel such as cetane number, viscosity, cold flow, oxidative stability, are largely determined by the composition and structure of fatty acid esters which in turn are determined by the characteristics of fatty acids of biodiesel feedstocks, for example carbon chain length and unsaturation degree (Knothe, 2005b). Thus, the genetic modification of algal fatty acid composition is of also great interest. Generally, saturated fatty esters possess high cetane number and superior oxidative stability; whereas unsaturated, especially polyunsaturated fatty esters have improved low-temperature properties (Knothe, 2008). In this regard, it is suggested that the modification of fatty esters, for example the enhanced proportion of oleic acid (C18:1) ester, can provide a compromise solution between oxidative stability and low-temperature properties and therefore promote

the quality of biodiesel (Knothe, 2008, 2009). Oleic acid is converted to linoleic acid (C18:2) in a single desaturation step, catalyzed by a $\Delta 12$ desaturase enzyme encoded by the *FAD2* gene. Inactivation of this desaturation step can greatly increase the proportion of oleic acid in soybean and may represent a possible strategy for elevated accumulation of oleic acid in algae.

Genetic engineering can also be used potentially to improve tolerance of algae to stress factors such as temperature, salinity and pH. These improved attributes will allow for the cost reduction in algal biomass production and be beneficial for growing selected algae under extreme conditions that limit the proliferation of invasive species. Photoinhibition is another technical challenge to be addressed by genetic engineering. When the light intensities exceed the value for maximum photosynthetic efficiency, algae show photoinhibition, a common phenomenon for phototrophy under which the growth rate slows down. Engineered algae with a higher threshold of light inhibition will significantly improve the economics of biodiesel production.

Engineering algae for biodiesel production is currently still in its infancy. Significant advances have only been achieved in the genetic manipulation of some model algae. It is likely that many of these advances can be extended to industrially important algal species in the future, making it possible to use modified algae as cell factories for commercial biodiesel production. Nevertheless, many challenges yet remain open and should be addressed before profitable algal biodiesel become possible.

5. Conclusion and perspectives

Microalgae have the potential for the production of profitable biodiesel that can eventually replace petroleum based fuel. Algal-biodiesel production, however, is still too expensive to be commercialized as no algal strains are available possessing all the advantages for achieving high yields of oil via the economical open pond culturing system. Current studies are still limited to the selection of ideal microalgal species, optimization of mass cultivation, biomass harvest and oil extraction processes, which contribute to high costs of biodiesel production from microalgae. Future cost-saving efforts for algal-biofuel production should focus on the production technology of oil-rich algae via enhancing algal biology (in terms of biomass yield and oil content) and culture-system engineering coupled with advanced genetic engineering strategies and utilization of wastes. In addition to oils, microalgae also contain large amounts of proteins, carbohydrates, and other nutrients or bioactive compounds that can be potentially used as feeds, foods and pharmaceuticals. Integrating the production of such co-products with biodiesel is an appealing way to lowering the cost of algal-biofuel production.

6. Acknowledgment

This work was supported by a grant from Seed-Funding Programme for Basic Research of the University of Hong Kong.

7. References

Abdullah, A.Z.; Salamatinia, B.; Mootabadi, H.& Bhatia, S. (2009). Current status and policies on biodiesel industry in Malaysia as the world's leading producer of palm oil. *Energy Policy*, 37, 5440-5448.

- Abou-Shanab, R.A.I.; Hwang, J.-H.; Cho, Y.; Min, B. & Jeon, B.-H. (2011). Characterization of microalgal species isolated from fresh water bodies as a potential source for biodiesel production. *Applied Energy*, In Press, DOI: 10.1016/j.apenergy.2011.01.060.
- Afify, A.; Shalaby, E.A. & Shanab, S.M.M. (2010). Enhancement of biodiesel production from different species of algae. *Grasas Y Aceites*, 61, 416-422.
- Ahmad, A.L.; Yasin, N.H.M.; Derek, C.J.C. & Lim, J.K. (2011). Microalgae as a sustainable energy source for biodiesel production: A review. *Renewable and Sustainable Energy Reviews*, 15, 584-593.
- Araujo, G.S.; Matos, L.J.B.L.; Gonçalves, L.R.B.; Fernandes, F.A.N. & Farias, W.R.L. (2011). Bioprospecting for oil producing microalgal strains: Evaluation of oil and biomass production for ten microalgal strains. *Bioresource Technology*, In Press, DOI: 10.1016/j.biortech.2011.01.089.
- Banerjee, A. & Chakraborty, R. (2009). Parametric sensitivity in transesterification of waste cooking oil for biodiesel production--A review. *Resources, Conservation and Recycling*, 53, 490-497.
- Bigogno, C.; Khozin-Goldberg, I.; Boussiba, S.; Vonshak, A. & Cohen, Z. (2002). Lipid and fatty acid composition of the green oleaginous alga *Parietochloris incisa*, the richest plant source of arachidonic acid. *Phytochemistry*, 60, 497-503.
- Boussiba, S.; Vonshak, A.; Cohen, Z.; Avissar, Y. & Richmond, A. (1987). Lipid and biomass production by the halotolerant microalga *Nannochloropsis salina*. *Biomass*, 12, 37-47.
- Brennan, L. & Owende, P. (2010). Biofuels from microalgae--A review of technologies for production, processing, and extractions of biofuels and co-products. *Renewable and Sustainable Energy Reviews*, 14, 557-577.
- Brown, M.R.; Dunstan, G.A.; Norwood, S.J. & Miller, K.A. (1996). Effects of harvest stage and light on the biochemical composition of the diatom *Thalassiosira pseudonana*. *Journal of Phycology*, 32, 64-73.
- Canakci, M. (2007). The potential of restaurant waste lipids as biodiesel feedstocks. *Bioresource Technology*, 98, 183-190.
- Chaiklahan, R.; Chirasuwan, N.; Loha, V. & Bunnag, B. (2008). Lipid and fatty acids extraction from the cyanobacterium *Spirulina*. *Scienceasia*, 34, 299-305.
- Checkbiotech (2009) Massive increase in global biofuel production. Available from: http://bioenergy.checkbiotech.org/news/massive_increase_global_biofuel_production.
- Chen, C.-Y.; Yeh, K.-L.; Aisyah, R.; Lee, D.-J. & Chang, J.-S. (2011). Cultivation, photobioreactor design and harvesting of microalgae for biodiesel production: A critical review. *Bioresource Technology*, 102, 71-81.
- Chen, F. & Johns, M. (1991). Effect of C/N ratio and aeration on the fatty acid composition of heterotrophic *Chlorella sorokiniana*. *Journal of Applied Phycology*, 3, 203-209.
- Chen, G.-Q.; Jiang, Y. & Chen, F. (2008). Salt-induced alterations in lipid composition of diatom *Nitzschia laevis* (Bacillariophyceae). *Journal of Phycology*, 44, 1309-1314.
- Cheng, Y.; Zhou, W.; Gao, C.; Lan, K.; Gao, Y. & Wu, Q. (2009). Biodiesel production from Jerusalem artichoke (*Helianthus Tuberosus* L.) tuber by heterotrophic microalgae *Chlorella protothecoides*. *Journal of Chemical Technology & Biotechnology*, 84, 777-781.
- Chinnasamy, S.; Bhatnagar, A.; Hunt, R.W. & Das, K.C. (2010). Microalgae cultivation in a wastewater dominated by carpet mill effluents for biofuel applications. *Bioresource Technology*, 101, 3097-3105.

- Chisti, Y. (2007). Biodiesel from microalgae. *Biotechnology Advances*, 25, 294-306.
- Chisti, Y. (2008). Biodiesel from microalgae beats bioethanol. *Trends in Biotechnology*, 26, 126-31.
- Chiu, S.Y.; Kao, C.Y.; Chen, C.H.; Kuan, T.C.; Ong, S.C. & Lin, C.S. (2008). Reduction of CO₂ by a high-density culture of *Chlorella sp* in a semicontinuous photobioreactor. *Bioresource Technology*, 99, 3389-3396.
- Chiu, S.-Y.; Kao, C.-Y.; Tsai, M.-T.; Ong, S.-C.; Chen, C.-H. & Lin, C.-S. (2009). Lipid accumulation and CO₂ utilization of *Nannochloropsis oculata* in response to CO₂ aeration. *Bioresource Technology*, 100, 833-838.
- Converti, A.; Casazza, A.A.; Ortiz, E.Y.; Perego, P. & Del Borghi, M. (2009). Effect of temperature and nitrogen concentration on the growth and lipid content of *Nannochloropsis oculata* and *Chlorella vulgaris* for biodiesel production. *Chemical Engineering and Processing: Process Intensification*, 48, 1146-1151.
- Couto, R.M.; Simoes, P.C.; Reis, A.; Da Silva, T.L.; Martins, V.H. & Sanchez-Vicente, Y. (2010). Supercritical fluid extraction of lipids from the heterotrophic microalga *Cryptothecodinium cohnii*. *Engineering in Life Sciences*, 10, 158-164.
- da Cunha, M.E.; Krause, L.C.; Moraes, M.S.A.; Faccini, C.S.; Jacques, R.A.; Almeida, S.R.; Rodrigues, M.R.A. & Caramao, E.B. (2009). Beef tallow biodiesel produced in a pilot scale. *Fuel Process Technology*, 90, 570-575.
- Dahlqvist, A.; Stahl, U.; Lenman, M.; Banas, A.; Lee, M.; Sandager, L.; Ronne, H. & Stymne, H. (2000). Phospholipid : diacylglycerol acyltransferase: An enzyme that catalyzes the acyl-CoA-independent formation of triacylglycerol in yeast and plants. *Proceedings of the National Academy of Sciences*, 97, 6487-6492.
- Damiani, M.C.; Popovich, C.A.; Constenla, D. & Leonardi, P.I. (2010). Lipid analysis in *Haematococcus pluvialis* to assess its potential use as a biodiesel feedstock. *Bioresource Technology*, 101, 3801-3807.
- De la Hoz Siegler, H.; Ben-Zvi, A.; Burrell, R.E. & McCaffrey, W.C. (2011). The dynamics of heterotrophic algal cultures. *Bioresource Technology*, In Press, DOI: 10.1016/j.biortech.2011.01.081.
- de Oliveira, D.; Di Luccio, M.; Faccio, C.; Dalla Rosa, C.; Bender, J.; Lipke, N.; Amroginski, C.; Dariva, C. & de Oliveira, J. (2005). Optimization of alkaline transesterification of soybean oil and castor oil for biodiesel production. *Applied Biochemistry and Biotechnology*, 122, 553-560.
- Demirbas, A. (2002). Biodiesel from vegetable oils via transesterification in supercritical methanol. *Energy Conversion and Management*, 43, 2349-2356.
- Demirbas, A. (2008). *Biodiesel-a realistic fuel alternative for diesel engines*. Springer - Verlag, London.
- Demirbas, A. (2009). Progress and recent trends in biodiesel fuels. *Energy Conversion and Management*, 50, 14-34.
- Demirbas, A. (2010). Use of algae as biofuel sources. *Energy Conversion and Management*, 51, 2738-2749.
- Dias, J.M.; Alvim-Ferraz, M.C.M. & Almeida, M.F. (2009). Production of biodiesel from acid waste lard. *Bioresource Technology*, 100, 6355-6361.
- Diaz-Felix, W.; Riley, M.R.; Zimmt, W. & Kazz, M. (2009). Pretreatment of yellow grease for efficient production of fatty acid methyl esters. *Biomass and Bioenergy*, 33, 558-563.

- D'Oca, M.G.M.; Viêgas, C.V.; Lemões, J.S.; Miyasaki, E.K.; Morón-Villarreyes, J.A.; Primel, E.G. & Abreu, P.C. (2011). Production of FAMES from several microalgal lipidic extracts and direct transesterification of the *Chlorella pyrenoidosa*. *Biomass and Bioenergy*, In Press, DOI: 10.1016/j.biombioe.2010.12.047.
- Dunahay, T.G.; Jarvis, E.E. & Roessler, P.G. (1995). Genetic transformation of the diatoms *Cyclotella cryptica* and *Navicula saprophila*. *Journal of Phycology*, 31, 1004-1012.
- Easterling, E.R.; French, W.T.; Hernandez, R. & Licha, M. (2009). The effect of glycerol as a sole and secondary substrate on the growth and fatty acid composition of *Rhodotorula glutinis*. *Bioresource Technology*, 100, 356-361.
- Ethier, S.; Woisard, K.; Vaughan, D. & Wen, Z. (2011). Continuous culture of the microalgae *Schizochytrium limacinum* on biodiesel-derived crude glycerol for producing docosahexaenoic acid. *Bioresource Technology*, 102, 88-93.
- Fan, K.-W.; Jiang, Y.; Faan, Y.-W. & Chen, F. (2007). Lipid characterization of Mangrove thraustochytrid - *Schizochytrium mangrovei*. *Journal of Agricultural and Food Chemistry*, 55, 2906-2910.
- Feng, Y.; Li, C. & Zhang, D. (2011). Lipid production of *Chlorella vulgaris* cultured in artificial wastewater medium. *Bioresource Technology*, 102, 101-105.
- Fukuda, H.; Kondo, A. & Noda, H. (2001). Biodiesel fuel production by transesterification of oils. *Journal of Bioscience and Bioengineering*, 92, 405-416.
- Fulke, A.B.; Mudliar, S.N.; Yadav, R.; Shekh, A.; Srinivasan, N.; Ramanan, R.; Krishnamurthi, K.; Devi, S.S. & Chakrabarti, T. (2010). Bio-mitigation of CO₂, calcite formation and simultaneous biodiesel precursors production using *Chlorella* sp. *Bioresource Technology*, 101, 8473-8476.
- Gao, C.; Zhai, Y.; Ding, Y. & Wu, Q. (2010). Application of sweet sorghum for biodiesel production by heterotrophic microalga *Chlorella protothecoides*. *Applied Energy*, 87, 756-761.
- Gerpen, J.V. (2005). Biodiesel processing and production. *Fuel Process Technology*, 86, 1097-1107.
- Gouveia, L.; Marques, A.; da Silva, T. & Reis, A. (2009). *Neochloris oleabundans* UTEX #1185: a suitable renewable lipid source for biofuel production. *Journal of Industrial Microbiology and Biotechnology*, 36, 821-826.
- Gouveia, L. & Oliveira, A. (2009). Microalgae as a raw material for biofuels production. *Journal of Industrial Microbiology and Biotechnology*, 36, 269-274.
- Graef, G.; LaVallee, B.J.; Tenopir, P.; Tat, M.; Schweiger, B.; Kinney, A.J.; Gerpen, J.H.V. & Clemente, T.E. (2009). A high-oleic-acid and low-palmitic-acid soybean: agronomic performance and evaluation as a feedstock for biodiesel. *Plant Biotechnology Journal*, 7, 411-421.
- Graham, L.E.; Wilcox, L.W. & Graham, J. (2009). *Algae*. 2nd ed. Benjamin Cummings, San Francisco, CA.
- Greenwell, H.C.; Laurens, L.M.L.; Shields, R.J.; Lovitt, R.W. & Flynn, K.J. (2010). Placing microalgae on the biofuels priority list: a review of the technological challenges. *Journal of The Royal Society Interface*, 7, 703-726.
- Griffiths, M. & Harrison, S. (2009). Lipid productivity as a key characteristic for choosing algal species for biodiesel production. *Journal of Applied Phycology*, 21, 493-507.

- Guedes, A.; Meireles, L.; Amaro, H. & Malcata, F. (2010). Changes in lipid class and fatty acid composition of cultures of *Pavlova lutheri*, in response to light intensity. *Journal of the American Oil Chemists' Society*, 87, 791-801.
- Hawash, S.; Kamal, N.; Zaher, F.; Kenawi, O. & Diwani, G.E. (2009). Biodiesel fuel from *Jatropha* oil via non-catalytic supercritical methanol transesterification. *Fuel*, 88, 579-582.
- Herrero, M.; Mendiola, J.A.; Cifuentes, A. & Ibáñez, E. (2010). Supercritical fluid extraction: Recent advances and applications. *Journal of Chromatography A*, 1217, 2495-2511.
- Hill, J.; Nelson, E.; Tilman, D.; Polasky, S. & Tiffany, D. (2006). Environmental, economic, and energetic costs and benefits of biodiesel and ethanol biofuels. *Proceedings of the National Academy of Sciences*, 103, 11206-11210.
- Ho, S.-H.; Chen, W.-M. & Chang, J.-S. (2010). *Scenedesmus obliquus* CNW-N as a potential candidate for CO₂ mitigation and biodiesel production. *Bioresource Technology*, 101, 8725-8730.
- Hsieh, C.-H. & Wu, W.-T. (2009). Cultivation of microalgae for oil production with a cultivation strategy of urea limitation. *Bioresource Technology*, 100, 3921-3926.
- Hu, C.; Li, M.; Li, J.; Zhu, Q. & Liu, Z. (2008a). Variation of lipid and fatty acid compositions of the marine microalga *Pavlova viridis* (Prymnesiophyceae) under laboratory and outdoor culture conditions. *World Journal of Microbiology and Biotechnology*, 24, 1209-1214.
- Hu, Q. (2004). Environmental effects on cell composition. in: *Handbook of microalgal culture*, (Ed.) Richmond, A., Blackwell. Oxford, pp. 83-93.
- Hu, Q.; Sommerfeld, M.; Jarvis, E.; Ghirardi, M.; Posewitz, M.; Seibert, M. & Darzins, A. (2008b). Microalgal triacylglycerols as feedstocks for biofuel production: perspectives and advances. *Plant Journal*, 54, 621-639.
- Huang, G.; Chen, F.; Wei, D.; Zhang, X. & Chen, G. (2010). Biodiesel production by microalgal biotechnology. *Applied Energy*, 87, 38-46.
- Huerlimann, R.; de Nys, R. & Heimann, K. (2010). Growth, lipid content, productivity, and fatty acid composition of tropical microalgae for scale-Up production. *Biotechnology and Bioengineering*, 107, 245-257.
- Jain, S. & Sharma, M.P. (2010). Prospects of biodiesel from *Jatropha* in India: A review. *Renewable and Sustainable Energy Reviews*, 14, 763-771.
- James, G.O.; Hocart, C.H.; Hillier, W.; Chen, H.; Kordbacheh, F.; Price, G.D. & Djordjevic, M.A. (2011). Fatty acid profiling of *Chlamydomonas reinhardtii* under nitrogen deprivation. *Bioresource Technology*, 102, 3343-3351.
- Kawachi, M.; Inouye, I.; Honda, D.; O'Kelly, C.J.; Bailey, J.C.; Bidigare, R.R. & Andersen, R.A. (2002). The Pinguiphyceae classis nova, a new class of photosynthetic stramenopiles whose members produce large amounts of omega-3 fatty acids. *Phycological Research*, 50, 31-47.
- Khozin-Goldberg, I.; Bigogno, C.; Shrestha, P. & Cohen, Z. (2002). Nitrogen starvation induces the accumulation of arachidonic acid in the freshwater green alga *Parietochloris incisa* (trebuxiophyceae). *Journal of Phycology*, 38, 991-994.
- Khozin-Goldberg, I. & Cohen, Z. (2006). The effect of phosphate starvation on the lipid and fatty acid composition of the fresh water eustigmatophyte *Monodus subterraneus*. *Phytochemistry*, 67, 696-701.

- Knothe, G. (2005b). Dependence of biodiesel fuel properties on the structure of fatty acid alkyl esters. *Fuel Process Technology*, 86, 1059-1070.
- Knothe, G. (2005a). Introduction: what is biodiesel. in: *The biodiesel handbook*, (Eds.) Knothe, G.; Gerpen, J.V.& Krahl, J., AOCs Press. Champaign, pp. 1-3.
- Knothe, G. (2008). "Designer" biodiesel: Optimizing fatty ester composition to improve fuel properties. *Energy & Fuel*, 22, 1358-1364.
- Knothe, G. (2009). Improving biodiesel fuel properties by modifying fatty ester composition. *Energy and Environmental Science*, 2, 759-766.
- Lee, R.E. (2008). *Phycology*. Forth ed. Cambridge University Press, Cambridge.
- Levine, R.B.; Costanza-Robinson, M.S.& Spatafora, G.A. (2011). *Neochloris oleoabundans* grown on anaerobically digested dairy manure for concomitant nutrient removal and biodiesel feedstock production. *Biomass and Bioenergy*, In Press, DOI: 10.1016/j.biombioe.2010.08.035.
- Li, M.; Gong, R.; Rao, X.; Liu, Z.& Wang, X. (2005). Effects of nitrate concentration on growth and fatty acid composition of the marine microalga *Pavlova viridis* (Prymnesiophyceae). *Annals of Microbiology*, 55, 51-55.
- Li, X.; Hu, H.-Y.; Gan, K.& Sun, Y.-X. (2010a). Effects of different nitrogen and phosphorus concentrations on the growth, nutrient uptake, and lipid accumulation of a freshwater microalga *Scenedesmus* sp. *Bioresource Technology*, 101, 5494-5500.
- Li, Y.; Chen, Y.-F.; Chen, P.; Min, M.; Zhou, W.; Martinez, B.; Zhu, J.& Ruan, R. (2011b). Characterization of a microalga *Chlorella* sp. well adapted to highly concentrated municipal wastewater for nutrient removal and biodiesel production. *Bioresource Technology*, In Press, DOI: 10.1016/j.biortech.2011.01.091.
- Li, Y.; Han, D.; Hu, G.; Sommerfeld, M.& Hu, Q. (2010b). Inhibition of starch synthesis results in overproduction of lipids in *Chlamydomonas reinhardtii*. *Biotechnology and Bioengineering*, 107, 258-268.
- Li, Y.; Han, D.; Sommerfeld, M.& Hu, Q. (2011a). Photosynthetic carbon partitioning and lipid production in the oleaginous microalga *Pseudochlorococcum* sp. (Chlorophyceae) under nitrogen-limited conditions. *Bioresource Technology*, 102, 123-129.
- Li, Y.; Horsman, M.; Wang, B.; Wu, N.& Lan, C. (2008). Effects of nitrogen sources on cell growth and lipid accumulation of green alga *Neochloris oleoabundans*. *Appl Microbiol Biotechnol*, 81, 629-636.
- Liang, Y.; Sarkany, N.& Cui, Y. (2009). Biomass and lipid productivities of *Chlorella vulgaris* under autotrophic, heterotrophic and mixotrophic growth conditions. *Biotechnology Letters*, 31, 1043-1049.
- Lin, Q.& Lin, J. (2011). Effects of nitrogen source and concentration on biomass and oil production of a *Scenedesmus rubescens* like microalga. *Bioresource Technology*, 102, 1615-1621.
- Lin, Y.-H.; Chang, F.-L.; Tsao, C.-Y.& Leu, J.-Y. (2007). Influence of growth phase and nutrient source on fatty acid composition of *Isochrysis galbana* CCMP 1324 in a batch photoreactor. *Biochemical Engineering Journal*, 37, 166-176.
- Liu, J.; Huang, J.; Fan, K.W.; Jiang, Y.; Zhong, Y.; Sun, Z.& Chen, F. (2010). Production potential of *Chlorella zofingiensis* as a feedstock for biodiesel. *Bioresource Technology*, 101, 8658-8663.

- Liu, J.; Huang, J.; Sun, Z.; Zhong, Y.; Jiang, Y. & Chen, F. (2011). Differential lipid and fatty acid profiles of photoautotrophic and heterotrophic *Chlorella zofingiensis*: Assessment of algal oils for biodiesel production. *Bioresource Technology*, 102, 106-110.
- Liu, X.-J.; Jiang, Y. & Chen, F. (2005). Fatty acid profile of the edible filamentous cyanobacterium *Nostoc flagelliforme* at different temperatures and developmental stages in liquid suspension culture. *Process Biochemistry*, 40, 371-377.
- Liu, Z.-Y.; Wang, G.-C. & Zhou, B.-C. (2008). Effect of iron on growth and lipid accumulation in *Chlorella vulgaris*. *Bioresour Technol*, 99, 4717-4722.
- Mandal, S. & Mallick, N. (2009). Microalga *Scenedesmus obliquus* as a potential source for biodiesel production. *Applied Microbiology and Biotechnology*, 84, 281-291.
- Mansour, M.P.; Volkman, J.K. & Blackburn, S.I. (2003). The effect of growth phase on the lipid class, fatty acid and sterol composition in the marine dinoflagellate, *Gymnodinium* sp. in batch culture. *Phytochemistry*, 63, 145-153.
- Mata, T.M.; Martins, A.A. & Caetano, N.S. (2010). Microalgae for biodiesel production and other applications: A review. *Renewable and Sustainable Energy Reviews*, 14, 217-232.
- Matsumoto, M.; Sugiyama, H.; Maeda, Y.; Sato, R.; Tanaka, T. & Matsunaga, T. (2010). Marine diatom, *Navicula* sp. strain JPCC DA0580 and marine green alga, *Chlorella* sp. strain NKG400014 as potential sources for biodiesel production. *Applied Biochemistry and Biotechnology*, 161, 483-490.
- Meher, L.C.; Naik, S.N.; Naik, M.K. & Dalai, A.K. (2008). Biodiesel production using karanja (*Pongamia pinnata*) and jatropha (*Jatropha curcas*) seed oil. in: *Handbook of plant-based biofuels*, (Ed.) Pandey, A., CRC Press. Boca Raton, FL pp. 255-266.
- Miao, X. & Wu, Q. (2006). Biodiesel production from heterotrophic microalgal oil. *Bioresource Technology*, 97, 841-846.
- Moazami, N.; Ranjbar, R.; Ashori, A.; Tangestani, M. & Nejad, A.S. (2011). Biomass and lipid productivities of marine microalgae isolated from the Persian Gulf and the Qeshm Island. *Biomass and Bioenergy*, In Press, DOI: 10.1016/j.biombioe.2011.01.039.
- Molina Grima, E.; Belarbi, E.H.; Acien Fernández, F.G.; Robles Medina, A. & Chisti, Y. (2003). Recovery of microalgal biomass and metabolites: process options and economics. *Biotechnology Advances*, 20, 491-515.
- Mussnug, J.H.; Klassen, V.; Schlüter, A. & Kruse, O. (2010). Microalgae as substrates for fermentative biogas production in a combined biorefinery concept. *Journal of Biotechnology*, 150, 51-56.
- Nakpong, P. & Wootthikanokkhan, S. (2010). High free fatty acid coconut oil as a potential feedstock for biodiesel production in Thailand. *Renewable Energy*, 35, 1682-1687.
- Napolitano, G.E. (1994). The relationship of lipids with light and chlorophyll measurements in freshwater algae and periphyton. *Journal of Phycology*, 30, 943-950.
- Oh, S.H.; Han, J.G.; Kim, Y.; Ha, J.H.; Kim, S.S.; Jeong, M.H.; Jeong, H.S.; Kim, N.Y.; Cho, J.S.; Yoon, W.B.; Lee, S.Y.; Kang, D.H. & Lee, H.Y. (2009). Lipid production in *Porphyridium cruentum* grown under different culture conditions. *Journal of Bioscience and Bioengineering*, 108, 429-434.
- Oner, C. & Altun, S. (2009). Biodiesel production from inedible animal tallow and an experimental investigation of its use as alternative fuel in a direct injection diesel engine. *Applied Energy*, 86, 2114-2120.

- Órpez, R.; Martínez, M.E.; Hodaifa, G.; El Yousfi, F.; Jbari, N. & Sánchez, S. (2009). Growth of the microalga *Botryococcus braunii* in secondarily treated sewage. *Desalination*, 246, 625-630.
- Ota, M.; Kato, Y.; Watanabe, H.; Watanabe, M.; Sato, Y.; Smith Jr, R.L. & Inomata, H. (2009). Fatty acid production from a highly CO₂ tolerant alga, *Chlorococcum littorale*, in the presence of inorganic carbon and nitrate. *Bioresource Technology*, 100, 5237-5242.
- Pahl, S.L.; Lewis, D.M.; Chen, F. & King, K.D. (2010). Heterotrophic growth and nutritional aspects of the diatom *Cyclotella cryptica* (Bacillariophyceae): Effect of some environmental factors. *Journal of Bioscience and Bioengineering*, 109, 235-239.
- Patil, P.D. & Deng, S. (2009). Optimization of biodiesel production from edible and non-edible vegetable oils. *Fuel*, 88, 1302-1306.
- Phan, A.N. & Phan, T.M. (2008). Biodiesel production from waste cooking oils. *Fuel*, 87, 3490-3496.
- Piorreck, M. & Pohl, P. (1984). Preparatory experiments for the axenic mass-culture of microalgae. 2. Formation of biomass, total protein, chlorophylls, lipids and fatty-acids in green and blue green-algae during one growth-phase. *Phytochem*, 23, 217-223.
- Pruvost, J.; Van Vooren, G.; Cogne, G. & Legrand, J. (2009). Investigation of biomass and lipids production with *Neochloris oleoabundans* in photobioreactor. *Bioresource Technology*, 100, 5988-5995.
- Pruvost, J.; Van Vooren, G.; Le Gouic, B.; Couzinet-Mossion, A. & Legrand, J. (2011). Systematic investigation of biomass and lipid productivity by microalgae in photobioreactors for biodiesel application. *Bioresource Technology*, 102, 150-158.
- Pushparaj, B.; Buccioni, A.; Paperi, R.; Piccardi, R.; Ena, A.; Carlozzi, P. & Sili, C. (2008). Fatty acid composition of Antarctic cyanobacteria. *Phycologia*, 47, 430-434.
- Queiroz, M.I.; Hornes, M.O.; da Silva-Manetti, A.G. & Jacob-Lopes, E. (2011). Single-cell oil production by cyanobacterium *Aphanothece microscopica* Nägeli cultivated heterotrophically in fish processing wastewater. *Applied Energy*, In Press, DOI: 10.1016/j.apenergy.2010.12.047.
- Rabbani, S.; Beyer, P.; Lintig, J.v.; Huguency, P. & Kleinig, H. (1998). Induced beta -carotene synthesis driven by triacylglycerol deposition in the unicellular alga *Dunaliella bardawil*. *Plant Physiology*, 116, 1239-1248.
- Radakovits, R.; Jinkerson, R.E.; Darzins, A. & Posewitz, M.C. (2010). Genetic Engineering of Algae for Enhanced Biofuel Production. *Eukaryotic Cell*, 9, 486-501.
- Ranganathan, S.V.; Narasimhan, S.L. & Muthukumar, K. (2008). An overview of enzymatic production of biodiesel. *Bioresource Technology*, 99, 3975-3981.
- Rashid, U. & Anwar, F. (2008). Production of biodiesel through optimized alkaline-catalyzed transesterification of rapeseed oil. *Fuel*, 87, 265-273.
- REN21. (2010) Renewables Global Status Report. Available from: http://www.ren21.net/Portals/97/documents/GSR/REN21_GSR_2010_full_revised%20Sept2010.pdf.
- Renaud, S.M.; Thinh, L.-V.; Lambrinidis, G. & Parry, D.L. (2002). Effect of temperature on growth, chemical composition and fatty acid composition of tropical Australian microalgae grown in batch cultures. *Aquaculture*, 211, 195-214.
- Rodolfi, L.; Zittelli, G.C.; Bassi, N.; Padovani, G.; Biondi, N.; Bonini, G. & Tredici, M.R. (2009). Microalgae for oil: Strain selection, induction of lipid synthesis and outdoor

- mass cultivation in a low-cost photobioreactor. *Biotechnology and Bioengineering*, 102, 100-112.
- Roessler, P.G. (1988). Changes in the activities of various lipid and carbohydrate biosynthetic enzymes in the diatom *Cyclotella cryptica* in response to silicon deficiency. *Archives of Biochemistry and Biophysics*, 267, 521-528.
- Ross, A.B.; Jones, J.M.; Kubacki, M.L. & Bridgeman, T. (2008). Classification of macroalgae as fuel and its thermochemical behaviour. *Bioresource Technology*, 99, 6494-6504.
- Saha, S.K.; Uma, L. & Subramanian, G. (2003). Nitrogen stress induced changes in the marine cyanobacterium *Oscillatoria willei* BDU 130511. *FEMS Microbiology Ecology*, 45, 263-72.
- Sahoo, P.K. & Das, L.M. (2009). Process optimization for biodiesel production from Jatropha, Karanja and Polanga oils. *Fuel*, 88, 1588-1594.
- Saka, S. & Kusdiana, D. (2001). Biodiesel fuel from rapeseed oil as prepared in supercritical methanol. *Fuel*, 80, 225-231.
- Sato, N.; Hagio, M.; Wada, H. & Tsuzuki, M. (2000). Environmental effects on acidic lipids of thylakoid membranes. in: *Recent advances in biochemistry of plant lipids*, (Eds.) Harwood, J.L. & Quinn, P.J., Portland Press. London, pp. 912-914.
- Shafiee, S. & Topal, E. (2009). When will fossil fuel reserves be diminished? *Energy Policy*, 37, 181-189.
- Sheehan, J.; Dunahay, T.; Benemann, J. & Roessler, P. 1998. A look back at the U.S. Department of Energy's aquatic species programme - Biodiesel from algae, Report No. NREL/TP-580-24190; National Renewable Energy Laboratory: Golden, CO.
- Singhania, R.R.; Parameswaran, B. & Pandey, A. (2008). Plant-based biofuels: an introduction. in: *Handbook of plant-based biofuels*, (Ed.) Pandey, A., CRC Press. Boca Raton, FL, pp. 3-12.
- Sobczuk, T.M. & Chisti, Y. (2010). Potential fuel oils from the microalga *Choricystis minor*. *Journal of Chemical Technology and Biotechnology*, 85, 100-108.
- Solovchenko, A.; Khozin-Goldberg, I.; Didi-Cohen, S.; Cohen, Z. & Merzlyak, M. (2008). Effects of light intensity and nitrogen starvation on growth, total fatty acids and arachidonic acid in the green microalga *Parietochloris incisa*. *Journal of Applied Phycology*, 20, 245-251.
- Somerville, C. (1995). Direct tests of the role of membrane lipid composition in low-temperature-induced photoinhibition and chilling sensitivity in plants and cyanobacteria. *Proceedings of the National Academy of Sciences*, 92, 6215-8.
- Sukenik, A.; Carmeli, Y. & Berner, T. (1989). Regulation of fatty acid composition by irradiance level in the eustigmatophyte *Nannochloropsis* sp. *Journal of Phycology*, 25, 686-692.

Eco-Physiological Barriers and Technological Advances for Biodiesel Production from Microalgae

Simrat Kaur¹, Mohan C. Kalita², Ravi B. Srivastava³ and Charles Spillane¹

¹*Genetics and Biotechnology Laboratory, Botany and Plant Science,
C306 Aras de Brun, National University of Ireland Galway,*

²*Department of Biotechnology, Gauhati University, Assam,*

³*Defence Institute of High Altitude Research, Defence Research & Development
Organisation, Leh (Jammu and Kashmir),*

¹*Ireland*

^{2,3}*India*

1. Introduction

The combination of diminishing fossil fuel reserves (peak oil) and increasing prices of diesel provide a challenge to the majority of nations in terms of national energy security and ensuring sustainable energy supplies. Such pressing challenges have provided the impetus for an acceleration of renewable energy research to identify novel and innovative liquid biofuels for the future (IEA 2011). Any such liquid biofuels from renewable resources will need to have a lower environmental footprint than fossil fuel derived liquid biofuels in order to meet key sustainability criteria (Nuffield 2011). The most abundant available natural renewable resource on planet earth is solar energy. Photosynthetic organisms such as plants, algae (macro- and micro-algae) and some bacteria have been selected through evolution to convert solar energy to storable forms of energy. Such photosynthetic organisms can constitute a renewable resource which can effectively harvest and convert solar energy to a variety of energy-dense biofuels. In the case of microalgae, at least US\$ 300 million has been committed to facilitate phycology research on bioprospecting microalgal diversity and evaluation of the feasibility of different microalgal species and strains for biofuels production (Sheehan et al., 1998). The use of oil crops such as palm, soy, and oilseed rape as feedstocks for biodiesel production has provided the basis for the first generation of biofuels. However, the cultivation of plants on arable land for biofuel production can compete with the use of the same land for food and animal feed production – the so called “food vs fuel” land-use competition dilemma. In addition, biofuel crops also have significant water and nutrient requirements which can adversely affect their sustainability when Life Cycle Analysis (LCA) is conducting across their value chain. For instance, microalgal production systems reliant on dwindling freshwater supplies will face sustainability problems if they are scaled up (Wigmosta et al., 2011). As a result microalgal systems based on saltwater or waste water are likely to be more sustainable. One approach being pursued for circumventing the ‘food vs fuel’ dilemma associated with first generation

biofuel involves biological processing of lignocellulosic biomass as the basis for development of second generation biofuel systems. The development of commercial-scale efficient conversion technologies for exploitation of biological wastes as an obvious source for biofuel generation is a major focus of research and development efforts associated with this generation of biofuel. One of the third generation biofuels under development aims to exploit the photosynthetic capability of microalgae for the conversion of solar energy into energy-dense biomass. A major advantage of microalgae over the use of crop biomass for biodiesel production is the lower land area requirements for production of an equivalent amount of fuel. As understanding of microalgal genomes and biochemistry increases, opportunities are emerging for development of fourth generation biofuels where metabolic engineering of microbes leads to more effective domestication of microalgae for biofuel production. However, at present the commercial production of biofuels from microalgae is limited by a lack of effective systems for biomass production, harvesting, extraction, and recovery of oils that can economically integrate all operational units from growth through to biofuel product recovery. In this chapter, we discuss the limitations of individual operational units in the context of efforts underway to establish fourth generation microalgal biofuels that are economically and environmentally sustainable.

2. Microalgae biomass generation

2.1 Open cultivation

Large scale microalgal biomass production can be achieved either through open pond cultivation under natural sunlight or under the controlled conditions of a photobioreactor. In the USA, the history of mass production of microalgae dates back at least to 1953 with the production of *Scenedesmus* species in Washington. Many systems for cultivating microalgae on a large scale have been suggested in many countries including the USA, Germany, Japan, Israel, the UK, the Czech Republic and others. Typically, microalgae are first grown in inorganic nutrients and then, in a second phase, are cultivated is done using waste water streams.

Commercial cultivation of microalgae can be done in a range of different ways including (a) open cultivation using natural sunlight, (b) closed cultivation using natural light and (c) closed cultivation using artificial light (in photobioreactors). Each of these systems has advantages and disadvantages, and the choice of system depends on the degree of parameter control needed to produce the desired product and on the value of the end-product (Apt and Behrens, 1999). The most commonly used artificial open pond systems consist of large shallow ponds, tanks, circular ponds and raceway ponds (Ugwu et al., 2008). The construction and operation costs of such open cultivation systems are considerably less but are challenging to operate on a year round basis due to seasonal climatic variations. While open pond culture is cheaper than culture in closed photobioreactors (Borowitzka 1999), it is currently limited to a relatively small number of microalgal species. Rectangular ponds with a paddle wheel (raceway ponds) are the most widely used for the production of *Spirulina* sp., *Dunaliella salina* and *Haematococcus* sp. and currently represent the most efficient design for the large scale culture of most species of microalgae. Individual ponds are typically up to 1 ha in area, with an average depth of about 20- 30 cm (Andersen 2005). The need to provide adequate light to the algal cells and maintaining an adequate water depth for mixing of the microalgae are important considerations for determining the pond depth. The diurnal natural light cycle results in the exposure of microalgae to limiting,

saturating and over-saturating light conditions. High irradiances throughout the year and moderate temperatures are optimal for outdoor microalgae cultivation. For example, the geographical location of southern Spain with an average of 10-12 hours of sunlight per day, and a mean solar irradiance ranging from 400 $\mu\text{mol photons m}^{-2}\text{s}^{-1}$ during winter to 1800 $\mu\text{mol photons m}^{-2}\text{s}^{-1}$ is considered highly suitable for outdoor cultivation of microalgae. The maximal areal productivity of microalgae in outdoor conditions ranges from 20 to 30 $\text{gm}^{-2}\text{d}^{-1}$ (Cuaresma et al., 2011). To date, light-to-biomass conversion efficiencies of 1-4 % have been achieved for microalgae grown in conventional open pond cultivation systems. Because the scaling-up of microalgal biomass production in open raceway ponds is relatively easy, such systems are primarily considered for commercial applications. However, differences in weather variables such as solar irradiance, rainfall, and temperature significantly affect prospects for open cultivation of microalgae at different geographical locations. Temperature influences the rate of various reactions of photosynthesis (Raven, 1988). Therefore, microalgae exhibit an optimal growth within a narrow temperature range and die above a certain threshold temperature (Béchet et al., 2011). In addition, temperature is an important factor that affects the rate of evaporation from shallow algal ponds. In addition to changing the physical environment of open ponds, rainfall can lead to microbial contamination that inhibits microalgal growth (Hase et al., 2000).

The paddle wheels installed in open ponds are used to circulate the water, while compressed air can be introduced into the bottom of a pond to agitate the water, bringing microalgae from the lower levels upwards. Raceway channels are typically built in concrete or compacted earth, and are often lined with white plastic. During daylight, the microalgal culture is fed continuously in front of the paddlewheel where the flow begins. The biomass is harvested behind the paddlewheel, on completion of the circulation loop. The paddlewheel operates continuously to prevent sedimentation and flocculation (Chisti, 2007). The largest raceway-based biomass production facility currently occupies an area of 440,000 m^2 (Spolaore et al., 2006). This facility is owned by Earthrise Nutritional (www.earthrise.com) and is used to produce cyanobacterial biomass for food. In India, Pary Nutraceuticals (part of the Chennai-based Murugappa group) has been focusing on microalgal research and development and are commercially producing *Spirulina* for nutraceuticals.


2.2 Closed cultivation systems for microalgae

Several different closed systems using natural sunlight have been described for microalgae (Richmond et al. 1993, Molina Grima et al., 1995, Spektorova et al., 1997). In such systems, microalgae are grown in transparent glass or plastic vessels, and the vessels are placed under natural illumination. A higher surface to volume ratio is provided, so microalgal cell densities are often higher than in open ponds. However, these systems are also subject to variations in light intensity and temperature that make cultivation reproducibility problematic. In addition, removal of oxygen from the culture and the provision of adequate temperature control (especially if energy is required for cooling) pose a major problem with such closed systems. Large scale indoor cultivation using highly-controlled photobioreactors or fermentors have also been used successfully for microalgal biomass production. The wide range of different types of closed photobioreactors (PBRs) include vertical-column, flat-plate and tubular PBRs (Ugwu et al., 2008). These provide the ability to control and optimize culture parameters, and as a result such photobioreactors are suitable for culturing many different species of microalgae. The basic features which must be considered when designing a photobioreactor are: source of light, churning rate of algae (to avoid biomass

sedimentation and for uniform availability of nutrients and light), material for construction, CO₂ supply, and removal of O₂, pH and temperature control (Kaur et al., 2010). Whether, closed or open systems will be optimal for commercial cultivation of different species (or strains) of microalgae is difficult to determine. However, it is clear that photobioreactors will play a critical role to feed open ponds with a high-cell-density unialgal inoculum (Cheng et al., 2011).

3. Thermodynamic efficiency of photosynthesis in microalgae

Photosynthesis is a chemical reaction governed by the laws of thermodynamics. Assuming a microalgal cell as 'boundary' and the process of photosynthesis as 'system', then according to the law of thermodynamics, the two kinds of work associated with this chemical reaction are electrical work and work of expansion. In a biological system such as microalgae, the production of ATP derived by the transfer of charges across the biofluidic membranes can be called electrical work. The growth or increase in size of cell and cellular components (including oil bodies) is the 'work of expansion'. In the very familiar photosynthetic reaction (Albarrán-Zavala & Angulo-Brown, 2007);



$$\Delta G^0 = 2880.31 \text{ kJ/mol}_{\text{C}_6\text{H}_{12}\text{O}_6} \quad \text{at } \lambda = 680 \text{ nm}$$

3.1 Photosynthetic conversion efficiency

In outdoor cultivation systems, the microalgal biomass productivity derived through photosynthesis depends on the solar energy input. The estimated yearly average solar energy density, including both direct beam radiation and diffuse scattered radiation is 10,038 MJ/m²year. To account for non-sunny weather conditions, a more realistic theoretical maximum solar energy density is obtained after reducing this value by 10%, which corresponds to a value of 9034 MJ/m²year. However, the actual value will exhibit temporal and spatial variation depending on the geographical location and will generally be lower (Cooney et al., 2011). The fraction of the solar energy spectrum (S_{Earth} ~ 9034 MJ/m²year) is further reduced by 45% to calculate the value of photosynthetically active radiation (PAR) that supports photosynthesis (S_{EarthPAR} ~ 4065 MJ/m²year). PAR is expressed in terms of photon flux as it reaches surface of microalgal cells in the form of photons, the energy of which varies inversely with the wavelength. The upper theoretical limit for the average PAR spectrum photon flux energy (E_{MaxAvePAR}) is 0.2253 MJ/mol that corresponds to λ531 nm (green) (Weyer et al., 2009). Hence, the available photon flux reaching the earth surface and which is available for photosynthesis is calculated by the following formula (Cooney et al., 2011):

$$\text{PF}_{\text{PAR}} = \frac{S_{\text{EarthPAR}} \sim 4065 \text{ MJ} / \text{m}^2 / \text{year}}{E_{\text{MaxAvePAR}} \sim 0.2253 \text{ MJ} / \text{mol photon}} = 18,043 \text{ moles photons} / \text{m}^2 \text{ year}$$

3.2 Maximum theoretical photosynthetic efficiency

The most cited values for maximum photosynthetic efficiencies in microalgae are in the range of 17-23% (Gordon & Polle 2007, Zemke et al., 2010). Cooney and coworkers (2011)

illustrate how to obtain the maximum theoretical value of photosynthetic efficiency from the available PF_{PAR} of 18,043 moles photons/ m^2 year. The theoretical maximum is calculated by considering both photon transmission (η_{PTE}) and photon conversion efficiencies (η_{PUE}) as 100%. Thus, according to the following equation:

$$\text{Photons utilized} = PF_{PAR} \times \eta_{PTE} \times \eta_{PUE} = 18,043 \text{ moles photons}/m^2 \text{ year} \times 1 \times 1$$

In a microalgal cell, these photons power the photosynthetic production of carbohydrates (CH_2O) which have an average energy content of 0.4825MJ/mole (Weyer et al., 2009). On average 10 photons are required to derive one mole of CH_2O . Hence, the total energy consumed during the photosynthetic conversion reaction is obtained as follows (Cooney et al 2011).

$$E_{CARB} = \frac{(18,043 \text{ moles photons} / m^2 \text{ year} \times 1 \times 1) \cdot (0.4825 \text{ MJ} / \text{mole})}{10} = 871 \text{ MJ} / m^2 \text{ year}$$

The estimated total photosynthetic efficiency during the conversion of PAR to microalgal biomass is calculated by dividing E_{CARB} (871 MJ/ m^2 year) and $S_{EarthPAR}$ (4065 MJ/ m^2 year), assuming that bioconversion of carbohydrates is 100% efficient. This gives a value of 21.4%, which is stated as the overall maximum theoretical photosynthetic efficiency relative to PAR. High lipid productivity depends on both the microalgal biomass areal productivity and the lipid content that can be generated from the microalgal strain. The lipid productivity is the most important factor influencing the cost of biodiesel production. High lipid content microalgal species and strains also favor the efficiency of biomass processing during oil extraction.

3.3 Technological innovations in illumination sources

3.3.1 Light Emitting Diodes (LEDs)

A light source with narrow spectral output that overlaps the photosynthetic absorption spectrum improves the energy conversion as the emission of light at unusable frequencies is eliminated. Light-emitting diodes (LEDs) are the only light source that currently meet this criterion. LEDs have the ability to produce high light levels with low radiant heat output and maintain useful light output for years. Thus, LEDs can have a very significantly longer life of 100,000 h as compared to 8000 h of fluorescent lights. These advantages make LEDs ideal for microalgal growth in controlled environments of growth chambers. The optimal wavelength conditions will vary from species to species of microalgae (Chen et al 2011). For example, the highest specific growth rate and biomass production from the photosynthetic cultivation of *Spirulina platensis* was obtained using red LED. The superimposed pattern of luminescence spectrum of blue LED (450-470 nm) and that of red LED (650-665 nm) corresponds to the light absorption spectrum of carotenoids and chlorophyll (Yeh & Chung, 2009). Therefore, the red LED favors microalgal growth but switching to illumination with blue LED improved the rate of astaxanthin production by *Haematococcus pluvialis* (Katsuda et al. 2004). Flashing light from blue LEDs is also a promising illumination method for *H. pluvialis* growth and astaxanthin production (Katsuda et al 2006). The use of flashing LED as sources of intermittent light in indoor algal culture can yield a major gain in energy economy comparing to fluorescent light sources (Matthijs et al., 1996). The research results by Nedbal et al. (1996) also suggest that algal growth rates in intermittent light can be higher than those in equivalent continuous light.

Red LEDs were found to reduce the average cell volume of *Chlorella vulgaris* without affecting the total biomass production (Lee and Palsson, 1994). However, under the exposure of fluorescent light, cells regained their normal size.

3.3.2 Optical fiber technology

The use of optical fibers as internal light sources could increase light efficiency whilst simultaneously reducing electricity consumption. For example, solar energy excited optical fiber requires only 1.0 kW-h of electricity (Chen et al., 2011). Spatial (i.e. orientation and dimensions of the photobioreactor) and temporal variations (i.e. due to weather conditions) greatly affect the availability of sunlight. Therefore, internal illumination by optical fiber is unstable. To circumvent this problem, Chen et al. (2011) have conceptualized a photobioreactor that combines optical fiber and multi-LED light sources with both solar panel and wind power generators. This has a potential to be developed into a commercially viable microalgae cultivation system with significantly reduced electricity consumption.

4. Limitations and improvements of photosynthetic biomass production of microalgae

4.1 Low light intensity and distribution

There are several key parameters which determine the microalgal productivity in a photobioreactor. These are lighting, mixing, water, CO₂ pressure, O₂ removal, nutrient supply, temperature, and pH (Kunjapur and Eldrige, 2010). Under nutrient-sufficient and optimal temperature conditions, the maximal culture productivity of photoautotrophic microorganisms is solely limited by the light (Richmond, 2004). The penetration of visible spectrum of light in the microalgal cultures decreases as the cell density increases (Figure 1). The appropriate intensity, duration, and wavelength of light must be provided to enhance the microalgal growth in photobioreactors. Supra-optimal light conditions lead to photoinhibition and sub-optimal light becomes a growth limiting factor. In both conditions, microalgal productivity will be lowered. The photosynthetic conversion efficiency of microalgae will generally be lower than theoretically expected under optimal conditions due to insufficient capacity to utilize the incident radiation (Zhu et al., 2008). The distribution of solar radiation over a greater photosynthetic area can spatially dilute the light in the light saturation zone, thereby reducing the mutual shading of the cells in the culture resulting in higher growth rate and lower accessory pigments content. The distribution of solar radiation can be increased by maintaining the surface to volume ratio as high as possible. The temporal and spectral distribution of irradiation and photon flux density is the main physical parameter that determines the photosynthetic productivity of microalgae. The solar conversion efficiency of microalgal mass culture grown under full sunlight is limited because of two reasons: 1) the photon absorption rate of the chlorophyll antennae of upper layers of cells far exceeds the rate of their utilization hence there is a loss of excess photons as fluorescence and heat leading to photoinhibition; 2) the deprivation of functional photons in the deeper cell layers, which is strongly attenuated due to the filtering effect of upper cells (Naus & Melis, 1991, Neidhardt et al., 1998). Gordon and Polle (2007) argued that a microalgal biomass productivity of 100 g m⁻² h⁻¹ could be obtained solely by improving the flux tolerance rather than by raising intrinsic photosynthetic efficiency.

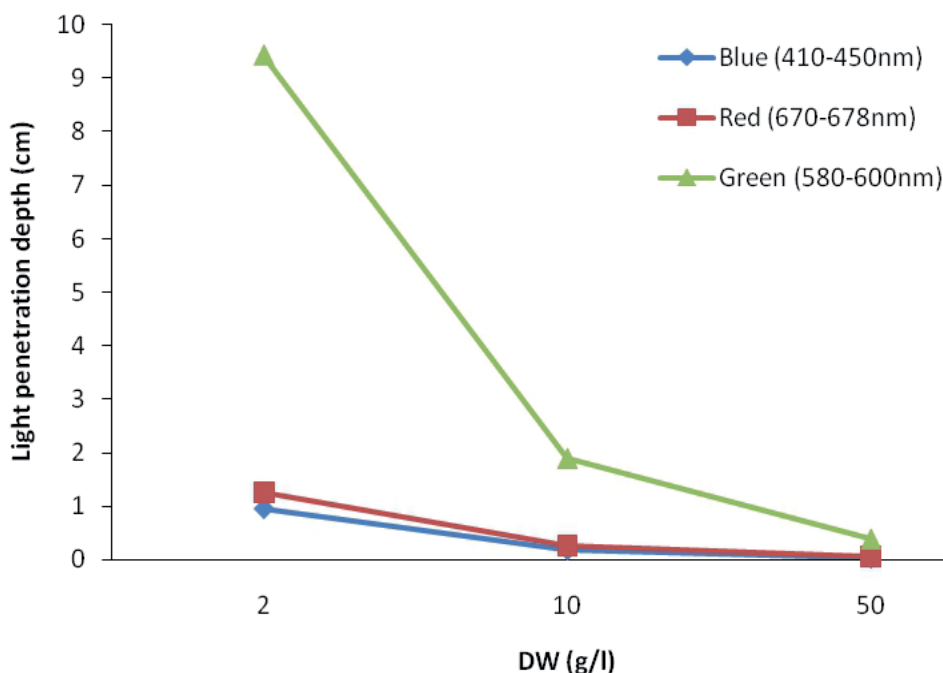


Fig. 1. Effect of biomass concentration on the penetration of incident light into cultures of *Nannochloropsis* sp. (from Richmond 2004).

4.2 Improvements of intrinsic photosynthetic efficiency

The photosynthetic efficiency of microalgae can potentially reach its theoretical maximum, which is calculated to be about 9-10% of total incident solar energy or 20-22% of PAR, being converted into biomass (Beilen, 2010). Such projected ultrahigh microalgal biomass yields of 100 g dry weight $m^{-2}h^{-1}$ can be realized in photobioreactors with sufficiently thin channels, ultradense cultures, and rapid light/dark cycles wherein optimal synchronization of photonic input with rate limiting dark reaction times is exploited (Gordon and Polle, 2007). However, this does not take into account the intrinsic conversion efficiency of photosynthesis, which is only likely to be improved upon through genetic engineering or synthetic biology. The integration of molecular and photobioreactor engineering is likely the only possible way of obtaining near-theoretical levels of algal biomass productivity while simultaneously augmenting lipid content. At the unicellular level, genetic modification of microalgal photophysiology could decrease light absorption, leading to enhanced availability of functional irradiance at the population level. The PSII and PSI in the light harnessing complex of green algae are associated with large numbers of chlorophyll a and chlorophyll b molecules, which are called antenna molecules. During photosynthetic biomass production in photobioreactors, high photon flux densities saturate the antenna molecules of upper cell layers with excessive photons which do not participate in the photosynthetic biomass production. These excess photons dissipate their energy as heat or fluorescence (photoinhibition) and reduce the overall solar to biomass conversion efficiency of the microalgal culture. Moreover, the lower layers do not receive appropriate amount of photons because of the

filtration of light by the cells of upper layer, which accounts for a further loss in the overall biomass productivities (Figure 2). Genetic modifications resulting in truncated chlorophyll antennae size could restrict the high photon absorption by the light harvesting complex. In this context, Polle et al. (2003) have cloned and functionally characterized the Chl antenna size regulatory *Tla1* gene in *Chlamydomonas reinhardtii*. The partially truncated chlorophyll antenna size of the *tla1* mutant prevents the over-absorption of irradiance by cells, thus avoiding wasteful heat losses (Polle et al., 2003). In *Dunaliella salina*, a highly truncated light-harvesting Chl antenna size resulted in aggravated photosynthetic productivity and greater oxygen production under mass microalgal culture (Melis et al., 1999). The *Stm3LR3* mutants of *C. reinhardtii* generated by RNAi technology demonstrated down-regulation of the entire LHC antenna system. The *Stm3LR3* mutant showed reduced fluorescence, increased photosynthetic quantum yield, increased resistance to photoinhibition and faster growth rate under high light levels (Mussnug et al., 2007).

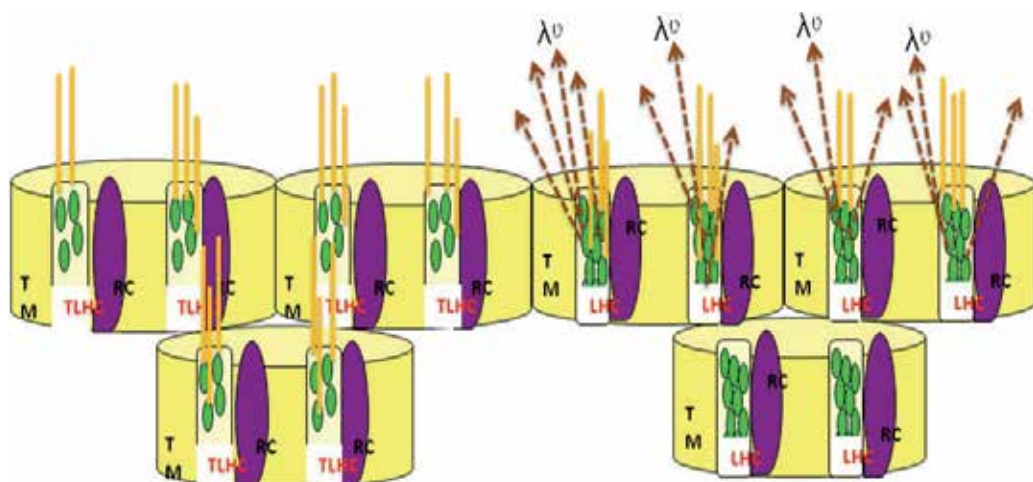


Fig. 2. A diagrammatic representation of wild-type and genetically truncated light harvesting complexes of microalgae. The incident light falling on the antenna molecules in the LHC are wasted as heat and fluorescence, while the lower layer cells are deprived of light. The modified TM has fewer antenna molecules in the TLHC that allows the absorption of light by the cells in the deeper layers. TM (thylakoid membrane), RC (reaction center), LHC (light harvesting complex), TLHC (truncated light harvesting complex).

5. Microalgal biomass harvesting

Conventional harvesting processes for microalgae include dewatering, extraction and purification of biomass. Bulk harvesting of microalgal biomass can be performed by centrifugation, flocculation, gravity sedimentation and/or filtration. Biomass harvesting is one of the most energy intensive processes, and can require high capital investments. Harvesting techniques tend to vary from species to species as various factors (namely density, size and the value of the microalgal end product) will typically inform the most

appropriate method. Acoustic focusing, hybrid capacitive deionization or electrophoresis and use of novel materials for conventional membranes and flocculent systems are amongst the range of new innovative strategies that are currently under investigation (Cheng & Ogden, 2011).

6. Biomass conversion to biodiesel

6.1 Lipid extraction and biodiesel formation from microalgal biomass

Conventional methodologies for lipid extraction involve the use of toxic organic solvents such as chloroform, methanol and hexane. While the solvent extraction process is effective it is difficult to adopt on a large scale. Novel methods for lipid extraction involve technologies such as acoustics, sonication, the use of mesoporous nanomaterials, and amphiphilic solvents (Cheng & Ogden 2011). Super critical fluid extraction has been reported to be safer and faster than the conventional solvent extractions (Andrich et al., 2005). Another technique of “milking” microalgae manipulates the hydrophobicity of the solvent system, which allows the extraction of lipids from living algal cells. A flat panel two-phase bioreactor designed by Hejazi & Wijffels (2004) was used in the milking process for *Dunaliella salina* production. In this process, microalgal cells grown under optimal growth conditions are stressed by excess light to stimulate the production of β -carotene, which is then extracted from the cells using lipophilic compounds. Important considerations for application of this “milking” process includes: a) cell wall and membrane properties of the microalgal strain; b) location and accumulation of the product inside the cell; and c) biocompatibility and chemical properties of the solvent used for the “milking” process (Hejazi & Wijffels 2004).

Lipid conversion to biodiesel can easily be achieved by chemical trans-esterification, enzymatic conversion, and catalytic cracking. Chemically, biodiesel is comprised of monoalkyl esters of fatty acids that are derived from triacylglycerols. These triacylglycerides can be produced from crop or microalgae oils, animal fats, and waste cooking oils. Such biodiesel is miscible with petroleum diesel and thus suitable blends of biodiesel-diesel can be obtained. These are denoted as BXX, where XX is the percent of biodiesel in the blend. For example, B40 is 40% biodiesel in a diesel-biodiesel blend (Tat et al., 2007).

6.2 Fuel properties of microalgal biodiesel

There are several properties which determine the suitability of biodiesel as a biofuel including cetane number, kinematic viscosity, cold flow and oxidative stability (Ramos et al, 2009). These properties are greatly influenced by the fatty acid compositions of the feedstock oils (Figure 3, 4). Therefore, to determine the best composition of biodiesel, it is necessary to study the lipid profile of potential biomass feedstocks. The most common fatty acid methyl esters present in most biodiesel are palmitic acid (16:0), stearic acid (18:0), oleic acid (18:1), linoleic acid (18:2) and linolenic acid (18:3) (Knothe, 2008). Biodiesel obtained upon trans-esterification of these common fatty acids has many advantages over petroleum-derived diesel fuel. However, there are several performance problems with biodiesel, notably poor cold flow properties, lower cetane number and insufficient oxidative stability (Knothe, 2009). Ignition delay time and combustion quality of a diesel fuel is determined by the cetane number. An adequate cetane number is required for better engine performance and a high cetane number is also associated with

biodiesel with good cold start properties and reduced NO_x exhaust emissions (Ramos et al., 2009; Knothe, 2009; Ladommatos et al., 1996).

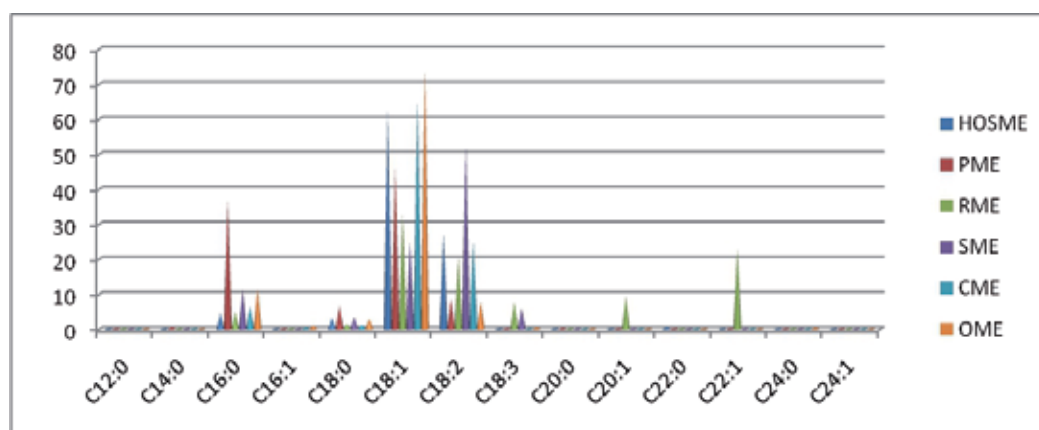


Fig. 3. Fatty acid composition of various vegetable oil crop feedstocks. (Data from Ramos et al 2009). HOSME (high oleic sunflower methyl ester), PME (palm methyl ester), RME (rape methyl ester), SME (soy methyl ester), CME (corn methyl ester), OME (olive methyl ester).

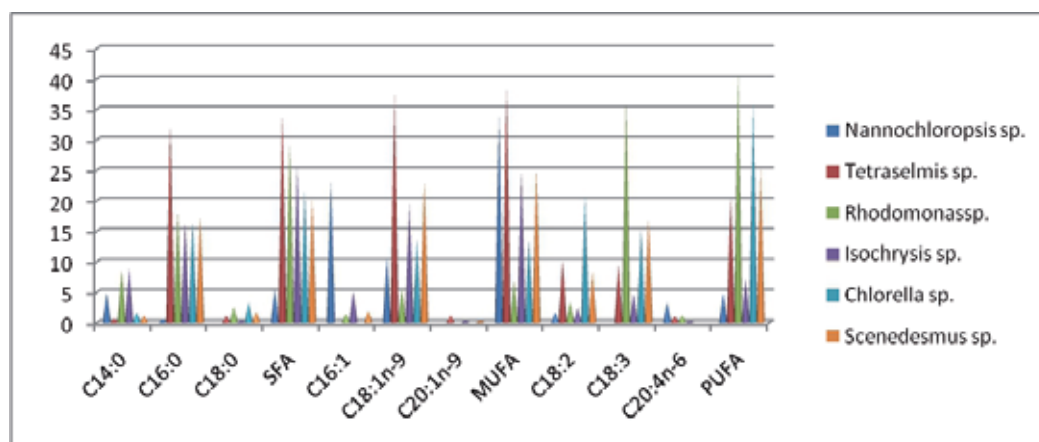


Fig. 4. Fatty acid composition of different microalgal species (Huerlimann et al., 2010). Data for *Chlorella* sp and *Scenedesmus* sp obtained from the author's investigations.

The cetane number of biodiesel can be determined using established standards such as ASTM D975 in the USA. Cetane is the common name for a long straight-chain hydrocarbon, hexadecane (C₁₆H₃₄), which is the high quality standard on the cetane scale with an assigned Cetane number of 100. In contrast, the low quality standard is a highly branched compound heptamethylnonane (C₁₆H₃₄) which exhibits poor ignition quality and has an assigned cetane number of 15 (Gopinath et al 2010). According to ASTM D975, conventional diesel fuel requires a minimum cetane number of 40 whereas a minimum of 47 has been prescribed for biodiesel (ASTM D6751) or (EN14214). For biodiesel, the cetane

number depends on the microalgal feedstock biomass from which the oil is derived and the alcohol that is used during the trans-esterification process. The cetane number decreases with increasing unsaturation and increases with increasing chain length without branching of the CH_2 moieties. However, the straight chain fatty acid methyl esters with carbon numbers of 6, 10, 12, 14, 16 and 18 show a non-linear increase with carbon number. Esters of saturated fatty acids (such as palmitic and stearic acids) give high cetane numbers. In summary, cetane number increases with chain length, decreases with unsaturation (or the number of double bonds) and decreases as double bonds and carbonyl group move toward the centre of the chain (Graboski & McCormik, 1998). Oils from different microalgal feedstocks will have different fatty acid compositions and such fatty acids are different with respect to the chain length, degree of unsaturation, or presence of other chemical moieties. While esters of long chain saturated fatty acid show higher cetane number, they can have a high cloud point that results in nozzle clogging (see below). On the other hand, esters of unsaturated fatty acid show low cetane number and are prone to oxidation. Among the non-algal biodiesel feedstocks, palm oil is reported to have the highest cetane number (61), whereas peanut, sunflower and corn oils typically have a cetane values of 53 (Ramos et al., 2009).

To improve the properties of biodiesel, it is necessary to enrich the biodiesel with fatty esters with desirable properties. Genetic engineering can provide important opportunities in this regard. For example, a soybean transgenic crop variety designated 335-13 has been genetically altered to increase concentration of oleic acid by more than 85%, with a corresponding reduction of palmitic acid content to less than 4% (Tat et al., 2007). Saturated and long chain fatty acids gave a high cetane number, which increases with increasing saturation and the chain length (Knothe et al., 2003; Bajpai & Tyagi, 2006; Knothe, 2009). Esters of highly unsaturated fatty acids such as linoleic (18:2) and linolenic (18:3) acids lower the cetane number (Knothe et al., 2003). According to Knothe et al. (2003) high cetane numbers were observed for esters of saturated fatty acids such as palmitic (C16:0) and stearic (C18:0) acids. Feedstock oils rich in these fatty acid compounds would have higher cetane values.

A higher content of polyunsaturated fatty esters in oil derived from the feedstock can reduce the quality of biodiesel upon storage due to oxidation in the presence of air, light, heat, peroxides, trace metals, or even the structural features of the fatty acids themselves. Thus, oxidation stability is another major issue affecting the use of biodiesel fuels (Ramos et al., 2009; Knothe, 2009). The number and position of double bonds in the chains of unsaturated fatty esters are both factors affecting the susceptible to autoxidation reaction (Bajpai & Tyagi, 2006; Frankel, 2005). Most biodiesel fuels contain significant amounts of alkyl esters of oleic, linoleic and linolenic acids, which influence the oxidation stability of the fuels. The relative rates of autoxidation for oleic acid methyl ester, linoleic acid methyl ester and linolenic acid methyl ester have been reported to be 1, 41 and 98 respectively (Knothe et al., 2005; Frankel, 2005; Ramos et al., 2009; Knothe, 2009).

The high viscosity of non-esterified vegetable oils leads to operational problems in diesel engines by increasing the level of engine deposits. Reduction of the high viscosity of vegetable oils is facilitated by the production of alkyl esters from the oil by transesterification. Since viscosity increases with decreasing temperature, handling of fuels in lower temperatures is facilitated by this lower viscosity as well (Knothe, 2009). This can be achieved by increasing the length and degree of saturation of the carbon chains (Knothe et al., 2005). Wax settling and plugging of filters and fuel lines are typical

problems associated with biodiesel fuels at low temperatures. The maximum temperature at which the first solids appear for a particular fuel is known as the cloud point (CP) and such solids can lead to fuel filter plugging. The pour point (PP) is typically a few degrees below the cloud point and represents the temperature at which the fuel can no longer be poured (Dunn & Bagby, 1996). Key properties of biodiesel fuels at low-temperature are determined by the cold filter plugging point (CFPP) and low-temperature flow test (LTFT) (Dunn & Bagby, 1996; Knothe, 2009). The cloud point (CP) and CFPP are included in the biodiesel standards but as “soft” specifications (Knothe, 2009). For instance, The cloud point in ATSM D6751 requires a report, while the CFPP in UNE-EN 14214 varies with time of year and geographic location.

The properties of biodiesel at low-temperature are correlated with the properties of individual fatty acids, which mostly depend on the saturated ester content. In contrast, the effect of unsaturated fatty acids is considered negligible (Imahara et al., 2006; Ramos et al., 2009). Saturated fatty acids have significantly higher melting points than unsaturated fatty acids and in a mixture saturated fatty acids will crystallize at higher temperature. Therefore, biodiesel fuels derived from fats or oils with significant amounts of saturated fatty compounds display higher values of CP and CFPP (Knothe, 2003).

7. Summary

Biofuels can broadly be classified as oxygenated (ethanol, biodiesel) and hydrocarbon biofuels (diesel, jet fuel and gasoline). Based on this classification, the different generations of biofuels are - 1st generation, where biofuels are obtained from natural vegetable oils and greases; 2nd generation of lignocellulosic biomass and algal derived fuels. Two biomass crops, *Jatropha* and *Camelina* bridged, the 1st and 2nd generations of biofuels. The next generations of biofuels will be based on the innovative technologies that improve the processing of biomass into various other types of biofuels and improving the existing feedstock species of biofuel using metabolic/ genetic engineering. For example, application of heat and pressure on algae/biomass/waste using innovative approaches like hydrothermal, catalytic and biological biomass conversions for the creation of cost-effective biofuels as a replacement for fossil fuels. Moreover, the next generation fuels are direct replacements for petroleum and are compatible with the existing infrastructure of the petrochemical industry. Genetic modification of microalgae improves their photosynthetic biomass conversion efficiency and hence can lead to higher biomass productivities, which is necessary for economic scalability. The improvements in the existing infrastructure for microalgae biomass production by photo engineering approaches will also play a key role towards the commercial application of next generation microalgae biofuels. In summary, the replacement of petroleum based fuels by bio-based products depends on several key factors, which include selection of the right bio-based product, process modification or product improvement for indirect substitutions, technological interventions to lower the cost of individual processing steps, scalability of biomass production and bioproduct delivery, and availability of sufficient and productive land.

8. Acknowledgements

Simrat Kaur and Charles Spillane acknowledge funding support from Science Foundation Ireland, the Irish Environmental Protection Agency (Fellowship Grant REP957, EPA STRIVE

2009 PHD ET8) and from the Competence Centre for Bio-refining and Bio-energy, Enterprise Ireland (www.cccb.ie).

9. References

- Albarrán-Zavala E & Angulo-Brown F. (2007) A simple thermodynamic analysis of photosynthesis. *Entropy*, 9, 152-168.
- Andersen R. A. (2005) *Algal Culturing Techniques*. Elsevier Academic Press, London, U K.
- Andrich G., Nesti U., Venturi F., Zinnai A. & Fiorentini R. (2005) Supercritical fluid extraction of bioactive lipids from microalga *Nannochloropsis* sp. *European J Lipid Science Tech.*, 107, 381-386.
- Apt K. E. & Behrens P. W. (1999) Commercial developments in microalgal biotechnology. *J. Phycol.*, 35, 215-226.
- Bajpai D. & Tyagi V.K. (2006) Biodiesel: source, production, composition, properties and its benefits. *J. Oleaginous Science* 55, 487-502.
- Beilen J. B. V. (2010) Why microalgal biofuels won't save the internal combustion machine. *Biofuels, Bioprod. Bioref.*, 4, 41-52.
- Béchet Q., Shilton A., Park J.B.K., Craggs R.J. & Guieysse B. (2011) Universal temperature model for shallow algal ponds provides improved accuracy. *Environmental Science Technology*, 45, 3702-3709.
- Borowitzka M. A. (1999) Pharmaceuticals and agrochemicals from microalgae. In: *Chemicals from microalgae*. Ed. Cohen Z, Taylor & Francis. pp, 313-52.
- Chen C.Y., Yeh K. Aisyah R., Lee D. & Chang J. (2011) Cultivation, photobioreactor design and harvesting of microalgae for biodiesel production: A critical review. *Bioresource Technology*, 102, 71-81.
- Cheng Kuan-Chen & Ogden K. L. (2011) Algal biofuels: the research. *SBE Supplement: Algal Biofuels, AIChE*, 42-47, www.aidche.org/cep
- Chisti Y. (2007) Biodiesel from microalgae. *Biotech. Advances.*, 25,294-306.
- Cooney M. J., Young G. & Pate R. (2011) Bio-oil from photosynthetic microalgae: case study. *Bioresource Technology*, 102, 166-177.
- Cuaresma M., Janssen M., Vilchez C., & Wijffels R. H. (2011) Horizontal or vertical photobioreactors? How to improve microalgae photosynthetic efficiency. *Bioresource Technology*, 102, 5219-5137.
- Dunn R.O. & Bagby M.O. (1996) Low-temperature filterability properties of alternative diesel fuels from vegetable oils. Liquid fuel and industrial product from renewable resources. In: *Proc.Third Liquid Fuel Conference, ASAE* 95-103.
- Frankel E.N.(2005) *Lipid Oxidation*. The Oily Press. U.K: PJ Barnes and Associates: Bridgwater.
- Gopinath A., Puhan S. & Nagarajan G. (2010) Effect of biodiesel structural configuration on its ignition quality. *International J. Energy Environment*, 1 (2), 295-306.
- Gordon J. F. & Polle J. E. W. (2007) Ultrahigh bioproductivity from algae. *Appl Microbiol Biotechnol.*, 76,969-975.
- Graboski M.S. & McCormik R.L. (1998) Combustion of fat and vegetable oil derived fuels in diesel engines. *Prog. Energy Combust. Sci*, 24, 125-164.

- Hase R, Oikawa H, Sasao C, Morita M & Watanabe Y (2000) Photosynthetic production of microalgal biomass in a raceway system under greenhouse conditions in Sendai city. *Journal of Bioscience and Bioengineering*, 89 (2), 157-163.
- Hejazi M. A. & Wijffels R. H. (2004) Milking of microalgae. *Trends Biotech.*, 22 (4), 189-194.
- Huerlimann R, de Nys R, Heimann K (2010) Growth, lipid content, productivity, and fatty acid composition of tropical microalgae for scale-up production. *Biotechnol. Bioeng.* 107(2), 245-257.
- IEA (2011) Technology Report: Biofuels for transport. International energy Agency, 9 rue de la Fédération, 75739 Paris Cedex 15, France. www.iea.org
- Imahara H, Minami E, Saka S. (2006) Thermodynamic study on cloud point of biodiesel with its fatty acid composition. *Fuel*, 85, 1666-70.
- Katsuda, T. Lababpour, A. Shimahara, K. & Katoh, S. (2004) Astaxanthin production by *Haematococcus pluvialis* under illumination with LEDs. *Enzyme Microb. Technol.*, 35, 81-86.
- Katsuda, T. Shimahara, K. Yamagami, K. Ranjbar, R. & Katoh, S. (2006) Effect of flashing light from blue light emitting diodes on cell growth and astaxanthin production of *Haematococcus pluvialis*. *J. Biosci. Bioeng.*, 102, 442-446.
- Kaur S., Gogoi H.K., Srivastava R. B. & Kalita M.C. (2010) Algal Biodiesel: Procedures and Resources for laboratory study. In: *Algal Biotechnology: New Vistas*. Ed. M.K. Das, Daya Publishing House, Delhi. ISBN-13. 9788170356479, 978-8170356479
- Knothe G., Matheaus, A.C. & Ryan III T.W. (2003) Cetane numbers of branched and straight chain fatty esters determined in an ignition quality tester. *Fuel* 82, 971-975.
- Knothe G. 2009. Improving biodiesel fuel properties by modifying fatty ester composition. *Energy Environment Science* 2, 759-66.
- Knothe G. (2008) "Designer" biodiesel: optimizing fatty ester composition to improve fuel properties. *Energy & Fuels*, 22, 1358-1364.
- Knothe, G., Gerpen, J.V. & Krahl, J. 2005. The Biodiesel Handbook. AOCS Press, Champaign, Illinois.
- Kunjapur A. M. & Eldridge R. B. (2010) Photobioreactor design for commercial biofuel production from microalgae. *Ind. Eng. Chem. Res.* 49, 3516-3526.
- Ladommatos N., Parsi M. & Knowles A. (1996) The effect of fuel cetane improver on diesel pollutant emissions. *Fuel* 75, 8-14.
- Lee, C.G. & Palsson, B. O. (1994) High-density algal photobioreactors using light-emitting diodes. *Biotechnol Bioeng.*, 44, 1161-1167.
- Matthijs, H.C.P. Balke, H. Van Hes, U.M. Kroon, B.M.A Mur, L.R. & Binot, R.A. (1996) Application of light-emitting diodes in bioreactors: flashing light effects and energy economy in algal culture. *Biotechnol Bioeng*, 50, 98-107.
- Melis Anastasios, N. J. & Benemann J. R. (1999). "*Dunaliella salina* (Chlorophyta) with small chlorophyll antenna sizes exhibit higher photosynthetic productivities and photon use efficiencies than normally pigmented cells. *Journal of Phycology*, 10, 515-525.
- Molina Grima E., Sanchez Perez J. A., Garcia Camacho F., Fernandez Sevilla J. M., Acien Fernandez F. G. & Urda Cardona J. (1995) Biomass and icosapentanoic acid productivities from an outdoor batch culture of *Phaeodactylum tricoratum* UTEX 640 in an airlift tubular photobioreactor. *Appl. Microbiol. Biotechnol.*, 42, 658-63.

- Mussgnug J. H., S. T.-H., Jens Rupprecht, Foo A., Klassen V., McDowall A., Schenk P.M., Kruse O. & Hankamer B. (2007). Engineering photosynthetic light capture: impacts on improved solar energy to biomass conversion. *Plant Biotechnology Journal*, 5, 802-814.
- Naus J & Melis A. (1991). Changes of photosystem stoichiometry during cell growth in *Dunaliella salina* cultures. *Plant Cell Physiol.*, 32, 569-575.
- Nedbal, L. Tichy, V. Xiong, F. & Grobbelaar J.U. (1996) Microscopic green algae and cyanobacteria in high-frequency intermittent light. *J Appl. Phys*, 8, 325-333.
- Neidhardt J., Zhang L. & Melis A. (1998) Photosystem II repair and chloroplast recovery from irradiance stress: relationship between chronic photoinhibition, light-harvesting chlorophyll antenna size and photosynthetic productivity in *Dunaliella salina* (green algae). *Photosynth.Res.*, 56, 175-184.
- Nuffield Council on Bioethics (2011). Biofuels: ethical issues. ISBN. 978-1-904384-22-9, www.nuffieldbioethics.org
- Polle Juergen E.W., S.-D. K. & Melis A. (2003). tla1, a DNA insertional transformant of the green alga *Chlamydomonas reinhardtii* with a truncated light-harvesting chlorophyll antenna size. *Planta*, 217, 49-59.
- Ramos, M.J., Fernández, C. M., Casas, A., Rodríguez, L. & Pérez, A. 2009. Influence of fatty acid composition of raw materials on biodiesel properties. *Bioresource Technology* 100, 261-68.
- Raven J.A. (1988) Temperature and algal growth. *New Phytol.*, 110 (4), 441-461.
- Richmond A. (2004) Principles for attaining maximal microalgal productivity in photobioreactors: an overview. *Hydrobiologia*, 512, 33-37.
- Richmond A., Boussiba S., Vonshak A. & Kopel R (1993) A new tubular reactor for mass production of microalgae outdoors. *J. Appl. Phycol.*, 5, 327-32.
- Sheehan J., Dunahay T., Benemann J. & Roessler P. (1998) A look back at the US Department of Energy's Aquatic Species Program- Biodiesel from Algae. National Renewable Laboratory, Golden, CO, Report NREL/TP-580-24190.
- Spektorova L., Creswell R. L. & Vaughan D. (1997) Closed tubular cultivators: an innovative system for commercial culture of microalgae. *World Aquaculture*, 28, 39-48.
- Spolaore P., Joannis-Cassan C., Duran E. & Isambert A. (2006) Commercial applications of microalgae. *J. Bioscience and Bioengineering*, 101, 87-96.
- Tat M.E., Wang P.S., Gerpen J.H.V. & Clemente T.E. (2007) Exhaust emissions from an engine fueled with biodiesel from high-oleic soybeans. *J Am Oil Chem Soc*, 84, 865-869.
- Ugwu C.U., Aoyagi H. & Uchiyama H. (2008) Photobioreactors for mass cultivation of algae. *Bioresource Technology*, 99, 4021-4028.
- Weyer K., Daniel B., Darzins A. & Willson B. (2009) Theoretical maximum algal oil production. *Bioenergy Research*, 3, 204-213.
- Wigmosta M. S., Coleman A. M., Skaggs R. J., Huesemann M. H. & Lane L. J. (2011) National microalgae biofuel production potential and resource demand. *Water Resource Research*, 47, W00H04.

- Zhu Xin-Ghang, Stephen P. L. & Donald R. O. (2008) What is the maximum efficiency with which photosynthesis can convert solar energy into biomass? *Current Opinion in Biotechnology*, 19, 153-159.
- Yeh N. & Chung Jen-Ping (2009) High-brightness LEDs- energy efficient lighting sources and their potential in indoor plant cultivation. *Renewable Sustainable Energy Reveiws*, 13, 2175-2180.
- Zemke P. E., Wood B. D. & Dye D. J. (2010) Considerations for the maximum production rates of triacylglycerol from microalgae. *Biomass Bioenergy*, 34, 145-151.

Advantages and Challenges of Microalgae as a Source of Oil for Biodiesel

Melinda J. Griffiths, Reay G. Dicks,
Christine Richardson and Susan T. L. Harrison
*Centre for Bioprocess Engineering Research (CeBER), University of Cape Town,
South Africa*

1. Introduction

Microalgal oil is currently being considered as a promising alternative feedstock for biodiesel. The present demand for oil for biofuel production greatly exceeds the supply, hence alternative sources of biomass are required. Microalgae have several advantages over land-based crops in terms of oil production. Their simple unicellular structure and high photosynthetic efficiency allow for a potentially higher oil yield per area than that of the best oilseed crops. Algae can be grown on marginal land using brackish or salt water and hence do not compete for resources with conventional agriculture. They do not require herbicides or pesticides and their cultivation could be coupled with the uptake of CO₂ from industrial waste streams, and the removal of excess nutrients from wastewater (Hodaifa et al., 2008; An et al., 2003). In addition to oil production, potentially valuable co-products such as pigments, antioxidants, nutraceuticals, fertilizer or feeds could be produced (Mata et al., 2010; Rodolfi et al., 2009).

Despite these advantages, algal fuel is not currently in widespread use, largely due to its high cost of production (Chisti, 2007; Miao & Wu, 2006). Despite strong interest from the commercial and scientific sectors, there are currently no industrial facilities producing biodiesel from algae (Lardon et al., 2009). One of the major economic and technological bottlenecks in the process is biomass and lipid production by the algae (Borowitzka, 1992; Sheehan et al. 1998; Tsukahara & Sawayama, 2005). Productive strains and optimized culture conditions able to produce cells with a simultaneously high growth rate and lipid content are required. The high cost and energy demand of harvesting unicellular algae also remains a major challenge. The small cell size (often < 10 µm in diameter) and dilute biomass produced requires innovative solutions to minimize the consumption of water and energy as well as processing costs (Rodolfi et al., 2009).

This chapter provides an overview of microalgae as a source of oil for biodiesel, focusing on:

- A description of algae and their properties with regards to oil production
- Requirements and key factors in microalgal cultivation
- Methods and challenges in harvesting and processing of algal biomass
- Economic and environmental feasibility of microalgal biodiesel
- Mechanisms to enhance lipid productivity of microalgae and future research directions.

2. Microalgae

The term 'algae' is used to describe a huge variety of prokaryotic (strictly termed Cyanobacteria) and eukaryotic organisms with a range of morphologies and phylogenies. They represent a wide array of species, inhabiting environments from deserts to the Arctic Ocean, including both salt and fresh water. They vary in colour, shape and size, from picoplankton (0.2 to 2 μm) to giant kelp fronds up to 60 m in length (Barsanti & Gualtieri, 2006). Macroalgae (e.g. seaweeds) are generally large (can be seen without the aid of a microscope), multicellular and often show some form of cellular specialisation. Microalgae are usually less than 2 mm in diameter and unicellular or colonial. Microalgae have been investigated for a variety of commercial applications. Annual global microalgal production is currently estimated at about 10 000 metric tons, with the main algae cultivated being *Spirulina* (accounting for roughly half of the worldwide algal production), *Chlorella*, *Dunaliella* and *Haematococcus*.

Algae have been investigated as a source of energy in many different contexts, from direct combustion to the production of hydrogen gas. Anaerobic digestion can be applied for the generation of methane or biogas (Golueke et al., 1957). Algal species with high oil content are particularly attractive as a feedstock for biodiesel production. Research into algae for the mass-production of oil has focused on the microalgae due to their high lipid content compared to macroalgae. Most algal species considered for biodiesel production are either green algae (Chlorophyta) or diatoms (Bacillariophyta) (Sheehan et al., 1998). They are generally photosynthetic, but several species are able to grow heterotrophically or mixotrophically (Barsanti & Gualtieri, 2006).

Microalgae have higher growth rates than land-based plants. Due to their simple cellular structure and existence in an aqueous environment, the entire cell surface is available for light capture and mass transfer, leading to high rates of substrate uptake and photosynthetic efficiency (Miao & Wu, 2006; Sheehan et al., 1998). In contrast to land-based oil crops, where only the seeds are harvested, each algal cell contains lipid and hence the yield of product from biomass is much higher (Becker, 1994). Due to these differences, the oil yield per area of microalgal cultures potentially exceeds that of the best oilseed crops (Table 1).

Oil source	Yield ($\text{L}\cdot\text{m}^{-2}\cdot\text{yr}^{-1}$)	Reference
Algae	4.7 to 14	Sheehan et al., 1998
Palm	0.54	Mata et al., 2010
Jatropha	0.19	Sazdanoff, 2006
Rapeseed	0.12	Sazdanoff, 2006
Sunflower	0.09	Sazdanoff, 2006
Soya	0.04	Sazdanoff, 2006

Table 1. Average productivities of some common oil seed crops compared to algae

3. Biodiesel from microalgae

Microalgal lipids can be extracted to yield oil similar to that from land-based oilseed crops. The amount and composition of the oil varies between algal species. Algal oil can be converted to biodiesel through the same methods applied to vegetable oil. The idea of using microalgae as a source of transportation fuel is not new. Research in this field has been

conducted since the 1950s (Oswald & Golueke, 1960). In the 1970s, several large, publicly funded research programs were set up in the USA, Australia and Japan (Regan & Gartside, 1983; Sheehan et al., 1998). The US Department of Energy invested more than US\$ 25 million between 1978 and 1996 in the Aquatic Species Program to develop biodiesel production from algae (Sheehan et al., 1998). The main focus of the program was the production of biodiesel from high lipid-content algae grown in open ponds, utilizing waste CO₂ from coal fired power plants. Over 3000 species were collected and many of them screened for lipid content.

Early in the program, it was observed that environmental stress, particularly nutrient limitation (nitrogen for green algae and silicon for diatoms) led to an increase in accumulation of lipids. Promising species were investigated to determine the mechanism of this 'lipid trigger'. Researchers in the program were the first to isolate the enzyme Acetyl CoA Carboxylase from a diatom. This enzyme catalyzes the first committed step in the lipid synthesis pathway. Acetyl CoA Carboxylase was over-expressed successfully in algae; however, the anticipated increase in oil production was not demonstrated. The program close out report (Sheehan et al., 1998) concluded that, although algae used significantly less land and water than traditional crops, and sufficient resources did exist for algal fuel to completely replace conventional diesel, the high cost of microalgae production remained an obstacle. Even with the most optimistic lipid yields, production would only have become cost effective if petro-diesel had risen to twice its 1998 price.

The last decade has seen a renewal of interest in biofuels and microalgae as a feedstock source. An increase in oil prices, additional pressure to find alternatives to dwindling oil supplies and an urgent need to cut carbon emissions contributing to global warming has led to a renewed interest in algae as a source of energy, particularly lipid producing algae as a source of biodiesel.

4. Microalgal lipids

The main components of algae cells are proteins, carbohydrates and lipids (Becker, 1994). Microalgae naturally produce lipids as part of the structure of the cell (e.g. in cell membranes and as signalling molecules), and as a storage compound, similar to fat stores in animals and humans (Tsukahara & Sawayama, 2005). The term lipid encompasses a variety of compounds with different chemical structures (e.g. esters, waxes, cholesterol). The most common lipids are composed of a glycerol molecule bound to three fatty acids, known as triacylglycerol or TAG, or to two fatty acids with the third position taken up by a phosphate (phospholipids) or carbohydrate (glycolipids) group. Fatty acids consist of a long unbranched carbon chain. They are classified according to the number of carbon atoms in the chain and the number of double bonds, for example saturated (no double bonds), monounsaturated (one double bond) or polyunsaturated (more than one double bond). Microalgae commonly contain fatty acids ranging from C12 to C24, often with C16 and C18 unsaturates. Certain species contain significant amounts of polyunsaturated fatty acids.

Storage lipids, generally in the form of TAG, accumulate in lipid vesicles called oil bodies in the cytoplasm. Most fast-growing species have relatively low lipid content during normal growth, with these lipids mainly consisting of phospho- or glycolipids associated with cell membranes. Under certain conditions, generally triggered by stress or the cessation of growth, lipid content can increase to over 60% of cell dry weight (DW), mostly composed of

TAG (Shifrin & Chisholm, 1981; Piorreck et al., 1984; Spoehr & Milner, 1949; De la Pena, 2007; Becker, 1994).

TAGs are the most suitable class of lipids for biodiesel production. Phospholipids are particularly undesirable as they increase consumption of catalyst and act as emulsifiers, impeding phase separation during transesterification (Mittelbach & Remschmidt, 2004; Van Gerpen, 2005). Phospholipids, and some sulphur-containing glycolipids, also increase the phosphorous and sulphur content of the fuel respectively, which must both be below 10 mg.L⁻¹ to meet the European biodiesel standard EN 14214. The type of fatty acids found in the oil can have a profound effect on the biodiesel quality. The fatty acid chain length and degree of saturation (determined by the number of double bonds) affects properties such as the viscosity, cold flow plug point, iodine number and cetane number of the fuel (Ramos et al., 2009). For biodiesel production, it is therefore important to maximize not only total lipid production, but also TAG content and appropriate fatty acid profile.

Lipid synthesis relies on carbon compounds generated from CO₂ by photosynthesis, as well as energy and reducing power (in the form of ATP and NAD(P)H respectively). The latter are produced during the light reactions of photosynthesis, while CO₂ uptake is mediated by the Calvin cycle during the dark reactions of photosynthesis. The output of the Calvin cycle is a three-carbon compound (glyceraldehyde 3-phosphate), which is converted through glycolysis into acetyl CoA. The conversion of acetyl CoA to malonyl CoA is the first committed step in lipid biosynthesis (Livne & Sukenik, 1992). Throughout metabolism there are a number of branch points at which metabolic intermediates are partitioned between the synthesis of lipids and other products such as carbohydrates and proteins (Lv et al., 2010). For example, acetyl CoA is a substrate for lipid synthesis as well as entry into the TCA cycle, which generates energy and biosynthetic precursors for proteins and nucleic acids. Both external and internal constraints, such as the availability of nutrients and the enzymatic reaction rates, limit the supply of metabolic intermediates. The production of storage lipids is particularly energy and resource intensive (Dennis et al., 1998; Roessler, 1990) and therefore usually occurs at conditions of reduced growth.

5. Cultivation of microalgae

The use of microalgae for energy generation requires large-scale, low-cost production. This demands cheap, scalable reactor design with efficient provision of the requirements for high algal productivity. Design considerations include optimum surface area to volume ratio for light provision, optimal mixing to keep cells in suspension and for distribution of nutrients, control over water balance and sterility, as well as maintenance of favorable temperature. A wide variety of reactor designs have been proposed, each with advantages and drawbacks.

5.1 Reactor systems

Microalgal production is a technology halfway between agriculture, which requires large areas for sunlight capture, and fermentation, which involves liquid culture of microorganisms (Becker, 1994). As light does not penetrate more than a few centimetres through a dense algal culture, scale-up is based on surface area rather than volume (Scott et al., 2010). Many different types of algal cultivation systems have been developed, but they can be divided into two main categories: open and closed.

Open systems consist of natural waters such as lakes, ponds and lagoons, or artificial ponds and containers that are open to the atmosphere. Most commercial production to date has taken place in open ponds as these systems are easy and cheap to construct (Pulz, 2001). The most common technical design is the raceway pond: an oblong, looped pond mixed by a paddlewheel, with water depths of 15 to 20 cm (Becker, 1994). Biomass concentrations of between 0.1 and 1 g.L⁻¹ and biomass productivities of between 50 and 100 mg.L⁻¹.day⁻¹ are possible (Chisti, 2007; Pulz, 2001). The main advantages of open systems are their low cost and ease of construction and operation. They also offer the potential for integration with wastewater treatment processes or aquaculture systems (Chen, 1996).

Disadvantages of open systems include contamination with unwanted species such as foreign algae, yeast, bacteria and predators, evaporation of water, diffusion of CO₂ to the atmosphere and low control over environmental conditions, particularly temperature and solar irradiation (Becker, 1994; Pulz, 2001). In addition, the relatively low cell densities achieved can lead to higher cost of cell recovery (Chen, 1996). Only a few microalgal species have been successfully mass cultivated in open ponds. These tend to be either fast-growers that naturally outcompete contaminating algae (e.g. *Chlorella* and *Scenedesmus*), or species that grow in a specialised environment such as high salt (e.g. *Dunaliella salina*) or high pH (*Spirulina platensis*), which limits growth of competitors and predators (Chen, 1996). Due to the lack of control over cultivation conditions resulting in low productivity, and the fact that many desirable species cannot be effectively maintained in open systems, attempts have been made to overcome some of these limitations through the use of enclosed reactor systems.

Closed systems, or photobioreactors, consist of containers, tubes or clear plastic bags of various sizes, lengths and orientations (Pulz, 2001). Commonly used designs include vertical flat-plate reactors and tubular reactors, either pumped mechanically or by airlift (Scott et al., 2010). Closed reactors offer a much higher degree of control over process parameters, leading to improved heat and mass transfer, and thus higher biomass yields. They can also offer a much higher surface area to volume ratio for light provision, better control of gas transfer, reduction of evaporation and easier installation in any open space (Chen, 1996). Additionally, the risk of contamination is reduced, CO₂ can be contained, production conditions can be reproduced and temperature can be controlled.

Productivity in closed systems can be much higher than open systems, with biomass concentrations of up to 8 g.L⁻¹ and productivities of between 800 and 1300 mg.L⁻¹.day⁻¹ (Pulz, 2001). However, they are generally much more costly to build and more energy demanding to operate than open systems (Table 2). Closed systems can also have problems with fouling and oxygen build-up. Large systems can be difficult to clean and sterilize and long sections of enclosed tubing may require oxygen purging. High oxygen concentrations cause the key enzyme Rubisco to bind oxygen instead of carbon dioxide, leading to photorespiration instead of photosynthesis (Dennis et al., 1998). Although closed bioreactors offer a much higher degree of control over process parameters and can have higher yields, it is uncertain whether the increased productivity can offset the higher cost and energy requirements. For a commodity product such as vegetable oil for biodiesel, low cost, high volume production is demanded, while quality is less critical (Pulz, 2001). In this case, the more favourable economics and energy requirements of open ponds may well outweigh the advantages of closed reactors.

A hybrid system combining the cost effectiveness of open ponds with the controlled environment of closed systems is appealing and has been tested in a few cases. Generally

production is divided into an initial growth or inoculum production stage in closed reactors, followed by a stress or scaling up stage in open ponds (Huntley & Redalje, 2006).

Parameter	Open	Closed
Control over process parameters	Low	High
Contamination risk	High	Low
Water loss due to evaporation	High	Low
CO ₂ loss	High	Low
O ₂ build-up	Low	High
Area required	High	Low
Productivity	Low	High
Consistency and reproducibility	Low	High
Weather dependence	High	Low
Cost	Low	High
Energy required	Low	High

Table 2. Comparison of open ponds and closed photobioreactors. Adapted from Pulz (2001).

5.2 Cultivation parameters

Several factors need to be considered in the cultivation of algal biomass. These include the provision of light, carbon and nutrients such as nitrate, phosphate and trace metals, the mixing regime, maintenance of optimal temperature, removal of O₂ and control of pH and salinity (Becker, 1994; Grobbelaar, 2000; Mata et al., 2010). The optimal and tolerated ranges tend to be species specific, and may vary according to the desired product.

5.2.1 Temperature

Light and temperature are among the most difficult parameters to optimise in large-scale outdoor culture systems. Daily and annual fluctuations in temperature can lead to significant decreases in productivity. Optimal growth temperatures are generally between 20 and 30°C (Chisti, 2008). Many algal species can tolerate temperatures of up to 15°C lower than their optimum, with reduced growth rates, but a temperature of only a few degrees higher than optimal can lead to cell death (Mata et al., 2010). Closed systems in particular often suffer from overheating during hot days, when temperatures inside the reactor can reach in excess of 50°C. Heat exchangers or evaporative water-cooling systems may be employed to counteract this (Mata et al., 2010). Low seasonal and evening temperatures can also lead to significant losses in productivity.

5.2.2 Light and mixing

The efficient production of algal biomass relies on the optimal provision of light energy to all cells within the culture. Most algal growth systems become light limited at high cell densities. Due to absorption and shading by the cells, light only penetrates a few centimetres into a dense algal culture (Richmond, 2004). The average provision of light is linked to reactor depth or diameter, cell concentration and mixing. A larger surface area to volume ratio, usually achieved through areas of thin panelling or narrow tubing, results in higher light provision.

Photosynthetic efficiency is highest at low light intensities. At high light levels, although photosynthetic rate may be faster, there is less efficient use of absorbed light energy.

Above the saturation point, damage to photosynthetic machinery can occur in a process known as photoinhibition (Scott et al., 2010). In a dense culture exposed to direct sunlight, cells at the surface are likely to be photoinhibited, while those at the centre of the reactor are in the dark. Mixing is therefore important not only in preventing cell settling and improving mass transfer, but also exposing cells from within a dense culture to light at the surface.

The frequency of light-dark cycling has been reported to affect algal productivity (Grobbeelaar, 1994; Grobbeelaar, 2000). Algae are less likely to become photoinhibited when the light is supplied in short bursts because the photosystems have time to recover during the dark period (Nedbal et al., 1996). While high rates of mixing facilitate rapid circulation of cells between light and dark zones in the reactor, high liquid velocities can damage algal cells due to increased shear stress (Mata et al., 2010). High rates of mechanical mixing or gas sparging also have large energy requirements, jeopardizing the process energy balance and increasing costs (Richardson, 2011).

5.2.3 Gas exchange

In order to maintain a high photosynthetic rate, the influx of carbon and energy must be non-limiting. In photoautotrophic growth, energy is provided by light and carbon in the form of CO₂. In order to be taken up by cells, the CO₂ must dissolve in the water. The rate of dissolution is determined by the CO₂ concentration gradient as well as by the temperature, rate of gas sparging and surface area of contact between the liquid and gas (a function of agitation and bubble size). Reactor geometry, methods of gas introduction and reactor mixing can all influence the rate of CO₂ delivery (Bailey & Ollis, 1977). Certain strains of microalgae can tolerate up to 12% CO₂ (Pulz, 2001). The 0.03% CO₂ content of ambient air is suboptimal for photosynthesis (Pulz, 2001), hence for optimal microalgal growth, additional CO₂ must be provided. This is usually done by direct injection of a CO₂ enriched air stream. As the addition of CO₂ acidifies the medium, care must be taken not to adversely decrease the pH (Anderson, 2005). It is debatable whether direct gas injection is the optimal method of CO₂ delivery. Efficiencies of carbon uptake are very low at high CO₂ concentrations, as most CO₂ exits the top of the reactor. Novel strategies of CO₂ provision include microporous hollow fibre membranes and separate gas exchanger systems (Carvalho et al., 2006).

5.2.4 Salinity, nutrients and pH

The major nutrient requirements for microalgal growth are nitrogen and phosphorous, with certain diatoms, silicoflagellates and chrysophytes also requiring silicon (Anderson, 2005). Requirements of nutrients, pH and osmolarity are species dependent. Deviation from optimal levels may cause a decrease in biomass productivity, but can have other advantages, for example, high salinity may limit contamination. Sufficient supply of all essential nutrients is a prerequisite for efficient photosynthesis and growth, but limitation of key nutrients (e.g. nitrate, phosphate or silica) may cause accumulation of desired products such as lipid.

5.2.5 Nutritional mode

Most microalgae are photoautotrophs (utilizing sunlight as their source of energy and CO₂ as a carbon source). This is the most common growth mode employed in algal cultivation

(Chen, 1996). However, several species (e.g. *Chlorella*, *Chlamydomonas*, *Phaeodactylum*, *Nitzschia*, *Tetraselmis* and *Cryptothecodinium*) are also capable of heterotrophic growth (utilizing organic carbon such as glucose, acetate or glycerol as the sole source or carbon and energy) or mixotrophic growth (photoautotrophic growth supplemented by an organic carbon source).

The advantages of using an organic carbon substrate are that it decreases dependence on light provision, allowing growth in conventional fermenters in the dark. Optimal growth conditions can be maintained, allowing higher cell concentrations and hence increased volumetric productivities to be reached (Chen, 1996). Higher productivities of both biomass and lipid have been reported under heterotrophic growth compared to autotrophic (Ceron Garcia, 2000; Miao & Wu, 2006). Disadvantages of feeding an organic carbon source include the fact that there are a limited number of algal species that can utilize organic carbon sources, the risk of bacterial contamination is greatly increased and the carbon substrate adds an additional cost, along with the environmental burden of its production. The use of a substrate such as glucose, commonly sourced from crop plants, adds a trophic level to the process, thereby removing the simplicity of the concept of microalgae as cellular factories producing liquid fuel from pure sunlight and CO₂.

5.2.6 Cultivation strategy

The optimal cultivation strategy (e.g. batch, fed-batch or continuous cultivation mode) is determined by the kinetics of growth, product accumulation and substrate uptake (Shuler & Kargi, 2005). For production of a primary product such as protein or biomass for food or feed, optimisation of biomass productivity is the main objective. In this case, batch or continuous systems are generally used. For production of a secondary product such as carotenoids or storage lipids, the use of two or more production stages to enhance yield has been proposed (Ben-Amotz, 1995; Huntley & Redalje, 2006; Richmond, 2004). The first stage is designed to optimize growth, while the second stage provides conditions that retard growth and encourage product synthesis, usually by applying some form of stress, e.g. nutrient deprivation in the case of lipid accumulation. Another potential two-stage strategy that could enhance lipid productivity is an initial photosynthetic stage, followed by a second heterotrophic phase, where feeding with an organic carbon source such as glucose may boost lipid content.

6. Harvesting and processing

The economic recovery of microalgal biomass remains a major challenge. Microalgae for biofuel are a low value product suspended in large volumes of water. Harvesting contributes 20 to 40% of the total cost of biomass production (Gudin & Therpenier, 1986; Molina Grima et al., 2003). The difficulty in separation can be attributed to the small size of the cells (3 to 300 µm, Henderson et al., 2008), their neutral buoyancy and the fact that photoautotrophic microalgal cultures are relatively dilute, achieving concentrations in the order of 1 to 8 g.L⁻¹ (Pulz, 2001). Each algal species presents unique challenges due to the array of sizes, shapes, densities and cell surface properties encountered. A low-cost, energy efficient method with a high recovery efficiency and concentration is required, minimizing cell damage and allowing for water and nutrient recycle (Fig. 1).

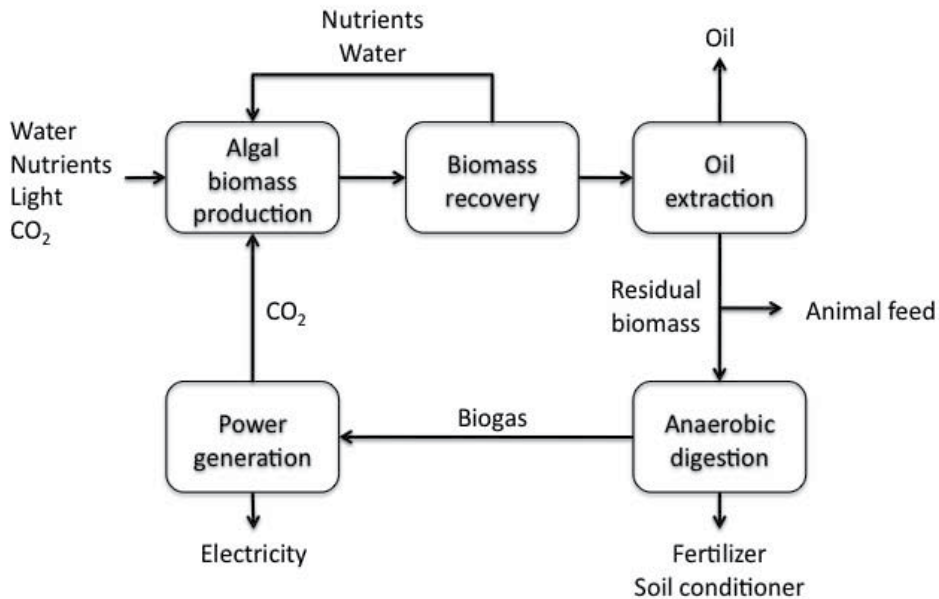


Fig. 1. Conceptual overview of microalgae process options (adapted from Chisti, 2008)

6.1 Factors affecting separation

Several natural properties of microalgal cells affect the choice and efficiency of harvesting methods. Factors relevant to separation include density, surface charge, size, shape, hydrophobicity, salinity of the medium, adhesion and cohesion properties and settling or floating velocities. Table 3 highlights the variability in some of these parameters between species, indicating that species-specific solutions may be required. Algal cell characteristics can vary with culture age and growth conditions. For example, changes in biochemical composition such as lipid content could affect the buoyancy of algal cells. Surface charge, the chemical structure of the cell wall and the amount and composition of the extracellular organic matrix (EOM) can vary with growth phase and greatly influence the degree to which cells repel or stick to one another (Bernhardt & Clasen, 1994; Henderson et al., 2008). Danquah et al. (2009) found a strong correlation between growth phase and settling efficiency, with improved filtration, flocculation and sedimentation rates during the stationary phase.

Species	Density (kg.m ⁻³)	Zeta potential (mV)	Culturing pH	Morphology	Diameter, length (µm)
<i>Microcystis</i>	1200	-7.5 to -26	5.6 - 9.5	Globular sphere	3-7
<i>Chlorella vulgaris</i>	1070	-17.4	7	Single cell spherical	3.5
<i>Cyclotella</i> sp.	1140	-19.8 to -22.3	4 - 10	Chains of spheres	6.1
<i>Syendra acus</i>	1100	-30 to -40	7.6	Needles	4.5-6, 100-300

Table 3. Characteristics relevant to harvesting of some microalgae (Henderson et al., 2008). Zeta potential is a measure of the degree of repulsion between adjacent particles due to surface charge.

Morphological characteristics that influence harvesting include cell motility, size, shape, cell wall elongations such as spines and flagella, colony formation, and the presence of extracellular mucilage layers or capsules (Petrusevski et al., 1995; Jarvis et al., 2009). Larger particles allow for easier separation due to increased surface area and mass. Filamentous morphology or appendages also allow for easier filtration as cells cannot pass through filter pores. Density affects sedimentation and flotation. Most algae have a specific gravity close to that of water, rendering them with a neutral buoyancy. Some cyanobacteria can adjust their density through gas vacuoles (Anderson, 2005), rendering sedimentation difficult but enabling potential surface collection.

Cell surface charges influence the electrostatic interactions between cells and between cells and surfaces or bubbles. This directly affects the adhesion, adsorption, flotation and flocculation properties of algal cells. Most algae have a negatively charged cell surface, leading to electrostatic repulsion between cell walls. Addition of positively charged ions to the solution can help to neutralize the negative surface charge and aid cell flocculation. Changing the pH of the solution can also cause flocculation (Chen et al., 1998). Hydrophobicity is another, non-electric property affecting interaction of algal cells with each other and external surfaces. Most algae are naturally hydrophilic (Fattom & Shilo, 1984), but this can be altered by surfactants and pH (Jameson, 1999). Increasing the hydrophobicity of cells could cause them to adhere to bubbles, filters or other separation catalysts.

6.2 Harvesting methods

Harvesting requires one or more solid-liquid separation techniques (Molina Grima et al., 2003). In order to achieve the levels of concentration required, various chemical, biological and physical separation steps may be necessary. Common methods of cell harvesting include flocculation, filtration, sedimentation, centrifugation and flotation (Mata et al., 2010). The small cell size of microalgae makes them difficult to dewater. Flocculation is used to 'clump' the cells, grouping them together to form larger particle sizes. This is often suggested as a pretreatment step prior to filtration, sedimentation or flotation. Flocculation occurs when the repulsion between cells is reduced, allowing them to either aggregate directly onto each other or through an intermediate bridging surface. The extent of flocculation is dependent on pH, temperature, density, hydrophobicity, surface charge and culture age (Lee et al., 1998). Flocculation can be induced by addition of positively charged ions or polymers, e.g. minerals such as lime, calcium and salts, metal salts such as aluminium sulphate and ferric chloride, and naturally occurring flocculants such as starch derivatives and tannins. Drawbacks to the use of chemical flocculants are the high dosages required, the need for pH correction (Pushparaj et al., 1993) and the contamination of the biomass and media with the flocculant, meaning that media cannot be recycled without removal of the chemical. Autoflocculation can be induced through pH change (Csordas & Wang, 2004), nutrient limitation (Schenk et al., 2008), excretion of macromolecules (Benemann et al., 1980) or aggregation between microalgae and bacteria (Lee et al., 2009).

Conventional filtration is only effective for larger (> 70 µm) or filamentous species such as *Coelastrum* and *Spirulina* (Brennan & Owende, 2010, Lee et al., 2009). For smaller cells, micro-filtration, ultra-filtration and membrane-filtration can be used, though usually only for small volumes (Brennan & Owende, 2010, Petrusevski et al., 1995, Borowitzka, 1997). Fouling (accumulation of material on the surface of the membrane, slowing filtration) is a major problem. If filtration were to be considered for mass production, a high driving force for separation (high pressure or suction) would be required, which necessitates a high energy

input. Microstraining (filtration by natural gravity using low speed rotating drum filters) is a promising method due to ease of operation and low energy consumption (Mohn, 1980). Another option is cross-flow membrane filtration (Zhang et al., 2010). Using a tangential, turbulent flow of liquid across the membrane prevents clogging of the filter with cells. The efficiency of the process is very dependent on cell morphology and the transmembrane pressure (Petrusevski et al., 1995). A more unconventional approach is magnetic filtration. Here addition of magnetic metals, either taken up by algal cells, or used to flocculate them, could allow capture using a magnetic field (Bitton et al., 1975).

Sedimentation is the process whereby solid particles suspended in a fluid are settled under the influence of gravity or some other force. In microalgae, it depends on coagulation or flocculation of cells to produce flocs with a large enough size ($> 70 \mu\text{m}$) or high enough density to induce settling (Vlaski et al., 1997). Sedimentation is typically used in wastewater treatment. It is suitable for large throughput volumes and has low operational costs. Flocculation, using a dense substance such as calcium carbonate, can greatly reduce settling time. Ultrasound (acoustic energy) can be used to induce aggregation and facilitate sedimentation (Bosma et al., 2003), however the energy requirement may be too high for large-scale use.

Centrifugation is essentially sedimentation under a rotational force rather than gravity. The efficiency of centrifugation depends on the size and density of the particles, the speed of the rotor, the time of centrifugation and the volume and density of the liquid. Almost all microalgae can be harvested by centrifugation. It is a highly efficient and reliable method, can separate a mixture of cells of different densities and does not require the addition of chemicals, but has a high energy consumption (Chisti, 2007). It is routinely used for recovery of high value products, or for small scale research operations, although large, flow-through centrifuges can be used to process large volumes. Many algae require speeds of up to 13 000 g which results in high shear forces (Harun et al., 2010; Knuckey et al., 2006) and can damage sensitive cells.

Flotation operates by passing bubbles through a solid-liquid mixture. The particles become attached to the bubble surface and are carried to the top of the liquid where they accumulate. The concentrated biomass can be skimmed off (Uduman et al., 2010). Flotation is considered to be faster and more efficient than sedimentation (Henderson et al., 2008). It is associated with low space requirements and moderate cost. Addition of chemical coagulants or flotation agents is often required to overcome the natural repulsion between the negatively charged algal particles and air bubbles. The pH and ionic strength of the medium are important factors to optimize this recovery technique.

6.3 Processing

After harvesting, the major challenge is in releasing the lipids from their intracellular location in the most energy efficient and economical way possible. Algal lipids must be separated from the rest of the biomass (carbohydrates, proteins, nucleic acids, pigments) and water. Common harvesting methods generally produce a slurry or paste containing between 5 and 25% solids (Shelef et al., 1984). Removing the rest of the water is thought to be one of the most expensive steps with literature values ranging from 20 to 75% of the total processing cost (Uduman et al., 2010, Molina Grima et al., 2003). Shelef et al. (1984) highlight a number of possible techniques for drying biomass: flash drying, rotary driers, toroidal driers, spray drying, freeze-drying and sun drying. Because of the high water content, sun-drying is not an effective method and spray-drying is not economically

feasible for low value products (Mata et al., 2010). The selection of drying technique is dependent on the scale of operation, the speed required and the downstream extraction process (Mohn, 1980).

Lipid extraction can be done in a number of ways. Solvent extraction techniques are popular, but the cost and toxicity of the solvent (e.g. hexane) is of concern and solvent recovery requires significant energy input. Other methods involve disruption of the cell wall, usually by enzymatic, chemical or physical means (e.g. homogenization, bead milling, sonication (Mata et al., 2010)), allowing the released oil to float to the top of the solution. Ultrasound and microwave assisted extraction methods have been investigated (Cravotto et al., 2008). Supercritical CO₂ extraction is an efficient process, but is too expensive and energy intensive for anything but lab-scale production. Direct transesterification (production of biodiesel directly from algal biomass) is also possible. Some of these techniques do not require dry biomass, but the larger the water content of the algal slurry, the greater the energy and solvent input required.

Once the algal oil is extracted, it can be treated as conventional vegetable oil in biodiesel production. Direct pyrolysis, liquefaction or gasification of algal biomass have also been suggested as means of producing fuel molecules. One of the concerns for biodiesel production through transesterification, shared with any biodiesel feedstock, is the quality of the biodiesel produced. Biodiesel must meet certain international regulations, for example, the ASTM international standards or the EN14214 in Europe. It has been calculated that the fatty acid profile of certain microalgal species will produce biodiesel that does not meet these specification, therefore blending or additives may be required (Stansell, 2011).

7. Economic and environmental feasibility

In order to be economically feasible, microalgal biodiesel must be cost competitive with petroleum-based fuels. We have investigated the relationship between algal lipid productivity and cost in order to determine the range of productivities that need to be achieved for economic viability. Based on values from Chisti (2007), a model was set up to estimate cost per litre of algal oil as a function of algal biomass productivity and lipid content. Where the cost of producing a litre of algal biodiesel was below the price of a litre of fossil-fuel derived diesel, it was considered economically viable (i.e. no profit margin was introduced). The price of fossil-fuel derived diesel is partly dependent on the price of crude oil, which has varied widely in the last few years, hence several scenarios were evaluated.

Assumptions made in the execution of the model were:

1. Cost per kg algal biomass: US\$ 0.6 for raceway ponds, and US\$ 0.47 for photobioreactors (Chisti, 2007)
2. In order to be economically viable, the cost of algal oil per litre must be less than 6.9×10^{-3} times the cost of crude oil in US\$ per barrel (Chisti, 2007)
3. Density of algal oil: 0.86 g.cm^{-3} (Barsanti & Gualtieri, 2007)

The economic model was run for three prices of crude oil, based on fluctuations over the last few years. These scenarios of 'high' (\$ 130), 'medium' (\$ 90) and 'low' (\$ 50) cost of crude oil per barrel gave the price limits for algal oil of 0.90, 0.62 and 0.35 US\$ per L respectively. The results of the model are shown in Fig. 2a (raceway ponds) and 2b (closed photobioreactors).

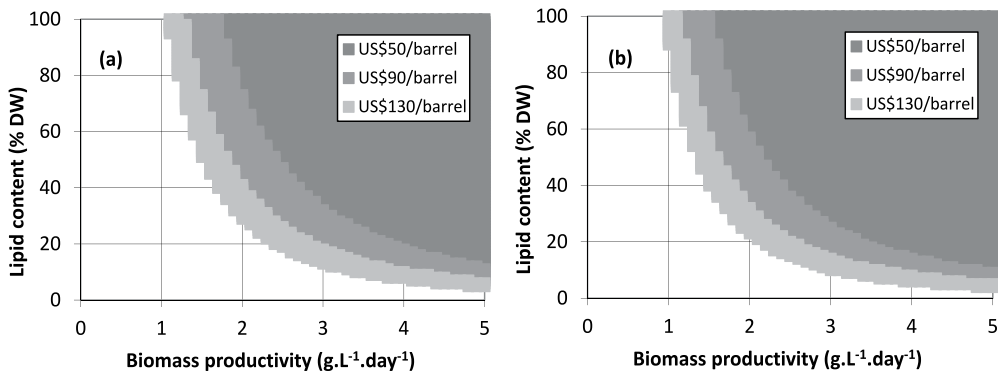


Fig. 2. Lipid contents and biomass productivities required for economic feasibility in (a) large-scale, outdoor raceway ponds and (b) large-scale, outdoor photobioreactors. Dark grey region: productivities economically feasible at US\$ 50 per barrel crude oil (cost of algal oil per L lower than cost of regular diesel per L). Additional region for crude oil price US\$ 90 per barrel = mid-grey and US\$ 130 = light grey

Based on this model, the results for raceway ponds show that algal biodiesel will not be economically feasible, either in ponds or photobioreactors, at current costs below a biomass productivity of $1 \text{ g.L}^{-1}.\text{day}^{-1}$. Assuming a maximum realistically achievable lipid content of 50% DW, algal biodiesel becomes economically feasible at biomass productivities of $1.5 \text{ g.L}^{-1}.\text{day}^{-1}$ (US\$ 130 per barrel crude oil), close to $2 \text{ g.L}^{-1}.\text{day}^{-1}$ (US\$ 90), and $2.5 \text{ g.L}^{-1}.\text{day}^{-1}$ (US\$ 50) in raceway ponds. At lower lipid contents, higher biomass productivity is required, e.g. at a lipid content of 25% DW, algal biodiesel only becomes cost effective at $2 \text{ g.L}^{-1}.\text{day}^{-1}$ for US\$ 130 per barrel. The model for photobioreactors is based on a lower cost per kg algal biomass than raceway ponds, hence economic feasibility is reached at slightly lower biomass productivities and lipid contents, e.g. at a biomass productivity of $2 \text{ g.L}^{-1}.\text{day}^{-1}$, a lipid content of only 20% DW is required to be viable at US\$ 130 per barrel crude oil.

Currently reported biomass productivities in outdoor raceway ponds average around $0.17 \text{ g.L}^{-1}.\text{day}^{-1}$, with a lipid content of 26% DW (Griffiths and Harrison, 2009), which is far from being economically feasible. Biomass productivities for closed photobioreactors ($1.33 \text{ g.L}^{-1}.\text{day}^{-1}$) are closer to being within the economically viable range, if they can be maintained in the long term, concurrent with sufficiently high lipid content. As a reflection of this, there are currently no industrial facilities producing biodiesel from microalgae (Lardon, 2009). For cultivation to be economically viable, productivities must be increased, costs lowered, or additional income streams developed. The economics of algal biofuel production could be greatly improved through the production of co-products. For example, high value compounds such as pigments could be produced along with lipid. The residual biomass after lipid extraction could be sold as animal feed, fertilizer or soil conditioner, anaerobically digested to produce biogas, gasified or merely burned to provide some of the heat or electricity required in the process.

In addition to economic feasibility, algal biodiesel must be environmentally desirable. It is critical that the energy embodied in the fuel produced is greater than the energy input required to produce it. Net energy analysis and life cycle analysis (LCA) are tools used to quantify the environmental burdens at every stage of production, from growth of the

biomass to combustion of the fuel. Lardon et al. (2009) conducted a life-cycle analysis of a hypothetical algal biodiesel production facility. Two different culture conditions: fertilizer feeding and nitrogen starvation, as well as two different extraction options: dry or wet, were investigated. The study confirmed the potential of microalgae as an energy source, but highlighted the necessity of decreasing energy and fertilizer consumption. Energy inputs, such as the energy required for mixing and pumping, the embodied energy in the materials used and the energy cost of harvesting and processing must be minimized. Recycling of material and energy from waste streams is also important wherever feasible (Scott et al., 2010). The use of nitrogen stress, as well as the optimization of wet extraction were indicated as desirable options. The anaerobic digestion of residual biomass was also suggested as a way of reducing external energy usage and recycling of nutrients.

We conducted a LCA on a hypothetical algal biodiesel process. Biomass production in three different reactor types (open ponds and two types of closed reactor: horizontal tubular and vertical tubular) was evaluated. In all cases, harvesting was modeled as an initial settling step followed by centrifugation. Hexane extraction was used to recover the oil, with the residual biomass sent for anaerobic digestion and the resulting energy from biogas production recycled to the process. The hexane was recovered and the oil converted to biodiesel using an enzymatic process. The basis chosen was production of 1000 kg of biodiesel from *Phaeodactylum tricornutum*. The net energy return (the energy embodied in the biodiesel produced divided by the energy input required) was positive (1.5) for the open pond, neutral (0.97) for the horizontal tubular reactor and negative (0.12) for the vertical tubular reactor. In this model, open ponds were the most energetically favorable reactor type, yielding 50% more energy than was put in. Horizontal tubular reactors required an energy input equivalent to the output, and vertical tubular reactors were the most unfavorable, requiring several times the energy input as that in the product, where system optimization was not conducted.

The overriding energy input in the process was found to be that required to run the reactor. Reactor energy was by far the most dominant determinant of the overall process energy requirement. This was largest in the vertical tubular reactor as these were continually mixed by gas sparging. Energy required for pumping between unit processes was also significant, particularly at lower biomass concentrations due to the larger volume of culture to be processed. The major energy inputs in downstream processing were that embodied in the lime used as a flocculation agent, and the energy required for solvent recovery. Lipid productivity and species choice had a significant impact on the energy balance.

8. Optimizing lipid productivity

Increasing microalgal lipid productivity improves both the economics and energy balance of the process. The land area and size of culture vessels required, as well as the energy and water requirements for large-scale algal culture are strongly dependent on algal productivity. With a higher productivity, lower cultivation, mixing, pumping and harvesting volumes would be required to yield the same amount of product, resulting in lower cost and energy requirements. More concentrated cell suspensions could also make downstream processing more efficient. The genetic characteristics of an algal species determine the range of its productivity. The levels reached in practice within this range are determined by the culture conditions. The two main approaches to enhancing productivity are: 1. selection of highly productive algal species and 2. designing and maintaining optimal conditions for productivity.

The choice of algal strain is a key consideration. The diversity of algal species is much greater than that of land plants (Scott et al., 2010) allowing selection of species best suited to the local environment and goals of the project. Although there have been several screening programs, building on the work of the Aquatic Species Program (Sheehan et al., 1998), the majority of strains remain untested, few species have been studied in depth and the data reported in the literature is often not comparable due to the different experimental procedures used. We conducted a broad literature review of the growth rates and lipid contents of 55 promising microalgal species under both nutrient replete and limited conditions. The original study (Griffiths & Harrison, 2009) has been extended here through the use of two key assumptions to convert data into common units of biomass and lipid productivity.

Lipid productivity is determined by both growth rate and lipid content. Lipid content (P) was typically reported as percentage dry weight (% DW). Data presented in $\text{pg lipid.cell}^{-1}$ was discarded if no cell weight was available for conversion. Growth rates were reported as doubling time (T_d) or specific growth rate (μ). These were inter-converted according to Equation 1.

$$T_d = \frac{\ln 2}{\mu} \quad (1)$$

Standard units of $\text{g.L}^{-1}.\text{day}^{-1}$ were chosen for biomass productivity. Specific growth rate (μ , in units of day^{-1}) can be converted to volumetric biomass productivity (Q_V , in $\text{g.L}^{-1}.\text{day}^{-1}$) where the biomass concentration (X , in g.L^{-1}) is known (Equation 2). Biomass productivity is often reported on the basis of surface area (Q_A), in units of $\text{g.m}^{-2}.\text{day}^{-1}$. This can be converted to Q_V using Equation 3 where the depth (D , in m) of the culture vessel can be calculated from the reactor geometry.

$$Q_V = \mu \times X \quad (2)$$

$$Q_V = \frac{Q_A}{D \times 1000} \quad (3)$$

Lipid productivity (Q_P) was infrequently reported in the literature, and was generally reported in $\text{g.L}^{-1}.\text{day}^{-1}$ or $\text{mg.L}^{-1}.\text{day}^{-1}$. This parameter could be calculated from volumetric biomass productivity (Q_V , in $\text{g.L}^{-1}.\text{day}^{-1}$) and lipid content (P in % DW) where appropriate data were available (Equation 4).

$$Q_P = Q_V \times P \quad (4)$$

The calculation of lipid productivity for the majority of species necessitated two assumptions:

1. Conversion of areal productivities (in $\text{g.m}^{-2}.\text{day}^{-1}$) to volumetric productivities ($\text{g.L}^{-1}.\text{day}^{-1}$), using an average depth of 0.1 m, based on best fit of the data
2. Conversion of specific growth rate to biomass productivity using an average biomass concentration of 0.15 g.L^{-1} , based on typical experimental results.

The average literature values for the 55 species are shown in Table 4. Among the species with the highest reported lipid productivity were *Neochloris oleoabundans*, *Navicula pelliculosa*, *Amphora*, *Cylindrotheca* and *Chlorella sorokiniana* (Fig. 3). Other findings were that green algae (Chlorophyta) generally showed an increase in lipid content when nitrogen deficient, whereas

Species	Taxa ^a	Media ^b	Lipid content		T _d	Biomass productivity			Lipid productivity	
			N replete	N deficient		Q _A	Q _V	Ave Q _V	Calculated	Literature
			% dw	% dw	days	g.m ⁻² .day ⁻¹	g.L ⁻¹ .day ⁻¹	g.L ⁻¹ .day ⁻¹	mg.L ⁻¹ .day ⁻¹	mg.L ⁻¹ .day ⁻¹
<i>Amphiprora hyalina</i>	B	M	22	28	0.41			0.30		67
<i>Amphora</i>	B	M	51		0.83	40.0		0.23	117	160
<i>Anabaena cylindrica</i>	Cy	F	5	5	1.00			0.10	5	
<i>Ankistrodesmus falcatus</i>	C	F	24	32	0.33	31.6	0.46	0.36	85	
<i>Chaetoceros calcitrans</i>	O	M	40				0.04	0.04	16	18
<i>Chaetoceros muelleri</i>	O	M	19	27	0.46		0.07	0.26	50	22
<i>Chlamydomonas appplanata</i>	C	F	18	33						
<i>Chlamydomonas reinhardtii</i>	C	F	21		0.26			0.40	83	
<i>Chlorella emersonii</i>	C	F	29	63	0.80		0.03	0.08	23	
<i>Chlorella minutissima</i>	C	M	31	57	1.60		0.03	0.05	15	
<i>Chlorella protothecoides</i>	C	F	13	23	1.68			0.07	8	
<i>Chlorella pyrenoidosa</i>	C	F	16	64	0.28			0.47	76	
<i>Chlorella sorokiniana</i>	C	F	18	18	0.35		0.55	0.62	110	45
<i>Chlorella vulgaris</i>	C	F	24	42	0.70	10.7	0.11	0.16	40	30
<i>Cryptocodinium cohnii</i>	D	M	25		0.38			0.28	70	
<i>Cyclotella cryptica</i>	O	M	18	34	0.56			0.20	36	
<i>Cylindrotheca</i>	B	M	27	27	0.30			0.43	114	
<i>Dunaliella primolecta</i>	Pr	S	23	14		9.1		0.09	21	
<i>Dunaliella salina</i>	Pr	S	19	10	0.44			0.27	53	
<i>Dunaliella tertiolecta</i>	Pr	S	15	18	0.48			0.22	35	
<i>Euglena gracilis</i>	Eg	F	20	35	0.60			0.18	37	
<i>Hymenomonas carterae</i>	H	M	20	14	1.71			0.06	12	
<i>Isochrysis galbana</i>	H	M	25	29	0.89	11.5	0.16	0.15	37	38
<i>Monodopsis subterranea</i>	E	F	25	13			0.19	0.19	48	30
<i>Monoraphidium minutum</i>	C	F	22	52	0.35			0.30	65	
<i>Nannochloris</i>	C	M/F	28	30	0.49	31.9	0.23	0.27	74	77
<i>Nannochloropsis</i>	E	M	31	41	1.20		0.27	0.24	72	52
<i>Nannochloropsis salina</i>	E	M	27	46		13.9		0.14	38	
<i>Navicula acceptata</i>	B	F	33	35	0.42			0.29	96	
<i>Navicula pelliculosa</i>	B	F	27	45	0.23			0.46	124	
<i>Navicula saprophila</i>	B	F	24	51	0.38			0.28	68	
<i>Neochloris oleoabundans</i>	C	F	36	42			0.46	0.46	164	136
<i>Nitzschia communis</i>	B	M			0.96			0.18		
<i>Nitzschia dissipata</i>	B	M	28	46	0.39			0.27	73	
<i>Nitzschia frustulum</i>	B	M	26							
<i>Nitzschia palea</i>	B	M	47	40						48
<i>Oscillatoria</i>	Cy	F	7	13	0.28			0.37	27	
<i>Ourococcus</i>	C	F	27	50	3.01			0.03	9	
<i>Parlova lutheri</i>	H	M	36				0.21	0.21	75	50
<i>Parlova salina</i>	H	M	31				0.16	0.16	49	49
<i>Phaeodactylum tricornutum</i>	B	M	21	26	1.02	20.0	0.34	0.18	38	45
<i>Porphyridium purpureum</i>	R	M	11		0.45		0.23	0.23	24	35
<i>Prymnesium parvum</i>	H	M	30		0.74			0.14	42	
<i>Scenedesmus dimorphus</i>	C	F	26		0.46			0.23	57	
<i>Scenedesmus obliquus</i>	C	F	21	42	2.74		0.12	0.10	22	
<i>Scenedesmus quadricauda</i>	C	F	18				0.19	0.19	35	35
<i>Selenastrum gracile</i>	C	F	21	28						
<i>Skeletonema costatum</i>	O	M	16	25	0.66		0.08	0.15	24	17
<i>Spirulina maxima</i>	Cy	S	7		1.34			0.16	11	
<i>Spirulina platensis</i>	Cy	S	13	10	0.60	25.0		0.23	29	
<i>Synechococcus</i>	Cy	M	11		0.36			0.29	32	75
<i>Tetraselmis suecica</i>	P	M	17	26	1.51	28.1	0.59	0.39	65	32
<i>Thalassiosira pseudonana</i>	O	M	16	26	0.49		0.08	0.26	43	17
<i>Thalassiosira weissflogii</i>	O	M	22	24	0.58			0.18	41	
<i>Tribonema</i>	O	M	12	16	1.82		0.51	0.28	33	
Total			Average	Average	Average	Average	Average	Average	Average	Average
Freshwater			23	32	0.80	22.2	0.23	0.23	52	51
Marine			25	31	0.82	22.7	0.21	0.21	49	47
Chlorophyta			23	41	1.01	24.7	0.24	0.25	58	65
Other taxa			25	30	0.72	20.4	0.24	0.23	57	50
Cyanobacteria			8	9	0.72	25.0		0.23	21	75

^a Key to taxa: C = Chlorophyta, Cy = Cyanobacteria, D = Dinophyta, E = Eustigmatophyta, Eg = Euglenozoa, H = Haptophyta, O = Ochrophyta, Pr = Prasinophyta, ^b Key to media: F = Freshwater, M = Marine, S = Saline

Table 4. Growth and lipid parameters of 55 species of microalgae, along with their taxonomy and media type (adapted from Griffiths and Harrison, 2009). The average of literature values for lipid content under nitrogen (N) replete and deficient growth conditions, doubling time (T_d), and areal (Q_A) and volumetric (Q_V) biomass productivities are shown in columns 4 to 8. Average biomass productivity calculated from T_d, μ, Q_A and Q_V is shown in column 9, and calculated and literature lipid productivity in columns 10 and 11 respectively. Blanks represent no data available

diatoms and other taxa were more variable in their response, although all those subjected to silicon deprivation showed an increase in lipid content. This increase in lipid content, however, does not necessarily translate into increased lipid productivity due to decreased growth rates under nutrient stress conditions. Response of biomass productivity to nutrient deprivation is variable between species and further investigation is necessary.

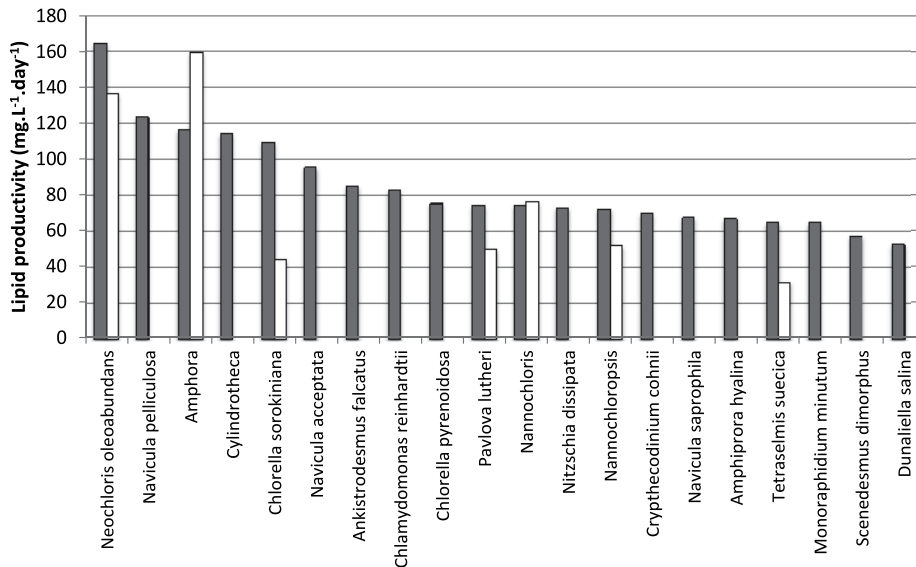


Fig. 3. Average calculated (grey bars) and literature (empty bars) biomass productivity for the 20 most productive species investigated (adapted from Griffiths & Harrison, 2009)

In Fig. 4, the impact of biomass productivity and lipid content on calculated lipid productivity is analyzed through correlation. A relationship is demonstrated between lipid productivity and biomass productivity. All species with a high biomass productivity (above $0.4 \text{ g.L}^{-1}.\text{day}^{-1}$), and all but one above $0.3 \text{ g.L}^{-1}.\text{day}^{-1}$, have a high lipid productivity, greater than $60 \text{ mg.L}^{-1}.\text{day}^{-1}$. However, there are a few species with high lipid productivity despite an average biomass productivity, indicating that lipid content is also a factor. Lipid content correlates poorly with lipid productivity, indicating that lipid content alone is not a good indicator of suitability for biodiesel production. There are several species with low lipid productivity despite an above-average lipid content ($> 22\%$). The species with high lipid productivities ($> 60 \text{ mg.L}^{-1}.\text{day}^{-1}$) range in lipid content from 16% DW to 51%. Further, species with high lipid content ($> 30\%$) vary in lipid productivity between 15 and $164 \text{ mg.L}^{-1}.\text{day}^{-1}$.

Once the species has been chosen, the next critical factor is the optimisation of culture conditions. In addition to optimal temperature and pH, conditions that maximize autotrophic growth rate are optimal light, carbon and nutrient supply. Microalgal lipid accumulation is affected by a number of environmental factors (Guschina & Harwood 2006; Roessler 1990), and often enhanced by conditions that apply a 'stress' to the cells. Lipids appear to be synthesised in response to conditions when energy input (rate of photosynthesis) exceeds the capacity for energy use (cell growth and division) (Roessler 1990). Enhanced cell lipid content has been found under conditions of nutrient deprivation (Hsieh & Wu, 2009; Illman et al., 2000; Li et al., 2008; Shifrin & Chisholm, 1981; Takagi et al.,

2000), high light intensity (Rodolfi et al., 2009), high temperature (Converti et al., 2009); high salt concentration (Takagi et al., 2000) and high iron concentration (Liu et al., 2008).

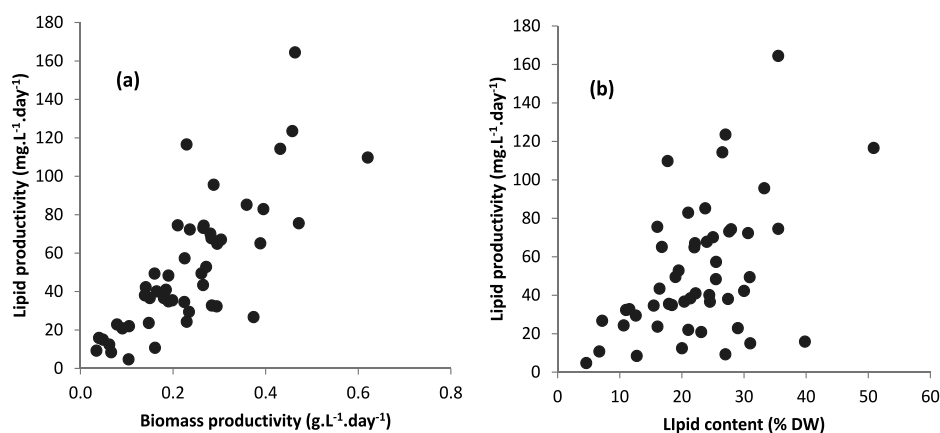


Fig. 4. Correlation of calculated lipid productivity with (a) biomass productivity and (b) lipid content under nutrient replete conditions

Nitrogen (N) deprivation is the most frequently reported method of enhancing lipid content, as it is cheap and easy to manipulate. N deficiency has a reliable and strong influence on lipid content in many species (Chelf, 1990; Rodolfi et al., 2009; Shifrin & Chisholm, 1981). Unfortunately, stress conditions that enhance lipid content, such as nitrogen deprivation, typically also decrease the growth rate, and thus the net effect on lipid productivity must be ascertained (Lardon et al., 2009). Maximum biomass productivity and lipid content in *Chlorella vulgaris* occur under different conditions of nitrogen availability, suggesting that a two-stage cultivation strategy may be advantageous. From studies we have conducted on *C. vulgaris*, it appears that an intermediate level of nitrogen limitation creates the optimum balance between biomass and lipid production. The optimum cultivation strategy tested was batch culture, using a low starting nitrate concentration (between 250 and 300 mg.L⁻¹ nitrate), ensuring that nitrogen in the medium was depleted towards the end of exponential growth. Other cultivation strategies (e.g. two-stage batch, fed-batch or continuous) were found not to improve upon the productivity achieved in N limited batch culture.

Although high lipid productivity is a key factor in species selection, other characteristics such as ease of cultivation, tolerance of a range of environmental conditions (particularly temperature and salinity), flue-gas contaminants and high O₂ concentrations, as well as resistance to contaminants and predators are likely to be equally as important.

9. Conclusion and future research directions

Algal biodiesel continues to hold promise as a sustainable, carbon neutral source of transportation fuel. The technical feasibility of algal biodiesel has been demonstrated (Miao & Wu, 2006; Xiong et al., 2008), but the economics and energy demands of production require substantial improvement. The necessary changes appear attainable through the enhancement of productivity, the reduction of cost and energy demand for key processes and the application of the biorefinery concept (co-production of valuable products or

processes). Current research is focussed on achieving this through a combination of biological and engineering approaches. The major challenges currently being addressed are:

- Increasing productivity in large-scale outdoor microalgal culture
- Minimizing contamination by predators and other algal species
- Mitigating temperature changes and water loss due to evaporation
- Optimizing supply of light and CO₂
- Developing cheap and efficient reactor designs
- Developing cost and energy-efficient methods of harvesting dilute suspensions of small microalgal cells
- Decreasing the overall energy and cost requirements, particularly for pumping, gas transfer, mixing, harvesting and dewatering
- Improving resource utilization and productivity through a biorefinery approach
- Producing valuable co-products
- Decreasing environmental footprint through recycling of water, energy and nutrients.

These topics have captured the imagination of several researchers and some innovative solutions are being investigated. The overall goal of biofuel production is to optimise the conversion of sunlight energy to liquid fuel. In algal cultivation, techniques to improve light delivery include manipulating the reactor design, the use of optics to deliver light to the centre of the reactor, optimising fluid dynamics to expose all cells to frequent light flashes, increasing the efficiency of photosynthesis and carbon capture (e.g. enhancing the carbon concentrating mechanism), and using mixed-species cultures to utilise different intensities or wavelengths of light (Scott et al., 2010).

One of the major problems with light delivery is poor penetration of light into dense cultures due to mutual shading by the cells. Under high light conditions, microalgal cells absorb more light than they can use, shading those below them and dissipating the excess energy as fluorescence or heat. In nature, this confers individual cells an evolutionary advantage, however, in mass production systems it is undesirable as it decreases overall productivity. It would be advantageous to minimize the size of the chlorophyll antennae in cells at the surface, so as to permit greater light penetration to cells beneath (Melis, 2009). Reducing the size of the light harvesting complexes through genetic modification has been shown to improve productivity (Nakajima et al., 2001). The goal now is to engineer cells that change antennae size according to light intensity.

Although the TAG content of cells can be enhanced by manipulation of the nutrient supply, there is a tradeoff between growth and lipid production. For optimum productivity, cells that can maintain a simultaneously high growth rate and lipid content are required. Strategies to achieve this include screening for novel species, and genetic engineering of well characterised strains. The genes and proteins involved in regulation of lipid production pathways are currently being investigated through synthetic biology and the modelling of carbon flux through metabolism. Key enzymes and branch-points can then be manipulated to improve productivity. For example, carbohydrate and lipid production compete directly for carbon precursors. Shunting carbon away from starch synthesis by downregulation of the enzyme ADP-glucose pyrophosphorylase in *Chlamydomonas* has been shown to enhance TAG content 10-fold (Li et al., 2010).

The challenge of harvesting small algae cells from dilute suspensions has yet to be solved in a cheap, energy efficient manner. Ideally the addition of chemical agents that impede the recycling of the culture medium and nutrients should be avoided. A series of methods is likely to be used e.g. flocculation followed by sedimentation, or settling followed by

centrifugation. Promising ideas for harvesting techniques include concentration using sound waves and triggering of autoflocculation on command. Another attractive idea is direct product excretion, where algae secrete fuel molecules into the medium as they are produced, allowing continuous production and harvesting without cell disruption. The Cyanobacterium *Synechocystis* has recently been successfully modified to excrete fatty acids (Liu, 2011).

The use of nutrients from waste sources (e.g. CO₂ from flue-gas and nitrate and phosphate from wastewater) could help to reduce costs and energy input, as well as contributing to environmental remediation. Potential co-products include fine chemicals such as astaxanthin, B-carotene, omega-3 fatty acids, polyunsaturated fatty acids, nutraceuticals, therapeutic proteins, cosmetics, aquafeed and animal feed (Mata et al., 2010). Algae could also potentially be modified to synthesize other types of fuel e.g. ethanol, butanol, isopropanol and hydrocarbons (Radakovits et al., 2010) or downstream processing of algae could be modified to process the entire biomass to energy containing fuels through thermal processes.

10. Acknowledgements

This work is based upon research supported by the South African National Energy Research Institute (SANERI), the South African Research Chairs Initiative (SARChI) of the Department of Science and Technology, the Technology Innovation Agency (TIA) and the National Research Foundation (NRF). The financial assistance of these organizations is hereby acknowledged. Opinions expressed and conclusions arrived at are those of the authors and are not necessarily to be attributed to SANERI, SARChI, TIA or the NRF.

11. References

- An, J-Y, Sim, S-J, Lee JS & Kim BW. (2003). Hydrocarbon production from secondarily treated piggery wastewater by the green alga *Botryococcus braunii*. *Journal of Applied Phycology*, 15(2-3): 185-191
- Anderson, RA. (2005). *Algal Culturing Techniques*. Elsevier, London
- Bailey, J & Ollis, D. (1977). *Biochemical Engineering Fundamentals*. McGraw-Hill, New York
- Barsanti, L & Gualtieri, P. (2006). *Algae: Anatomy, Biochemistry and Biotechnology*. CRC Press, Taylor and Francis Group, Florida
- Becker, EW. (1994). *Microalgae: Biotechnology and Microbiology*. Cambridge University Press, Cambridge
- Ben-Amotz, A. (1995). New Mode of *Dunaliella* Biotechnology: Two-Phase Growth for B-Carotene Productio. *Journal of Applied Phycology*, 7(1):65-68
- Benemann, J, Koopman, B, Weissman, J, Eisenberg, D & Gobell R. (1980). Development of Microalgae Wastewater Treatment and Harvesting Technologies in California. In *Algae Biomass: Production and Use*. Edited by Shelef, G & Soeder, C. pp. 457-495 . Elsevier, Amsterdam
- Bernhardt, H & Clasen, J. (1994). Investigations into the Flocculation Mechanisms of Small Algal Cells. *Journal of Water Supply: Research and Technology – AQUA*, 43(5): 222-232
- Bitton, G, Fox, JL & Strickland, HG. (1975). Removal of Algae from Florida Lakes by Magnetic Filtration. *Applied and Environmental Microbiology*, 30(6):905-908
- Borowitzka, MA. (1992). Algal Biotechnology Products and Processes - Matching Science and Economics. *Journal of Applied Phycology*, 4:267-279

- Borowitzka, MA. (1997). Microalgae for Aquaculture - Opportunities and Constraints. *Journal of Applied Phycology*, 9(5):393-401
- Bosma, R, van Spronsen, WA, Tramper, J & Wijffels, RH. (2003). Ultrasound, a New Separation Technique to Harvest Microalgae. *Journal of Applied Phycology*, 15(2-3):143-153
- Brennan, L & Owende, P. (2010). Biofuels from microalgae: A Review of Technologies for Production, Processing, and Extractions of Biofuels and Co-Products. *Renewable and Sustainable Energy Reviews*, 14(2):557-577
- Carvalho, AP, Meireles, LA & Malcata, FX. (2006). Microalgal Reactors: A Review of Enclosed System Designs and Performances. *Biotechnology Progress*, 22(6):1490-1506
- Ceron Garcia, MC, Fernandez Sevilla, JM, Acien Fernandez, FG, Molina Grima, E & Garcia Camacho, F. (2000). Mixotrophic Growth of *Phaeodactylum tricornutum* on Glycerol: Growth Rate and Fatty Acid Profile. *Journal of Applied Phycology*, 12:239-248
- Chelf, P. (1990). Environmental Control of Lipid and Biomass Production in Two Diatom Species. *Journal of Applied Phycology*, 2(2):121-129
- Chen, F. (1996). High Cell Density Culture of Microalgae in Heterotrophic Growth. *Trends in Biotechnology*, 14(11):421-426
- Chen, YM, Liu, JC & Ju, Y. (1998). Flotation Removal of Algae from Water. *Colloids and Surfaces B: Biointerfaces*, 12(1):49-55
- Chisti, Y. (2007). Biodiesel from Microalgae. *Biotechnology Advances*, 26(3):294-306
- Chisti, Y. (2008). Biodiesel from Microalgae Beats Bioethanol. *Trends in Biotechnology*, 25(3):126-31
- Converti, A, Casazza, A, Ortiz, EY, Perego, P & Del Borghi, M. (2009). Effect of Temperature and Nitrogen Concentration on the Growth and Lipid Content of *Nannochloropsis Oculata* and *Chlorella vulgaris* for Biodiesel Production. *Chemical Engineering and Processing: Process Intensification*, 48(6):1146-1151
- Csordas, A. (2004). An Integrated Photobioreactor and Foam Fractionation Unit for the Growth and Harvest of *Chaetoceros* spp. in Open Systems. *Aquaculture Engineering*, 30(1-2):15-30
- Danquah, MK, Gladman, B, Moheimani, N & Forde, GM. (2009). Microalgal Growth Characteristics and Subsequent Influence on Dewatering Efficiency. *Chemical Engineering Journal*, 151(1-3):73-78
- De la Pena, M. (2007). Cell Growth and Nutritive Value of the Tropical Benthic Diatom, *Amphora* sp., at Varying Levels of Nutrients and Light Intensity, and Different Culture Locations. *Journal of Applied Phycology*, 19(6):647-655
- Dennis, DT, Turpin, DH, Lefebvre, DD & Layzell, DB. (1998). *Plant metabolism*. Longman, Singapore
- Fattom, A & Shilo, M. (1984). Hydrophobicity as an Adhesion Mechanism of Benthic Cyanobacteria. *Applied and Environmental Microbiology*, 47(1):135-143
- Golueke, CG, Oswald, WJ & Gotaas, HB. (1957). Anaerobic Digestion of Algae. *Applied Microbiology*, 5(1):47-55
- Griffiths, MJ & Harrison, STL. (2009). Lipid Productivity as a Key Characteristic for Choosing Algal Species for Biodiesel Production. *Journal of Applied Phycology*, 21(5):493-507
- Grobbelaar, JU. (1994). Turbulence in Mass Algal Cultures and the Role of light/dark Fluctuations. *Journal of Applied Phycology*, 6(3):331-335
- Grobbelaar, JU. (2000). Physiological and Technological Considerations for Optimising Mass Algal Cultures. *Journal of Applied Phycology*, 12:201-206

- Gudin, C & Therpenier, C. (1986). Bioconversion of Solar Energy into Organic Chemicals by Microalgae. *Advanced Biotechnology Processes*, 6:73-110
- Harun, R, Singh, M, Forde, GM & Danquah, MK. (2010). Bioprocess Engineering of Microalgae to Produce a Variety of Consumer Products. *Renewable and Sustainable Energy Reviews* 14(3):1037-1047
- Henderson, R, Parsons, SA & Jefferson, B. (2008). The Impact of Algal Properties and Pre-Oxidation on Solid/Liquid Separation of Algae. *Water Research*, 42:1827-1845
- Hodaifa, G, Martínez, M & Sánchez, S. (2008). Use of industrial wastewater from olive-oil extraction for biomass production of *Scenedesmus obliquus*. *Bioresource Technology*, 99(5):1111-1117
- Hsieh, C & Wu, W. (2009). Cultivation of Microalgae for Oil Production with a Cultivation Strategy of Urea Limitation. *Bioresource Technology*, 100(17):3921-3926
- Huntley, ME & Redalje, DG. (2006). CO₂ Mitigation and Renewable Oil from Photosynthetic Microbes: A New Appraisal. *Mitigation and Adaptation Strategies for Global Change*, 12(4):573-608
- Illman, A, Scragg, AH & Shales, SW. (2000). Increase in *Chlorella* Strains Calorific Values when Grown in Low Nitrogen Medium. *Enzyme Microbial Technology*, 27(8):631-635
- Lee, SJ, Kim, S, Kim, J, Kwon, G, Yoon, B & Oh, H. (1998). Effects of Harvesting Method and Growth Stage on the Flocculation of the Green Alga *Botryococcus braunii*. *Letters in Applied Microbiology*, 27(1):14-18
- Jameson, GJ. (1999). Hydrophobicity and Flocc Density in Induced-Air Flotation for Water Treatment. *Colloids and Surfaces A: Physicochemical and engineering aspects*, 151:269-281
- Jarvis, P, Buckingham, P, Holden, B & Jefferson, B. (2009). Low Energy Ballasted Flotation. *Water Research*, 43:3427-3434
- Knuckey, R, Brown, M, Robert, R & Frampton, D. (2006). Production of Microalgal Concentrates by Flocculation and their Assessment as Aquaculture Feeds. *Aquaculture Engineering*, 35(3):300-313
- Lardon, L, Heñ lias, A, Sialve, B, Steyer, JP & Bernard, O. (2009). Life-Cycle Assessment of Biodiesel Production from Microalgae. *Environmental science & technology*, 43(17):6475-6481
- Lee, AK, Lewis, DM & Ashman, PJ. (2008). Microbial Flocculation, a Potentially Low-Cost Harvesting Technique for Marine Microalgae for the Production of Biodiesel. *Journal of Applied Phycology*, 21(5):559-567
- Li, Y, Han, D, Hu, G, Dauvillee, D, Sommerfeld, M, Ball, S & Hu, Q. (2010). Chlamydomonas Starchless Mutant Defective in ADP-Glucose Pyrophosphorylase Hyper-Accumulates Triacylglycerol. *Metabolic Engineering*, 12(4):387-91
- Li, Y, Horsman, M, Wang, B, Wu, N & Lan, CQ. (2008). Effects of Nitrogen Sources on Cell Growth and Lipid Accumulation of Green Alga *Neochloris oleoabundans*. *Applied microbiology and biotechnology*, 81(4):629-36
- Liu, X, Sheng, J & Curtiss, R. (2011). Fatty Acid Production in Genetically Modified Cyanobacteria. *Proceedings of the National Academy of Sciences of the United States of America*, 108(17):6899-904
- Liu, Z, Wang, G & Zhou, B. (2008). Effect of Iron on Growth and Lipid Accumulation in *Chlorella vulgaris*. *Bioresource Technology*, 99(11):4717-22
- Livne, A & Sukenik, A. (1992). Lipid Synthesis and Abundance of Acetyl CoA Carboxylase in *Isochrysis galbana* (Prymnesiophyceae) Following Nitrogen Starvation. *Plant and Cell Physiology*, 33(8):1175-1181

- Lv, J, Cheng, L, Xu, X, Zhang, L & Chen, H. (2010). Enhanced Lipid Production of *Chlorella vulgaris* by Adjustment of Cultivation Conditions. *Bioresource Technology*, 101(17):6797-804.
- Mata, TM, Martins, AA & Caetano, NS. (2010). Microalgae for Biodiesel Production and Other Applications: A Review. *Renewable and Sustainable Energy Reviews*, 14(1):217-232
- Melis, A. (2009). Solar Energy Conversion Efficiencies in Photosynthesis: Minimizing the Chlorophyll Antennae to Maximize Efficiency. *Plant Science*, 177(4):272-280
- Miao, X & Wu, Q. (2006). Biodiesel Production from Heterotrophic Microalgal Oil. *Bioresource Technology*, 97(6):841-846
- Mittelbach, M & Reimschmidt, C. (2004). *Biodiesel - The Comprehensive Handbook*. Martin Mittelbach
- Mohn, FH. (1980). Experiences and Strategies in the Recovery of Biomass from Mass Cultures of Microalgae. In *Algae biomass: Production and Use*. Edited by Shelef, G & Soeder, C. pp. 547-571. Elsevier, Amsterdam
- Molina Grima, E, Belarbi, E, Acien Fernandez, FG, Robles Medina, A & Chisti, Y. (2003). Recovery of Microalgal Biomass and Metabolites: Process Options and Economics. *Biotechnology Advances*, 20(7-8):491-515
- Nakajima, Y, Tsuzuki, M & Ueda, R. (2001). Improved Productivity by Reduction of the Content of Light-Harvesting Pigment in *Chlamydomonas perigranulata*. *Journal of Applied Phycology*, 13(2):95-101
- Nedbal, L, Tichy, V, Xiong, F & Grobbelaar, JU. (1996). Microscopic Green Algae and Cyanobacteria in High-Frequency Intermittent Light. *Journal of Applied Phycology*, 8(4-5):325-333
- Oswald, WJ & Golueke, C. (1960). Biological Transformation of Solar Energy. *Advanced Applied Microbiology*, 2:223-262
- Petrusevski, B, Bolier, G, van Breemen, A & Alaerts, GJ. (1995). Tangential Flow Filtration: A Method to Concentrate Freshwater Algae. *Water Research*, 29:1419-1424
- Piorreck, M, Baasch, K & Pohl, P. (1984). Biomass Production, Total Protein, Chlorophylls, Lipids and Fatty Acids of Freshwater Green and Blue-Green Algae Under Different Nitrogen Regimes. *Phytochemistry*, 23(2):207-216
- Pulz, O. (2001). Photobioreactors: Production Systems for Phototrophic Microorganisms. *Applied Microbiology and Biotechnology*, 57(3):287-293
- Pushparaj, B, Pelosi, E, Torzillo, G & Materassi, R. (1993). Microbial Biomass Recovery using a Synthetic Cationic Polymer. *Bioresource Technology*, 43(1):59-62
- Radakovits, R, Jinkerson, RE, Darzins, A & Posewitz, MC. (2010). Genetic Engineering of Algae for Enhanced Biofuel Production. *Eukaryotic Cell*, 9(4):486-501
- Ramos, MJ, Fernandez, CM, Casas, A, Rodriguez, L & Perez, A. (2009) Influence of Fatty Acid Composition of Raw Materials on Biodiesel Properties. *Bioresource Technology*, 100(1):261-268
- Regan, DL & Gartside, G. (1983). *Liquid Fuels from Microalgae in Australia*. CSIRO, Melbourne
- Richardson, C. 2011. *Investigating the role of reactor design to maximise the environmental benefit of algal oil for biodiesel*. Master's thesis. University of Cape Town.
- Richmond, A. (2004). *Microalgal culture: biotechnology and applied phycology*. Blackwell Science, Oxford
- Rodolfi, L, Chini Zittelli, G, Bassi, N, Padovani, G, Biondi, N, Bonini, G & Tredici, MR. (2009). Microalgae for Oil: Strain Selection, Induction of Lipid Synthesis and Outdoor Mass Cultivation in a Low-Cost Photobioreactor. *Biotechnology and Bioengineering*, 102(1):100-112

- Roessler, P. (1990). Environmental Control of Glycerolipid Metabolism in Microalgae: Commercial Implications and Future Research Directions. *Journal of Phycology*, 26:393-399
- Sazdanoff, N. (2006). *Modeling and simulation of the algae to biodiesel fuel cycle*. Honour's thesis, Ohio State University
- Schenk, PM, Thomas-Hall, S, Stephens, E, Marx, UC, Mussgnug, JH, Posten, C, Kruse, O & Hankamer, B. (2008). Second Generation Biofuels: High-Efficiency Microalgae for Biodiesel Production. *BioEnergy Research* 1(1):20-43
- Scott, SA, Davey, MP, Dennis, JS, Horst, I, Howe, CJ, Lea-Smith, D & Smith, AG. (2010). Biodiesel from Algae: Challenges and Prospects. *Current Opinions in Biotechnology*, 21:277-286
- Sheehan, J, Dunahay, T, Benemann, J & Roessler, P. (1998). *A Look Back at the U.S. Department of Energy's Aquatic Species Program: Biodiesel from Algae*. Close-Out report. National Renewable Energy Lab, Department of Energy, Golden, Colorado, U.S.A. Report number NREL/TP-580-24190, dated July 1998
- Shelef G, Sukenik A, Green M (1984) *Microalgae Harvesting and Processing: a Literature Review*. SERI report.
- Shifrin, NS & Chisholm, SW. (1981). Phytoplankton Lipids: Interspecific Differences and Effects of Nitrate, Silicate and Light-Dark Cycles. *Journal of Phycology*, 374-384
- Shuler, ML & Kargi, F. (2005). *Bioprocess Engineering: Basic Concepts*. Pearson Education, Singapore
- Spoehr, HA & Milner, HW. (1949). The Chemical Composition of *Chlorella*, Effect of Environmental Conditions. *Plant Physiology*, 24:120-149
- Stansell, G, Gray, VM & Sym, S. (2011). Microalgal Fatty Acid Composition: Implications for Biodiesel Quality. *Journal of Applied Phycology*, In press. DOI: 10.1007/s10811-011-9696-x
- Takagi, M, Watanabe, K, Yamaberi, K & Yoshida, T. (2000). Limited Feeding of Potassium Nitrate for Intracellular Lipid and Triglyceride Accumulation of *Nannochloris* sp. UTEX LB1999. *Applied Microbiology and Biotechnology*, 54(1):112-7
- Tsukahara, K & Sawayama, S. (2005). Liquid Fuel Production using Microalgae. *Journal of the Japan Petroleum Institute*, 48(5):251-259
- Uduman, N, Qi, Y, Danquah, MK, Forde, GM & Hoadley, A. (2010). Dewatering of Microalgal Cultures: A Major Bottleneck to Algae-Based Fuels. *Journal of Renewable and Sustainable Energy*, 2(1)
- Van Gerpen, J. (2005). Biodiesel Processing and Production. *Fuel Processing Technology* 86:1097-1107
- Vlaski, A, van Breemen, A & Alaers, G. (1997). The Role of Particle Size and Density in Dissolved Air Flotation and Sedimentation. *Water Science and Technology*, 36(4):177-189
- Xiong, W, Li, X, Xiang, J & Wu, Q. (2008). High-Density Fermentation of Microalga *Chlorella protothecoides* in Bioreactor for Microbio-Diesel Production. *Applied Microbiology and Biotechnology*, 1:29-36
- Zhang, X, Hu, Q, Sommerfeld, M, Puruhito, E & Chen, Y. (2010). Harvesting Algal Biomass for Biofuels using Ultrafiltration Membranes. *Bioresource Technology*, 101(14):5297-304

An Integrated Waste-Free Biomass Utilization System for an Increased Productivity of Biofuel and Bioenergy

László Kótai et al.*

*Institute of Materials and Environmental Chemistry, Chemical Research Center,
Hungarian Academy of Sciences,
Hungary*

1. Introduction

The increase in production and utilization of biomass and other renewable sources of energy are important challenges of the energy industry. It generates, however, demands for ecologically and economically acceptable production systems. Here we report an integrated system of known and new technologies developed for biomass conversion to biofuels. This includes classical and biobutanol based new biodiesels, biogas and electricity production, and an agricultural production system involving fertilization with the ash of the biomass power plants. Basically, three types of agricultural production system are needed for the agricultural segment of the integrated system, namely:

A – plants for combustion in biomass power plants (energy grass)

B – plants for production of vegetable oils for biodiesel production

C – plants for conversion of sugar derivatives to price alcohols, mainly butanol as a diesel fuel source

Depending on the climate, the soil type, the agricultural experiences, and the type of the plants (A,B,C), the produced biomass materials can fulfill more than one requirement as it can be seen in Fig. 1. Depending on the constituents of the biomass (cellulose, starch, lignin, oil, proteins), the energy production can be performed via direct combustion or, after digestion in biogas systems, by using the biogas. The biomass power plants, biogas combustion plants/engines produce hot water, steam and electricity. In plants type B soybean, rape, sunflower or likes are pressed to obtain the oil, while the pressing cake can be used as optimal raw material for biogas plants due to its high protein content, while the

* János Szépvölgyi^{1,6}, János Bozi¹, István Gács¹, Szabolcs Bálint², Ágnes Gömörö², András Angyal³, János Balogh⁴, Zhibin Li⁵, Moutong Chen⁵, Chen Wang⁵ and Baiquan Chen⁵

¹ Institute of Materials and Environmental Chemistry, Chemical Research Center, Hungarian Academy of Sciences, Hungary,

² Institute of Structural Chemistry, Chemical Research Center, Hungarian Academy of Sciences, Hungary,

³ Axial-Chem Ltd., Hungary,

⁴ Kemobil Co., Hungary,

⁵ China New Energy Co., China,

⁶ Research Institute of Chemical and Process Engineering, University of Pannonia, Hungary.

stalk can also be used as solid fuel (after drying with the low heating value warm water) in biomass power plants. Generally, the green biomass can be utilized in biogas plant and the dried ones as solid combustion fuel in power plants. The residues of the sugar derivatives producing plants (sugar sorghum, corn, etc.) can supply a biomass power plant with their dried stalk. The complete waste processing in these energy producing units and recirculation of other wastes (potassium sulfate, calcium sulfate or biomass power plant ash) of the integrated system as fertilizers into the agriculture contribute to a sustainable biomass production and fuel production, as well.

2. Energy aspects of biomass utilization

The intensive production of biomass as raw material for fuel or bioenergy production would lead to fast exhausting of the soil and dramatic increasing the production costs without intensive fertilization. Except nitrogen, all of the nutrients (P, K) and microelements can be recycled by reprocessing the residues of the biomass work up or biomass utilizing energy producing technologies. The nitrogen fertilization, however, always requires fossil energy source, since the base material of the two most typical nitrogen fertilizer (ammonia and urea) is the natural gas. It is one of the main reasons of the opposite statements about energy intake and output balance of the biomass based fuel and energy productions. Otherwise, the conversion of the waste to fertilizers (to supply other elements like P, K, S and microelements) should also be the integrated part of the sustainable and economic biomass production system.

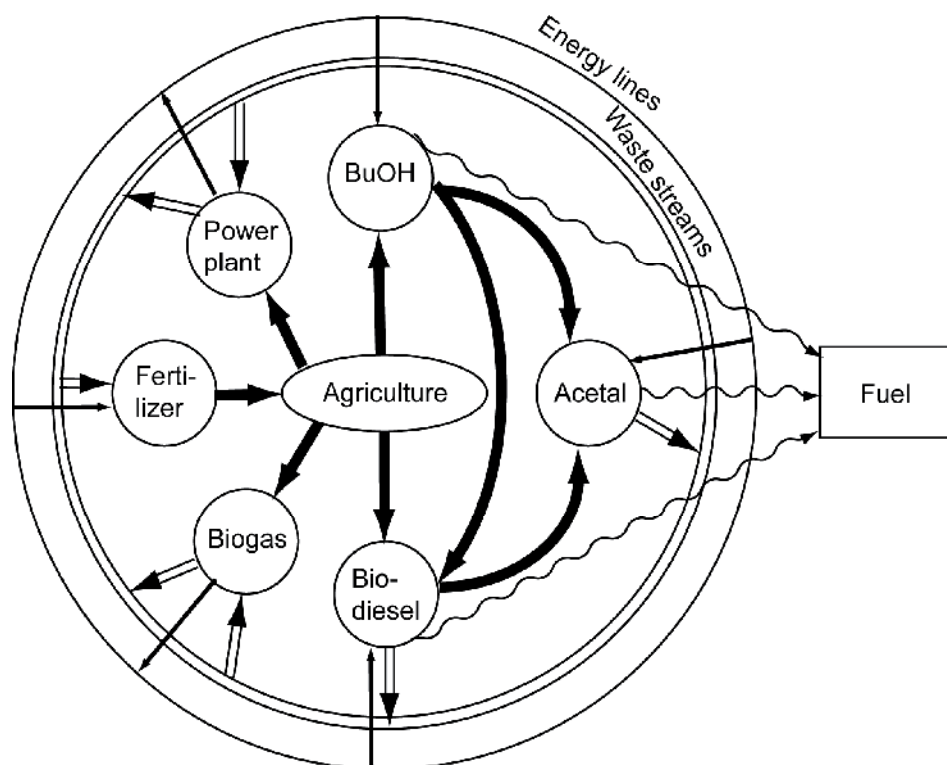


Fig. 1. Waste free biofuel production cycle

The review of the energy inputs required for the production of the raw materials like corn, switchgrass or sunflower, or the cost of the biofuel production from these agricultural materials (Pimental and Petzek, 2005) unambiguously show, that the climate (crop amount), type of the agricultural plant and the type of the processing technologies basically determines the feasibility of an energy positive biofuel production. The energy saving in the production of the various biofuel components from various sources is compared to the production costs related to petrochemical raw materials (Arlie, 1983) is given in Table 1. Selection of the biomass produced and the fuel type prepared from this biomass requires that environmental, economic and energetic viewpoints (Hill et al., 2006) should also be taken into consideration. The social-economic viewpoints play also key role in this decision. That is obvious, that there is not any type of biomass plant which could completely be turned into biofuel, only integrated systems can solve this problem, when more than one type of biomass plants are in synchronized operation. More than one energy producing system is used to utilize the various type of green biomass, and more than one type of biofuel are produced from the various parts of each type of biomass plants. At the same time the energy producing plants or the waste producing and nutrient reprocessing plant (fertilizer plant) can use the wastes of each technological step as raw material to ensure the recyclability.

Product	Petrochemical source	Biomass	Energy gain
MeOH	Natural gas	Wood	0.60
EtOH	Ethylene	Sugarcane	0.73
		Artichoke	0.88
		Corn	0.65
n-BuOH	Propylene	Sugarcane	0.10
		Artichoke	0.75
		Wheat straw	0.80
Acetone	Propylene	Sugarcane	0.80
		Artichoke	1.45
		Wheat straw	1.51

Table 1. Energy gain of sugar-based biofuel components (ton of oil equivalent/ton)

Since the energetically favorable components as BuOH, EtOH and acetone can be produced from biomass the use of these in biofuel including biodiesel production seems to be essential and unavoidable step. The EU biofuel standards now declare that rapeseed oil and ethanol as raw materials are permitted and standardized as biofuels within European Community. Due to the limits of the agricultural area and the productivity of rape in this climate and low energy content of ethanol, however, requires changing this statement and the use of other type of biofuels should be also permitted. Thus, in our integrated system we incorporate new type of blend materials, mainly butanol for replacing the ethanol, and new kind of blends are produced from the wastes of biodiesel and biobutanol production as well. In order to increase the amount of biodiesel produced from one unit of vegetable oil, butyl ester production is suggested instead of the methyl esters, and butoxylation or blending with pure butanol are also possible increments in increasing the efficiency of the biofuel production related to one hectare of the agricultural area.

3. New trends in biodiesel technologies

The new developments in biodiesel production technologies are focused on simplification of the existing technologies by using co-solvents (Guan et al., 2009b), supercritical solvents (Geuens et al., 2008), new catalysts (including heterogeneous and biocatalysts) (Fu and Vasudevan, 2009; Soriano et al., 2009; Leung et al., 2010) and the efforts are directed on founding new blends and raw materials (including the waste glycerol (Guerrero-Perez, et al., 2009)) to increase the amount of biofuel produced on a given agricultural area. Some of the improved methods are discussed below.

3.1 Trans-esterification with phase mixing materials

Base catalyzed trans-esterification of the vegetable oils with methanol is a slow process in the two-phase system due to the mass transfer limitation. The butanolysis is much faster because it takes place in homogeneous phase. Therefore, the possibilities to create a homogeneous mixture by using an appropriate co-solvent which homogenizes the vegetable oil and methanol has extensively been studied (Guan et al., 2009a; 2009b; Leung et al., 2010; Meng et al., 2009; Soiano et al., 2009). The best solvents are the ether-type compounds like THF, methyl tertiary butyl ether, Me_2O or diethers. Phase diagrams of different vegetable oils - ethereal solvents (1,4-dioxane, THF, Et_2O , diisopropyl ether and MTBE)-methanol have been studied (Boocok et al., 1996a) and THF was found to be the preferred solvent on the basis of the volume required by the miscibility and boiling point considerations. Initially the reactions are very fast, but they slow down drastically due to the polarity changes in the mixed phase containing esters and decreasing amount of alcohol [Boocock et al., 1998]. The decreasing polarity of the intermediate mixture could be avoided only by using large excess of methanol (methanol/oil molar ratio 27) when the methyl ester production exceed 94.4 % in 7 min even at room temperature. The separation of the glycerol phase in the presence of THF was much more rapid as in the case of two-phase trans-esterification reaction mixtures (Boocock et al., 1996a). The use of cyclic THF or 1,4-dioxane provides a possibility to decrease the amount of the co-solvent and perform the trans-esterification at higher oil : co-solvent ratios. The THF and the dioxane are miscible with vegetable oils and methanol in any proportion and they have hydrogen bonding ability (Boocock et al., 1996b). In spite of that 5 % dioxane ensures almost complete reaction within 30 min at room temperature at a 6:1 methanol : oil molar ratio, the 1,4-dioxane ring opens up during the trans-esterification reaction at the presence of 1 % KOH catalyst, thus it cannot be recycled at all.

Dimethyl ether can be separated easily with depressurizing the reaction system and Me_2O as a polar compound ensures a sufficiently high trans-esterification reaction rate at room temperature. The effects of the reaction conditions on the reaction time indicated that under the usual conditions, such as 1 % of KOH and 2-fold molar excess of methanol (6:1 methanol : oil molar ratio), the reactions can be performed within 5-10 min which would provide a good technological base for the continuous production of biodiesels (Guan et al., 2009a and 2009b). The gaseous state of form of the Me_2O requires pressurized reactors and the risk of explosion is very high.

Recently a new technology has been developed (Kótai et al., 2008) for the phase-mixing of methanol (or other alcohols) and vegetable oils in trans-esterification reactions with alkoxyalkanol phase transfer agents. These are hemi-ethers of glycols. They are polar end-group, but they have oil-soluble alkyl chain as well. The best candidate is the butylglycol (2-butoxy-ethanol), which can act at even 1 % concentration, and at the 6:1 MeOH : rapeseed

oil molar ratio with 1 % KOH a catalyst. The reaction is almost completed within 30 min even at room temperature. By using 5 % of butylglycol, the reaction time is 5-10 min. Since the butyl glycol acts also as an alcohol (not only as an ether), thus not only methyl esters but 2-butoxyethyl esters - $R-C(O)-O-C_2H_4-OC_4H_9$ - are also formed. These esters are formed in an amount of 2-3 %w/w and act as fuel components. In this way, the phase mixing agents built into the ester phase and they contribute to the mass of the biodiesel and do not need to recover it which simplifies the production technology. The catalyst solution prepared from KOH, butylglycol and methanol was used in our plant scale experiment performed in Hungary in 2009, when a continuous trans-esterification process with continuous separator was put into operation. The method could be combined with the ion exchange type removal and recycling of the neutralization agent ($KHSO_4$, chapter 3. 2), because the reaction takes place at room temperature and the amount of soaps formed and appeared in the ester phase was very small. The catalyst distribution between the ester and glycerol phase is around 2:98. The ester phase has been neutralized with $KHSO_4$, when the potassium content is decreased with the continuous operation mode below 50 ppm without any further washing. The further purification steps, washing with water and removing the residual MeOH in vacuum, are the same as in the classical biodiesel technologies, however, the amount of the dissolved MeOH, due to the lack of soaps and residual catalyst is much lower than in the usual technologies. The flow-sheet of the technology is shown in Fig 2.

In order to decrease the length of the tube reactor and the residence time of the mixture in the apparatus, a two-stage trans-esterification seems to be the most reliable, when after decreasing the rate of the reaction, after the first separator a further amount of methanol and catalyst are added, when the reaction rate is suddenly increases: it is attributed to the extra methanol ensuring a large excess for the residual triglyceride, thus the conversion reaches 98 % in 20-30 min reaction time. We have used 50 m³ tanks for the esterification with intensive stirring. Separators for removing the glycerol phase, and the same volume of the separator was used to separate the neutralization agent and the ester phase which was mixed in a tube after exit of the first separator and before entering into the second one.

3.2 Removal of the residual catalyst from the biodiesel (decontamination)

In spite of the efforts to produce solid phase non-soluble alkaline catalysts or highly active acidic (super-acidic) catalysts (Di Serio et al, 2008; Leung et al., 2010; Soriano et al., 2009), the homogeneous catalytic (KOH or NaOMe catalyzed) trans-esterification of vegetable oils have been the most commonly used method in the biodiesel industry (Huber et al., 2006). However, soap formation during the alkaline-catalyzed trans-esterification is the most problematic by-reaction. In case of low water and carboxylic acid containing vegetable oils the main source of the soap formation is the hydrolysis of the formed methyl esters during washing, which is a strongly pH dependent process. Thus the neutralization preceding the washing is an essential step to minimize the saponification by-reactions. The amount and type of the formed soap is strongly affected by the separation characteristics of the glycerol and the ester phase. The acid treatment is generally needed to start or quicken the phase separation process producing aqueous glycerol solution. It is well known that the distribution of the catalyst between the glycerol and the methyl ester phase is strongly depends on the temperature, type of the catalyst, excess of methanol and the composition of the two separated phases [Chiu et al., 2005; Di Felice et al., 2008; Zhou and Boocock, 2006]. Table 2 shows the distribution of 1 % KOH and 0.5 % of H_2SO_4 distribution at different temperatures depending on the amount of methanol at biodiesel : glycerol molar ratio of 1:3.

Catalyst	T, °C	MeOH, mol	K	Catalyst	T, °C	MeOH, mol	K
KOH	25	0	98	H ₂ SO ₄	25	0	60
	25	3	95		25	3	53
	25	6	77		25	6	46
	75	0	47		75	0	31
	75	3	45		75	3	28
	75	6	35		75	6	24

Table 2. Distribution of the KOH catalyst between the ester and glycerol phase in the function of temperature and MeOH excess ($K = C_{\text{glycerol}} / C_{\text{ester phase}}$)

It can be seen that increasing temperature increases the amount of the catalyst in the ester phase. The amount of dissolved methanol also increases the amount of dissolved catalyst. The K values of the distribution of methanol, however, 10.9 and 7.5 at 3 and 8.5 and 4.8 at 6 moles of methanol towards 3 mol of biodiesel and 1 moles of glycerol at 25 and 75 °C, respectively. In the presence of 1 % KOH, these values changed to 2.29, 1.64, 1.90 and 1.48, respectively.

Due to the room-temperature reaction, there is low catalyst and low methanol concentration in the ester phase, thus the amount of the required neutralization agent is also low. Considering the use of a continuous separator, the relative volumes of the separated phases should be adjusted between 10-1:1, so it is possible to use dilute (2 %) KHSO₄ solution. The neutralization acts as the first washing step, when the potassium content in the biodiesel phase was proved to be up to 8 ppm without further aqueous washing. Instead of mineral acids we used an acidic salt as hydrogen ion sources, namely, potassium hydrogen sulfate (KHSO₄). Potassium hydrogen sulfate has as strong acidic function as the pure sulfuric acid without the disadvantages of the sulfuric acid, e.g. it is a solid crystalline mass can be stored without risk and can be dissolved in water without extreme heat generation, and no acidic vapors as in the case of hydrochloric acid can be felt. Due to the low amount of soaps in the ester phase, the dissolved methanol content of the ester phase is lower than in case of the classical biodiesel technologies. Potassium hydrogen sulfate as a strong “acid” reacts with KOH catalyst and soaps easily and spontaneously as



where R = alkylcarbonyl radical (potassium soaps) or H (KOH). The aqueous KHSO₄ solution decomposes soaps immediately without emulsion formation. The formed potassium sulfate is neutral, soluble in water, insoluble in the ester phase and has no phase transfer property at all. The concentration of the formed potassium sulfate is low (~2-3 %), since dilute KHSO₄ solutions is used for neutralization of the potassium compounds in the ester phase. The aqueous phase will contain potassium sulfate, glycerol, methanol, and other water soluble components. The dilute solution can easily be ion-exchanged with strong acidic cationic exchangers as Varion KSM resin. The glycerol and the methanol containing aqueous phase is a strong polar solution, thus regeneration and recycling of the KHSO₄ should be taken place. However, stopping and controlling the operation of the ion exchanger at the stage of the hydrogen sulfate formation is difficult. Therefore, the K₂SO₄ containing material stream is divided into two equal parts. One part of the K₂SO₄ is ion-exchanged in a common way with the formation of H₂SO₄ solution (the

K-ions are bound by the resin phase). The dilute sulfuric acid is combined with the other stream of the K_2SO_4 , when $KHSO_4$ forms which can be recycled without further treatment (Kótai et al., 2008a).



The exhausted ion exchanger can be regenerated with the 20 % sulfuric acid solution consumed also for the formal neutralization. The potassium sulfate solution obtained during the regeneration process of the ion exchanger resin can be used as a fertilizer component. The ion exchanger can be regenerated and used again several thousand times.

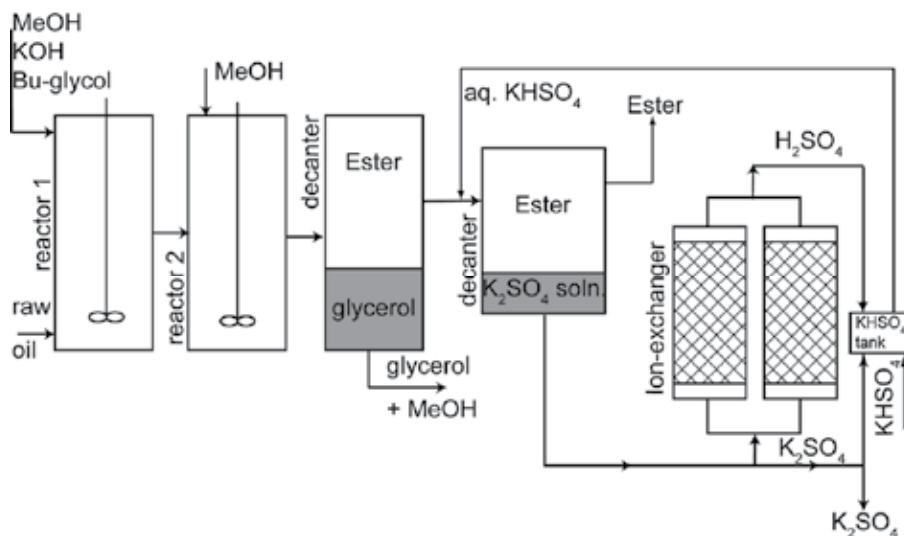


Fig. 2. Flow-sheet of biodiesel synthesis

However, the recycling of the $KHSO_4$ solutions is recommended only 2-20 times due to the accumulation of glycerol and methanol in the aqueous $KHSO_4$ solutions. The process flow is shown in Fig. 2.

The completely neutralized $KHSO_4$ solution turns into K_2SO_4 , therefore it can be used as a fertilizer component together with the K_2SO_4 originated from the ion exchange regeneration cycle. Similarly, the potassium hydroxide content of the glycerol phase may be utilized in the same way after processing its glycerol and methanol content with H_2SO_4 catalyst into fuel (see in Chapter 4.2). In this way, the starting potassium based catalyst (KOH) is used not only as a catalyst but as a fertilizer source in an advantageous sulfate form, which helps to avoid the chloride accumulation in the soil and supplies the sulfur deficiency of the soil, especially in the case of rape plant cultures of high sulfur demand (Scherer, 2001).



3.3 Trans-esterification of high acid containing vegetable oils

Production of biodiesels from non-food quality vegetable oils with high fatty acid content is an important area of the biodiesel developments. The common alkaline catalysts cannot be used economically, because they reacts with the fatty acids and form soaps causing high catalyst consumption and a decrease in the catalyst activity. The alkali soaps are the cause of

problems in the phase separation and the decreasing in the yield of esters. The calcium soaps do not dissolve in water and not surface active agents, do not cause problems in the phase separation and using calcium methanolate as catalyst in the trans-esterification of the vegetable oils is a well-known process (Lindquist, 1991). Due to the insolubility of CaO and Ca(OH)₂ in methanol, the CaO and the Ca(OH)₂ are known as less active or inactive compounds for the vegetable oil trans-esterification (Di Serio, et al., 2008), but the activation of calcium oxide to act as a catalysts in this reaction leads to good results (Kótai et al., 2006, 2008b). The free acid content of the vegetable oils and CaO were immediately reacted with formation of calcium soaps, and the Ca(OH)₂ formed from the excess of CaO played role in the trans-esterification. The best results (quantitative conversion of triglycerides into methyl esters) was obtained by using calcium hydroxide (5.6 %) prepared in situ by slaking of CaO at a 3:1 CaO to H₂O mass ratio and at a 10:4 oil: methanol ratio for 1 h under reflux. Excess of CaO is essential in this reaction. Using half amount of catalyst and methanol, the conversion was 90 % only, and 9% triglyceride and 1 % diglyceride could be detected in the ester phase. In case of high fatty acid containing starting vegetable oils the calcium soaps formed is partially soluble in the methanol containing ester phase, thus after separation of the soap containing glycerol the ester phase was treated with a slight excess of concentrated sulfuric acid. The sulfuric acid has multiple roles in the system,

1. it forms calcium sulfate and releases the bound fatty acids
2. catalyzes the reaction of the liberated fatty acids and the methanol excess used in the trans-esterification
3. destroys the instable polyunsaturated compounds which could cause deposition in the engines
4. decreases the iodine number and the ash content in the ester phase

Since the optimal trans-esterification can be performed at 2-4 fold excess of methanol, the residual methanol content means a very high (30-60 fold) excess toward the liberated fatty acids taking part in the acid catalyzed trans-esterification (Khelevina 1968). The anhydrous CaSO₄ formed in the neutralization step promotes the esterification reaction of the liberated fatty acids due to binding of the water formed in the equilibrium esterification reactions:



Although the calcium sulfate has di-hydrate, in this system only the hemihydrate has formed (Kótai et al., 2008b). The solid CaSO₄·0.5H₂O can be used as sulfur fertilizer and improve the properties of unbound (sandy like) soils due to its binding properties with water (plaster of paris). During the removal of the polyunsaturated (Benjumea et al., 2011) labile compounds by sulfuric acid various compounds having acidic character form. The acid number of the ester phase is around 3.2 mg KOH/g oil. It is essential to remove these acids from the ester phase. It has been tried with filtering this ester phase through calcium or iron carbonate containing mineral granulates. This method, however, have not been effective, and in case of calcium carbonate some oil soluble products were also formed which increased the ash content of the ester. By using Varion ADA type resin (alkyl-ammonium type ion exchanger in OH form) the acidic constituent could easily be removed. The acid number was found to be 1.25 mg KOH/g oil, practically the same as was found for this oil after complete vacuum distillation (1.24 mg KOH/g oil) (Kótai et al., 2008b).

4. Butanol as raw material in biodiesel production

By using of butanol as blending material for gasoline and diesel fuels has many advantages towards fuel ethanol (Andersen et al., 2010; Bruno et al., 2009, Duck and Bruce, 1945, Workman et al., 1983), additionally, it can also be used as reactive component in biodiesel production. Butanol can substitute methanol as an alcohol for esterification (Wahlen et al., 2008; Nimcevic et al., 2000, Stoldt and Dave, 1998), it can be an acetal forming compounds for transforming of acetone or other ketones into acetals, or can easily be converted to butyraldehyde for the conversion of glycerol formed during trans-esterification of oils into 1,3-dioxane- or dioxolane type fuel additives (Silva et al., 2010)

4.1 Butanol as blending or reactive component in biodiesel production

The butanol or the butanol - acetone - ethanol mixture produced in the ABE fermentation have been tested already during the World War II as a blending components for gasoline powered engines (Duck and Bruce, 1945). The engines can be powered with gasoline containing butanol up to 40 % without any technical modification of the engine. The characteristics of pure butanol and ABE solvent mixtures as gasoline or diesel fuel additives have been tested in detail. Generally, the blended mixtures produce almost the same power and thermal efficiency as the gasoline (Schrock and Clark, 1983). The same time the blending has a positive effect via substantially decreasing the NO_x content of the exhaust gases.

Since the modern mobile agricultural equipment used in the production of biomass is mostly diesel powered, both ethanol and butanol have been tested for using them as blending components of diesel fuels. By the addition of butanol or ABE blends to diesel fuel the thermal efficiency could be increased, the exhaust gas temperatures are lowered and the soot formation is decreased. The operational parameters of the engine have been studied in detail (Workman et al., 1983). Butanol proved to be an alternative diesel fuel blend. By using butanol as a reactive component in vegetable oil butyl ester preparation or preparation of butanol based acetals, the residual butanol content does not has to be removed from the reaction mixture because it can act as blending component. A special case of the extraction of butanol from aqueous solutions during ABE fermentation is when the extractant is vegetable oil (Welsh and Williams, 1989). The butanol to be extracted can be reacted easily with the extractant. Since the vegetable oil alkyl esters are also extractants of the butanol (Crabbe et al., 2001, Ishizaki et al., 1999), this method can easily be integrated into a catalyst free supercritical trans-esterification technology, when the partially trans-esterified vegetable oil is recycled into the extraction process until its complete transformation into butylester. Since the butanol content extracted in the last step does not need to be separated from the butyl ester product, the method is advantageously integrated into the waste free biodiesel production system.

The use of butanol as a reactive component in biodiesel production has a lot of advantage. First of all, the convenient base catalyzed reaction takes place in homogeneous phase, thus the reaction is faster, the separation of the glycerol is better and the temperature of the reaction can be lowered. The excess of the butanol does not need to be removed from the ester phase. The viscosity of the butylester mixture prepared from soya oil was found to be 4.50 mm²/s at 40 °C, the cetane index was 69. The cloud point of butyl-biodiesel is -3 °C. The flash point and pour point were found to be 44 and -13 °C, respectively (Wahlen et al., 2008). Since butanol reacts with free acids faster than methanol, the high acid containing vegetable oils (free fatty acid content of vegetable oils varies from 7 to 40 %), the waste

cooked oils or other high free acid containing oils can also be used as raw materials. These high free fatty acid containing oils could not be trans-esterified economically with methanol and basic catalysts, and in the presence of acidic catalysts the reactions are very slow.

Solid phase heterogeneous catalysts have not widely been available for use them in industrial scale for these type of oils (Di Serio et al., 2008). The acid catalysts simultaneously catalyze the esterification of the free acids and the trans-esterification of the glycerides however, butyl esters are formed more easier than methyl esters (Wahlen et al., 2008). Methanol, ethanol, n-propanol and n-butanol have been reacted with oleic acid as a model for free fatty acids at 4:1 alcohol/acid molar ratio in the presence of 5 % sulfuric acid (as catalyst) at 80 °C for 16 min. The conversion was best (90%) for n-butanol, and the worst in the case of methanol (85%). The difference in trans-esterification activity of C₁₋₄ alcohols in the presence of H₂SO₄ catalyst is more significant. The methanol can react with the soybean oil (10:1 methanol/bound fatty acid ratio) at 60 °C with 5 % sulfuric acid as catalyst only with 2 % conversion within 32 min. By using 12:1 alcohol/soybean oil ratio and 80 °C temperature, the methanol and ethanol gave 18 % conversion in 16 min, while the propanol and butanol showed 50 % conversion during the same time. The reaction of butanol with vegetable oils at a mixed feedstock containing oleic acid and soya oil with a ratio of 5:1-1:5 required minimum 2:1 butanol/fatty acid (free and bound) molar ratio at 110 °C in the presence of 5% H₂SO₄ catalyst . Using microwave heating at 6:1 butanol/soybean oil ratio in the presence of 3 % H₂SO₄, a 98 % conversion was achieved within 50 min. By using microwave heating the trans-esterification reaction of the vegetable oils with butanol can be performed without any catalyst under supercritical conditions (Geuens et al., 2008). Since the butanol boiling point is higher than methanol boiling point, the reactions takes place at higher temperatures without using extremely large pressures. The best results were achieved at 310 °C and 80 bar pressure in SiC coated tube reactor. The lack of the catalyst results very a small amount of glycerol without soap formation. The excess of butanol does not need to be separated from the ester phase or can be flashed out from the glycerol phase for recycling.

By using n-butanol instead of methanol and butoxylation of the unsaturated alkyl chain improve the ratio of the fossil energy used to produce a unit of renewable energy source. The highly unsaturated oils cause gum and deposit formation, but their epoxidation with peroxy-acetic acid and contacting the epoxides with n-butanol in the presence of 2 % sulfuric acid as catalyst at 80 C°, results 100% conversion of the epoxides. The selectivity is 87 %, and the 46 % conversion of the unsaturated alkyl chains does not cause an increase in the cloud point (Smith et al., 2009). As it can be seen, the butanol increases the amount of the biofuel produced from raw vegetable oil, by molar weight increasing referring to methyl esters (Table 3., Nimcevic et al., 2000), by incorporating butoxy groups into the unsaturated alkyl chains and by mixing the excess butanol with the formed fuel.

Ester	Combustion value		Alcohol molar fraction in the ester molecule
	MJ/kg	MJ/kmol	
Methyl	39.83	14156	8.7
Ethyl	40.03	14787	12.2
Butyl	40.52	16103	18.4


Table 3. Alcohol inputs in the production of biodiesel

In addition to these possibilities, in case of high acid containing raw vegetable oils, the acid content can also be transformed into butyl-type biofuel and does not need to be recovered as soaps. The abovementioned possibilities can be applied as parts of an integrated system together with other techniques to improve biofuel production, e.g. during the conversion of vegetable oils into methyl esters, the free fatty acids liberated from calcium soaps can be esterified with butanol instead of methanol as well (see Chapter 3.3).

4.2 Transformation of the wastes of butanol and biodiesel production into fuel

Glycerol is a very hygroscopic material and its combustion heat is low due to its high oxygen content. Neither its viscosity nor its hygroscopic nature or the miscibility properties indicate direct applicability as a fuel component. However, the glycerol is a reactive compound, thus the glycerol formed in the biodiesel synthesis can be transformed into lower oxygen containing compounds or to their mixture by various reactions (Guerro-Perez et al., 2009, Mota et al., 2009). In order to decrease the oxygen content of the products formed, the most reliable way is water elimination. It can be performed by reduction or by condensation reactions performed with reactants containing O= or HO-functions. The structure and reactivity ensure a series of water elimination (intra or intermolecular) reactions and formation of a variety of compounds.

The glycerol can act as a multifunctional primary and secondary alcohol and can easily be dimerized or polymerised into compounds with residual alcohol functions and alcoholic type reactivity. The glycerol can also be reacted with various other alcohol derivatives (with methanol residue from trans-esterification or with ethanol or butanol from ABE fermentation) into ethers. Transformation into cyclic acetals by using oxo-compounds e.g. acetone from ABE fermentation or acetone - acetaldehyde - butyraldehyde mixtures from the oxidation of not separated ABE products can also be performed. The formed acetals are cyclic dioxolane and dioxane type primary or secondary alcohols, or their stereoisomers (if R₁ and R₂ are not the same), respectively (Ferreira, et. al., 2010; Kótai and Angyal, 2011).

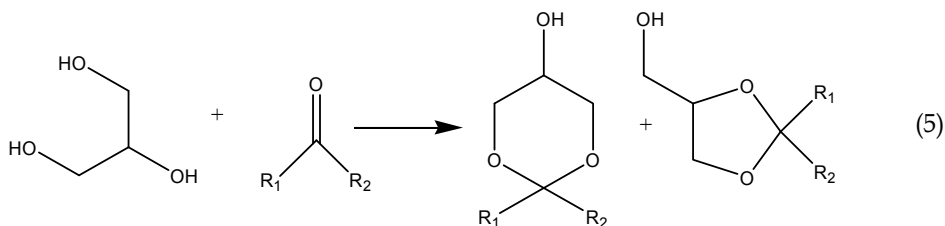

By partial oxidation of the mixture of primary alcohols from the first ABE fraction containing acetone, ethanol and butanol to aldehydes, a mixture of alcohols and oxo-compounds can be prepared. By using the waste glycerol containing methanol from the biodiesel production (or formaldehyde from the methanol oxidation) can provide a complex reaction mixture which can be condensed into an un-separated multicomponent mixture of various oxygenates with lower oxygen content than the starting glycerol. This mixture does not require complete separation into components or individual compounds to use it as a fuel. The reaction has been studied in the presence of various acidic catalysts as sulfuric acid, sulfonated styrene-divinyl-benzene copolymers and p-toluene-sulfonic acid. All of the catalyst gave similar results, the main product have been the 1,3-dioxolane derivatives. Various other components have also been formed in 1-2 % amount of each. The low-boiling fractions contain mainly the starting alcohols, acetone and dialkoxypropane derivatives, the

higher fractions contain mainly 2,2-dimethyl-4-hydroxymethyl-1,3-dioxolane, its mixture with the starting alcohols and the formed dialkoxypropanes. The 2,2-dimethyl-5-hydroxy-1,3-dioxane has appeared only in the distillation residue because its boiling point is higher than 120 °C. In the acetalization of acetone with glycerol the two possible isomers 1,3-dioxolane or 1,3-dioxane ring containing products can also be formed in the 1,2- or 1,3-type cyclization reactions. The molar ratio of the dioxolane /dioxane and the yields slightly depend on the type of the acidic catalyst. The composition of a typical reaction mixture is illustrated in Table 4. The main product is the 2,2-dimethyl-4-hydroxymethyl-1,3-dioxolane, a smaller amount of the 2,2-dimethyl-5-hydroxy-1,3-dioxane and dialkoxy-propanes are also formed. Two mixed methoxy-group containing acetals are formed, as well. Thus, it seems to be probably that the primarily formed 2,2-dimethoxypropane has reacted with the higher primary alcohols. In order to increase the complexity of the mixture, which is an optimal situation for fuels, the glycerol - MeOH mixture was mixed with the first un-separated fraction of the butanol production which contains EtOH, acetone and BuOH, and reacted with various oxo- compounds prepared from the abovementioned alcohols by oxidation (CH₂O, CH₃CHO and butyraldehyde).

Compound	Alcohol	Fraction	Peak area	B.p. range
MeC(OMe) ₂ Me	MeOH	I-IV	1	58-99 °C
MeC(OMe)(OEt)Me	MeOH, EtOH	I-IV	2	58-99 °C
MeC(OEt) ₂ Me	EtOH	III,IV	1	71-99 °C
MeC(OMe)(OBu)Me	MeOH, BuOH	I-IV	1	58-99 °C
2,2-Me ₂ -4-CH ₂ OH-1,3-dioxolane	glycerol	III-VI	88	71-120 °C<
2,2-dimethyl-5-OH-1,3-dioxane	glycerol	VI	2	120 °C<

Table 4. The acetals formed in the reaction of ABE solvents and glycerol containing methanol with Varion KSM acidic ion exchanger catalyst at 3 h reflux

It can be seen that from the same molar amounts of the alcohols the acetone prefers the reaction with the glycerol, or the dialkoxy-propanes formed reacts with the glycerol via re-formation of the alcohols.

In this way, the waste stream from ABE and biodiesel production with or without oxidative treatment results an un-separated mixture containing various alcoholic and oxo-components which can react with each other in various water elimination reactions to form a variety of lower oxygen containing acetal/ether type compounds. The formed mixture contains components with a wide boiling range. Table 5 contains the product distribution in a mixture formed in the reaction of 1-1 equivalents of acetone, acetaldehyde, n-butyraldehyde and formaldehyde by 1 equivalent of glycerol and 2-2 equivalents of MeOH, EtOH and BuOH with Varion KSM sulfonated ion exchanger as catalyst under 3 h reflux. The reaction mixture has been separated into five fractions to study the distribution of each component formed and the starting material in the fractions. Depending on the reaction conditions, molar ratios of each reactant and the catalyst, the product distribution can be varied. Two isomers of 2-alkyl-4-hydroxymethyl dioxolanes are formed which have different boiling points. As an example, the effect of glycerol formal on the properties of the biodiesels can be seen in Table. 6. (Puche, 2009)


Compounds	Alcohol	Oxo-reactants	Fraction	Peak area
<i>Dialkoxi-methanes</i>				
(MeO) ₂ CH ₂	MeOH	CH ₂ O	I-II	2
(EtO) ₂ CH ₂	EtOH	CH ₂ O	I-IV	5
BuOCH ₂ OMe	BuOH,MeOH	CH ₂ O	I-III	15
BuOCH ₂ OEt	BuOH,EtOH	CH ₂ O	I-IV	14
(BuO) ₂ CH ₂	BuOH	CH ₂ O	II-V	5
<i>Dialkoxymethanes</i>				
(BuO)(MeO)CHCH ₃	BuOH,MeOH	CH ₃ CHO	I-IV	1
(BuO) ₂ CHCH ₃	BuOH	CH ₃ CHO	IV-V	2
<i>Dialkoxymethanes</i>				
(BuO) ₂ CHCH ₂ CH ₂ CH ₃	BuOH	PrCHO	IV-V	2
<i>1,3-Dioxolanes (2 isomers)</i>				
2-Me-4-CH ₂ OH-1,3-dioxolane	glycerol	CH ₃ CHO	I-V	6
2-Me-4-CH ₂ OH-1,3-dioxolane	glycerol	CH ₃ CHO	V	4
2-Pr-4-CH ₂ OH-1,3-dioxolane	glycerol	PrCHO	V	12
2-Pr-4-CH ₂ OH-1,3-dioxolane	glycerol	acetone	IV-V	11
<i>1,3-Dioxanes</i>				
2-Me-5-OH-1,3-dioxane	glycerol	CH ₃ CHO	IV-V	2
2-Pr-5-OH-1,3-dioxane	glycerol	PrCHO	V	3

Table 5. The identified components of the reaction between biodiesel waste and partially oxidized ABE production waste streams in the presence of Varion KSM catalyst

Glycerol formal content	RME + glycerol formal				
	0	0.5 %	1%	5%	10%
Density, g/cm ³	0.8592	0.8620	0.8631	0.8711	0.8802
Freezing point, °C	-7	-16	-21	-21	-21
Viscosity at -10 C°, cSt	Solid	No data	548.2	343.3	No data


Table 6. Effect of glycerol formal on properties of methyl ester of rapeseed oil

Not only acetals, but other ether type components can also be used as fuel blends. The condensation products formed with alcoholic functions can be used for further acetal formation. The dioxolane and dioxane type compounds with alcoholic function groups can be esterified or etherified in a further reaction into other valuable products (Jalinski, 2006).

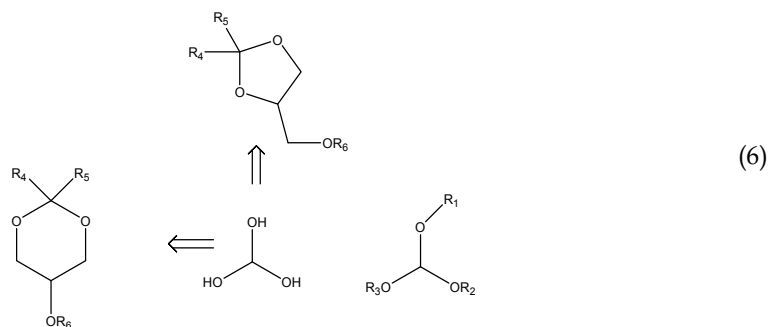

The general scheme for transformation of glycerol into fuel components with ABE components is given by eqn. (6), where R_1 , R_2 and R_3 are Me, Et, Bu, $\text{CH}_3\text{C}(\text{O})-$, $\text{C}_3\text{H}_7\text{C}(\text{O})-$, R_4 and R_5 are H, Me, Pr, and R_6 means Me, Et, Bu, $\text{CH}_3\text{C}(\text{O})-$, $\text{C}_3\text{H}_7\text{C}(\text{O})$ or other groups derived from the alcohol-type glycerol condensation products. Transformation of all three hydroxyl groups of the glycerol into alkoxy groups (methoxy, ethoxy or butoxy), or esterifying them with low carbon chain carboxylic acids (acetic acid, butyric acid) decrease the hydrophil nature and oxygen content and increase the combustion heat, the miscibility with fuel. Thus, these compounds are advantageous fuel additives (Mota et al., 2009). Since ethanol, butanol, methanol, acetic and butyric acid are products/by-products and intermediates of the ABE fermentation or biodiesel production, these reactions are candidates for integration into a complex biomass utilization system. The intermediate acetic and butyric acid can also be used as acylation agents for the cyclic acetals, and in this way all product of the ABE fermentation become fuel component. Not only these organic acids but carbonic acid can also acts as acid residue in the esterified products. The carbonate compounds prepared form acetals formed from n-butyraldehyde or acetone and glycerol lowering the soot and the particulate formation during ignition of the diesel fuels (Delfort, 2004). Alkylation or acylation of free hydroxy-groups in 1,3-dioxolane and dioxane type fuel blends increases their solubility with two order of magnitudes (Jalinski, 2006)].

It is obvious, that glycerol which has primary and secondary alcohol functions, and can be condensed with itself to different kind of polyglycerols (Barrault et al., 1998). Polyglycerols can be obtained at high temperature vapor phase reaction over solid catalysts as alkali and alkaline earth metal hydroxides or carbonates, zeolites, La-ion-exchanged zeolites and ion-exchanger resins (Barrault et al., 1998). In the presence of resins, the main product is the diglycerol.

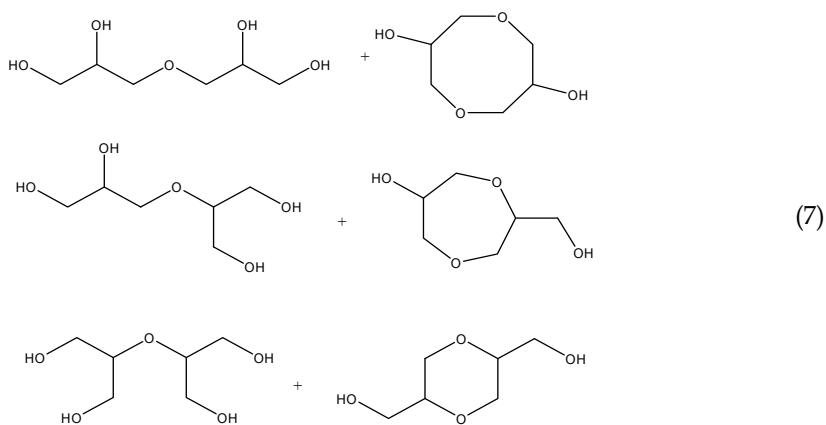

Since the glycerol has hydroxyl groups with various reactivity, depending on the catalyst and the reaction conditions, various dimers and even more type of oligomers and polymers can be formed. By using these dimers (oligomers) in acetal forming reactions, the complexity of fuel mixture can be further increased.

Not only water elimination, but increasing carbon chain length can decrease the relative oxygen content and increase the combustion heat and improve the fuel properties. Selective etherification of glycerol or the free alcoholic function groups of the condensates formed from the glycerol. The alcohol functions of glycerol or other alcohols formed during polymerization of glycerol or acetal production can easily be alkylated by reaction with isoalkenes (Klepacova et al., 2003). Trans-esterification of crude soya oil with methanol in the presence of NaOH catalyst, then separating the glycerol phase reacted with the mixture in the presence of Amberlyte-15 acidic ion exchanger catalysts for 2 when isobutylene converts the glycerol into ethers. The mixture formed contains 9 % triether, 47 % diether, 21 % mono-ether, 5 % unreacted glycerol, 14 % isobutylene and 4 % methyl esters. By separating and recycling the starting materials and the mono-ethers the residue can be mixed with the ester phase formed in the trans-esterification when a mixture is formed containing 12 % ethers and 88 % methyl esters. Its clouding point is below 0 °C and having a viscosity of 5.94 cSt which is lower with 9 °C and 0.5 cSt, respectively, if this parameters are compared to the ester phase without the addition of glycerol ethers (Barrault et al., 1998).

The oxygenate mixtures produced in the abovementioned ways ensures that a very complex mixture of compounds could be manufactured, in which all components of the ABE fermentation and biodiesel production turn into fuel component. These blending materials have very advantageous properties, decrease the viscosity, decrease the pouring point and soot formation and improve the cetane number. In this way, vegetable oil ester (mainly butyl ester), butanol and acetal or other oxygenate mixture containing biodiesels are formed with much higher production efficiency compared to the classical vegetable oil methyl esters. Thus, our technology can provide an aromatic hydrocarbon-free fuel which can be used even in highly populated large cities. Since biodiesels, fossil diesels and the gasolines can be mixed with pure butanol up to an amount of 40% without influencing the fuel properties, and these oxygenates can also be used around in an amount of 20 %, these new kind of fuel mixtures can provide a solution for the EU demand (incorporation of 20 % biocomponent into fuels until 2020).

5. Other aspects of the integrated biomass utilization system

It is an obvious question that which bioalcohol should be used for the replacement of methanol in biodiesel production, or it is worth to change the ethanol blends of fuels to butanol which has much better fuel properties and energy content than the ethanol.

Comparison of technical and economical assessment for corn and switch grass fermented by yeast into ethanol and *C. acetobutylicum* into butanol showed (Pfromm et al., 2010) that biobutanol production is not competitive with ethanol production. As an example, the carbon balances for corn are illustrated in Fig. 3. However, involving new technologies, new raw materials (e.g. sugar sorghum) and the extractive fermentation processes combined with immobilized cell techniques, and decrease the production cost by means of the new separation technologies, the butanol becomes competitive as blending or reactive component in biofuel production.

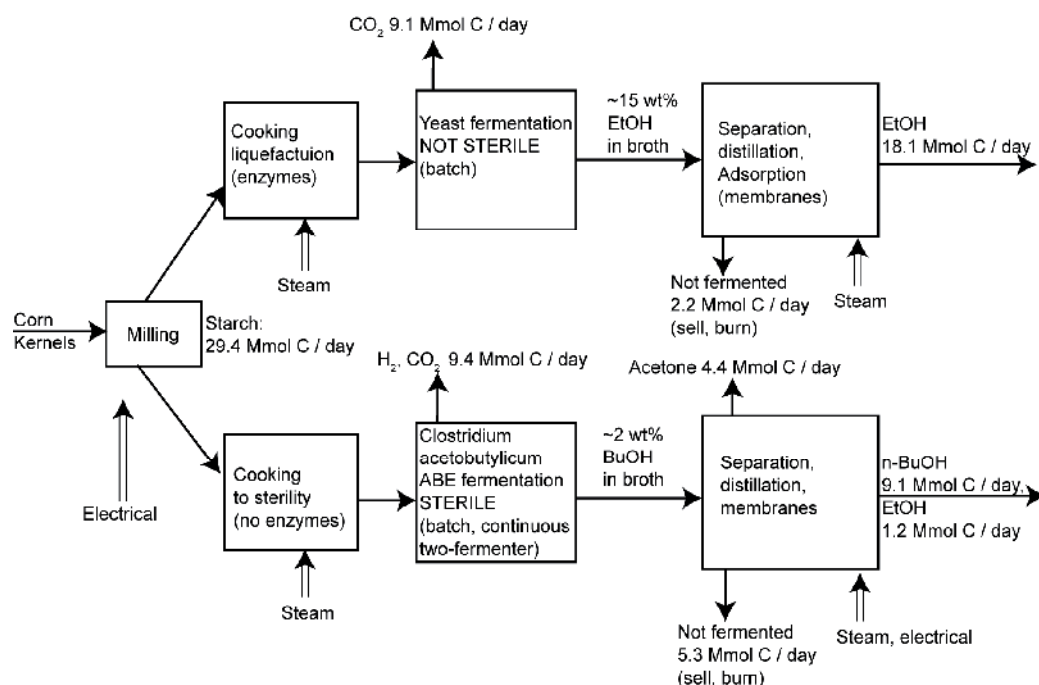


Fig. 3. Comparison of the carbon balances in the fermentation of corn into ethanol (yeast) and ABE (bacteria)

5.1 New trends in biobutanol technology

The industrial production of biobutanol has roughly a 100 years history, here only some new trends are reviewed in order to indicate the new perspectives of the biobutanol technology. The so called ABE fermentation produces acetone, butanol and ethanol in a ratio of about 2:1:7 or 3:1:6 depending on the bacteria and the fermentation conditions. A small amount of acetic acid and butyric acid are also formed. The starting materials are C₅ and C₆ sugars, e.g. starch or cellulose hydrolizates, and there are some bacteria strain as well which can utilize cellulose directly. The main problem of the biotechnological butanol production is the toxicity of the solvents formed (mainly the butanol) towards the microorganism (Costa, 1981). The most intensively studied area of the developments is the genetic engineering to produce butanol tolerant bacterium strains or produce less sensitive genetically modified yeast and saving the microorganism from the toxic effects, e.g. by immobilization and capsulation of the bacteria (Park et al., 1989), or by the removal of the accumulated solvents before reaching the toxicity level (Papadopoulos and Linke, 2009; Schmidt et al., 1988). Combination of the methods provides a good chance to start a continuous ABE fermentation (Hartmeier et al., 1991, Ishii et al., 1985, Kótai and Balogh, 2011). Since the energy demand of the butanol recovery from the dilute solution is one of the main cost factor extraction with a suitable solvent or adsorption on a cheap heterogeneous carrier can be candidates for the development of energy efficient butanol production. Due to the low adsorption capacity of known adsorbents like activated carbon, or the affinity of solid sorbents towards water allowed only utilization at low level. The extraction seemed to be more effective, but the solvents have to meet serious requirements like:

- Non-toxic to the microorganism and high stability,
- High distribution coefficient and selectivity with respect to the product,
- Low viscosity and solubility in the aqueous phase,
- Gravitation separation by density difference,
- Large interfacial tension and low tendency to emulsify the broth,
- High boiling point difference with respect to ABE solvents and low price

By using immobilized microorganism and in situ extraction the continuous production of butanol and ABE solvents can be performed easily, especially, if the integrated biomass utilization system ensures the sugar solution from sorghum processing. Thus, a large amount of ballast materials from corn or starch hydrolysis which increase the dry material content of the mash can be avoided. The main problems are;

1. that the solvents which have high selectivity to the ABE solvents are very toxic to the microorganisms,
2. the best distribution coefficients for butanol found among the non-toxic solvents is only 3.5 (oleyl alcohol). In order to apply the high distribution coefficient of a toxic solvent associated with the requirements of the continuous production of butanol, a special system to produce ABE solvents has been developed.

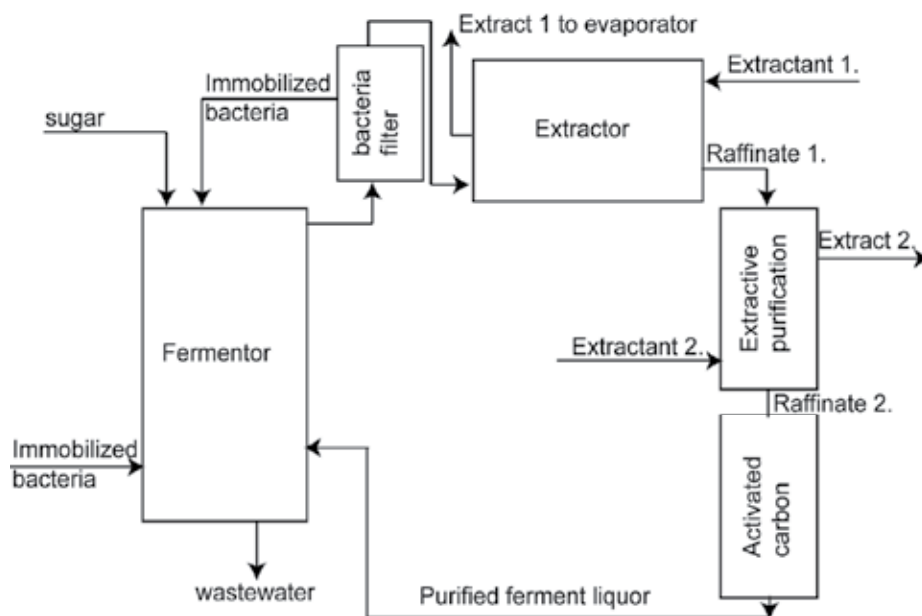


Fig. 4. Flow-sheet of continuous butanol fermentation with outer extraction

Heptanal, which has distribution coefficient for butanol of $K_B=11.3$ has been selected for the new technique. The toxicity of the heptanal is avoided via a by-pass extraction and a post-extractive purification for removal of traces of extractant from the ferment liquor before recycling it to the fermentation. The flow-sheet of particular method can be seen in Fig. 4. The technology using immobilized bacteria and heptanal as solvent is under development now. After starting the fermentation and before reaching the toxic level of butanol, a part of the ferment liquor is pumped out into a counter-current extractor filled with heptanal. The extraction is a continuous process. It means that the raffinate phase is

contacted with another non-toxic solvent and/or a sorbent which removes the toxic solvent from the raffinate before recycling it into the fermentation. It should be noted here, that in case of heptanal the distribution of the ABE solvents can be considered to be advantageous.

Solvent	Heptanal	Oleyl alcohol
Acetone	1.65	0.40
Ethanol	1.01	0.10
Butanol	11.13	3.75

Table 7. Distribution coefficients of ABE solvents

The boiling point of heptanal is higher than the ABE solvents, thus the evaporation of the heptanal is avoided and does not require energy, By using a special fermentor - extractor system (Fig. 5) the extract phase containing the ABE solvents are contacted with another heptanal phase having a smaller volume (1/10-1/5) than the volume of the primary extract. The contact takes place through a special porous wall based on a pumicite - cement composite (Kótai and Balogh, 2011; Kótai et al., 2011.).

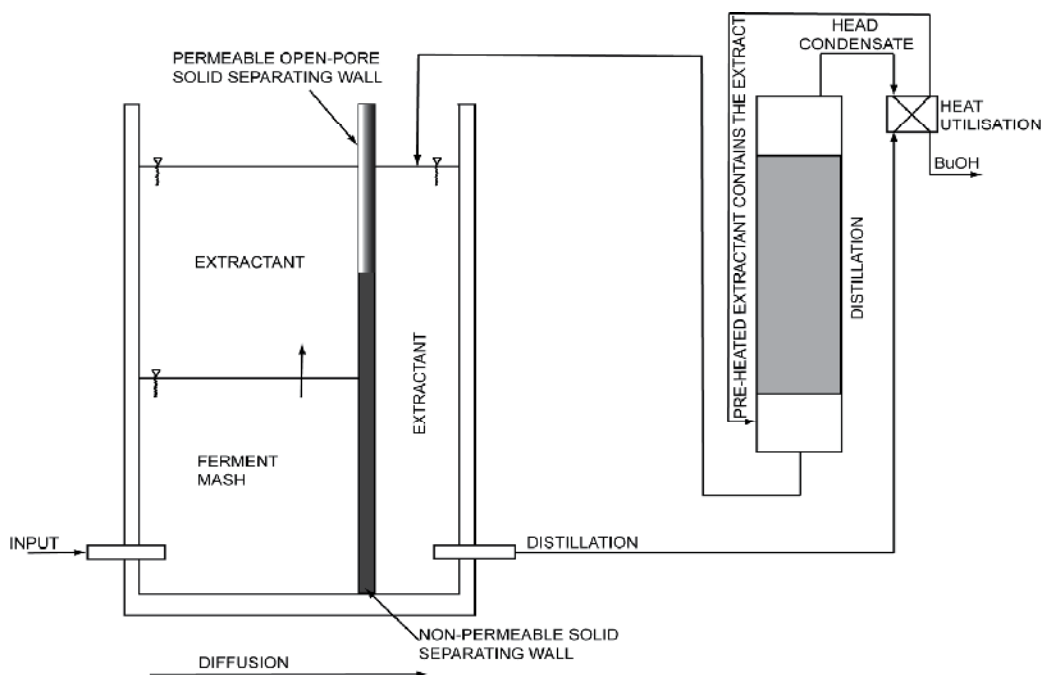


Fig. 5. Fermentor with composite wall

The porous material absorbs the solvents as a sponge, and it acts as a liquid transmitting media. There is no physical mixing only the diffusion controls the distribution of the solvents at the two sides of the wall. In order to keep the concentration difference as driving

force, the ABE solvents is produced continuously at the A side (including the extraction step) and the extracted solvents are continuously removed at the B side of the wall, e.g. vacuum distillation, sorption by solid solvents as sulfonated styrene-divinyl-benzene copolymers (Kótai and Balogh, 2011), or with other methods. Due to their higher affinity towards water than the ABE solvents these copolymers ca not remove the AB solvents from the water directly. The Varion KSM sulfonated styrene-divinylbenzene copolymer can absorb the following amount of solvents (Kótai and Balogh, 2011)

Solvent	Amount, g/100g	Solvent	Amount, g/100g
Water	87	acetone	40
MeOH	75	heptanal	35
EtOH	73	Oleyl alcohol	35
BuOH	63	Hexane	30

Table 8. The adsorbed amount of solvents by solid sorbent based on sulfonated polymer

By using waste ion-exchangers, metal-containing activated carbons or metal-free carbons were prepared by leaching of metals from these metal-containing carbons [Kótai and Angyal, 2011], which are candidates as selective spherical sorbents with low hydrodynamic resistance for removing residual extractants and absorb the contaminants occurring in small amount in the ferment liquor. The Fe-containing sorbent are magnetic and could be separated very easily (without filtering) with an electromagnet (Kótai and Angyal, 2011). Elastic waste tires were also sulfonated for the preparation of sulfonated organic polymers to absorb butanol from organic media (Kótai and Balogh, 2011).

The supplement of the continuous reactor with sugar solution from the sorghum processing results a much cleaner technology than the process using the corn mash containing a lot of solid ballast material. Additional advantage of the method is the small volume of the B extract, because the small volume of invaluable solvents (water) needs small volume and investment of the distillation unit. A rough comparison of the energy and material balance shows, that selecting the appropriate bacteria and conditions, it is possible to reach the almost maximal theoretical utilization of glucose (0.37 g butanol/g glucose), so the amount of waste water and the energy to produce a unit of butanol in principle can be decreased to 25-50 %.

Combination of these techniques with new developments in membrane technologies, mainly with selective membrane separation and pervaporation (Liu et al., 2005; Thongsukmak & Sirkar), can provide a feasible butanol production technology.

5.2 Recycling of ash from biomass power plants


Combustion of biomass to produce energy (heat or electricity) always leaves back ash in various amount and composition depending on the biomass used as raw materials in the furnaces. This ash highly alkaline due to its potassium carbonate content (pH >10). Therefore it cannot be used directly as a fertilizer; only very small amount can be applied even for acidic soils. Since the ash contains all microelements and non-volatile elements in the amount absorbed and used by the plants harvested from the given area, their amount and ratio is optimal for the plant. Its insoluble content (e.g. phosphates) can be converted via digestion to utilizable material. In addition, it can be also supplemented with nitrogen fertilizers or other additives. In this way the processed ash becomes a useful material called

eco-fertilizer (Angyal et al., 2006). In order to ensure the waste free technological viewpoints, the biomass power plant ash has to transform into fertilizer. It has been known for a long time that the alkaline ash can be neutralized with mineral acids, when potassium containing fertilizers are formed. However, these methods are difficult to perform technically, due to the large volume of gas formed in these reactions. Roughly 150 normal m³ of carbon dioxide evolves in the reaction of 1 ton of ash with intensive foaming. A biomass power plant with electric capacity of 50 MW produces roughly 50-60 tons ash/day which means producing of > 300 normal m³ of CO₂ gas/h. Furthermore, a very large volume of dilute fertilizer solution is produced, thus the cost of transportation is very high. The evaporation of the solution is not feasible. In order to solve these problems and ensure recycling the ash components for sustainable biomass production, a new technology has been developed for the neutralization of the biomass power plant ashes. This method ensures complete digestion of potassium and phosphorus content of the ash and decreases the K and P fertilization costs which are essential in the case of plants with fast metabolism such as sugar sorghum or energy grass. The nitrogen supplement is the only one which should be ensured in a usual way with the addition of N fertilizers. In this way the sulfur deficiency of the soils, or extreme sulfur demand as in case of oily plants like rape can also be satisfied (Scherer, 2001).

The new method based on the reaction of sulfuric acid and the biomass ash in a long quasi-closed tube reactor equipped with a screw for moving the reaction mixture. The reaction substantially proceeds during the mixture motion from the one end of the reactor to the other. This technology ensures not only continuous production of neutralized ash, but other important changes also appear in the chemical constitution of the starting ash. Normally, concentrated sulfuric acid does not wet the ash and does not react with it at all, their mixing can be proceed without CO₂ evolution. The reaction starts only in the presence of water. The mortar like mass prepared from the ash/limestone mixture and cc. sulfuric acid are mixed with water and reacted in the tube reactor. The reaction starts only after the dilution of the sulfuric acid. The most advantageous concentration is ~50 % (of sulfuric acid) when the carbonates reacts in a self-sustainable way due to producing water in the neutralization reactions. The key element in the reaction is the quasi-closed tube reactor. During moving the mortar like mass toward the opened end of the tube reactor, the neutralization reaction takes place and CO₂ gas evolves as usual. However, the reaction mass acts as a plug which ensures that the formed CO₂ gas cannot released from the reactor. The in situ evolved CO₂ gas makes micro-bubbles in the material, because of the overpressure of the quasi-closed equipment, and the swelled mass fills out the tube reactor. However, the wall of the reactor and the reaction mass as a plug ensures an overpressure within the reactor. Due to the overpressure no fizzing out occurs within the reactor and the micro-bubbles of the carbon dioxide gas are kept in the mortar-like mass. If the amount of the mass is adjusted to be less in its volume than the volume of the reactor, the mass is blown up due to the evolved gas and fills completely the space within the reactor. The carbon dioxide micro-bubbles have a slight overpressure, thus leaving the tube reactor at the opened end, the gas leaves the semi-solidified mass and the places of the micro-bubbles becomes opened pores. Technologically this method ensures processing of the ash with sulfuric acid in a small volume of continuously operated tube reactor having only a volume of ~3 times larger than the volume of the ash that can be processed (~ 60-80 times larger reactors as used in the classical neutralization methods do not

needed (Angyal et al, 2006). Since the formed mortar like mass dries and solidifies easily, after granulating or pelletizing into the usual shape of solid fertilizers, the formed eco-fertilizer can be spread as solid by common facilities.

This method of neutralization has numerous advantages towards the classical neutralization technologies, not only the formation of solid fertilizer instead of dilute liquids, and thus avoiding the high volume expensive reactors during manufacturing, but from chemical viewpoints as well. Normally, the ash formed from straw and energy grass contains a mixed potassium calcium carbonate (Buetschliite), $K_2Ca(CO_3)_2$ as main components, the second most important phase is the KCl, and K_2CO_3 and K_2SO_4 can also be detected by powder X-ray diffraction. Similar amount of magnesium hydroxide and sodium carbonate can also be detected. The ratio of potassium chloride and sulfate depends on the soil composition, and the fertilization and type of fertilizer used (KCl or K_2SO_4) during the production of the wheat of course. Expressing the important metal content in the form oxides are as it follows: ~40 % of K_2O , ~10% CaO , 3.5 % MgO and 2.5 % of Na_2O . The straw contains a lot of chlorides (~7 %), the other anions as sulfate and carbonate expressed in SO_3 and CO_2 are ~10 % and ~20 %, respectively. The potassium-calcium carbonate (or potassium and calcium carbonate as well) easily reacts with diluted (~50 %) sulfuric acid, but not only the expected K_2SO_4 and $CaSO_4$ but their double salts as syngenite ($K_2Ca(SO_4)_2 \cdot H_2O$) and polyhalite ($K_2Ca_2Mg(SO_4)_4 \cdot 2H_2O$) are formed as main products. The syngenite is less soluble (but not completely insoluble) in water and has ion-exchange properties toward ammonium ion, because due to their similar sizes of potassium and ammonium ions they can substitute each other in the structure of this compound.



The excess of sulfuric acid is neutralized to pH=6 with limestone powder and can be used as simple and general potassium and sulfate fertilizer which has opened pore structures which can absorb water and keep it in the pores, this way increasing the water retaining capacity of the soil. This fertilizer contains soluble phosphates and microelements previously digested by the sulfuric acid treatment. Furthermore, via controlling the amount of the calcium carbonate powder in the last step of the manufacturing, acidic (sub-neutralized), neutral or alkaline (over-neutralized) fertilizers can also be produced. No liquid or solid waste form in this technology, all the used components are built into the structure of the product. Since the water absorbing capacity of these materials, due to the porosity controlled by the synthesis conditions is very high (50-120 % of its mass), it is obvious, that not only water but various aqueous solutions can also be absorbed in these pores. This behavior opens new perspectives, namely absorbing different other fertilizers, e.g. nitrogen fertilizers, insecticides, or any other solutions of important compounds which should be injected into the soils.

The most common nitrogen fertilizer is the ammonium nitrate, however, the metal-doped NH_4NO_3 production has serious problems because the ammonium nitrate is prilled from the melt, and the melted ammonium nitrate is easily exploded due to the catalytic effect of metal compounds. Thus, these metal microelements cannot be added to the melted NH_4NO_3 before prilling. Using ammonium nitrate solutions, the metals compounds can be added in the required amounts without any risk to the porous granulated eco-fertilizer. Although drying after the absorption of the aqueous solutions (e.g. NH_4NO_3 solutions) requires extra energy, but the complete process energetically is still more advantageous, due to the

following considerations. Ammonium nitrate solution is prepared in an exothermic reaction of a ~65 % of nitric acid with ammonia gas, when an aqueous solution of NH_4NO_3 solution (roughly 80%) is formed. Evaporation of this solution at high temperature leads to the melt of ammonium nitrate which is prilled in the next step of manufacturing. Since we use the NH_4NO_3 solution, which is contacted with the granules, the water removal, without melting of the NH_4NO_3 , requires less energy than the final step of the solid NH_4NO_3 manufacturing. This concentrated NH_4NO_3 solution has acidic character, and easily react with the syngenite and other components of the eco-fertilizer. The concentrated NH_4NO_3 solutions are not only physically absorbed and imbibed in the pores of the eco-fertilizer, but chemically reacts with its components, as well.



The potassium ions can be substituted with ammonium ion with the formation of partially or completely ion-exchanged syngenite-like isomorphous compounds. The completely substituted product is called to be koktaite, $(\text{NH}_4)_2\text{Ca}(\text{SO}_4)_2 \cdot \text{H}_2\text{O}$, which is less soluble in water, thus releases nitrogen slowly into the soil (Angyal et al., 2006; Coates and Woodward, 1988; Von Maessenhausen et al., 1988). The formed potassium nitrate transformed into a solid solution with the excess of the ammonium nitrate, the typical composition of this product was the $\text{K}_{0.27}(\text{NH}_4)_{0.73}\text{NO}_3$. The koktaite and NH_4 -syngenites are sparingly soluble in water, thus the ammonium ion concentration liberated in the presence of water is constant at a given temperature and ionic strength of sulfate ion. Since not the full amount of the ammonium ion is liberated, no damages to the plant and losses by washing away, respectively occur even if using in high doses. When the plant absorbs the ammonium-ion from the soil, due to the equilibrium conditions, a part of the solid will dissolve and supply the water with a new amount of ammonium ion. Since the equilibrium concentration is closely constant, the amount of water will control the amount of the released ammonium ion, namely, the release of the ammonium ion from this koktaite type compounds is controlled by raining or irrigating. In drought situation, when there is no absorption of ammonium ion from the soil by the plant, there is no dissolution of ammonium syngenites and releasing ammonium ion which would be decomposed by the soil bacteria as it happens in case of water soluble ammonium ion containing fertilizers. Besides ammonium nitrate, other fertilizer components can also be used to adjust the main element concentrations, such as K, P or N, and to change the available form of these elements in various chemical compounds. The K_2HPO_4 does not react at all with other components of the ash. It is interesting, that ammonium salts as NH_4Cl and $(\text{NH}_4)_2\text{SO}_4$ cannot transform the syngenite completely into $(\text{NH}_4)_2\text{SO}_4$, even if the ammonium sulfate is in excess, but in the presence of urea, the transformation is complete. Both KCl and K_2SO_4 decompose the ammonium syngenite, but the mixture of the K_2SO_4 and the NH_4Cl produces $(\text{NH}_4)_2\text{Ca}(\text{SO}_4)_2 \cdot \text{H}_2\text{O}$. Thus, the main factor is probably the ammonium to potassium ion ratio. There is an important difference between the behavior of the potassium sulfate and potassium chloride. The latter compound is more reactive, and KCl , KNO_3 and NH_4MgCl_3 are also formed in its presence. Using various additives not only the ratio of the agriculturally important elements (K, P, N, S) are controlled but their chemical forms can also be altered. Using various kind of soil bacteria and supplementary materials to ensure their intensive growing is another possibility for nitrogen-fixation in the treated area. By using the eco-fertilizer technology supplemented

with absorbing of aqueous liquids ensures the recycling of the by-product of the biomass power plant providing energy and electricity for the biofuel (biodiesel and biobutanol and supplemented) plants. This way we can sustain the production of the renewable energy plants, e.g. sugars sorghum, while the soil quality is maintained and improved, respectively.

6. Conclusion

By proper selection of biomass available from a given area, the sugar and energy sources, and the relative amount of the vegetable oil produced can be adjusted. In order to decrease the processing cost of raw materials into sugar containing mash for fermentation plants, the classical sugar sources as corn can be replaced with sugar sorghum, which can be processed similar to sugarcane. Combustion of the residual biomass in power plants or their digestion into biogas depend on the water and protein content of the residue and the heat or electricity demand of fuel-producing (biodiesel, biobutanol, acetals, etc.) or waste processing (fertilizer production) plants. Generally, it is more advantageous to use biomasses of high protein and water content in biogas plants. Burning the biogas or by using it as fuel in gas-engines the amount of heat and electricity can be controlled. Wastes of high cellulose content can be advantageously burned in power plants, sometimes after drying with the low heat value warm water streams of energy production. Wastes of fuel production can be utilized by combination these two methods of energy production. The ash and the solid residues from biomass power plants can be utilized as fertilizers by mixing them with potassium sulfate or calcium sulfate formed during recovery of the catalyst (KHSO_4 or H_2SO_4) in biodiesel or acetal plants. Finally, there are two other wastes. The first is K_2SO_4 from the biodiesel technology, and the other is the ash from the combustion. Beyond the integration of energy producing and consuming plants and controlling the ratio of the raw materials and the type of the energy (heat or electricity), the production technology is also to be changed mainly in biodiesel, biobutanol and fertilizer plants. In this way the energy consumption of each technological step can be decreased.

7. References

- Andersen, V. F., Anderson, J. E., Wallington, T. J., Mueller, S. A. & Nielsen, O. J., *Energy & Fuels*, Vol. 24, (2010), pp. 2683-2691. ISSN 0887-0624
- Angyal, A., Hujber, O., Kótai, L., Legeza, L. & Sajó, I. E., *HU Patent Appl.* 0600390, 2006.
- Arlie, J.-P., *Revue de l' Institute Francais du Petrole*, Vol. 38, No.2. (1983), pp. 251-257. ISSN 0020-2274
- Barrault, J., Pouilloux, Y., Vanhove, C., Cottin, K., Abro, S. & Clacens, J. M., *Chemistry and Industry*, Vol. 75, (1998), pp. 13-23. ISSN 0009-3068
- Benjumea, P., Agudelo, J. R. & Agudelo, A. F., *Energy & Fuel*, Vol. 25, (2011), pp. 77-85. ISSN 0887-0624
- Boocock, D. G. B., Konar, S. K. & Sidi, H., *Journal of the American Oil Chemists Society*, Vol 73 (1996), pp. 1247-1251, ISSN 0003-021X

- Boocock, D. G. B., Konar, S. K., Mao, V. & Sidi, H., *Biomass & Bioenergy*, Vol.11, No.1. (1996), pp. 43-50, ISSN: 0961-9534
- Boocock, D. G. B., Konar, S. K., Mao, V., Lee, C. & Buligan, S., *Journal of the American Oil Chemists Society*, Vol. 75, (1998), pp. 1167-1172, ISSN 0003-021X
- Bruno, T. J., Wolk, A. & Naydich, A., *Energy & Fuel*, 23 (2009), pp. 2295-2306. ISSN 0887-0624
- Coates, R. V. & Woodard, G. D., *Journal of Science of Food & Agriculture*, Vol. 14, No.6, (1963), pp. 398-404, ISSN 0022-5142
- Costa, J. M., *Proc. Ann. Biochem. Eng. Symp.* 11th, (1981), pp. 83-90.
- Crabbe, E., Nolasco-Hipolito, C., Kobayashi, G., Sonomoto, K. & Ishizaki, A., *Process Biochemistry*, Vol. 37, (2001), pp. 65-71, ISSN 0032-9592.
- Delfort, B., Durand, I., Jaecker, A., Lacombe, T., Montagne, X. & Fabrice, P., US 7097674, 2004.
- Di Serio, M., Tesser, R., Pengmei, L. & Santacesaria, E., *Energy & Fuels*, Vol. 22, (2008), pp. 207-217. ISSN 0887-0624
- Duck, J. T. & Bruce, C. S., *Journal of Research of the National Bureau of Standards*, (1945), pp.439-465, ISSN: 0160-1741.
- Ferreira, P., Fonseca, I. M., Ramos, A. M., Vital, J. & Castanheiro, J. E., *Applied Catalysis B. Environmental*, Vol.98, (2010), pp. 94-99, ISSN 0926-3373
- Fu B., & Vasudevan, P. T., *Energy & Fuels*, vol. 23, (2009), pp. 4105-4111. ISSN 0887-0624
- Geuens, J., Kreamsner, J. M., Nebel, B. A., Schober, S., Dommissse, R. A., Mittelbach, M., Tavernier, S., Kappe, C. O. & Maes, B. U. W., *Energy & Fuels*, vol. 22, (2008), pp. 643-645. ISSN 0887-0624
- Guan, G., Kusakabe, K., Sakurai, N. & Moriyama, K., *Fuel*, Vol. 88, (2009), pp. 81-6, ISSN 0016-2361
- Guan, G., Sakurai, N. & Kusakabe, K., *Chemical Engineering Journal*, Vol.146, (2009), pp. 302-6, ISSN 1385-8947.
- Guerro-Perez, M. O., Rosas, J. M., Bedia, J., Rodriguez-Mirasol, J. & Cordero, T., *Recent Patents on Chemical Engineering*, Vol. 2, (2009), pp. 11-21. ISSN 2211-3347
- Hartmeier, W., Buecker, C. & Wallrath, J., *Biochem. Bioeng., 2nd Int. Symp., Stuttgart*, (1991), pp. 236-241.
- Hill, J., Nelson, E., Tilman, D., Polasky, S. & Tiffany, D., *Proceedings of the National Academy of Sciences* Vol. 103, No. 30, (2006), pp. 11206-11210, ISSN 1091-6490.
- Huber, G. W., Iborra, S. & Corma, A., *Chemical Reviews*, Vol. 106, (2006), pp. 4044-4098, ISSN 0009-2665
- Ishii, S., Taya, M., Kobayashi, T., *Journal of Chemical Engineering of Japan*, Vol. 18, No.2, (1985), pp. 125-130, ISSN 0021-9592
- Ishizaki, A., Michiwaki, S., Crabbe, E., Kobayashi, G., Sonomoto, K. & Yoshino, S., *Journal of Bioscience and Bioengineering*, Vol. 87, No. 3, (1999), pp. 352-356 ISSN 1389-1723
- Jalinski, T. J., *WO 2006/084048 A1*, 2006
- Khelevina, O. G. & Kanyaev, N. P., *Izvestiya Vysshikh Uchebnykh Zavedenii, Khimiya i Khimicheskaya Tekhnologiya*, Vol. 11, No.2, (1968), pp. 166-170, ISSN 0579-2991.

- Klepacova, K., Mravec, D., Hajekova, E. & Bajus, M., *Petroleum & Coal*, Vol. 45, (2003), pp. 54-57, ISSN 1335-3055
- Kótai, L. & Angyal, A., *Research Report, GOP 1.1.1.*, Axial-Chem Ltd., 2011.
- Kótai, L., Angyal, A., Somogyi, I., Bihatsi, L., May, Z., Gömör, Á. & Tamics, E., *HU 08/00437A*, 2008.
- Kótai, L. & Balogh, J., *Research Report, GOP 1.1.1.*, Kemobil Co., 2011.
- Kótai, L., Gömör, Á., Gács, I., Holly, S., Sajó, I. E., Tamics, E., Aradi, T. & Bihátsi, L., *Chemistry Letters*, Vol. 37, No. 10, (2008), pp. 1076-7, ISSN 0366-7022
- Kótai, L., Szépvölgyi, J., Tamics, E., *HU 11/00286 A*. 2011.
- Kótai, L., Tamics, E., Sas, J., Deme, P., Gömör, Á. & Aradi, T., *HU 06/00886A*, 2006.
- Leung, D. Y. C., Wu, X. & Leung, M. K. H., *Applied Energy*, Vol. 87, (2010), pp. 1083-1085, ISSN 0306-2619
- Lindquist, C.-J., *WO91/15452*, 1991.
- Liu, F., Liu, L., Feng, X., *Separation & Purification Technology*, Vol. 42, (2005), pp. 273-282. ISSN 1383-5866
- Maeda, K., Kuramochi, H., Asakuma, Y., Fukui, K., Tsuji, T., Osako, M. & Sakai, S., *Chemical Engineering Journal*, Vol. 169, (2011), pp. 226-30, ISSN 1385-8947.
- Meng, Z., Jiang, J. & Li, X., *Taiyangneng Xuabao*, Vol.30, No.3, (2009), pp. 385-389. ISSN 02540096
- Mota, C. J. A., da Silva, C. X. A. & Goncalves, V. L. C., *Quimica Nova* Vol.32, No.3, (2009), pp. 639-648, ISSN 0100-4042
- Nimcevic, D., Puntigam, R., Woergetter, M. & Gapes, J. R., *Journal of the American Oil Chemists Society*, Vol. 77, No. 3, (2000), pp. 275-280. ISSN 0003-021X
- Papadopoulos, A. I. & Linke, P., *Chemical Engineering and Processing: Process Intensification*, Vol. 48, (2009), pp. 1047-1060, ISSN 0255-2701.
- Park, C.-H., Okos, M. R. & Wankat, P. C., *Biotechnology and Bioengineering*, Vol. 34, (1989), pp. 18-29, ISSN 0006-3592
- Pimentel, D. & Petzek, T. W., *Natural Resources Research*, Vol. 14, No.1, (2005), pp. 65-76, ISSN 1520-7439.
- Pfromm, P. H., Amanor-Boadu, V., Nelson, R., Vadlani, P. & Madl, R., *Biomass and Bioenergy*, Vol. 34, (2010), pp. 515-524, ISSN 0961-9534
- Puche, J. D., *US 7637969B2*, 2009.
- Scherer, H. W., *European Journal of Agronomy*, Vol. 14, (2001), pp. 81-111, ISSN 1161-0301
- Schmidt, A., Windsperger, A. & Friedl, A., *US 4749495*, 1988.
- Schrock, M. D. & Clark, S. J., *Transactions of the ASAE* (1983), pp. 723-727, ISSN 0001-2351
- Silva, P. H. R., Goncalves, V. L. C. & Mota, C. J. A., *Bioresource Technology*, Vol. 101, (2010), 101, pp. 6225-6229, ISSN 0960-8524.
- Smith, P. C., O'Neill, B. K., Ngothai, Y. & Nguyen, Q. D., *Energy & Fuels*, Vol. 23, (2009), pp. 3798-3803, ISSN 0887-0624
- Soriano, N. U., Jr., Venditti, R. & Argyropoulos, D. S., *Fuel*, Vol. 88, (2009), pp. 560-565, ISSN 0016-2361
- Stoldt, S. H. & Dave, H., *EP 0860494 A1*, 1998.

- Thongsukmak, A. & Sirkar, K. K., *Journal of Membrane Science*, Vol. 302, (2007), pp. 45-58, ISSN 0376-7388.
- Von Maessenhausen, W., Czikkely, V. & Jung, J., *US4883530 B2*, 1988.
- Wahlen, B. D., Barney, B. M. & Seefeldt, L. C., *Energy & Fuels*, Vol. 22 (2008), pp. 4223-28. ISSN 0887-0624.
- Welsh, F. W. & Williams, R. E., *Journal of Chemical Technology & Biotechnology*, Vol. 46, No. 3, (1989), pp. 169-78, ISSN 0268-2575
- Workman, J.P., Miller, G. L. & Smith, J. L., *Transactions of ASAE*, 1983, 642-645, ISSN 0001-2351

Part 2

Biodiesel Production Methods

Production of Biodiesel via In-Situ Supercritical Methanol Transesterification

Asnida Yanti Ani, Mohd Azlan Mohd Ishak and Khudzir Ismail
*Fossil & Biomass Energy Research Group, Fuel Combustion Research Laboratory,
Universiti Teknologi MARA, Perlis,
Malaysia*

1. Introduction

Most energy that the world is using is derived from unrennewable fossil fuel that has a great impact on environments (Warabi et al., 2004). The demand of fossil fuels is increasing very rapidly and it is estimated that the remaining world reserves will be exhausted by the year 2020, with the current rate of consumption. There is an urgent need to seek for an alternative fuels to substitute the diesel due to gradual depletion of world crude oil reserves. Research is, therefore oriented for alternative energy. Biomass is one of its candidates, because biomass energy has some advantageous in reproduction, cyclic and carbon neutral properties (Warabi et al., 2004). Biodiesel fuel is one example of biomass energy, and it is generally made of methyl esters of fatty acids produced by the transesterification reaction of triglycerides with methanol with the help of a catalyst (Clark et al., 1984). Alcoholysis of vegetable oils produces fatty acids alkyl esters that are excellent substitutes for conventional fossil diesel fuels (Selmi and Thomas, 1998; De et al., 1999). The viscosity of alkyl esters is nearly twice that of diesel fuel instead of 10–20 times as in the case of neat vegetable oil (Rathore and Madras, 2007).

The use of such edible oil to produce biodiesel is not feasible in view of big gap in the demand and supply of such oils in the country for dietary consumption. Increased pressure to augment the production of edible oils has also put limitations on the use of these oils for production of biodiesel (Sinha et al., 2008). Therefore, biodiesel is actually competing limited land availability with the food industry for the same oil crop. Thus, instead of arable land being utilized to grow food, it is now being used to grow fuel. This will then raise the price of edible oil making the biodiesel produced economically unfeasible as compared to petroleum-derived diesel. In order to overcome this issue, many researchers have begun searching for cheaper and non-edible oils to be used as alternative feedstock for biodiesel production (Kansedo et al., 2009). Few sources have been identified such as waste cooking oil (Wang et al., 2006; Chen et al., 2009) and oils from non-edible oil-producing plants such as *Jatropha curcas* (Heller, 1996; Herrera et al., 2006; Tiwari et al., 2007; Berchmans and Hirata, 2008; Chew, 2009), *Pongamia pinnata* (Meher et al., 2006; Naik et al., 2008; Pradhan et al., 2008), *Calophyllum inophyllum* (Sahoo et al., 2007), cottonseed (Demirbas, 2008; Qian et al., 2008; Rashid et al., 2009), rubber seeds (Ikwaugwu et al., 2000; Ramadhas et al., 2005) and tobacco seeds (Usta, 2005; Veljkovic et al., 2006). Obviously, developing nations have to focus their attention on oils of non-edible nature, which are cheaper (Sinha et al., 2008). In Malaysia, *Jatropha curcas* L. (JCL), could be utilized as a source for production of oil and can be grown in large scale on non-cropped marginal lands and waste lands.

JCL oil is obtained only after going through the following steps: collection of fruit from the trees, separation of seed from the hull, seed drying (Chew, 2009), oil pressing and filtration. Pressing oil from the kernel yields kernel cake (40-50%) and crude oil (50-60%). At present, in the majority of cases oil is generally pressed directly from the seed without separating the kernel and shell. This method produces seed cake (70-75%) and crude oil (25-30%) (Chew, 2009). Much of the un-extractable oil still remains in the seed cake; hence better ways of extracting the oils are needed. Among the extraction techniques reported in the literature include the use of Soxhlet extraction method (Castro and Ayuso, 1998; Ayuso and Castro, 1999; Szentmihalyi et al., 2002; Darcia and Castro, 2004), aqueous enzymatic oil extraction (Rosenthal et al., 1996; Sharma and Gupta, 2006; Jiang et al., 2010) and enzyme assisted three phase partitioning (Shah et al., 2004; Gaur et al., 2007). Some of these extraction methods, however, required a longer extraction time (Chew, 2009). Nowadays, many researchers (Papamichail et al., 2000; King et al., 2001; Cao and Ito 2003; Machmudah et al., 2008) turns to supercritical extraction techniques which is relatively rapid because of the low viscosities and high diffusivities associated with supercritical fluids.

Transesterification is the general term used to describe the important class of organic reactions where an ester is transformed into another ester through interchange of the alkoxy moiety. Several aspects, including the type of catalyst (alkaline, acid or enzyme), alcohol/vegetable oil molar ratio, temperature, purity of the reactants (mainly water content) and free fatty acid content have an influence on the course of the transesterification. In the conventional transesterification of fats and vegetable oils for biodiesel production, free fatty acid and water always produce negative effects, since the presence of free fatty acids and water causes soap formation, consumes catalyst and reduces catalyst effectiveness, all of which result in a low conversion (Demirbas, 2007). In addition to that, more catalyst is required to neutralize free fatty acids of oil with higher free fatty acids content (Kusdiana and Saka, 2004). Thus, the catalytic processes have a high production cost and are energy intensive. One primary problem is due to the vigorous stirring required for the mixing of the two-phase mixture of oil and alcohol. Another problem is the separation of catalyst after the reaction (Madras et al., 2004). Therefore, non-catalytic transesterification has been investigated.

Supercritical fluid extraction using polar solvent such as methanol as an extraction solvent is highly potential extraction technique to be used whereby high yield of oil can be achieved within a shorter time (Hawash et al., 2009). Further, at supercritical state, the solvent solubility increased dramatically, and the extracted oil is relatively low in impurities (Tan et al., 2009). However, there is no details on the maximum crude biodiesel yield can be obtained related to the in-situ supercritical methanol transesterification direct from the seeds.

In situ transesterification differs from the conventional reaction in the sense that the oil-bearing material contacts acidified alcohol directly instead of reacting with purified oil and alcohol. That is, extraction and transesterification of the seed powder proceed within the same process, with alcohol acts as an extracting solvent as well as esterification reagent (Fukuda et al., 2001). In situ transesterification (Harrington and Evans, 1985; Marinkovic and Tomasevic, 1998; Kildiran et al., 1996; Hass et al., 2004), a biodiesel production method that utilizes the original agricultural products instead of purified oil as the source of triglycerides for direct transesterification, eliminates the costly hexane extraction process and works with virtually any lipid-bearing material. It could reduce the long production system associated with pre-extracted oil and maximize alkyl ester yield. The use of reagents and solvents is reduced, and the concern about waste disposal is avoided. This process reduces the cost of final product as this process has less number of unit operations. It is the best non-renewable source of energy with good environmental impact and easy recovery.

Thus, this study contributes in terms of design, development and improvement of the in-situ supercritical methanol transesterification of biodiesel production via high-pressure high-temperature batch-wise reactor system. In this study, biodiesel is generated directly from JCL seeds using methanol at different solvent critical states.

2. Materials and methods

2.1 Sample preparation

The *Jatropha curcas* L. (JCL) fruits were obtained with cooperation from the Plantation Unit of Universiti Teknologi MARA Perlis, Malaysia. JCL fruits were cleaned and de-hulled to separate the hull from the seeds. The seeds were then dried in an oven at 105 °C for 35 min (Akbar et al., 2009). The JCL seeds were ground using grinder and sieved through progressively finer screen to obtain particle sizes (d_p) of < 1 mm (Augustus et al., 2002). Sieving was accomplished by shaking the JCL powder in a Endecotts Shaker Model EFL2 for about 30 min and finally stored in a tightly-capped plastic container. The seeds need to be dried and ground in order to remove surface moisture content to obtain constant weight and weaken or rupture the cell walls to release oil for extraction, respectively (Akpan, 2006).

2.2 In-situ supercritical methanol transesterification

A batch type reactor at supercritical methanol was used for in-situ supercritical methanol transesterification of biodiesel from JCL seeds. The in-situ transesterification was carried out at temperatures and pressures ranging from 180 – 300 °C and 6 – 18 MPa, respectively. After a leak-check test, the reactor was pressurized with nitrogen to the desired pressure and heated to reaction temperature at a rate of 5 °C/min. After reaching desired temperature, the reaction was held for periods of 5 – 35 min. A JCL seeds-to-methanol ratio (1:15, 1:20, 1:30, 1:40 and 1:45 w/v) was also investigated. After each reaction, the vessel was removed from the heater and placed into a cold water bath to quench the reaction and depressurized to ambient pressure. The extracted product was discharged from the reactor and was vacuum-filtered on a Buchner funnel and the filter cake was washed with methanol. The extracted products from the in-situ transesterification were allowed to settle and separated into two phases in 500 ml separating funnel. It took about 30 min to separate into two phases, i.e., the top phase consists of the biodiesel (fatty acid methyl ester) and the lower phase consists of the glycerol and other minor components. The schematic diagram of the experimental apparatus of the batch-wise extraction system is shown in Fig. 1.

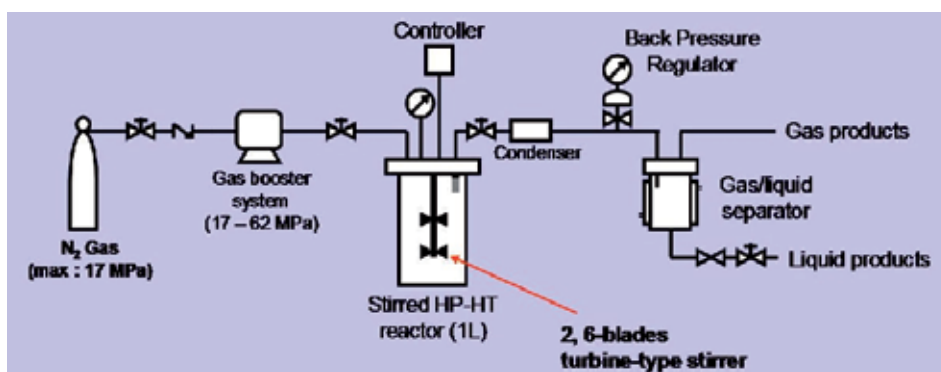


Fig. 1. Schematic diagram of batch-wise extraction system.

2.3 FAMES analysis

The FAMES analysis was quantified by Agilent Technologies 6890N with HP-5 5% Phenyl Methyl Siloxane capillary column (30 m by 320 μm by 0.25 mm) and a flame ionization detector. Methyl heptadecanoate (10.0 mg; internal standard) was dissolved in 1 ml hexane to prepare the standard solution. Approximately 100 mg crude methyl ester was dissolved in 1 ml standard solution for GC analysis (Hong, 2009). Approximately 1 μl sample was injected into the GC at an oven temperature of 210 $^{\circ}\text{C}$ with Helium as the carrier gas. The GC oven was programmed at 210 $^{\circ}\text{C}$, isothermally for 15 min. the FAMES content was calculated by use of the Equation 1:

$$C = \frac{\sum A - A_{IS}}{A_{IS}} \times \frac{C_{IS} \times V_{IS}}{m} \times 100\% \quad (1)$$

Where:

$\sum A$ = total peak area of methyl ester

A_{IS} = peak area of internal standard (methyl heptadecanoate)

C_{IS} = concentration of the internal standard solution, in mg/ml

V_{IS} = volume of the internal standard solution used, ml

m = mass of the sample, in mg

2.4 Biodiesel properties

The biodiesel was characterized by its density, viscosity, high heating value, cloud and pour points and flash points according to ASTM standards.

3. Results and discussion

3.1 Effect of temperature

The effect of temperature on percent of FAMES yields from JCL seeds were investigated. The parameters were fixed at 12 MPa of pressure, 1:40 (w/v) of seeds-to-methanol ratio, 30 min of reaction time and at varying temperatures of 180, 200, 240, 280 and 300 $^{\circ}\text{C}$. The results of in-situ supercritical methanol on percent of FAMES yields from JCL seeds at various temperatures are shown in Table 1. For simplification, the data are also plotted in Fig. 2.

Temperature ($^{\circ}\text{C}$)	Yields (%)					Others
	FAMES	Methyl Palmitate	Methyl Oleate	Methyl Linoleate	Methyl Stearate	
180	63.9	10.3	27.9	22.1	3.6	36.1
200	76.0	13.4	34.6	23.2	4.8	24.0
240	90.3	16.2	36.4	31.1	6.6	9.7
280	97.9	18.1	39.5	33.2	7.1	2.1
300	90.9	16.3	36.6	31.3	6.7	9.1

¹conditions: 12 MPa, 30 min and 1:40 (w/v) seeds-to-methanol ratio.

Table 1. In-situ supercritical methanol transesterification¹ results from JCL seeds at various temperatures on percent of FAMES yield and its contents.

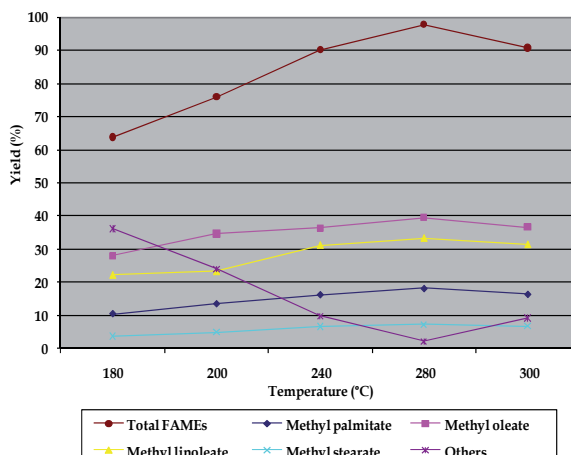


Fig. 2. In-situ supercritical methanol transesterification results from JCL seeds at various temperatures on percent of FAMEs yield and its contents.

From Table 1, the results indicate that the percent of FAMEs yields obtained at temperatures of 180 to 300 °C were in the range of 63.9 – 97.9%. The saturated FAMEs content of the seed samples are low, which is between 10.3 – 18.1% for methyl palmitate and 3.6 – 7.1% for methyl stearate. Meanwhile, the content of unsaturated FAMEs, methyl oleate and methyl linoleate are considerably higher at 27.9 – 39.5% and 22.1 – 33.2%, respectively. It should be noted that the critical temperature of methanol is at 240 °C and therefore, the conditions at 180 – 200 °C, 240 and >240 – 300 °C represent subcritical, supercritical and postcritical states of the medium, respectively.

At 180 °C, which is the lowest temperature of investigation, low yields of FAMEs (63.9%) were obtained. This observation might be due to the subcritical state of methanol or the instability of the supercritical state of methanol. It was observed that by increasing the reaction temperature to supercritical conditions had a favorable influence on the yield of ester conversion (Demirbas, 2008). Similar results have been reported by Cao et al., (2005), Madras et al., (2004) and Bunyakiat et al., (2006) on soybean oil, sunflower oil and coconut oil, respectively.

Apparently, by increasing the reaction temperature from 200 to 280 °C, the conversion increases significantly with FAMEs yields increased from 76.0 – 97.9%. The higher conversions observed in the supercritical state can be attributed to the formation of a single phase between alcohol and oil (Madras et al., 2004). Under supercritical conditions, the solubility parameter of alcohol reduces and was close to the solubility parameter of oil (Han et al., 2005). According to Petchmala et al., (2008), the increase in temperature causes the polarity of methanol to decrease, as a result of the breakdown of the hydrogen bonding of methanol, leading to an increased in the solubility of fatty acids in methanol. The complete solubility occurs as the temperature approaches the mixture critical temperature, at which point the reaction mixture became homogeneous and reaction took place rapidly. In addition, higher temperature contributed to the decomposition of cell walls, and as a result crude biodiesel yield was increased (Machmudah et al., 2007).

At 300 °C, the percent of FAMEs (90.9%) yields were slightly decreased. This observation was due to the decomposition of polyunsaturated methyl esters and unreacted triglycerides in postcritical methanol at severe high temperature (Tan et al., 2009). This finding was further supported by Xin et al., (2008) who suggested that the favorable reaction temperature adopted

in supercritical methanol method should be lower than 300 °C. Reaction temperature at above 380 °C is insuitable for transesterification reaction because the oil and methyl esters tend to decompose at the highest rate. Furthermore, Kusdiana and Saka's (2001) pointed out that saturated and unsaturated FAMES undergo side reactions such as thermal decomposition and dehydrogenation reactions at temperature >400 °C and >350 °C, respectively. In these experiments, the temperature used was lower than that of Kusdiana and Saka's work and the side reactions did not occur since the temperature was below 300 °C. Furthermore, at 300 °C, a strong burning smell of the extract was detected. Hence, at this point, there is no reason to further increase the extraction temperature beyond 280 °C.

3.2 Effects of pressure

The results of in-situ supercritical methanol transesterification on percent of FAMES yields from JCL seeds at various pressures are shown in Table 2. For simplification, the data are also being plotted and is shown in Fig. 3. The temperature was fixed at 280 °C based on the maximized yield conditions from the previous experiment.

Pressure (MPa)	Yields (%)					
	FAMES	Methyl Palmitate	Methyl Oleate	Methyl Linoleate	Methyl Stearate	Others
6	80.6	13.1	41.0	20.4	6.1	19.4
8	95.6	15.7	47.1	26.3	6.5	4.4
12	97.9	18.1	39.5	33.2	7.1	2.1
16	93.5	16.0	38.4	32.1	7.0	6.5
18	92.5	16.0	38.6	31.1	6.8	7.5

¹conditions: 280 °C, 30 min and 1:40 (w/v) seeds-to-methanol ratio.

Table 2. In-situ supercritical methanol transesterification¹ results from JCL seeds at various pressures on FAMES yield and its contents.

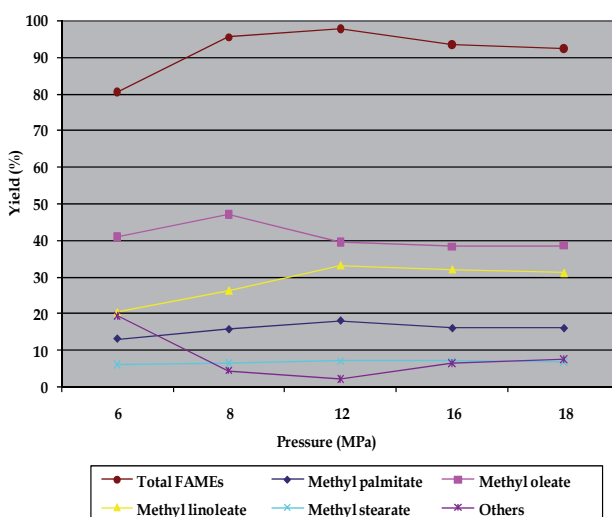


Fig. 3. In-situ supercritical methanol transesterification results from JCL seeds at various pressures on FAMES yield and its contents.

From Table 2, the results indicated that the percent of FAMES yields obtained at temperatures of 280 °C and pressures of 6-18 MPa was in the range of 80.6 – 97.9% with maximum yields at 12 MPa. The saturated FAMES content of the seed samples are low, which is between 13.1 – 18.1% for methyl palmitate and 6.1 – 7.1% for methyl stearate. Meanwhile, the content unsaturated FAMES, methyl oleate and methyl linoleate are considerably higher at 38.6 – 47.1% and 20.4 – 33.2%, respectively.

At the lowest pressure of 6 MPa, FAMES yields are only 80.6%, but increases to 97.9% when the pressure are increased to 12 MPa. The high FAMES yields achieved at 12 MPa, which is slightly above the critical pressure of methanol (8.09 MPa), might be due to the increase in solvent power of methanol with increasing pressure.

Further, increasing the pressure to 18 MPa, the FAMES yield decreases slightly to 92.5%. After the pressure increased to a specific level, the increase of pressure does not cause an obvious improvement in the FAME yield (He et al., 2007). This phenomenon might be due to the maximum solubility and/or hydrogen donor ability of the solvent that has been achieved regardless of high pressure employed.

As the pressure of the system increased, the solubility parameter of the methanol decreased and is close to the solubility parameter of the oil, thus forming a single phase between the alcohol and the oil. Based on these results, it can be seen that the fact that both temperature and pressure play an important role that contributes to high extraction yield, with the later being more prominent. Based on these results, it can be seen that the fact that both temperature and pressure play an important role that contributes to high yield, with the later being more prominent.

3.3 Effects of reaction time

Table 3 and Fig. 4 shows the effect of reaction time on percent of FAMES yields from JCL seeds using in-situ supercritical methanol transesterification. The reaction conditions were fixed based on maximum yields at optimized conditions discussed previously, i.e. 280 °C of temperature and 12.7 MPa of pressure.

Reaction time (min)	Yields (%)					
	FAMES	Methyl Palmitate	Methyl Oleate	Methyl Linoleate	Methyl Stearate	Others
5	88.4	15.0	38.5	28.6	6.3	11.6
10	94.2	16.6	40.5	30.6	6.5	5.2
20	96.0	17.2	39.6	32.0	7.2	4.0
30	97.9	18.1	39.5	33.2	7.1	2.1
35	93.1	16.6	38.8	30.8	6.9	6.9

¹conditions: 280 °C, 12.7 MPa and 1:40 (w/v) seeds-to-methanol ratio.

Table 3. In-situ supercritical methanol transesterification¹ results of JCL seeds at various reaction times on percent of FAMES yield and its contents.

From Table 3 and Fig. 4, the results indicated that the percent of FAMES yields obtained at temperatures of 280 °C, pressures of 12.7 MPa, seeds-to-methanol ratio of 1:40 (w/v) and reaction time of 5 – 35 min was in the range of 88.4 – 97.9% with maximum yields at 30 min.

The saturated FAMES content of the seed samples are low, which is between 15.0 – 18.1% for methyl palmitate and 6.3 – 7.2% for methyl stearate. Meanwhile, the content unsaturated FAMES, methyl oleate and methyl linoleate are considerably higher at 38.5 – 39.5% and 28.6 – 33.2%, respectively.

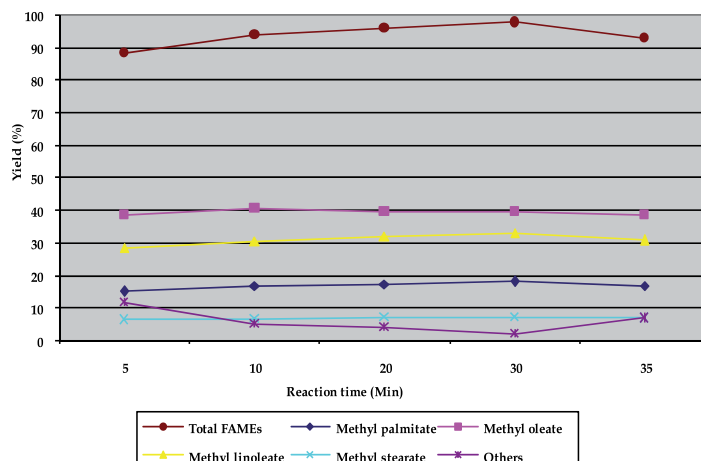


Fig. 4. In-situ supercritical methanol transesterification results from JCL seeds at various reaction times on percent of FAMES yield and its contents.

From the results, it can be seen that the percent of FAMES yields were only 88.4% at 5 min of reaction time. According to Saka and Kusdiana (2001), in the common method, the reaction is initially slow because of the two-phase nature of the methanol/oil system, and slows even further because of the polarity problem even with the help of an acid or an alkali catalyst. However, as described in this work, supercritical method can readily solve these problems because of the supercritical temperature and pressure employed. It can be seen that the conversion was increased in the reaction time ranges between 5 and 30 min with the percent of FAMES yields showed a slight increase in the range of 88.4 – 97.9%.

Further, the results indicated that an extension of the reaction time from 30 to 35 min had leads to a reduction in the FAMES yield (93.1%). This is because longer reaction time enhanced the hydrolysis of esters (reverse reaction of transesterification), resulted in loss of esters as well as causing more fatty acids to form soap (Eevera et al., 2009). Hence, for this process, there is no reason to prolong the reaction time beyond 30 min. Thus, the reaction time of 30 min can be considered as the economic reaction time by considering the percent of crude biodiesel and FAMES yields being achieved.

3.4 Effects of seeds-to-methanol ratio

Table 4 and Fig. 5 shows the effect of seeds-to-methanol ratio on percent of FAMES yields from JCL seeds using in-situ supercritical methanol transesterification. The reaction conditions were fixed based on maximized yields at optimized conditions discussed previously, i.e. 280 °C of temperature and 12.7 MPa and 30 min of reaction time with varying seeds-to-methanol ratio of 1:20, 1:30 and 1:40 (w/v).

Seed-to-methanol ratio (w/v)	Yields (%)					
	FAMEs	Methyl Palmitate	Methyl Oleate	Methyl Linoleate	Methyl Stearate	Others
1:15	89.0	15.2	37.4	29.8	6.6	11.0
1:20	94.4	16.9	38.8	31.6	7.1	5.6
1:30	95.9	17.5	38.6	32.3	7.5	4.1
1:40	97.9	18.1	39.5	33.2	7.1	2.1
1:45	97.0	17.4	40.1	32.3	7.2	3.0

¹ conditions: 280 °C, 12.7 MPa, 30 min reaction time.

Table 4. In-situ supercritical methanol transesterification¹ results of JCL seeds at various seed-to-methanol ratios on percent of FAMEs yield and its contents.

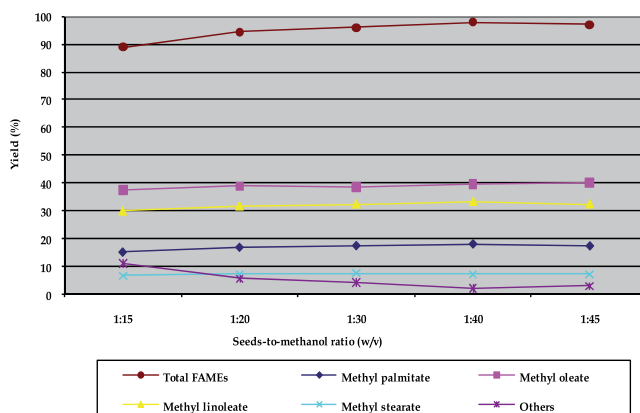


Fig. 5. In-situ supercritical methanol transesterification results of JCL seeds at various seeds-to-methanol ratios on percent of FAMEs yield and FAMEs contents.

From Table 4 and Fig. 5, the results indicated that the percent of FAMEs yields obtained at temperatures of 280 °C, pressures of 12.7 MPa, reaction time of 30 min and at various seeds-to-methanol ratio (1:15 – 1:45 w/v) was in the range of 89.0 – 97.9%, with maximum yields at 1:40 (w/v). The saturated FAMEs content of the seed samples are low, which is between 15.2 – 18.1% for methyl palmitate and 6.6 – 7.5% for methyl stearate. Meanwhile, the content unsaturated FAMEs, methyl oleate and methyl linoleate are considerably higher at 37.4 – 39.5% and 29.8 – 33.2%, respectively.

Obviously, at the lowest seeds-to-methanol ratio of 1:15 (w/v), the percent of FAMEs yields was relatively low (89.0%) and increased with increasing seeds-to-methanol ratio. When the methanol content in the supercritical fluids increased, the percent conversion of methyl ester also increased. The higher methanol content is favorable not only because more molecules of methanol surround the oil molecules but also because it contributes to the lower critical temperature of the mixture. Maximum percent of crude biodiesel and FAMEs yields were

obtained at a 1:40 (w/v) of seeds-to-methanol ratio. This is a significant difference from conventional catalytic reaction for which at least 1 h of reaction time is needed to attain the same yield. In this reaction, an excess of methanol was used in order to shift the equilibrium in the direction of the products (Demirbas, 2007). Kusdiana and Saka (2001) have suggested that higher molar ratios of methanol to oil also result in a more efficient transesterification reaction. The results obtained shows good agreement with previous work, where maximum conversion was obtained for rapeseed oil (Saka and Kusdiana, 2001) at molar ratio of 42:1, for various vegetable oils (Demirbas, 2002; Diasakou et al., 1998; Ma, 1998) and linseed oil (Varma and Madras, 2007) at molar ratio of 41:1 and 40:1, respectively. According to Bunyakiat et al., (2006), when the methanol content in the supercritical fluids increased, the percent of methyl esters conversion also increased.


The higher methanol content is favorable not only because more molecules of methanol surround the oil molecules but also because it contributes to the lower critical temperature of the mixture. It can be seen that an increment in seed-to-methanol ratio can enhance biodiesel yield due to higher contact area between methanol and triglycerides. However, when the ratio is beyond 40, the yield of biodiesel begins to decrease substantially. This might be due to the restriction of the reaction equilibrium and difficulties in separating excessive methanol from methyl esters and glycerol, which subsequently lowered the yield of biodiesel (Tan et al., 2009).

Moreover, it was observed that for high seeds-to-methanol ratio added the set up required longer time for the subsequent separation stage since separation of the FAMES layer from the organic layer becomes more difficult with the addition of a large amount of methanol. This is due to the fact that methanol, with one polar hydroxyl group, can work as an emulsifier that enhances emulsion. Operating beyond the optimal value, the ester yield would not be increased but will result in additional cost for methanol recovery (Eevera et al., 2009). Therefore, increasing the seeds-to-methanol ratio is another important parameter affecting the FAMES yield. This report is in line with the results of many investigations based on neat vegetable oils (Freedman et al., 1984; Zhang et al., 2003; Leung et al. 2006, Eevera et al., 2009).

3.5 Biodiesel characterization

The biodiesel obtained through the one-step supercritical methanol extraction and transesterification in-situ process in this experiment was dark yellow in color. Compositions of samples were analyzed by GC. Figure 6 shows the total ion current chromatogram of the biodiesel. Furthermore, Table 5 shows the names, structure and compositions of *Jatropha curcas* L. FAMES.

Fig. 6 depicts the gas chromatographic evaluation of the FAMES produced over the course of reaction. The methyl esters analyzed by GC appear in the retention time of less than 15 min in the chromatograms. The weight percentages were similar for all of the variables condition; temperature, pressure, reaction time and seeds-to-methanol ratio of in-situ transesterification, as suggested by Carrapiso et al., (2000) that transesterification was random. The average saturated FAMES content of the seed samples are low: 18.1% for methyl palmitate (C17:0) and 7.1% for methyl stearate (C19:0). The average content of the unsaturated FAMES, methyl oleate (C19:1) and methyl linoleate (C19:2) are considerably higher at 39.5 and 33.2%, respectively which are comparable to the fatty acid composition in crude JCL oil feedstock. Depending on the origin, either oleic or linoleic acid content is higher. In this case, the seed oil belongs to the oleic or linoleic acid group, to which similar to the majority of vegetable oils (Carrapiso et al., 2000).

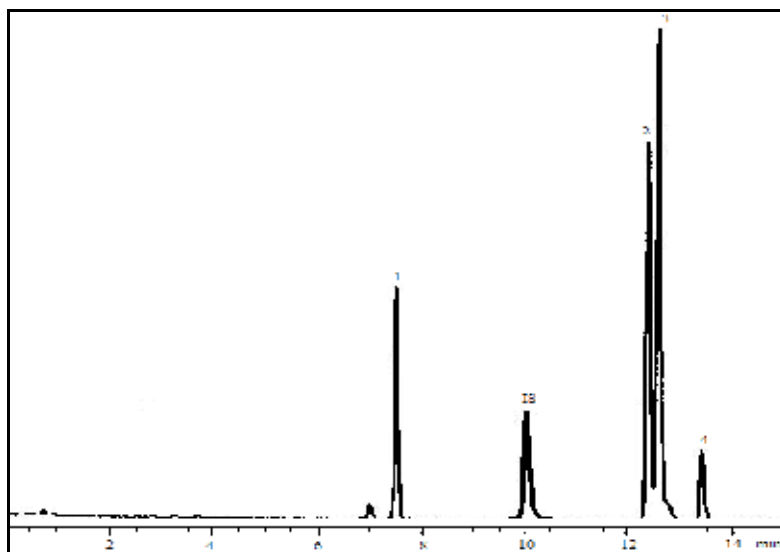

IS: Internal standard (Methyl heptadecanoate)

Fig. 6. Total ion current chromatogram of the biodiesel.

Peak No.	Name	Wt%
1	Methyl Palmitate	18.46
2	Methyl Oleate	40.41
3	Methyl Linoleate	33.91
4	Methyl stearate	7.22

Table 5. Names, structure and compositions of *Jatropha curcas* L. FAMES.

3.5.1 Biodiesel characterization

Vegetable oil methyl esters, commonly referred to as “biodiesel” are prominent candidates as alternative Diesel fuels. Biodiesel is technically competitive with or offers technical advantages compared to conventional petroleum Diesel fuel. The vegetable oils, as alternative engine fuels, are all extremely viscous with viscosities ranging from 10 to 20 times greater than that of petroleum Diesel fuel (Demirbas, 2003). The purpose of the transesterification process is to lower the viscosity of the oil. In this study, in-situ supercritical methanol transesterification for production of biodiesel from *Jatropha curcas* L. (JCL) seeds was generate via 1000 ml high-temperature high-pressure batch-wise reactor system in an absence of catalyst. The reaction conditions were conducted at 280 °C of temperature, 12.7 MPa of pressure, 30 min of reaction time and 1:40 of seeds-to-methanol ratio at 450 rpm of stirring rate. Samples of the biodiesel obtained from the in-situ experiment were determined using reference methods published by American Society for Testing and Materials (ASTM) D6751. In order to ensure that it can be used in diesel engine without any modification, the properties of biodiesel produced from this in-situ transesterification reaction was comparable with fuel properties of No. 2 Diesel. Fuel

properties of No. 2 Diesel, JCL biodiesel and ASTM D6751 derived biodiesel standards is shown in Table 6 for comparison.

Properties	No.2 Diesel ^a	JCL biodiesel ^b	ASTM D6751 ^a	JCL Biodiesel (This study)
Specific gravity	0.85	0.86 to 0.87	0.87 to 0.90	0.87
Kinematic viscosity @ 40 °C (cSt)	1.9 to 4.1	4.23 to 5.65	1.9 to 6	5.27
Cloud point (°C)	-19 to -8	8 to 10.2	Report	-2.06
Pour point (°C)	-34 to -10	4.2 to 6	-15 to 10	0
Flash point (°C)	51 to 85	130 to 192	130 min	100
Calorific value (MJ/kg)	45.0 to 45.3	38.5-42.7	41.0	39.3

^aDemirbas, (2008); Encinar, (2005); Vyas, (2009)

^bGhadge and Rehman, (2005); Vyas, (2009); Sahoo and Das, (2009)

Table 6. Fuel properties of No. 2 Diesel and JCL biodiesel.

The properties of biodiesel produced from this in-situ supercritical methanol transesterification were comparable with fuel properties of commercial No. 2 Diesel. It was found that specific gravity of JCL biodiesel was 0.87 g/cm³ and it falls between the ASTM D6751 ranges. Fuel injection equipment operates on a volume metering system, hence a higher density for biodiesel results in the delivery of a slightly greater mass of fuel (Demirbas, 2005). The kinematic viscosity was 5.27 cSt. Among the general parameters for biodiesel the viscosity of FAMES can go very high levels and hence it is important to control it within an acceptable level to avoid negative impacts on fuel injector's system performance (Murugesan et al., 2009). The flash point was determined to be at 100 °C. Since biodiesel has a higher flash point than diesel, it is a safer fuel than diesel. Addition of a small quantity of biodiesel with diesel increases the flash point of diesel which can result in improved fire safety for transport purpose (Lu et al., 2009) and it is safer to store biodiesel-diesel blends in comparison to diesel alone (Sahoo et al., 2009). Meanwhile, the pour point was measured to be 0 °C which was slightly higher than that of No. 2 Diesel fuel. This might be due to the presence of wax, which begins to crystallize with the decrease in temperature. This finding was agreed with Vyas et al., (2009) and Raheman and Ghadge, (2007). The problems of higher pour point of JCL biodiesel could be overcome by blending with diesel. The cloud point was reported to be -2.06 °C. The cloud point depends upon the feedstock used and must be taken into consideration if the fuel is to be used in cold environments (Fernando et al., 2007). The calorific value of JCL biodiesel was 39.3 MJ/kg, which was almost 88% of the calorific value of diesel (44.8 MJ/kg). The lower calorific value of JCL is because of the presence of oxygen in the molecular structure, which is confirmed by elemental analysis also. Furthermore, the presence of oxygen in the biodiesel helps for complete combustion of fuel in the engine. These findings were also agreed by Sinha et al., (2008). Therefore, they could be excellent substitutes and blends of No. 2 diesel fuel.

4. Conclusions

Based on the findings, it can be concluded that temperature is an important property in this in-situ process. As the temperature increased, the crude biodiesel and FAMES yields also increased. The crude biodiesel and FAMES of the yields reached a maximum (59.9 and 97.9,

respectively) at 280 °C and then decreased with increasing temperature. The loss was caused by thermal decomposition, dehydrogenation and other side reactions. For the effect of pressure, the crude biodiesel and FAMES yield increased with increasing pressure. Above 12 MPa, no improvement of both yields was observed. The optimum pressure was thus fixed at 12.7 MPa in this experiment. For the effect of reaction time, it can be seen that the conversion was increased in the reaction time ranges between 5 and 30 min, and thereafter reduced as a representative of the equilibrium conversion. The excess reaction time did not promote the conversion but favors the reverse reaction of transesterification which resulted in a reduction in the ester yield. The optimal FAMES yield was found to be 97.9% in 30 min. For the effect of seeds-to-methanol ratio, the maximum crude biodiesel and FAMES yields were obtained at a 1:40 of seeds-to-methanol ratio. It can be seen that an increment in seed-to-methanol ratio can enhance biodiesel yield due to higher contact area between methanol and triglycerides. However, when the ratio is beyond 40, the yield of biodiesel begins to decrease substantially.

The merit of this method is that this new process just requires a single process, where the normal oil extraction process can be avoided. In addition, because of non-catalytic process, the purification of products after transesterification reaction is much simple, compared to the common method. Therefore, this new process can offer an alternative way to convert the fruits directly to methyl esters by a simpler-shorter production process.

5. Acknowledgment

The authors acknowledge the scholarship fund provided by Ministry of Science, Technology and Innovative under the National Science Fellowship (NSF), Universiti Teknologi MARA and Fundamental Research Grant Scheme (FRGS grant no: 600-RMI/ST/FRGS 5/3/Fst (2/2009)) for their financial support.

6. References

- Ayuso, L. E. G. & Castro M. D. L. (1999). A multivariate study of the performance of a microwave-assisted Soxhlet extractor for olive seeds. *Analytica Chimica Acta*, Vol. 382(3), pp. 309-316.
- Berchmans, H. J. & Hirata, S. (2008). Biodiesel production from crude *Jatropha curcas* L. seed oil with a high content of free fatty acids. *Bioresource Technology*, Vol. 99, pp. 1716-1721.
- Bunyakiat, K.; Makmee, S.; Sawangkeaw, R. & Ngamprasertsith. (2006). Continuous production of biodiesel via transesterification from vegetable oils in supercritical methanol. *Energy & Fuel*, Vol. 20, pp. 812-817.
- Cao, W.; Han, H. & Zhang, J. (2005). Preparation of biodiesel from soybean oil using supercritical methanol and co-solvent. *Fuel*, Vol. 84(4), pp. 347-351.
- Cao, X. & Ito, Y. (2003). Supercritical fluid extraction of grape seed oil and subsequent separation of free fatty acids by high-speed counter-current chromatography. *Journal of Chromatography A*, Vol. 1021, pp. 117-124.
- Carrapiso, A. I. and García, C. (2000). Development in lipid analysis: some new extraction techniques and in situ transesterification. *Lipids*, Vol. 35, pp. 1167-1177.

- Castro, M. D. L. & Ayuso, L. E. G. (1998). Soxhlet extraction of solid materials: Soxhlet extraction of solid materials: an outdated technique with a promising innovative future. *Analytica Chimica Acta*, Vol. 369(1-2), pp. 1-10.
- Chen, W. H.; Chen, C. H.; Chang, C. M. J.; Chiu, Y. H. & Hsiang, D. (2009). Supercritical carbon dioxide extraction of triglycerides from *Jatropha curcas* L. seeds. *Journal of Supercritical Fluids*, Vol. 51, pp. 174-180.
- Chew, C. S. (2009). *Jatropha curcas*. L.: Development of a new oil crop for biofuel (Summary). New and Renewable Energy Group, Strategy and Industry Research Unit, The Institute of Energy Economics, Japan (IEEJ).
- Clark, S. J.; Wagner, L.; Schrock, M. D. & Pinnaar, P. G. (1984). Methyl and ethyl esters as renewable fuels for diesel engines. *Journal of American Oil Chemists' Society*, Vol. 61, pp. 1632-1638.
- Darcia, J. L. L. & Castro, M. D. L. (2004). Ultrasound-assisted Soxhlet extraction: An expeditive approach for solid sample treatment – Application to the extraction of total fat from oleaginous seeds. *Journal of Chromatography A*, Vol. 1034 (1-2), pp. 237-242.
- De, B. K.; Bhattacharyya, D. K. & Bandhu, C. (1999). Enzymatic synthesis of fatty alcohol esters by alcoholysis. *Journal of American Oil Chemists' Society*, Vol. 76, pp. 451-453.
- Demirbas, A. (2003). Biodiesel fuels from vegetable oils via catalytic and non-catalytic supercritical alcohol transesterifications and other methods: a survey. *Energy Convers Mgmt*, Vol. 44, pp. 2093-109.
- Demirbas, A. (2005). Biodiesel production from vegetable oils via catalytic and non catalytic supercritical methanol transesterification methods. *Progress in Energy and Combustion Science*, Vol. 31, pp. 466-487.
- Demirbas, A. (2007). Biodiesel from sunflower oil in supercritical methanol with calcium oxide. *Energy Conversion and Management*, Vol. 48(3), pp. 937-941.
- Demirbas, A. (2008). Studies On cottonseed oil biodiesel prepared in non-catalytic SCF conditions. *Bioresource Technology*, Vol. 99(5), pp. 1125-1130.
- Diasakou, M.; Louloudi, A. & Papayannakos, N. (1998). Kinetics of the non-catalytic transesterification of soybean oil. *Fuel*, Vol. 77(12), pp. 1297-1302.
- Eevera, T.; Rajendran, K. & Saradha, S. (2009). Biodiesel production process optimization and characterization to assess the suitability of the product for varied environmental conditions. *Renewable Energy*, Vol. 34(3), pp. 762-765.
- Encinar, J. M.; Gonzalez, J. F. & Reinales, A. R. (2005). Biodiesel from Used Frying Oil. Variables Affecting the Yields and Characteristics of the Biodiesel. *Industrial & Engineering Chemistry Research*, Vol. 44(15), pp. 5491-5499.
- Fernando, S.; Karra, P.; Hernandez, R. & Jha, S. K. (2007). Effect of incompletely converted soybean oil on biodiesel quality. *Energy*, Vol. 32, pp. 844-851.
- Freedman, B.; Pyrd, E. H. & Mounts, T. L. (1984). Variables affecting the yield of fatty esters from transesterified vegetable oils. *Journal of American Oil Chemists' Society*, Vol. 61(10), pp. 1638-1643.
- Fukuda, H.; Kondo, A. & Noda, H. (2001). Biodiesel fuel production by transesterification of oils. *Journal of Bioscience and Bioengineering*, Vol. 92(5), pp. 405-416.

- Gaur, R.; Sharma, A.; Khare, S. K. & Gupta, M. N. (2007). A novel process for extraction of edible oils: Enzyme assisted three phase portioning (EATPP). *Bioresource Technology*, Vol. 98(3), pp. 696-699.
- Ghadge, S. V. & Raheman, H. (2005). Biodiesel production from mahua (*Madhuca indica*) oil having high free fatty acids. *Biomass and Bioenergy*, Vol. 28, pp. 601-605.
- Han, H.; Cao, W. & Zhang, J. (2005). Preparation of biodiesel from soybean oil using supercritical methanol and CO₂ as co-solvent. *Process Biochemistry*, Vol. 40, pp. 3148-3151.
- Harrington, K. J. & Evans, C. D. A. (1985). Transesterification in situ of sunflower seed oil. *Industrial & Engineering Chemistry Product Research & Development*, Vol. 62, pp. 314-318.
- Hass, M. J.; Scott, K. M.; Marmer, W. N. & Foglia, T. A. (2004). In situ alkaline transesterification: an effective method for the production of fatty acid esters from vegetable oils, *Journal of American Oil Chemists' Society*, Vol. 81, pp. 83-89.
- Hawash, S.; Kamal, N.; Zaher, F.; Kenawi, O. & El Dewani, G. (2009). Biodiesel fuel from *Jatropha* oil via non-catalytic supercritical methanol transesterification. *Fuel*, Vol. 88(3), pp. 579-582.
- He, H.; Wang, T. & Zhu, S. (2007). Continuous production of biodiesel fuel from vegetable oil using supercritical methanol process. *Fuel*, Vol. 86, pp. 442-447.
- Heller, J. (1996). *Physic nut. Jatropha curcas L. Promoting the conservation and use of underutilized and neglected crops*. Institute of Plant Genetics and Crop Plant Research, Gatersleben/ International Plant Genetic Resources Institute, Rome.
- Herrera, J. M.; Siddhuraju, P.; Francis, G., Ortiz.; G. D. V. & Becker, K. (2006). Chemical composition, toxic/antimetabolic constituents, and effects of different treatments on their levels, in four provenances of *Jatropha curcas* L. from Mexico. *Food Chemistry*, Vol. 96(1), pp. 80-89.
- Ikwuagwu, O. E.; Ononogbu, I. C. & Njoku, O. U. (2000). Production of biodiesel using rubber [*Hevea brasiliensis* (Kunth. Muell.)] seed oil. *Industrial Crops and Products*, Vol. 12(1), pp. 57-62.
- Jiang, L.; Hua, D.; Wang, Z. & Xu, S. (2009). Aqueous enzymatic extraction of peanut oil and protein hydrolysates. *Food and Bioprocess Processing*, Vol. 88 (2-3), pp. 2010.
- Kansedo, J.; Lee, K. T. & Bhatia, S. (2009). *Cerbera odollam* (sea mango) oil as promising non-edible feedstock for biodiesel production. *Fuel*, Vol. 88(6), pp. 1148-1150.
- Kildiran, G.; Yucel, S. O. & Turkay, S. (1996). In-situ alcoholysis of soybean oil, *Journal of American Oil Chemists' Society*, Vol. 73, pp. 225-228.
- King, J. W.; Mohamed, A.; Taylor, S. L.; Mebrahtu, T. & Paul, C. (2001). Supercritical fluid extraction of *Vernonia galamensis* seeds. *Industrial Crops and Products*, Vol. 14, pp. 241-249.
- Kusdiana, D. & Saka, S. (2001). Kinetics of transesterification in rapeseed oil to biodiesel fuel as treated in Supercritical methanol. *Fuel*, Vol. 80, pp. 693-698.
- Kusdiana, D. & Saka, S. (2004). Effects of water on biodiesel fuel production by supercritical methanol treatment. *Bioresource Technology*, Vol. 91, pp. 289-295.
- Leung, D. Y. C.; Koo, B. C. P. & Guo, Y. (2006). Degradation of biodiesel under different storage conditions. *Bioresource Technology*, Vol. 97(2), pp. 250-256.

- Lu, H.; Liu, Y.; Yang, Y.; Chen, M. & Liang, B. (2009). Production of biodiesel from *Jatropha curcas* L. oil. *Computers and Chemical Engineering*, Vol. 33 (5), pp. 1091-1096.
- Ma, F.; Clements, L. D. & Hanna, M. A. (1998). The effects of catalysts, free fatty acids and water on transesterification of beef tallow. *Transactions of the American Society of Agricultural Engineers*, Vol. 41, pp. 1261-1264.
- Machmudah, S.; Kawahito, Y.; Sasaki, M. & Goto, M. (2007). Supercritical CO₂ extraction of rosehip seed oil: Fatty acids composition and process optimization. *Journal of Supercritical Fluids*, Vol. 41(3), pp. 421-428.
- Machmudah, S.; Kondo, M.; Sasaki, M.; Goto, M.; Munemasa, J. & Yamagata, M. (2008). Pressure effect in supercritical CO₂ extraction of plant seeds. *Journal of Supercritical Fluids*, Vol. 44, pp. 301-307.
- Madras, G.; Kolluru, C. & Kumar, R. (2004). Synthesis of biodiesel in supercritical fluids. *Fuel*, Vol. 83, pp. 2029-2033.
- Marinkovic, S. S. & Tomasevic, A. (1998). Transesterification of sunflower oil in situ. *Fuel*, Vol. 77(12), pp. 1389-1391.
- Meher L. C.; Kulkarni M. G.; Dalai A. K. & Naik, S. N. (2006). Transesterification of karanja (*Pongamia pinnata*) oil by solid basic catalysts. *European Journal of Lipid Science & Technology*, Vol. 108, pp. 389-397.
- Murugesan, A.; Umarani, C.; Chinnusamy, T. R.; Krishnan, M.; Subramanian, R. & Neduzchezhain, N. (2009). Production and analysis of bio-diesel from non-edible oils – A review. *Renewable and Sustainable Energy Reviews*, Vol. 13, pp. 825-834.
- Naik, M.; Meher, L. C.; Naik, S. N. & Das, L. M. (2008). Production of biodiesel from high free fatty acid Karanja (*Pongamia pinnata*) oil. *Biomass and Bioenergy*, Vol. 32(4), pp. 354-357.
- Papamichail, I.; Louli, V. & Magoulas, K. (2000). Supercritical fluid extraction of celery seed oil. *Journal of Supercritical Fluids*, Vol. 18, pp. 213-226.
- Petchmala, A.; Yujaroen, D.; Shotipruk, A.; Goto, M. & Sasaki, M. (2008). Production methyl esters from palm fatty acids in supercritical methanol. *Chiang Mai Journal of Science*, Vol. 35(1), pp. 23-28.
- Pradhan, R. C.; Naik, S. N.; Bhatnagar, N. & Swain, S. K. (2008). Moisture-dependent physical properties of Karanja (*Pongamia pinnata*) kernel. *Industrial Crops and Products*, Vol. 28(2), pp. 155-161.
- Qian, J.; Wang, F.; Liu, S. & Yun, Z. (2008). In situ alkaline transesterification of cottonseed oil for production of biodiesel and nontoxic cottonseed meal. *Bioresource Technology*, Vol. 99(18), pp. 9009-9012.
- Raheman, H. & Ghadge, S. V. (2007). Performance of compression ignition engine with mahua (*Madhuca indica*) biodiesel. *Fuel*, Vol. 86(16), pp. 2568-2573.
- Ramadhas, A. S.; Jayaraj, S. & Muraleedharan, C. (2005). Biodiesel production from high FFA rubber seed oil. *Fuel*, Vol. 84(4), pp. 335-340.
- Rashid, U.; Anwar, F. & Knothe, G. (2009). Evaluation of biodiesel obtained from cottonseed oil. *Fuel Processing Technology*, Vol. 90(9), pp. 1157-1163.
- Rathore, V. & Madras, G. (2007). Synthesis of biodiesel from edible and non-edible oils in supercritical alcohols and enzymatic synthesis in supercritical carbon dioxide. *Fuel*, Vol. 86, pp. 2650-2659.

- Rosenthal, A.; Pyle, D. L. & Niranjana, K. (1996). Aqueous and enzymatic processes edible oil extraction for edible oil extraction. *Enzyme and Microbial Technology*, Vol. 19, pp. 402-420.
- Sahoo, P. K. & Das, L. M. (2009). Process optimization for biodiesel production from *Jatropha*, karanja and *Polanga* oils. *Fuel*, Vol. 88(9), pp. 1588-1594.
- Sahoo, P. K.; Das, L. M.; Babu, M. K. G. & Naik, S. N. (2007). Biodiesel development from high acid value polanga seed oil and performance evaluation in a CI engine. *Fuel*, Vol. 86(3), pp. 448-454.
- Saka, S. & Kusdiana, D. (2001). Biodiesel fuel from rapeseed oil as prepared in supercritical methanol. *Fuel*, Vol. 80, pp. 225-231.
- Selmi, B. & Thomas, D. (1998). Immobilized lipase-catalyzed ethanolysis of sunflower oil in a solvent-free medium. *Journal of American Oil Chemists' Society*, Vol. 75, pp. 691-695.
- Sharma, A. & Gupta, M. N. (2006). Ultrasonic pre-irradiation effect upon aqueous enzymatic oil extraction from almond and apricot seeds. *Ultrasonics Sonochemistry*, Vol. 13(6), pp. 529-534.
- Sinha, S.; Agarwal, A. K. & Garg, S. (2008). Biodiesel development from rice bran oil: Transesterification process optimization and fuel characterization. *Energy Conversion and Management*, Vol. 49(5), pp. 1248-1257.
- Tan, K. T.; Lee, K. T. & Mohamed, A. R. (2009). Production of FAME by palm oil transesterification via supercritical methanol technology. *Biomass and Bioenergy*, Vol. 33(8), pp. 1096-1099.
- Tiwari, A. K.; Kumar, A. & Raheman, H. (2007). Biodiesel production from *Jatropha* oil (*Jatropha Curcas*) with high free fatty acids: an optimized process", *Biomass and Bioenergy*, Vol. 31, pp. 569-575.
- Usta, N. (2005). An experimental study on performance and exhaust emissions of a diesel engine fuelled with tobacco seed oil methyl ester. *Energy Conversions and management*, Vol. 46(15-16), pp. 2373-2386.
- Varma, M. N. & Madras, G. (2007). Synthesis of biodiesel from castor oil and linseed oil in supercritical fluids, *Industrial & Engineering Chemistry Research*, Vol. 46, pp. 1-6.
- Veljkovic, V. B.; Lakicevic, S. H.; Stamenkovic, O. S.; Todorovic, Z. B. & Lazic, M. L. (2006). Biodiesel production from tobacco (*Nicotiana tabacum* L.) seed oil with a high content of free fatty acids. *Fuel*, Vol. 85(17-18), pp. 2671-2675.
- Vyas, A. P.; Subrahmanyam, N. & Patel, A. (2009). Production of biodiesel through transesterification of *Jatropha* oil using KNO_3/Al_2O_3 solid catalyst. *Fuel*, Vol. 88(4), pp. 625-628.
- Wang, Y.; Ou, S.; Liu, P.; Xue, F. & Tang, S. (2006). Comparison of two different processes to synthesize biodiesel by waste cooking oil. *Journal of Molecular Catalysis A: Chemical*, Vol. 252(1-2), pp. 107-112.
- Warabi, Y.; Kusdiana, D. & Saka, S. (2004). Reactivity of triglycerides and fatty acids of rapeseed oil in supercritical alcohols. *Bioresource Technology*, Vol. 9, pp. 283-287.
- Xin, J.; Imahara, H. & Saka, S. (2008). Oxidation stability of biodiesel fuel as prepared by supercritical methanol. *Fuel*, Vol. 87(10-11), pp. 1807-1813.

Zhang, Y.; Dube, M. A.; McLean, D. D. & Kates, M. (2003). Biodiesel production from waste cooking oil: 1. Process design and technological assessment. *Bioresource Technology*, Vol. 89(1), pp. 1-16.

Transesterification in Supercritical Conditions

Somkiat Ngamprasertsith and Ruengwit Sawangkeaw
*Fuels Research Center, Department of Chemical Technology,
 Faculty of Science, Chulalongkorn University,
 Center for Petroleum, Petrochemicals and Advance Materials,
 Chulalongkorn University,
 Thailand*

1. Introduction

The transesterification or biodiesel production under supercritical conditions (supercritical transesterification) is a catalyst-free chemical reaction between triglycerides, the major component in vegetable oils and/or animal fats, and low molecular weight alcohols, such as methanol and ethanol, at a temperature and pressure over the critical point of the mixture (see Section 1.1). The overall transesterification reaction is shown in Fig. 1.

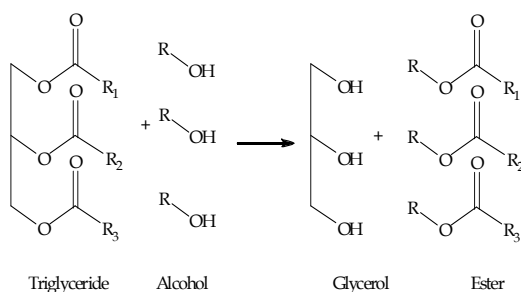


Fig. 1. The overall transesterification reaction (R is a small alkyl group, R₁, R₂ and R₃ are a fatty acid chain)

The reaction mechanism for supercritical transesterification has been proposed to be somewhat alike the acidic-catalyzed reaction as described in Section 1.2.

Since the actual feedstocks are not composed solely of triglycerides, especially the low-grade feedstocks, but are also contaminated with water and free fatty acids, some side reactions also take place under supercritical conditions (see Section 1.3). For example, the esterification of free fatty acids with alcohols increases the fatty acid alkyl ester content in the biodiesel product, while the thermal cracking of unsaturated fatty acids decreases the esters content.

The earlier research on supercritical transesterification mostly employed methanol as the reacting medium and reacting alcohol at the same time due to the fact that it has the lowest critical point and the highest activity (Warabi et al., 2004). Ethanol is also an interesting candidate because it can be industrially produced from renewable sources in many countries nowadays. However, other supercritical mediums, such as methyl acetate (Saka & Isayama, 2009) and dimethyl carbonate (Ilham & Saka, 2009; Tan et al., 2010b), have also

been used to produce biodiesel, but these are not described in this chapter since the chemical reaction involved is not a transesterification reaction. The reaction parameters and optimal conditions for supercritical transesterification are summarized in Section 1.4.

1.1 The definition of supercritical transesterification

A pure substance ordinarily exists in a solid, liquid or gaseous state, depending on the temperature and pressure. For example, methanol is in a liquid state at ambient temperature (and pressure) and changes to a gaseous state above its boiling point. A gaseous substance can be compressed to a liquid state when a pressure above the boiling point is applied. Until the critical temperature is reached, a gaseous substance cannot be compressed to the liquid state. In the same manner, a compressed liquid substance cannot be heated to a gaseous state at its critical pressure.

Above its inherent critical temperature and pressure, the substance becomes a supercritical fluid, which is a non-condensable dense fluid. In the supercritical state, the density is generally in a range between 20 – 50% of that in the liquid state and the viscosity is close to that in the gaseous state. In other words, the molecules in the supercritical fluid have high kinetic energy like a gas and high density like a liquid. Therefore, the chemical reactivity can be enhanced in this state.

The critical point of any transesterification reaction mixture is mostly calculated by the critical properties of the alcohols and the vegetable oils and/or animal fats. However, the critical properties of vegetable oils and/or animal fats cannot be experimentally measured because they thermally decompose before the critical point is reached. In addition, the molecular structure of vegetable oils and/or animal fats is impossible to know because the exact distribution of the fatty acids chain in triglycerides mixture is unknown.

Therefore to estimate the critical properties of vegetable oils and/or animal fats, their molecular is assumed to be a simple triglyceride (tripalmitin, triolein, etc.) or pseudo-triglycerides (Espinosa et al., 2002), with the proportion of such different simple triglycerides reflecting the actual overall fatty acid composition in the feedstock. The type of simple triglycerides or the pseudo-triglycerides are thus defined by their actual fatty acid profile in the vegetable oils and/or animal fats. For instance, soybean oil has linoleic acid as the major fatty acid, and so it is usually assumed to be trilinolein. Next, the critical properties of the simple triglycerides or the pseudo-triglycerides are estimated by the Fedor and Lydersen group contribution method (Poling et al., 2001), or similar. After the critical properties of each of the triglycerides are estimated, the critical point of the mixture can be estimated by mixing rules, such as the Lorentz-Berthelot-type (Bunyakiat et al., 2006) and the group-contribution with associated mixing rules (Hegel et al., 2008).

For example, the critical temperature and pressure of soybean oil-methanol and palm kernel oil-methanol mixtures are illustrated in Figs. 2 and 3, respectively.

From Figs. 3 and 4, it is clear that the critical point of the reaction mixture depends on the alcohol to oil molar ratio, so the selected alcohol to oil molar ratio will reflect the operating temperature and pressure, as described in Section 2.1. For a high transesterification conversion (triglyceride to alkyl ester) at a constant methanol to oil molar ratio, the operating temperature and pressure have to be approximately 1.5- to 2.0-fold over the critical point of the reaction mixture. For example, the optimal conditions at a methanol to oil molar ratio of 42:1 is 350 °C and 20 MPa, respectively. Therefore, the definition of supercritical conditions is the temperature and pressure above the critical point of the reaction mixture, which is calculated from the critical properties of the vegetable oils and/or animal fats and the alcohols.

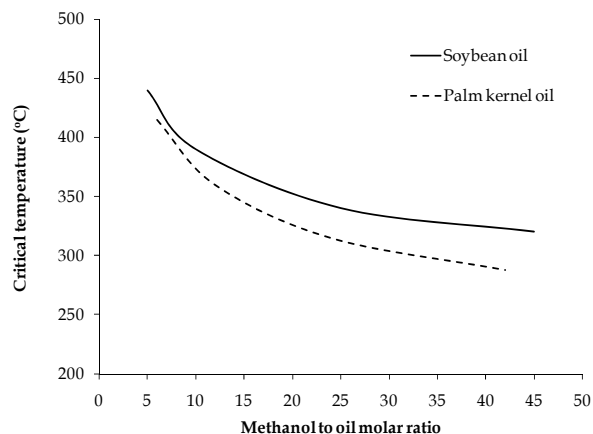


Fig. 2. The estimated critical temperature of soybean oil-methanol (Hegel et al., 2008) and palm kernel oil-methanol (Bunyakiat et al., 2006) mixtures.

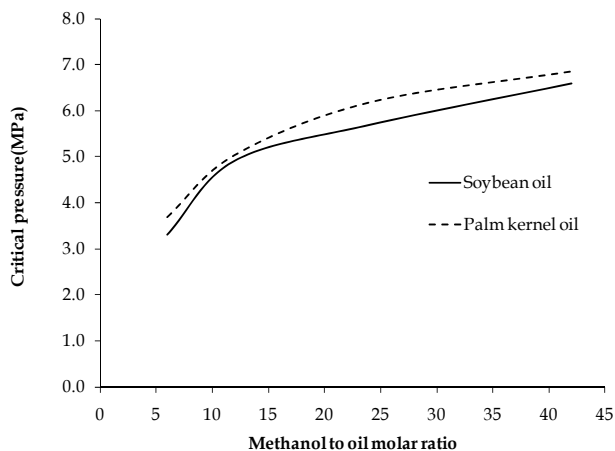


Fig. 3. The estimated critical pressure of soybean oil-methanol (Hegel et al., 2008) and palm kernel oil-methanol (Bunyakiat et al., 2006) mixtures.

1.2 The reaction mechanism of supercritical transesterification

Below the critical point of mixture, transesterification can take place in the presence of acidic or basic catalysts. Thus, the reaction mechanisms of transesterification are divided into acid and base catalyzed paths, as summarized elsewhere (Meher et al., 2006). The reaction mechanism of supercritical transesterification is somewhat similar to the acid catalyzed path in that the hydrogen bond of the alcohol is weakened at high temperatures (Hoffmann & Conradi, 1998). However, whilst the acid-catalyzed transesterification reaction is much slower than the base-catalyzed one at ambient conditions, the supercritical transesterification is much faster and achieves complete conversion of triglycerides to esters rapidly because the chemical kinetics are dramatically accelerated under supercritical conditions.

The reaction mechanism of supercritical transesterification, as shown in Fig. 4, was proposed by the analogues between the hydrolysis of esters in supercritical water (Krammer

& Vogel, 2000) and the transesterification of triglycerides in supercritical methanol (Kusdiana & Saka, 2004b). It is assumed that the alcohol molecule (in this case methanol) directly attacks the carbonyl carbon of the triglyceride because the hydrogen bond energy is lowered; which would allow the alcohol to be a free monomer. In the case of methanol, the transesterification is completed via transfer of a methoxide moiety, whereby fatty acid methyl esters and diglycerides are formed. Consequently, the diglyceride reacts with other methanol molecules in a similar way to form the methyl ester and monoglyceride, the later of which is further converted to methyl ester and glycerol in the last step. The same process is applicable to other primary alkyl alcohols, such as ethanol.

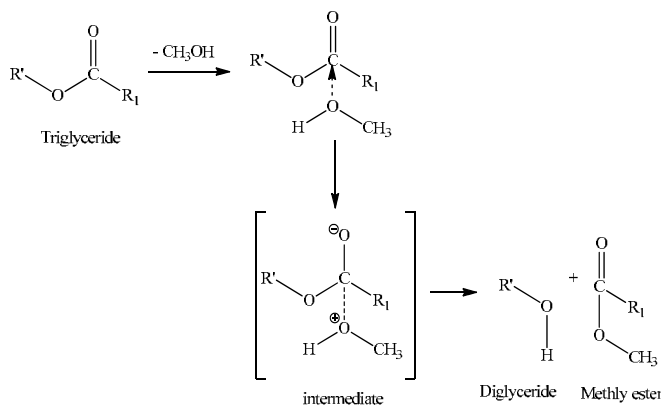


Fig. 4. The proposed reaction mechanism of transesterification in supercritical methanol (R' is a diglyceride group and R_1 is a fatty acid chain).

1.3 The side reactions in the supercritical conditions

Firstly, the hydrolysis reaction of alkyl esters and triglyceride can take place at over 210 °C (Khuwijitjaru et al., 2004) and over 300 °C (W. King et al., 1999), respectively, in present of water and pressure above 20 MPa. The overall hydrolysis reaction of triglycerides and alkyl esters is shown in Figs. 5 and 6, respectively, with the principal products of the hydrolysis reaction being the respective fatty acids which are subsequently converted to alkyl esters under the supercritical condition by the esterification, as illustrated in Fig. 7.

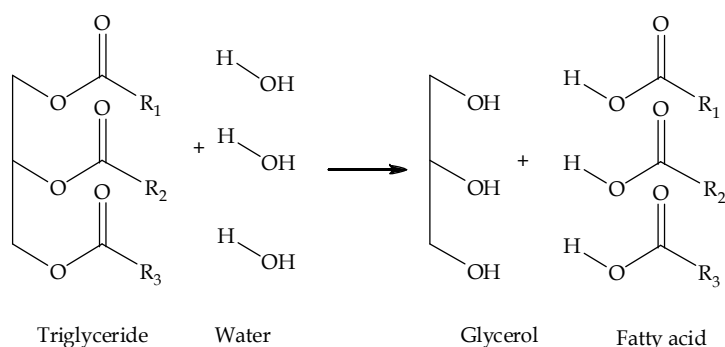


Fig. 5. The overall hydrolysis reaction of triglycerides under supercritical conditions (R is an alkyl group and R_1 , R_2 and R_3 are fatty acid chains)

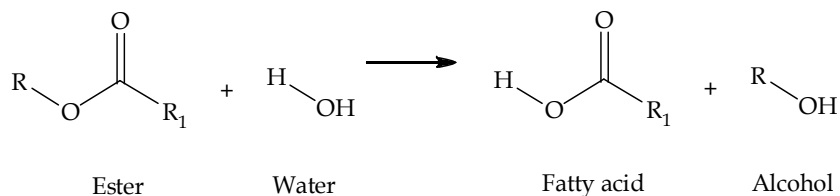


Fig. 6. The hydrolysis reaction of alkyl esters under supercritical conditions (R is an alkyl group and R₁ is a fatty acid chain)

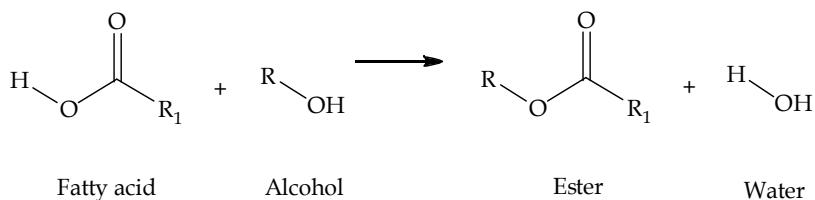


Fig. 7. The esterification reaction under supercritical conditions (R is an alkyl group and R₁ is a fatty acid chain)

In actuality, the hydrolysis reaction or the presence of water and free fatty acids do not affect the final alkyl ester content obtained for supercritical transesterification (Kusdiana & Saka, 2004b), because the alcohols have a much higher reactivity than water at the optimal point of supercritical transesterification. For example, the chemical rate constant for the transesterification of rapeseed oil is approximately 7-fold higher than that for the hydrolysis of soybean oil (Khuwijitjaru et al., 2004; Kusdiana & Saka, 2001).

Secondly, the thermal cracking of unsaturated fatty acids, especially the polyunsaturated fatty acids, occurs at temperatures over 300 °C and reaction times over 15 min (Quesada-Medina & Olivares-Carrillo, 2011). An example of the thermal cracking of a palmitic, oleic and linoleic acid based triglyceride is illustrated in Fig. 8.

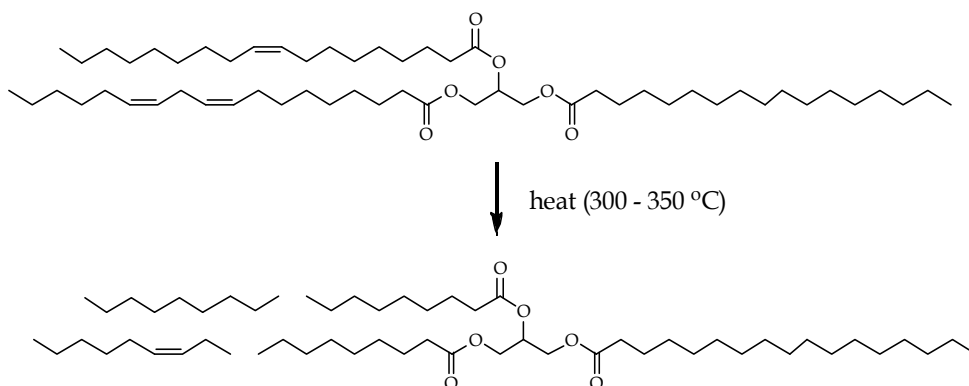


Fig. 8. The thermal cracking reaction of a triglyceride under supercritical conditions at a temperature range of 300 - 350 °C and a reaction time of over 15 min.

The triglyceride product from the thermal cracking reaction can be transesterified afterwards under supercritical conditions to alkyl esters. However, these alkyl esters are not

the fatty acid alkyl esters of the common fatty acids in vegetable oils and/or animal fats. Therefore, the thermal cracking reaction reduces the acceptable primary alkyl ester content, as quantified and defined by the international standard for biodiesel (EN14103), and this is especially the case for the oils with a high polyunsaturated fatty acid content, such as soybean and sunflower oil.

In addition, triglycerides are decomposed to fatty acids and some gaseous products within the temperature range of 350 - 450 °C, as shown in Fig. 9 (Lima et al., 2004; Marulanda et al., 2009). In the same manner, with thermal cracking at 300 - 350 °C, the fatty acids product can be esterified under supercritical conditions, but the alkyl ester content is also decreased. However, the small hydrocarbon molecules of the thermal cracking products could improve some fuel properties of biodiesel, such as viscosity, density and cold flow properties.

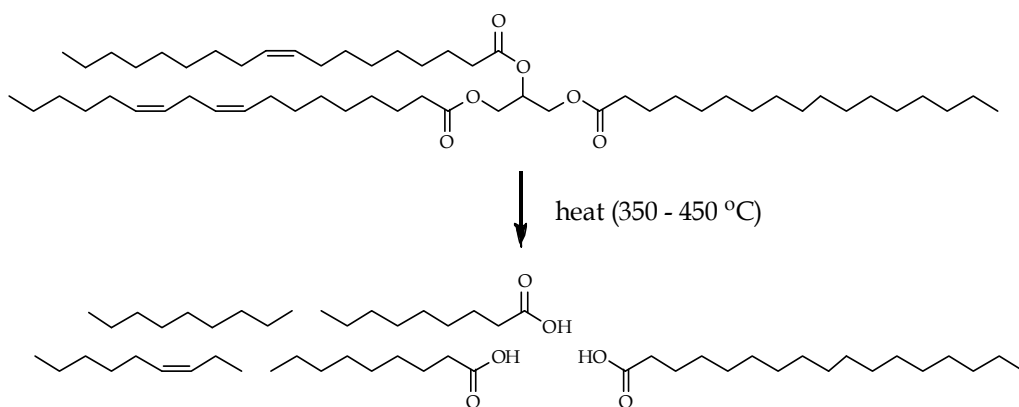


Fig. 9. The thermal cracking reaction of triglycerides under supercritical conditions at temperature range of 350 - 450 °C

1.4 The original reaction parameters and optimal conditions in the early scientific articles

The reaction parameters that were typically investigated in supercritical transesterification reactions are the temperature, pressure, alcohol to oil molar ratio and reaction time in batch and continuous reactors, and are summarized in Table 1.

The extent of the reaction was reported in terms of the % alkyl ester content and the % conversion of triglycerides. The % alkyl esters content refers to the alkyl esters of the common fatty acids in the vegetable or animal oils/fats that can be identified by different analytical techniques, while the % triglycerides conversion implies the remaining triglyceride reactant that is converted to fuels. Note that the % alkyl esters content refers to the specified esters, which must not be less than 96.5%, in the International standard (EN14214) for biodiesel fuel. It should also be noted that a high alkyl esters content infers a high triglyceride conversion, but, in contrast, a high triglyceride conversion does not have to infer a high alkyl esters content because the triglycerides could have been converted by the side reactions to other products.

According to Table 1, the original optimal conditions, defined as yielding the highest extent of reaction as over 90% conversion or over 96% alkyl esters content, were within 300 - 350 °C, 20 - 35 MPa, an alcohol to oil molar ratio of 40:1 - 42:1 and a reaction time of

5 – 30 min, for both methanol and ethanol. These parameters are referred to as the original supercritical transesterification parameters, and have been employed to study the effects of each parameter, the chemical kinetics, the phase behavior and the economical feasibility of the process. Since the original parameters are elevated conditions, innovative techniques are proposed to reduce these original parameters.

2. Process overview

2.1 The effects of reaction parameters on the % conversion in supercritical transesterification

Among the general operating parameters mentioned previously (temperature, pressure, alcohol to oil molar ratio and reaction time), the reaction temperature is the most decisive parameter for indicating the extent of the reaction. This is as a result of the accelerated chemical kinetics and changes to the alcohol's properties. For example, the rate constant of supercritical transesterification is dramatically enhanced some 7-fold as the temperature is increased from 210 to 280 °C at 28.0 MPa and a 42:1 methanol to oil molar ratio (He et al., 2007a), whilst the degree of hydrogen bonding also suddenly drops as the temperature is increased from 200 to 300 °C at 30.0 MPa (Hoffmann & Conradi, 1998). However, where a maximum alkyl ester content is required, that is for biodiesel production, the higher operating temperatures cause a negative effect on the proportion of alkyl esters obtained in the product due to the thermal cracking reaction. Indeed, the thermal cracking is the chemical limitation of supercritical transesterification, and this is discussed in Section 2.4.2.

Oil type	Alcohol	T (°C)	P (MPa)	Alcohol: oil (mol: mol)	Reaction time (min)	Reactor (size / type) ^a	Extent of reaction ^b	Ref
Coconut & Palm kernel	Methanol	350	19	42:1	7 - 15	251-mL / CT	95% MEC	(Bunyakiat et al., 2006)
Hazelnut kernel & Cottonseed	Methanol	350	NR	41:1	5	100-mL / Batch	95% MEC	(Demirbas, 2002)
Palm and Groundnut	Methanol	400	20	50:1	30	11-mL / Batch	95% Con.	(Rathore & Madras, 2007)
Palm kernel	Methanol	350	20	42:1	30	250-mL / Batch	95% MEC	(Sawangkeaw et al., 2007)
Rapeseed	Methanol	350	45	42:1	4	5-mL / Batch	98% MEC	(Saka & Kusdiana, 2001)
Rapeseed	Methanol	350	20	42:1	30	200-mL / CT	87% MEC	(Minami & Saka, 2006)
Soybean	Methanol	350	20	42:1	30	250-mL / Batch	95% MEC	(Yin et al., 2008a)
Sunflower	Methanol & Ethanol	400	20	40:1	30	8-mL / Batch	97% Con.	(Madras et al., 2004)
Castor	Ethanol	300	20	40:1	NR	42-mL / CT	75% EEC	(Vieitez et al., 2011)
Soybean	Ethanol	350	20	40:1	15	42-mL / CT	80% Con.	(Silva et al., 2007)
Sunflower	Ethanol	280	NR	40:1	5	100-mL / Batch	80% EEC	(Balat, 2008)

^a CT = Continuous reaction in a tubular vesicle.

^b Reaction extents are expressed as the % triglyceride conversion (Con.), % methyl esters content (MEC) or the % ethyl esters content (EEC).

NR = not reported

Table 1. The original reaction parameters and optimal conditions of supercritical transesterification for various oil types and alcohols.

The reaction pressure also has a significant effect on the efficiency of the supercritical transesterification reaction below 20.0 MPa, but the effects tend to be negligible above 25.0 MPa (He et al., 2007a; He et al., 2007b), due to the fact that increasing the reaction pressure simultaneously increases both the density of the reaction mixture (Velez et al., 2010) and the degree of hydrogen bonding (Hoffmann & Conradi, 1998) at an otherwise constant temperature and alcohol to oil molar ratio. The transesterification conversion is enhanced with an increased reaction mixture density, due to the resulting increased volumetric concentration of alcohols and the residence time in a tubular reactor, which is commonly used to investigate the effect of pressure. On the other hand, the increasing degree of hydrogen bonding or alcohol cluster size weakens the nucleophilic strength of supercritical alcohols and so the reactivity of supercritical alcohol is reduced with increasing pressure. Thus, the desirable pressure for supercritical transesterification is in the range of 20.0 – 35.0 MPa.

From Table 1, the original alcohol to oil molar ratio for supercritical transesterification is in range of 40:1 – 42:1. The alcohol to oil molar ratio affects the supercritical transesterification efficiency strongly below 24:1, but its effect is then reduced with increasing alcohol to oil molar ratios to plateau at over a 50:1 alcohol to oil molar ratio for methanol (He et al., 2007a) or 70:1 for ethanol (Silva et al., 2007) at 330 °C and 20.0 MP. This is likely to be due to the fact that the operating temperature and pressure are much higher than the critical point of the reaction mixture, and are still located in the supercritical region.

As mentioned in Section 1.1, the critical point of the reaction mixture decreases with increasing alcohol to oil molar ratios. Thus, the optimal reaction temperature and pressure at a high alcohol to oil molar ratio is always milder than that at a low molar ratio. Nonetheless, the large amount of alcohol not only increases the required reactor volume but importantly it consumes a large amount of energy to heat the reactant and also to subsequently recover the excess alcohol. The energy for recycling excess alcohol might be minimized by a low temperature separation process, such as the use of a medium-pressure flash drum (Diaz et al., 2009), whereas the additional energy for heating the excess reactant alcohol cannot be avoided. Therefore, the use of assisting techniques, as described in Sections 3.2 – 3.4, have been introduced to decrease the alcohol to oil molar ratio whilst maintaining the transesterification conversion efficiency (and so the fatty acid alkyl ester content).

The effect of the reaction time on the transesterification conversion follows the general rate law. For example, the alkyl ester content increases gradually with reaction time and then remains constant after the optimal point (maximum conversion to alkyl esters) is reached. The optimal reaction time for supercritical transesterification at around 300 – 350 °C varied between 4 to 30 minutes, depending upon the reactor size and type. Since the effect of residence time is directly related to the chemical kinetics of transesterification, the optimal reaction time at low temperatures is longer than that at high temperatures.

2.2 The chemical kinetics and phase behavior in supercritical transesterification

2.2.1 The chemical kinetics of supercritical transesterification

The chemical kinetics of supercritical transesterification is divided into three regions, that of the slow (<280 °C), transition (280 - 330 °C) and fast (>330 °C) regions, and usually follows the first-order rate law with respect to the triglyceride concentration alone (He et al., 2007a; Kusdiana & Saka, 2001; Minami & Saka, 2006). Here, the reaction mechanism is merged into one overall step and the concentrations of all intermediates (mono- and diglycerides) are ignored. However, the first-order kinetic model is only suitable for a high alcohol to oil

molar ratio, due to the insignificant changes in the alcohol concentration, but this increasingly becomes untrue as the alcohol to oil molar ratio decreases.

For the first-order model, the rate constants for each vegetable oil have a different temperature sensitivity, as noticed by the slope of Arrhenius' plot (Sawangkeaw et al., 2010). For example, the rate constants of rapeseed and soybean oil depend more strongly on the temperature than that for sunflower, palm and groundnut oils. The rate constants of saturated triglycerides were found to be faster than unsaturated triglycerides and slow down with increasing levels of double bonds in the triglyceride molecule (Rathore & Madras, 2007; Varma & Madras, 2006). However, saturated fatty acids have a slightly lower reactivity than the unsaturated fatty acids (Warabi et al., 2004).

On the other hand, a second-order kinetic model with respect to both the triglycerides and alcohol concentrations has also been proposed (Diasakou et al., 1998; Song et al., 2008). This divides the transesterification reaction into three steps; the reaction between a triglyceride and an alcohol that generates a diglyceride and an alkyl ester, the diglyceride and alcohol and finally the monoglyceride and alcohol. The concentration of the intermediates is then taken into account and the rate constants are found by mathematical model fitting. Thus, although more complex, the second-order kinetic model is more appropriate than the first-order model for reactions involving alcohol to oil molar ratios below 24:1.

2.2.2 The phase behavior of reactants in supercritical transesterification

The fact that the required optimal operating parameters can become milder with the addition of co-solvents has spurred much interest in the phase behavior of reactants during supercritical transesterification. The phase behavior of soybean oil-methanol with propane as a co-solvent was reported first (Hegel et al., 2007), followed by that for soybean oil-methanol and soybean oil-ethanol with carbon dioxide as the co-solvent (Anitescu et al., 2008). The study of the phase behavior of supercritical transesterification, when performed in a high-pressure view cell, revealed that the liquid - liquid (LL) alcohol - triglycerides mixture transforms to a vapor - liquid - liquid (VLL) phase equilibrium. The VLL equilibrium consists of two immiscible liquid phases (triglycerides and alcohol) and a vapor phase which mainly contains alcohol. Then, the VLL equilibrium changes to a vapor - liquid (VL) phase as a result of the triglycerides dissolving into the supercritical alcohol phase. Finally, the VL equilibrium merges to a one-phase supercritical at nearly the estimated critical point of mixture.

The transition temperature of the VLL to VL equilibriums decreases with increasing methanol to oil molar ratios (Anitescu et al., 2008; Hegel et al., 2007). For example, the reaction mixture of soybean oil and methanol are partially miscible up to temperatures close to 350 °C at a methanol to oil molar ratio of 24:1, while the two liquid phases of soybean oil and methanol become completely miscible at 180 °C and 157 °C with a methanol to oil molar ratio of 40:1 and 65:1, respectively. For a soybean oil-ethanol mixture, it becomes a VL equilibrium at a lower temperature than that for the soybean oil-methanol due to the higher solubility of soybean-oil in ethanol than in methanol (Anitescu et al., 2008).

The transition from a VL system to a one-phase supercritical system was observed near the estimated critical temperature of the mixture, as described in Section 1.1. At a methanol to oil molar ratio of 24:1, the critical temperature of the soybean oil-methanol mixture was 377 °C where the transition temperature was reported to be higher than 350 °C (Anitescu et al., 2008). Moreover, the transition temperature of the two-phase VL to a one-phase supercritical

could be reduced by the addition of gaseous co-solvents, such as carbon dioxide and propane. For instance, the addition of 24% by weight of propane decreased the transition temperature of soybean oil-methanol, at a methanol to oil molar ratio of 65:1, from 315 °C to 243 °C (Hegel et al., 2007). Therefore, the addition of gaseous co-solvents is able to reduce the original severe conditions due to their ability to lower the transition temperature from a VL system to a one-phase supercritical system.

2.3 The advantages and drawbacks of supercritical transesterification

Novel solid heterogeneous catalysts that catalyze the transesterification on acidic or basic surfaces instead of in solution have been proposed to overcome the drawbacks of the conventional homogeneous catalytic method, which in part are the same as the supercritical transesterification. The enzyme catalysts typically also allow for a very high selectivity on the alkyl ester products (Helwani et al., 2009; Lene et al., 2009).

2.3.1 The advantages of supercritical transesterification

The advantages of supercritical transesterification over the conventional homogeneous catalytic method are feedstock flexibility, higher production efficiency and it is more environmentally friendly. The feedstock quality is far less influential under supercritical conditions than with the heterogeneous catalytic method, whilst supercritical transesterification has a similar advantage with respect to the product separation as the novel catalytic methods, but it has a higher production efficiency than both novel catalytic methods. The feedstock flexibility is the most important advantage to consider for biodiesel production methods because the resultant biodiesel price strongly depends on the feedstock price (Kulkarni & Dalai, 2006; Lam et al., 2010). The free fatty acids and moisture in low-grade feedstocks and hydrated ethanol pose a negative effect on the basic homogeneous and heterogeneous catalytic methods. Whereas, free fatty acid levels and moisture contents in the feedstock do not significantly affect supercritical transesterification with methanol or ethanol. Therefore, supercritical transesterification is more suitable for use with the low-grade and/or the hydrated ethanol feedstocks (Demirbas, 2009; Gui et al., 2009; Kusdiana & Saka, 2004b; Vieitez et al., 2011). For example, the in-situ transesterification of wet algal biomass in supercritical ethanol gave a 100% alkyl ester yield (Levine et al., 2010).

Supercritical transesterification has a better production efficiency than the conventional catalytic method because it requires a smaller number of processing steps. For instance, the feedstock pretreatment to remove moisture and free fatty acids, and the post-production product treatment steps, such as neutralization, washing and drying, are not necessary. In addition, the rate of reaction under supercritical conditions is significantly faster than the conventional catalytic method, so that the supercritical transesterification requires a smaller reactor size for a given production output.

With respect to environmental aspects, supercritical transesterification does not require any catalysts or chemicals, whilst the waste from the pretreatment and post-treatment steps are also reduced, since those steps are not necessary, leading to the generation of insignificant waste levels. However, the distillation process to recover the excess alcohol requires a large amount of energy which reduces the environmentally friendly advantage of the process (Kiwjaroun et al., 2009). Thus to maintain an environmentally friendly advantage, low-energy separation methods, such as medium pressure flash drum, must be applied to recover the excess alcohol (Diaz et al., 2009).

2.3.2 The drawbacks of supercritical transesterification

The original parameters to achieve a high transesterification conversion were a high temperature (330 – 350 °C), high pressure (19 – 35 MPa) and high alcohol to oil molar ratio (1:40 – 1:42). Indeed, the high temperature and pressure requires both an expensive reactor and a sophisticated energy and safety management policy. As a result of the high alcohol to oil molar ratio a large energy consumption in the reactants pre-heating and recycling steps is required. Moreover, the high amount of alcohol in the biodiesel product retards the biodiesel-glycerol phase separation. Therefore, the use of those original parameters results in high capital costs, especially for the reactor and pump, being somewhat higher than the novel catalytic methods.

To increase the technical and economical feasibility of supercritical transesterification, further studies are required to reduce the energy consumption and operating parameters of this process. For example, the integration of a heating and cooling system can improve (reduce) the energy demand. The experimental techniques that have demonstrated the ability to lower the original parameters for supercritical transesterification are illustrated in sections 3.2 – 3.4.

2.4 The economical feasibilities and chemical limitations of supercritical transesterification

The economical feasibilities of supercritical transesterification, compared with the conventional homogeneous catalytic methods, have been studied by computer simulation (van Kasteren & Nisworo, 2007). These studies usually employed the original parameters for transesterification in supercritical methanol (350 °C, 20.0 MPa and 1:42 methanol to oil molar ratio) and the general parameters for the conventional catalytic methods, such as a reaction at 60 °C, 0.1 MPa and a methanol to oil molar ratio of 9:1. With respect to chemical limitations, supercritical transesterification is limited by the operating temperature due to the thermal cracking of the unsaturated fatty acids.

2.4.1 The economical feasibilities of supercritical transesterification

Supercritical transesterification with the original reacting parameters is economically competitive compared to the conventional catalytic method especially when low-grade feedstocks are employed (van Kasteren & Nisworo, 2007). As expected, the supercritical transesterification has a larger capital cost, due to the required reacting and pumping systems, than the conventional catalytic method, but has no additional capital and operating costs on feedstock pre-treatment, product post-treatment and waste management.

For a better economic feasibility, research into ways to reduce the high operating conditions and lower energy consumption are warranted. For example, supercritical transesterification is not economically feasible when the heating and cooling integration is not employed (Marchetti & Errazu, 2008), while it is a feasible method when heat integration and the presence of catalysts are applied (D'Ippolito et al., 2006; Glišić et al., 2009; van Kasteren & Nisworo, 2007). The addition of calcium oxide as a solid catalyst and the reduction of the alcohol to oil molar ratio significantly decreased the total energy demand and improved the economic feasibility as well (Glišić & Skala, 2009). Furthermore, the addition of propane as co-solvent also enhanced the economic feasibility of supercritical transesterification with methanol (van Kasteren & Nisworo, 2007). However, additional feasibility studies on other assisting techniques that lower the original parameters (see Sections 3.2 - 3.4) are still required.

2.4.2 The chemical limitation of supercritical transesterification

To fulfill the international standard of biodiesel (EN14214), which requires over 96.5% esters content, thermal cracking of polyunsaturated fatty acids is a serious obstacle. At over 300 °C and a reaction time of over 15 min, the methyl linoleate content in biodiesel decreases by approximately 10% compared with the level in the feedstock (Quesada-Medina & Olivares-Carrillo, 2011). Whereas, the % recovery of biodiesel samples which are prepared from various vegetable oils remains constant after exposure with supercritical methanol at 270 °C over 40 min (Imahara et al., 2008). Therefore, the 96.5% alkyl esters content requirement for biodiesel cannot be achieved when an operating temperature of over 300 °C and a reaction time of over 15 min are employed.

To prevent this thermal degradation, the suggested temperature for supercritical transesterification is below 300 °C, and preferably 270 °C. However, the required reaction time to nearly complete transesterification conversion at a 42:1 alcohol to oil molar ratio is then significantly longer at more than 90 min (Minami & Saka, 2006). This prolonged reaction time might cause a decline in the production efficiency obtained by supercritical transesterification, but it could be shortened by the use of assisting methods, as discussed in Sections 3.2 – 3.4.

On the other hand, the gradual heating technique in a tubular reactor has been demonstrated to avoid the thermal cracking of unsaturated fatty acids and shorten the reaction time at the same time (He et al., 2007b). For instance, when the reaction mixture is heated in a tubular reactor gradually from 100 °C at the inlet to 320 °C at the outlet, the biodiesel product obtained after 25 min of reaction time has an over 96% methyl ester content (He et al., 2007b).

3. Process improvements

The process improvements to the supercritical transesterification can be divided into three routes; the addition of the co-solvents, the use of catalysts and process modifications. The general goal, to reduce the original parameters altogether, is the most challenging aspect for supercritical transesterification. The reduced parameters are 270 – 300 °C, 15 – 20 MPa and an alcohol to oil molar ratio of 24:1 – 35:1.

3.1 The chronological development of supercritical transesterification

In 1998, non-catalytic transesterification of soybean oil at the near-critical point of methanol (230 °C, 6.2 MPa and a 27:1 methanol to oil molar ratio) was invented as an alternative method to produce biodiesel, but this method obtained only an 85% methyl ester content after over 10 hours (Diasakou et al., 1998). In 2001, the pioneering transesterification of rapeseed oil in supercritical methanol at 350 °C, 45 MPa and a 42:1 methanol to oil molar ratio, attaining a high methyl ester content (98%) after only 4 min was reported (Kusdiana & Saka, 2001; Saka & Kusdiana, 2001). Transesterification in supercritical methanol has evolved continuously since 2001.

In 2002, the transesterification of cottonseed, hazelnut kernel, poppy seed, safflower and sunflower derived oils in supercritical methanol were evaluated, with a nearly complete transesterification reaction being found for all of the vegetable oils (Demirbas, 2002). Meanwhile, the effect of water and free fatty acids (Kusdiana & Saka, 2004b), the catalytic effect of a metal reactor for supercritical transesterification with methanol (Dasari et al.,

2003; Kusdiana & Saka, 2004a) and the reactivity of supercritical alcohols were all reported (Warabi et al., 2004). In 2004, the first supercritical transesterification of sunflower oil with ethanol and supercritical carbon dioxide in the presence of a lipase enzyme were investigated in a batch reactor (Madras et al., 2004). However, during 2001 – 2005, the maximum alkyl ester contents were generally observed at nearly the same reaction conditions as that reported earlier by the Japanese pioneers (Kusdiana & Saka, 2001; Saka & Kusdiana, 2001).

In 2005, carbon dioxide and propane were introduced as co-solvents to obtain milder operating parameters for the supercritical transesterification with methanol (Cao et al., 2005; Han et al., 2005). Then, the two-step supercritical process (Minami & Saka, 2006) was demonstrated to reduce those operating parameters. In the following years, various catalysts were employed to assist the supercritical transesterification to achieve the maximum alkyl esters content but at milder operating conditions (Demirbas, 2007; Wang et al., 2008; Wang et al., 2007; Wang & Yang, 2007; Yin et al., 2008b). The continuous production of biodiesel in supercritical methanol was reported in 2006 (Bunyakiat et al., 2006) (Minami & Saka, 2006) and 2007 (He et al., 2007b). Therefore, the research focus on the reduction of the elevated operating conditions and continuous process has been ongoing since 2005.

In 2007, the gradual heating technique was introduced to limit or prevent thermal cracking of the unsaturated fatty acids and so prevent the reduction in the final methyl esters content obtained (He et al., 2007b). At the same time, the effect of using co-solvents to reduce the viscosity of vegetable oils was successfully investigated (Sawangkeaw et al., 2007). Supercritical transesterification in ethanol was studied in a continuous reactor in 2008 (Vieitez et al., 2008). In 2009, carbon dioxide was applied to supercritical transesterification with ethanol to reduce the operating conditions (Bertoldi et al., 2009). From 2007 to 2010, numerous additional studies, such as vapor-liquid equilibria of binary systems (Anitescu et al., 2008; Fang et al., 2008; Shimoyama et al., 2008; Shimoyama et al., 2009; Tang et al., 2006), phase behavior of the reaction mixture (Glišić & Skala, 2010; Hegel et al., 2008; Hegel et al., 2007), thermal stability of unsaturated fatty acids in supercritical methanol (Imahara et al., 2008) and process simulation and economic analysis (Busto et al., 2006; D'Ippolito et al., 2006; Deshpande et al., 2010; Diaz et al., 2009; van Kasteren & Nisworo, 2007) were reported, leading to a better understanding of the supercritical transesterification process.

3.2 The addition of co-solvents

The co-solvents that have been used in supercritical transesterification are liquid co-solvents, such as hexane and tetrahydrofuran (THF), and gaseous co-solvents, such as propane, carbon dioxide (CO₂) and nitrogen (N₂). Both types of co-solvents have different purposes and advantages that will be presented accordingly.

The liquid co-solvents are added into the supercritical transesterification reaction to reduce the viscosity of the vegetable oils, which might otherwise pose some pumping problems in a continuous process (Sawangkeaw et al., 2007). Since hexane is the conventional solvent for vegetable oil extraction, it could be possible to combine the supercritical transesterification after the extraction process using hexane for both. Additionally, THF improves the solubility of alcohols in the triglyceride and so forms a single phase mixture, allowing a single high-pressure pump to be employed to feed the reaction mixture into the reactor. A small amount of liquid co-solvent, up to ~20% (v/v) of hexane in vegetable oil, neither affects the

transesterification conversion nor lowers the original operating parameters. Whereas, an excess amount of hexane shows a negative effect on the final obtained alkyl esters content due to dilution and obstruction of the reactants (Tan et al., 2010a).

The addition of gaseous co-solvents to the supercritical transesterification reaction aims to reduce the original operating parameters. Due to the fact that the critical properties of gaseous co-solvents are much lower than alcohol and triglycerides, the addition of a small amount of gaseous co-solvents dramatically decreases the critical point of the reaction mixture allowing the use of milder operating parameters. For example, 0.10 mole of CO₂ or 0.05 mole of propane per mole of methanol lowers the reaction temperature and methanol to oil molar ratio to 280 °C and 1:24, respectively (Cao et al., 2005; Han et al., 2005). Furthermore, it was reported that the addition of N₂ improved the oxidation stability and reduced the total glycerol content in the biodiesel product (Imahara et al., 2009). Gaseous co-solvents have the advantage of easier separation from the product than the liquid co-solvents. For instance, they can be separated from the biodiesel product by expansion without using additional energy at the end of the transesterification process, unlike the liquid co-solvents that typically need to be recovered by distillation.

3.3 The use of catalysts

The homogeneous acidic and basic catalysts, such as H₃PO₄, NaOH and KOH, have been applied to supercritical transesterification to obtain milder operating conditions (Wang et al., 2008; Wang et al., 2007; Yin et al., 2008b). However, despite the milder operating conditions and faster rate of reaction obtained compared to the catalyst-free process, the addition of homogeneous catalysts is not an interesting idea because the problem of subsequent catalyst separation and waste management still remain, the same situation as with the conventional homogeneous catalytic process. The use of solid heterogeneous catalysts might enhance the technical and economical feasibility of using supercritical transesterification as a result of the ease of separation of the catalysts. However, the acidic and basic heterogeneous catalysts have different characteristics and advantages, as will be discussed below.

The acidic heterogeneous catalysts, such as WO₃/ZrO₂, zirconia-alumina, sulfated tin oxide and Mg–Al–CO₃ hydrotalcites, have been evaluated in the supercritical transesterification process (Helwani et al., 2009). However, despite the presence of the catalysts, the chemical kinetics of the acidic heterogeneous catalysts at atmospheric pressure were slower than the catalyst-free process. For example, the transesterification of soybean oil in supercritical methanol at 250 °C and a 40:1 methanol to oil molar ratio in the presence of WO₃/ZrO₂ as catalyst still takes 20 hours to attain a 90% conversion level (Furuta et al., 2004). However, the acidic catalysts are less sensitive to moisture and free fatty acid content than the basic catalysts and so they could be appropriate for low-grade feedstocks.

Alternatively, basic heterogeneous catalysts, such as CaO (Demirbas, 2007) MgO (Demirbas, 2008) and nano-MgO (Wang & Yang, 2007), have been applied to supercritical transesterification to reduce the original operating conditions. These catalysts have the ability to catalyze the transesterification reaction at the boiling point of alcohols and are stable at supercritical conditions. As expected, the rate of reaction at the supercritical conditions is faster than that at lower temperatures. For example, the CaO catalyst takes over 180 min to reach over 95% conversion at 65 °C (Liu et al., 2008), but only 10 min to reach complete conversion at 250 °C (Demirbas, 2007). Unfortunately, the basic catalysts can

be poisoned by the presence of water and free fatty acids. Therefore, further studies on using low-grade feedstocks with basic heterogeneous catalysts are still required.

3.4 The process modifications

The two-step process is based on firstly a hydrolysis reaction in subcritical water to obtain fatty acid products and then secondly the transesterification and esterification reactions in supercritical alcohol to form the alkyl esters product. The two-step process reduces the optimal operating parameters successfully since the hydrolysis and esterification reactions reach complete conversion at a lower temperature than the transesterification reaction does (Minami & Saka, 2006). Nonetheless, the two-step process is more complicated than the single-step process. For example, the process has high-pressure reactors that connect in series with a high-pressure water-glycerol-fatty acid phase separator. Furthermore, the glycerol-water stream, which is contaminated by trace amounts of fatty acids, requires more separation units. Although a distillation tower is the simplest separation unit for handling the glycerol-water stream, it consumes a large amount of energy to operate.

The high-temperature process involves increasing the operating temperature to 400 to 450 °C (Marulanda et al., 2009; Marulanda et al., 2010), so that the operating pressure, methanol to oil molar ratio and reaction time for complete conversion are reduced to 10.0 MPa, 6:1 and 4 min, respectively. As expected, the unsaturated fatty acids are partially consumed by thermal degradation but the oxidation resistance or storage stability of the product might be enhanced. Under these conditions it was reported that triglyceride and glycerol convert to oxygenate liquid fuel with a conversion of up to 99.5%. The glycerol dehydration both increases the fuel yield by up to 10% and reduces the amount of glycerol by-products (Aimaretti et al., 2009). By using the high-temperature process, the simultaneous conversion of triglyceride, free fatty acids and glycerol to liquid fuel is an alternative option that will increase the feasibility and profitability of supercritical transesterification.

4. Process prospective

In this section, the process prospective is split into two on the basis of the operating temperature since the temperature is the key parameter and chemical limitation for supercritical transesterification. The low-temperature approach aims to produce biodiesel that fulfills the 96.5% alkyl esters content requirement for biodiesel, while the high-temperature approach proposes an alternative method to synthesize the biofuel from a triglyceride-base biomass in supercritical conditions.

4.1 The low-temperature approach

The term “Low-temperature approach” defines supercritical transesterification within a temperature range of 270 – 300 °C so as to avoid the thermal degradation of unsaturated fatty acids and to maximize the alkyl esters content in the product. Without the assistance of any co-solvent, catalyst or other process modification techniques, the low-temperature approach employs a high pressure, a high alcohol to oil molar ratio and a long reaction time to achieve the >96.5% alkyl esters content required for biodiesel composition by the international standard. However, with the assisting techniques, as mentioned in Sections 3.2 – 3.4, the optimal conditions of low-temperature approach generally involve 20 – 30 MPa, an

alcohol to oil molar ratio of 24:1 and a reaction time over 30 min. The biodiesel product, which typically exceeds the 96.5% alkyl esters content of the international standard for biodiesel (EN14214), can be used as biodiesel.

For future research involving the low-temperature approach, the use of low-grade feedstocks and/or heterogeneous catalysts are very interesting topics. Alternatively, studies on scale up continuous reactors which are more suitable for an industrial scale are required. These have been successfully evaluated in lab-scale tubular reactors (Bunyakiat et al., 2006; He et al., 2007b; Minami & Saka, 2006), but an evaluation on a scaled-up reactor is presently lacking. An optimal reaction time to achieve over 96.5% alkyl esters content is the most important finding for the low-temperature approach studies because it corresponds with reactor sizing and reflects on the economical feasibility.

4.2 The high-temperature approach

The high-temperature approach uses supercritical transesterification at temperatures over 400 °C, as described in Section 3.4. Even though the mono-alkyl esters content in the product from the high-temperature process is always lower than the biodiesel specification value of 96.5%, it can be proposed as an alternative biofuel that would require further studies on engine testing and fuel properties itself. Improved fuel properties, such as the viscosity and density of the biofuel product, from the high-temperature approach have been proposed (Marulanda et al., 2009). Furthermore, the operating temperature and pressure used in the high-temperature approach are close to those for catalytic hydrocracking in conventional petroleum refining, so it has a high possibility that it can be realized in an industrial scale.

Since the high-temperature approach, as recently initiated, has evaluated the triglycerides found in soybean oil (Anitescu et al., 2008) and chicken fat (Marulanda et al., 2009; Marulanda et al., 2010) only, then additional research into other triglycerides are needed. In addition, studies on the economical feasibility and environmental impact are also required. Indeed, the complete fuel properties need examining along with engine testing for the biofuel product for the high-temperature approach (Basha et al., 2009). On the other hand, the fine studies on the reactions pathways and/or chemical kinetics are also attractive works to better understand the high-temperature approach.

5. Conclusion

Supercritical transesterification is a promising method for a more environmentally friendly biodiesel production as a result of its feedstock flexibility, production efficiency and environmentally friendly benefits. For extended details, the review articles on supercritical transesterification with methanol (de Boer & Bahri, 2011; Sawangkeaw et al., 2010), or ethanol (Balat, 2008; Pinnarat & Savage, 2008) and other supercritical technologies (Lee & Saka, 2010; Tan & Lee, 2011) are also available elsewhere.

Even though the knowledgebase of this process has been growing the past decade, more work is still required for an adequate understanding of the process. In spite of its advantage of feedstock flexibility, there has so far been very little research on the use of low-grade feedstocks in supercritical transformation. Furthermore, prospective studies for both the low-temperature and high-temperature approaches, as mentioned previously, are required to realize supercritical transesterification at an industrial scale.

6. Acknowledgments

The authors would like to acknowledge the financial support from Postdoctoral Fellowship (Ratchadaphiseksomphot Endowment Fund) and the Thai Government Stimulus Package 2 (TKK2555), under the Project for Establishment of Comprehensive Center for Innovative Food, Health Products and Agriculture. We also express thanks to Dr. Robert Douglas John Butcher from the Publication Counseling Unit, Faculty of Science, Chulalongkorn University, for English language editing.

7. References

- Aimaretti, N., Manuale, D.L., Mazzieri, V.M., Vera, C.R. & Yori, J.C. (2009). Batch Study of Glycerol Decomposition in One-Stage Supercritical Production of Biodiesel. *Energy and Fuels*, Vol.23, No.2, pp. (1076-1080), ISSN 0887-0624
- Anitescu, G., Deshpande, A. & Tavlarides, L.L. (2008). Integrated technology for supercritical biodiesel production and power cogeneration. *Energy and Fuels*, Vol.22, No.2, pp. (1391-1399), ISSN 0887-0624
- Balat, M. (2008). Biodiesel fuel production from vegetable oils via supercritical ethanol transesterification. *Energy Sources, Part A: Recovery, Utilization and Environmental Effects*, Vol.30, No.5, pp. (429-440), ISSN 1556-7036
- Basha, S.A., Gopal, K.R. & Jebaraj, S. (2009). A review on biodiesel production, combustion, emissions and performance. *Renewable and Sustainable Energy Reviews*, Vol.13, No.6-7, pp. (1628-1634), ISSN 1364-0321
- Bertoldi, C., da Silva, C., Bernardon, J.P., Corazza, M.L., Filho, L.C., Oliveira, J.V. & Corazza, F.C. (2009). Continuous Production of Biodiesel from Soybean Oil in Supercritical Ethanol and Carbon Dioxide as Cosolvent. *Energy and Fuels*, Vol.23, No.10, pp. (5165-5172), ISSN 0887-0624
- Bunyakiat, K., Makmee, S., Sawangkeaw, R. & Ngamprasertsith, S. (2006). Continuous Production of Biodiesel via Transesterification from Vegetable Oils in Supercritical Methanol. *Energy and Fuels*, Vol.20, No.2, pp. (812-817), ISSN 0887-0624
- Busto, M., D'Ippolito, S.A., Yori, J.C., Iturria, M.E., Pieck, C.L., Grau, J.M. & Vera, C.R. (2006). Influence of the Axial Dispersion on the Performance of Tubular Reactors during the Noncatalytic Supercritical Transesterification of Triglycerides. *Energy and Fuels*, Vol.20, No.6, pp. (2642-2647), ISSN 0887-0624
- Cao, W., Han, H. & Zhang, J. (2005). Preparation of biodiesel from soybean oil using supercritical methanol and co-solvent. *Fuel*, Vol.84, No.4, pp. (347-351), ISSN 0016-2361
- D'Ippolito, S.A., Yori, J.C., Iturria, M.E., Pieck, C.L. & Vera, C.R. (2006). Analysis of a Two-Step, Noncatalytic, Supercritical Biodiesel Production Process with Heat Recovery. *Energy and Fuels*, Vol.21, No.1, pp. (339-346), ISSN 0887-0624
- Dasari, M., Goff, M. & Suppes, G. (2003). Noncatalytic alcoholysis kinetics of soybean oil. *Journal of the American Oil Chemists' Society*, Vol.80, No.2, pp. (189-192), ISSN 0003-021X
- de Boer, K. & Bahri, P.A. (2011). Supercritical methanol for fatty acid methyl ester production: A review. *Biomass and Bioenergy*, Vol.35, No.3, pp. (983-991), ISSN 0961-9534

- Demirbas, A. (2002). Biodiesel from vegetable oils via transesterification in supercritical methanol. *Energy Conversion and Management*, Vol.43, No.17, pp. (2349-2356), ISSN 0196-8904
- Demirbas, A. (2007). Biodiesel from sunflower oil in supercritical methanol with calcium oxide. *Energy Conversion and Management*, Vol.48, No.3, pp. (937-941), ISSN 0196-8904
- Demirbas, A. (2008). Biodiesel from vegetable oils with MgO catalytic transesterification in supercritical methanol. *Energy Sources, Part A: Recovery, Utilization and Environmental Effects*, Vol.30, No.17, pp. (1645-1651), ISSN 1556-7036
- Demirbas, A. (2009). Biodiesel from waste cooking oil via base-catalytic and supercritical methanol transesterification. *Energy Conversion and Management*, Vol.50, No.4, pp. (923-927), ISSN 0196-8904
- Deshpande, A., Anitescu, G., Rice, P.A. & Tavlarides, L.L. (2010). Supercritical biodiesel production and power cogeneration: Technical and economic feasibilities. *Bioresource Technology*, Vol.101, No.6, pp. (1834-1843), ISSN 0960-8524
- Diasakou, M., Louloudi, A. & Papayannakos, N. (1998). Kinetics of the non-catalytic transesterification of soybean oil. *Fuel*, Vol.77, No.12, pp. (1297-1302), ISSN 0016-2361
- Diaz, M.S., Espinosa, S. & Brignole, E.A. (2009). Model-Based Cost Minimization in Noncatalytic Biodiesel Production Plants. *Energy and Fuels*, Vol.23, No.11, pp. (5587-5595), ISSN 0887-0624
- Espinosa, S., Fornari, T., Bottini, S.B. & Brignole, E.A. (2002). Phase equilibria in mixtures of fatty oils and derivatives with near critical fluids using the GC-EOS model. *The Journal of Supercritical Fluids*, Vol.23, No.2, pp. (91-102), ISSN 0896-8446
- Fang, T., Shimoyama, Y., Abeta, T., Iwai, Y., Sasaki, M. & Goto, M. (2008). Phase equilibria for the mixtures of supercritical methanol + C18 methyl esters and supercritical methanol + α -tocopherol. *The Journal of Supercritical Fluids*, Vol.47, No.2, pp. (140-146), ISSN 0896-8446
- Furuta, S., Matsushashi, H. & Arata, K. (2004). Biodiesel fuel production with solid superacid catalysis in fixed bed reactor under atmospheric pressure. *Catalysis Communications*, Vol.5, No.12, pp. (721-723), ISSN
- Glišić, S., Lukic, I. & Skala, D. (2009). Biodiesel synthesis at high pressure and temperature: Analysis of energy consumption on industrial scale. *Bioresource Technology*, Vol.100, No.24, pp. (6347-6354), ISSN 0960-8524
- Glišić, S. & Skala, D. (2009). The problems in design and detailed analyses of energy consumption for biodiesel synthesis at supercritical conditions. *The Journal of Supercritical Fluids*, Vol.49, No.2, pp. (293-301), ISSN 0896-8446
- Glišić, S.B. & Skala, D.U. (2010). Phase transition at subcritical and supercritical conditions of triglycerides methanolysis. *The Journal of Supercritical Fluids*, Vol.54, No.1, pp. (71-80), ISSN 0896-8446
- Gui, M.M., Lee, K.T. & Bhatia, S. (2009). Supercritical ethanol technology for the production of biodiesel: Process optimization studies. *The Journal of Supercritical Fluids*, Vol.49, No.2, pp. (286-292), ISSN 0896-8446
- Han, H., Cao, W. & Zhang, J. (2005). Preparation of biodiesel from soybean oil using supercritical methanol and CO₂ as co-solvent. *Process Biochemistry*, Vol.40, No.9, pp. (3148-3151), ISSN 1359-5113

- He, H., Sun, S., Wang, T. & Zhu, S. (2007a). Transesterification Kinetics of Soybean Oil for Production of Biodiesel in Supercritical Methanol. *Journal of the American Oil Chemists' Society*, Vol.84, No.4, pp. (399-404), ISSN 0003-021X
- He, H., Wang, T. & Zhu, S. (2007b). Continuous production of biodiesel fuel from vegetable oil using supercritical methanol process. *Fuel*, Vol.86, No.3, pp. (442-447), ISSN 0016-2361
- Hegel, P., Andreatta, A., Pereda, S., Bottini, S. & Brignole, E.A. (2008). High pressure phase equilibria of supercritical alcohols with triglycerides, fatty esters and cosolvents. *Fluid Phase Equilibria*, Vol.266, No.1-2, pp. (31-37), ISSN 0378-3812
- Hegel, P., Mabe, G., Pereda, S. & Brignole, E.A. (2007). Phase Transitions in a Biodiesel Reactor Using Supercritical Methanol. *Industrial and Engineering Chemistry Research*, Vol.46, No.19, pp. (6360-6365), ISSN 0888-5885
- Helwani, Z., Othman, M.R., Aziz, N., Kim, J. & Fernando, W.J.N. (2009). Solid heterogeneous catalysts for transesterification of triglycerides with methanol: A review. *Applied Catalysis A: General*, Vol.363, No.1-2, pp. (1-10), ISSN 0926-860X
- Hoffmann, M.M. & Conradi, M.S. (1998). Are There Hydrogen Bonds in Supercritical Methanol and Ethanol? *The Journal of Physical Chemistry B*, Vol.102, No.1, pp. (263-271), ISSN 1520-6106
- Ilham, Z. & Saka, S. (2009). Dimethyl carbonate as potential reactant in non-catalytic biodiesel production by supercritical method. *Bioresource Technology*, Vol.100, No.5, pp. (1793-1796), ISSN 0960-8524
- Imahara, H., Minami, E., Hari, S. & Saka, S. (2008). Thermal stability of biodiesel in supercritical methanol. *Fuel*, Vol.87, No.1, pp. (1-6), ISSN 0016-2361
- Imahara, H., Xin, J. & Saka, S. (2009). Effect of CO₂/N₂ addition to supercritical methanol on reactivities and fuel qualities in biodiesel production. *Fuel*, Vol.88, No.7, pp. (1329-1332), ISSN 0016-2361
- Khuwijtjaru, P., Fujii, T., Adachi, S., Kimura, Y. & Matsuno, R. (2004). Kinetics on the hydrolysis of fatty acid esters in subcritical water. *Chemical Engineering Journal*, Vol.99, No.1, pp. (1-4), ISSN 1385-8947
- Kiwjaroun, C., Tubtimdee, C. & Piumsomboon, P. (2009). LCA studies comparing biodiesel synthesized by conventional and supercritical methanol methods. *Journal of Cleaner Production*, Vol.17, No.2, pp. (143-153), ISSN 0959-6526
- Krammer, P. & Vogel, H. (2000). Hydrolysis of esters in subcritical and supercritical water. *The Journal of Supercritical Fluids*, Vol.16, No.3, pp. (189-206), ISSN 0896-8446
- Kulkarni, M.G. & Dalai, A.K. (2006). Waste Cooking Oil An Economical Source for Biodiesel: A Review. *Industrial and Engineering Chemistry Research*, Vol.45, No.9, pp. (2901-2913), ISSN 0888-5885
- Kusdiana, D. & Saka, S. (2001). Kinetics of transesterification in rapeseed oil to biodiesel fuel as treated in supercritical methanol. *Fuel*, Vol.80, No.5, pp. (693-698), ISSN 0016-2361
- Kusdiana, D. & Saka, S. (2004a). Catalytic effect of metal reactor in transesterification of vegetable oil. *Journal of the American Oil Chemists' Society*, Vol.81, No.1, pp. (103-104), ISSN 0003-021X
- Kusdiana, D. & Saka, S. (2004b). Effects of water on biodiesel fuel production by supercritical methanol treatment. *Bioresource Technology*, Vol.91, No.3, pp. (289-295), ISSN 0960-8524

- Lam, M.K., Lee, K.T. & Mohamed, A.R. (2010). Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: A review. *Biotechnology Advances*, Vol.28, No.4, pp. (500-518), ISSN 0734-9750
- Lee, J.-S. & Saka, S. (2010). Biodiesel production by heterogeneous catalysts and supercritical technologies. *Bioresource Technology*, Vol.101, No.19, pp. (7191-7200), ISSN 0960-8524
- Lene, F., Knud, V.C. & Birgir, N. (2009). A review of the current state of biodiesel production using enzymatic transesterification. *Biotechnology and Bioengineering*, Vol.102, No.5, pp. (1298-1315), ISSN 1097-0290
- Levine, R.B., Pinnarat, T. & Savage, P.E. (2010). Biodiesel Production from Wet Algal Biomass through in Situ Lipid Hydrolysis and Supercritical Transesterification. *Energy and Fuels*, Vol.24, No.9, pp. (5235-5243), ISSN 0887-0624
- Lima, D.G., Soares, V.C.D., Ribeiro, E.B., Carvalho, D.A., Cardoso, É.C.V., Rassi, F.C., Mundim, K.C., Rubim, J.C. & Suarez, P.A.Z. (2004). Diesel-like fuel obtained by pyrolysis of vegetable oils. *Journal of Analytical and Applied Pyrolysis*, Vol.71, No.2, pp. (987-996), ISSN 0165-2370
- Liu, X., He, H., Wang, Y., Zhu, S. & Piao, X. (2008). Transesterification of soybean oil to biodiesel using CaO as a solid base catalyst. *Fuel*, Vol.87, No.2, pp. (216-221), ISSN 0016-2361
- Madras, G., Kolluru, C. & Kumar, R. (2004). Synthesis of biodiesel in supercritical fluids. *Fuel*, Vol.83, No.14-15, pp. (2029-2033), ISSN 0016-2361
- Marchetti, J.M. & Errazu, A.F. (2008). Technoeconomic study of supercritical biodiesel production plant. *Energy Conversion and Management*, Vol.49, No.8, pp. (2160-2164), ISSN 0196-8904
- Marulanda, V.F., Anitescu, G. & Tavlarides, L.L. (2009). Biodiesel Fuels through a Continuous Flow Process of Chicken Fat Supercritical Transesterification. *Energy and Fuels*, Vol.24, No.1, pp. (253-260), ISSN 0887-0624
- Marulanda, V.F., Anitescu, G. & Tavlarides, L.L. (2010). Investigations on supercritical transesterification of chicken fat for biodiesel production from low-cost lipid feedstocks. *The Journal of Supercritical Fluids*, Vol.54, No.1, pp. (53-60), ISSN 0896-8446
- Meher, L.C., Vidya Sagar, D. & Naik, S.N. (2006). Technical aspects of biodiesel production by transesterification--a review. *Renewable and Sustainable Energy Reviews*, Vol.10, No.3, pp. (248-268), ISSN 1364-0321
- Minami, E. & Saka, S. (2006). Kinetics of hydrolysis and methyl esterification for biodiesel production in two-step supercritical methanol process. *Fuel*, Vol.85, No.17-18, pp. (2479-2483), ISSN 0016-2361
- Pinnarat, T. & Savage, P.E. (2008). Assessment of noncatalytic biodiesel synthesis using supercritical reaction conditions. *Industrial and Engineering Chemistry Research*, Vol.47, No.18, pp. (6801-6808), ISSN 0888-5885
- Poling, B.E., Prausnitz, J.M. & O'Connell, J.P. (2001). *The properties of gases and liquids*. (5 ed). McGraw-Hill, ISBN 7011-6822, New York.
- Quesada-Medina, J. & Olivares-Carrillo, P. (2011). Evidence of thermal decomposition of fatty acid methyl esters during the synthesis of biodiesel with supercritical

- methanol. *The Journal of Supercritical Fluids*, Vol.56, No.1, pp. (56-63), ISSN 0896-8446
- Rathore, V. & Madras, G. (2007). Synthesis of biodiesel from edible and non-edible oils in supercritical alcohols and enzymatic synthesis in supercritical carbon dioxide. *Fuel*, Vol.86, No.17-18, pp. (2650-2659), ISSN 0016-2361
- Saka, S. & Isayama, Y. (2009). A new process for catalyst-free production of biodiesel using supercritical methyl acetate. *Fuel*, Vol.88, No.7, pp. (1307-1313), ISSN 0016-2361
- Saka, S. & Kusdiana, D. (2001). Biodiesel fuel from rapeseed oil as prepared in supercritical methanol. *Fuel*, Vol.80, No.2, pp. (225-231), ISSN 0016-2361
- Sawangkeaw, R., Bunyakiat, K. & Ngamprasertsith, S. (2007). Effect of co-solvents on production of biodiesel via transesterification in supercritical methanol. *Green Chemistry*, Vol.9, No.6, pp. (679-685), ISSN 1463-9262
- Sawangkeaw, R., Bunyakiat, K. & Ngamprasertsith, S. (2010). A review of laboratory-scale research on lipid conversion to biodiesel with supercritical methanol (2001-2009). *The Journal of Supercritical Fluids*, Vol.55, No.1, pp. (1-13), ISSN 0896-8446
- Shimoyama, Y., Abeta, T. & Iwai, Y. (2008). Prediction of vapor-liquid equilibria for supercritical alcohol + fatty acid ester systems by SRK equation of state with Wong-Sandler mixing rule based on COSMO theory. *The Journal of Supercritical Fluids*, Vol.46, No.1, pp. (4-9), ISSN 0896-8446
- Shimoyama, Y., Abeta, T., Zhao, L. & Iwai, Y. (2009). Measurement and calculation of vapor-liquid equilibria for methanol + glycerol and ethanol + glycerol systems at 493-573 K. *Fluid Phase Equilibria*, Vol.284, No.1, pp. (64-69), ISSN 0378-3812
- Silva, C., Weschenfelder, T.A., Rovani, S., Corazza, F.C., Corazza, M.L., Dariva, C. & Oliveira, J.V. (2007). Continuous Production of Fatty Acid Ethyl Esters from Soybean Oil in Compressed Ethanol. *Industrial and Engineering Chemistry Research*, Vol.46, No.16, pp. (5304-5309), ISSN 0888-5885
- Song, E.-S., Lim, J.-w., Lee, H.-S. & Lee, Y.-W. (2008). Transesterification of RBD palm oil using supercritical methanol. *The Journal of Supercritical Fluids*, Vol.44, No.3, pp. (356-363), ISSN 0896-8446
- Tan, K.T. & Lee, K.T. (2011). A review on supercritical fluids (SCF) technology in sustainable biodiesel production: Potential and challenges. *Renewable and Sustainable Energy Reviews*, Vol.15, No.5, pp. (2452-2456), ISSN 1364-0321
- Tan, K.T., Lee, K.T. & Mohamed, A.R. (2010a). Effects of free fatty acids, water content and co-solvent on biodiesel production by supercritical methanol reaction. *The Journal of Supercritical Fluids*, Vol.53, No.1-3, pp. (88-91), ISSN 0896-8446
- Tan, K.T., Lee, K.T. & Mohamed, A.R. (2010b). Optimization of supercritical dimethyl carbonate (SCDMC) technology for the production of biodiesel and value-added glycerol carbonate. *Fuel*, Vol.89, No.12, pp. (3833-3839), ISSN 0016-2361
- Tang, Z., Du, Z., Min, E., Gao, L., Jiang, T. & Han, B. (2006). Phase equilibria of methanol-triolein system at elevated temperature and pressure. *Fluid Phase Equilibria*, Vol.239, No.1, pp. (8-11), ISSN 0378-3812
- van Kasteren, J.M.N. & Nisworo, A.P. (2007). A process model to estimate the cost of industrial scale biodiesel production from waste cooking oil by supercritical transesterification. *Resources, Conservation and Recycling*, Vol.50, No.4, pp. (442-458), ISSN 0921-3449

- Varma, M.N. & Madras, G. (2006). Synthesis of Biodiesel from Castor Oil and Linseed Oil in Supercritical Fluids. *Industrial and Engineering Chemistry Research*, Vol.46, No.1, pp. (1-6), ISSN 0888-5885
- Velez, A., Hegel, P., Mabe, G. & Brignole, E.A. (2010). Density and Conversion in Biodiesel Production with Supercritical Methanol. *Industrial and Engineering Chemistry Research*, Vol.49, No.16, pp. (7666-7670), ISSN 0888-5885
- Vieitez, I., da Silva, C., Borges, G.R., Corazza, F.C., Oliveira, J.V., Grompone, M.A. & Jachmanián, I. (2008). Continuous Production of Soybean Biodiesel in Supercritical Ethanol-Water Mixtures. *Energy and Fuels*, pp., ISSN 0887-0624
- Vieitez, I., Pardo, M.J., da Silva, C., Bertoldi, C., de Castilhos, F., Oliveira, J.V., Grompone, M.A. & Jachmanián, I. (2011). Continuous synthesis of castor oil ethyl esters under supercritical ethanol. *The Journal of Supercritical Fluids*, Vol.56, No.3, pp. (271-276), ISSN 0896-8446
- W. King, J., L. Holliday, R. & R. List, G. (1999). Hydrolysis of soybean oil in a subcritical water flow reactor. *Green Chemistry*, Vol.1, No.6, pp. (261-264), ISSN 1463-9262
- Wang, C.-W., Zhou, J.-F., Chen, W., Wang, W.-G., Wu, Y.-X., Zhang, J.-F., Chi, R.-A. & Ying, W.-Y. (2008). Effect of weak acids as a catalyst on the transesterification of soybean oil in supercritical methanol. *Energy and Fuels*, Vol.22, No.5, pp. (3479-3483), ISSN 0887-0624
- Wang, L., He, H., Xie, Z., Yang, J. & Zhu, S. (2007). Transesterification of the crude oil of rapeseed with NaOH in supercritical and subcritical methanol. *Fuel Processing Technology*, Vol.88, No.5, pp. (477-481), ISSN 0378-3820
- Wang, L. & Yang, J. (2007). Transesterification of soybean oil with nano-MgO or not in supercritical and subcritical methanol. *Fuel*, Vol.86, No.3, pp. (328-333), ISSN 0016-2361
- Warabi, Y., Kusdiana, D. & Saka, S. (2004). Reactivity of triglycerides and fatty acids of rapeseed oil in supercritical alcohols. *Bioresource Technology*, Vol.91, No.3, pp. (283-287), ISSN 0960-8524
- Yin, J.-Z., Xiao, M. & Song, J.-B. (2008a). Biodiesel from soybean oil in supercritical methanol with co-solvent. *Energy Conversion and Management*, Vol.49, No.5, pp. (908-912), ISSN 0196-8904
- Yin, J.-Z., Xiao, M., Wang, A.-Q. & Xiu, Z.-L. (2008b). Synthesis of biodiesel from soybean oil by coupling catalysis with subcritical methanol. *Energy Conversion and Management*, Vol.49, No.12, pp. (3512-3516), ISSN 0196-8904

Alternative Methods for Fatty Acid Alkyl-Esters Production: Microwaves, Radio-Frequency and Ultrasound

Paula Mazo, Gloria Restrepo and Luis Rios
*Universidad de Antioquia. Grupo Procesos Fisicoquímicos Aplicados
Colombia*

1. Introduction

Biodiesel production is a very modern and technological area for researchers due to the relevance that it is winning every day because of the increase in the petroleum price and the environmental advantages (Mustafa, 2011).

Biodiesel is a mixture of mono-alkyl esters of long chain fatty acids, is an alternative fuel made from renewable sources as vegetable oils and animal fats. It is biodegradable, non-toxic, show low emission profiles and also is beneficial environmentally. (Fangrui and Milford, 1999).

Biodiesel is quite similar to petroleum-derived diesel in its main characteristics such as cetane number, energy content, viscosity, and phase changes. Biodiesel contains no petroleum products, but it is compatible with conventional diesel and can be blended in any proportion with fossil-based diesel to create a stable biodiesel blend. Therefore, biodiesel has become one of the most common biofuels in the world (Lin et al., 2011). There are four primary techniques for biodiesel production: direct use and blending of raw oils, microemulsions, thermal cracking and trans-esterification (Siddiquee and Rohani, 2011).

Direct use of vegetable oil and animal fats as combustible fuel is not suitable due to their high kinematic viscosity and low volatility. Furthermore, its long term use posed serious problems such as deposition, ring sticking and injector chocking in engine. Microemulsions with alcohols have been prepared to overcome the problem of high viscosity of vegetable oils. Another alternative way to produce biodiesel is through thermal cracking or pyrolysis. However, this process is rather complicated to operate and produce side products that have not commercial value. The most commonly used method for biodiesel production is trans-esterification (also known as alcoholysis) reaction in presence of a catalyst. Trans-esterification is the process of exchanging the alkoxy group of an ester compound with another alcohol (Lam et al., 2010).

Esterification is the sub category of trans-esterification. This requires two reactants, carboxylic acids (fatty acids) and alcohols. Esterification reactions are acid-catalyzed and proceed slowly in the absence of strong acids such as sulfuric, phosphoric, sulfonic-organic acids and hydrochloric acid (Vyas et al., 2010).

The fatty acid methyl esters (FAME) are more used because of its facility of production, however, presents operating problems at low temperatures for its high content of saturated

fractions that crystallize and can block the filters of the engines. One of the alternatives to reduce the flow properties at low temperatures (FPLT) of methyl esters specially the obtained from oil palm is use alkyl esters, obtained through of trans-esterification with branched alcohols, that prevent the agglomeration and formation of crystals of these methyl esters.

Alkyl esters can be produced through trans-esterification of triglycerides, which are separated by immiscibility and higher density. (Marchetti et al., 2007; Ma and Hanna, 1999; Vicente et al., 2004)

Very few studies have been made with the aim to obtain alkyl esters and all are obtained by homogeneous catalysis (Lee et al., 1995). Yields of these reactions are very low by the high steric hindering that presenting the branched alcohols. To increase the conversion, in this work, we propose use assisted reactions by alternative methods.

The preparation of fatty acid alkylester using alternative methods, such as: electromagnetic radiation (microwave, radio frequency) and ultrasound, offers a fast, easy route to this valuable biofuel with advantages of a short reaction time, a low reactive ratio, an ease of operation a drastic reduction in the quantity of by-products, and all with reduced energy consumption.

In this work the revision of the relevant aspects of the production optimization, intrinsic effects and parameters more relevant in the synthesis and characterization of fatty acid alkylesters (biodiesel) using as alternative methods: Microwaves, Radio Frequency and Ultrasound is proposed.

2. Fatty acid alkylesters production assisted by microwaves

Electromagnetic radiation (EMR) is a form of energy exhibiting wave like behaviour as it travels through space. EMR has both electric and magnetic field components, which oscillate in phase perpendicular to each other and perpendicular to the direction of energy propagation. Electromagnetic radiation is classified according to the frequency of its wave. In order of increasing frequency and decreasing wavelength, these are radio waves, microwaves, infrared radiation, visible light, ultraviolet radiation, X-rays and gamma rays (Serway and Jewett, 2004).

Microwaves belong to the portion of the electromagnetic spectrum with wavelengths from 1 mm to 1 m with corresponding frequencies between 300 MHz and 300 GHz.

Within this portion of the electromagnetic spectrum there are frequencies that are used for cellular phones, radar, and television satellite communications. For microwave heating, two frequencies, reserved by the Federal Communications Commission (FCC) for industrial, scientific, and medical (ISM) purposes are commonly used for microwave heating. The two most commonly used frequencies are 0.915 and 2.45 GHz. Recently, microwave furnaces that allow processing at variable frequencies from 0.9 to 18 GHz have been developed for material processing (Thostenson and Chou, 1999). Microwave radiation was discovered as a heating method in 1946, with the first commercial domestic microwaves being introduced in the 1950s. The first commercial microwave for laboratory utilization was recognized in 1978 (Gedye et al., 1986; Giguere et al., 1986).

Over the last decade, microwave dielectric heating as an environmentally benign process has developed into a highly valuable technique, offering an efficient alternative energy source for numerous chemical reactions and processes. It has many advantages compared to conventional oil-bath heating, such as non-contact heating, energy transfer instead of heat

transfer, higher heating rate, rapid start-up and stopping of the heating, uniform heating with minimal thermal gradients, selective heating properties, reverse thermal effects (heating starting from the interior of the material body), energy savings and higher yields in shorter reaction time (Tierney and Lidstrom, 2005). Microwave heating is based dielectric heating, the ability of some polar liquids and solids to absorb and convert microwave energy into heat. In this context, a significant property is the mobility of the dipoles by either ionic conduction or dipolar polarization and the ability to orient them according to the direction of the electric field. The orientation of the dipoles changes with the magnitude and the direction of the electric field. Molecules that have a permanent dipole moment are able to align themselves through rotation, completely or at least partly, with the direction of the field. Therefore, energy is lost in the form of heat through molecular friction and dielectric loss (Loupy, 2002). The amount of heat produced by this process is directly related to the capability of the matrix to align itself with the frequency of the applied electric field. If the dipole does not have enough time to realign, or reorients too rapidly with the applied field, no heating occurs (Kappe, 2004).

The production of biodiesel via the conventional heating system appears to be inefficient due to the fact that the heat energy is transferred to the reactants through conduction, convection and radiation from the surface of the reactor. Hence, conventional heating requires longer reaction time and a larger amount of heat energy to obtain a satisfactory biodiesel. The replacement of conventional heating by microwave radiation for the transesterification process is expected to shorten the reaction time due to the transfer of heat directly to the reactants. The microwave radiation during the transesterification process is expected to create (i) an alignment of polar molecules such as alcohols with a continuously changing magnetic field generated by microwaves and (ii) molecular friction due to which heat will be generated (Yaakob et al., 2009).

The involvement of such heterogeneous catalytic systems under microwave conditions represents an innovative approach with processing advantages. These solid-state catalysts find scope in the context of green chemistry development as they are active in solvent free or dry media synthesis, with potential advantages in terms of separation, recovery post-reaction and recycling assays. The creation of hot spots, specific under MW conditions, is typically utilized for energy saving as improved yields and selectivities are recorded after shorten reaction times at lower nominal temperatures. These hot spots may induce a re-organization of the catalyst under microwave conditions and are probably responsible for reaction rates and selectivity enhancement (compared to conventional heating at the same nominal temperature) (Richela et al., 2011)

2.1 Esterification reactions assisted by MW

The esterification reaction is a slow equilibrium, and can be catalyzed by Brønsted acids such as sulfuric acid. The main problem is the generation of highly acidic waste causing a serious environmental problem, and to reduce this problem have been used alternative heterogeneous catalysts and microwaves as a heating source to promote and increase the yielding. Algunos catalizadores empleados son: scandium triflate and bismuth triflate (Socha and Sello, 2010), sulfated zirconia (Kim et al., 2011a), niobium oxide (Melo et al., 2010), entre otros.

The temperature presented a pronounced effect on the conversion, following an exponential dependence. The results for a distinct molar ratio of alcohol/fatty acid indicated that the

increase of this parameter lead to a decrease on the reaction conversion. In general, the esterification reaction under microwave irradiation yielded similar results to those obtained with the conventional heating but with very fast heating rates (Melo et al., 2009). The pulsed microwaves with repetitive strong power could enhance the efficiency of biodiesel production relative to the use of continuous microwave with mild power (Kim et al., 2011b). Electric energy consumption for the microwave heating in this accelerated esterification was only 67% of estimated minimum heat energy demand because of significantly reduced reaction time (Kim et al., 2011a).

For oils with a high content of free fatty acid FFA as palm oil, has been proposed obtain alkyl ester from crude palm oil (CPO), using microwaves like heating source, in a process of two stages by means of homogeneous and heterogeneous catalysis; the first stage (esterification), was made using sulfuric acid and Dowex 50X2, Amberlyst 15 and Amberlite IR-120 resin catalysts, to diminish the acid value of the oil, avoiding the soap formation and facilitating the separation of the phases. In these works has been reported the obtaining of alkyl ester using alcohols non-conventional such as: ethanol (EtOH) (Suppalakpanya et al., 2010a, 2010b), isopropyl (IsoprOH), isobutyl (IsobuOH), 2-butyl (2-BuOH) and Isopentyl (IsopentOH) alcohols (Mazo and Rios, 2010a; Mazo and Rios, 2010b), where was found that that the acidity order obtained for the catalysts is Dowex < Amberlite < Amberlyst, and the order for the alcohols: Methanol < isopropyl alcohol < isobutyl alcohol < 2-butyl alcohol < isopentyl alcohol, because Dowex microreticular resin presents the lowest divinylbenzene (2%), which has a lower cross-linking that produces a high expansion of the resin in a polar medium, and the resin can expand their pores up to 400%, enabling the income of the voluminous substrate (FFA) and its protonation. Amberlyst 15 macroreticular resin is activated due to its surface area, and the protons located on the outer surface seem that catalyse the esterification because the interiors are inaccessible due to high cross-linking. The reaction is favoured with the increasing of polarity of solvents.

Table 1 shows the work carried out for bio-diesel production by esterification of FFA under different conditions using microwave irradiation.

2.2 Transesterification reactions assisted by MW

Vegetable oils are becoming a promising alternative to diesel fuel because they are renewable in nature and can be produced locally and in environmentally friendly ways. Edible vegetable oils such as canola and soybean oil in the USA, palm oil in Malaysia, rapeseed oil in Europe and corn oil have been used for biodiesel production and found to be good diesel substitutes. Non-edible vegetable oils, such as *Pongamia pinnata* (Karanja or Honge), *Jatropha curcas* (*Jatropha* or *Ratanjyote*), *Madhuca iondica* (Mahua) and Castor Oil have also been found to be suitable for biodiesel production (Yusuf et al., 2011).

Transesterification (also called alcoholysis) is the reaction of a fat or oil with an alcohol (with or without catalyst) to form esters and glycerol. Since the reaction is reversible, excess alcohol is used to shift the equilibrium to the product side (Fangrui and Milford, 1999). Under Transesterification reaction with alcohol the first step is the conversion of triglycerides to diglycerides, which is followed by the subsequent conversion of higher glycerides to lower glycerides and then to glycerol, yielding one methyl ester molecule from each glyceride at each step (Hideki et al., 2001).

FFA	Catalyst	Catalyst amount (%)	Alcohol	Oil to alcohol molar ratio	Microwave reaction conditions	Ester conversion (%)	Ref.
Oleic Linoleic	-	-	MeOH EtOH MeOH	1:10	Synthos 3000-Anton Paar. 1400W. 30min, 200°C	51.8 31.5 49.6	(Melo et al., 2009)
Oleic	Sulfated Zirconia	5 wt	MeOH	1:20	Experimental MW heating system 20min, 60°C	90.0	(Kim et al., 2011a)
Oleic	Amberlyst 15 dry	10 wt	MeOH	1:20	Experimental MW heating system. Pulsed MW. 15min, 60°C	66.1	(Kim et al., 2011b)
Oleic	Niobium Oxide Sulfated Zirconia	5 wt	MeOH	1:10	Synthos 3000-Anton Paar. 1400W. 20min, 200°C	68.0 68.7	(Melo et al., 2010)
Linoleic Linoleic Oleic Oleic Myristic Myristic Palmitic Palmitic	Sc(OT _i) ₃ Bi(OT _i) ₃ Sc(OT _i) ₃ Bi(OT _i) ₃ Sc(OT _i) ₃ Bi(OT _i) ₃ Sc(OT _i) ₃ Bi(OT _i) ₃	1% mol	MeOH	48 eq	Biotage MW reactor. 1min, 150°C	97.0 98.0 100.0 88.0 98.0 90.0 100.0 99.0	(Socha and Sello, 2010)
FFA Palm Oil	H ₂ SO ₄	2.5% wt Oil	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:8	Domestic MW 1000W 60 min, 60°C 60 min, 75°C 60 min, 105°C 60 min, 90°C 60 min, 115°C	99.8 99.8 96.2 95.5 90.8	(Mazo and Rios, 2010a)
FFA Palm Oil	H ₂ SO ₄	4% wt FFA	EtOH	1:24	Domestic MW 800W 60 min, 70°C	87.7	(Suppalakpanya et al., 2010a and b)
FFA Palm Oil	Dowex 50X2	10% wt Oil	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:20	Domestic MW 1000W 60 min, 60°C 60 min, 75°C 60 min, 105°C 60 min, 90°C 60 min, 115°C	95.6 86.2 82.8 78.5 77.7	(Mazo and Rios, 2010b)
FFA Palm Oil	Amberlite IR120	10% wt Oil	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:20	Domestic MW 1000W 60 min, 60°C 60 min, 75°C 60 min, 105°C 60 min, 90°C 60 min, 115°C	91.3 85.1 81.4 74.8 74.1	(Mazo and Rios, 2010b)
FFA Palm Oil	Amberlyst15	10% wt Oil	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:20	Domestic MW 1000W 60 min, 60°C 60 min, 75°C 60 min, 105°C 60 min, 90°C 60 min, 115°C	91.4 84.7 80.6 66.8 73.5	(Mazo and Rios, 2010b)

Table 1. Microwave assisted esterification.

Several examples of microwave irradiated transesterification methods have been reported using homogenous alkali catalyst (Kumar et al., 2011; Azcan and Danisman, 2008), acid catalyst (Mazo and Rios, 2010a) and heterogeneous alkali catalyst (Patil et al., 2011), heterogeneous acid catalyst (Yuan et al., 2009) and enzymatic (Yu et al., 2010).

Microwave synthesis is not easily scalable from laboratory small-scale synthesis to industrial multi kilogram production. The most significant limitation of the scale up of this technology is the penetration depth of microwave radiation into the absorbing materials, which is only a few centimeters, depending on their dielectric properties. The safety aspect is another reason for rejecting microwave reactors in industry (Groisman and Aharon, 2008).

The preparation of biodiesel using a scientific microwave apparatus offers a fast, easy route to this valuable biofuel with advantages of a short reaction time, a low oil/methanol ratio, and an ease of operation. The methodology allows for the reaction to be run under atmospheric conditions; it is complete in a matter of a few minutes and can be performed on batch scales up to 3 kg of oil at a time (Leadbeater and Stencel, 2006).

The continuous-flow preparation of biodiesel using a commercially available scientific microwave apparatus offers a fast, easy route to this valuable biofuel. The methodology allows for the reaction to be run under atmospheric conditions and performed at flow rates of up to 7.2 L/min using a 4 L reaction vessel. Energy consumption calculations suggest that the continuous-flow microwave methodology for the transesterification reaction is more energy-efficient than using a conventional heated apparatus (Barnard et al., 2007).

Few studies report the use of alcohols different to methanol. Alcohols more used are ethanol and butanol, and the latter is a versatile and sustainable platform chemical that can be produced from a variety of waste biomass sources. The emergence of new technologies for the production of fuels and chemicals from butanol will allow it to be a significant component of a necessarily dynamic and multifaceted solution to the current global energy crisis. Recent work has shown that butanol is a potential gasoline replacement that can also be blended in significant quantities with conventional diesel fuel (Harvey and Meylemans, 2011).

Table 2 shows the work carried out for bio-diesel production from various feedstocks, catalysis and alcohols under different conditions using microwave irradiation.

Oil	Catalyst	Catalyst amount (%wt)	Alcohol	Oil to alcohol molar ratio	Microwave reaction conditions	Ester conversion (%)	Ref.
Castor	50% H ₂ SO ₄ /C	5	MeOH	1:12	MAS-1 Shanghai Sineo MW 65°C, 60 min	94	(Yuan et al., 2009)
Castor	SiO ₂ /50%H ₂ SO ₄	10	MeOH	1:6	Domestic MW 540W	95	(Perin et al., 2008)
	SiO ₂ /50%H ₂ SO ₄	10	EtOH		60°C, 30 min	95	
	Al ₂ O ₃ /50%KOH	10	MeOH		60°C, 20 min 60°C, 5 min	95	
Jatropha	KOH	1.5	MeOH	1:7.5	Start Synth-Milestone 1200W 65°C, 2 min	99	(Shakinaz et al., 2010)
Waste frying	SrO	1.5	MeOH	1:4 wt	Domestic MW 900W	99	(Koberg et al., 2011)
	Sr(OH) ₂					97	

Pongamia Pinnata	NaOH KOH	0.5 1.0	MeOH	1:6	Start Synth-Milestone 1200W 60°C, 7 min	95.3 96.0	(Kumar et al., 2011)
Rapeseed	NaOH KOH	1.0	MeOH	-	Start Synth-Milestone 1200W 60°C, 5 min	91.7 90.8	(Azcan and Danisman, 2008)
Soybean	Nano CaO	3.0	MeOH	1:7	ETHOS900 Milestone 900W 65°C, 60 min	96.6	(Hsiao et al., 2011)
Soybean	Novozym 435	3.0	MeOH	1:6	MCR-3 Shanghai JieSi 800W 40°C, 12h	94.0	Yu et al., 2010)
Canola	ZnO/La ₂ O ₂ CO ₃	1.0	MeOH	1:1 wt	Biotage MW reactor. <100°C, 5 min	>95	(Jin et al., 2011)
Camelina	BaO SrO	1.5 2.0	MeOH	1:9 1:12	Domestic MW 800W 100°C, 4 min 60°C, 4 min	95 78	(Patil et al., 2011)
Camelina	NaOH KOH BaO SrO BaCl ₂ /AA SrCl ₂ /AA	0.5 1.0 1.5 2.0 2.0 2.0	MeOH	1:9	Domestic MW 800W 60°C, 60 s 60°C, 60 s 60°C, 4 min 60°C, 4 min 60°C, 5 min 60°C, 5 min	95 85 95 95 27 20	(Patil et al., 2010)
Safflower	NaOH	1.0	MeOH	1:10	Start labstation-Milestone 60°C, 6 min	98.4	(Duz et al., 2011)
Soybean Rice Bran	NaOH	0.6	EtOH	1:5	ETHOS E-Milestone 73°C, 10 min	99.25 99.34	(Terigar et al., 2010)
Rapeseed	KOH	1.0	ButOH	1:4	MARS CEM Corp. 117°C, 30 min	100	(Geuens et al., 2008)
Soybean	H ₂ SO ₄ KOH	5.0 1.0	ButOH ButOH	1:6	CEM Discover 300W CEM MARS 1600W 100°C, 15 min 120°C, 1 min	93 93	(Leadbeater et al., 2008)
Jatropha Waste frying	NaOH	1.0	MeOH	1:12	MW650 Aurora Instruments MW discovery 65°C, 7 min	89.7 88.63	(Yaakob et al., 2009)
Palm	H ₂ SO ₄	3.0	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:30	Domestic MW 1000W 60°C, 5h 75°C, 5h 105°C, 5h 90°C, 5h 115°C, 5h	49.40 62.39 67.39 62.39 75.00	(Mazo and Rios, 2010a)

Palm	NaOCH ₃	0.9	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:27	Domestic MW 1000W 60°C, 1h 75°C, 1h 105°C, 1h 90°C, 1h 115°C, 1h	99.9 99.87 88.39 83.19 81.63	(Mazo and Rios, 2010a)
Palm	K ₂ CO ₃	3.0	MeOH IsoprOH IsoBuOH 2-BuOH IsopentOH	1:20	Domestic MW 1000W 60°C, 3h 75°C, 3h 105°C, 3h 90°C, 3h 115°C, 3h	8.63 49.51 67.59 52.00 54.59	(Mazo and Rios, 2010b)
Palm	KOH	1.5	EtOH	1:4	Domestic MW 800W 70°C, 5 min	97.4	(Suppalakpanya et al., 2010a)

Table 2. Microwave assisted transesterification.

2.3 Optimization production biodiesel under MW irradiation

Some examples about the obtaining of biodiesel making a response surface methodology (RSM) was used to analyze the influence of the process variables (oil to methanol ratio, catalyst concentration, and reaction time) on the fatty acid methyl ester conversion, are shown in Table 3, where is confirmed that the microwave energy has a significant effect on esterification and transesterification reactions.

Oil	Catalyst	Catalyst amount (%wt)	Alcohol	Oil to alcohol molar ratio	Microwave reaction conditions	Ester conversion (%)	Ref.
Dry algae	KOH	2.0	MeOH	1:12 (wt/vol)	Domestic MW 800W 60°C, 4min	64.18	(Patil et al., 2011)
Macauba	Novozyme 435 Lipozyme IM	2.5	EtOH	1:9	Synthos 3000-Anton Paar. 1400W. 30°C, 15min	45.2 22.9	(Nogueira et al., 2010)
Pongamia pinnata	Esterification: H ₂ SO ₄ Transesterification: KOH	3.73 1.33	MeOH MeOH	33.83% (w/w) 33.4% (w/w)	Domestic MW 800W 60°C, 190s 60°C, 150s	87.4 89.9	(Venkatesh et al., 2011)

Table 3. Recent examples of optimization of reaction conditions a for production of biodiesel from various feedstocks using response surface methodology

3. Fatty acid alkylesters production assisted by radio frequency

Radio waves, whose wavelengths range from more than 104 m to about 0.1 m, are the result of charges accelerating through conducting wires. They are generated by such electronic devices as LC oscillators and are used in radio and television communication systems (Serway and Jewett, 2004).

Radio frequency (RF) heating is a promising dielectric heating technology which provides fast heat generation through a direct interaction between an RF electromagnetic field and the object being heated (Piyasena et al., 2003). Compared to microwave heating, a popular

dielectric heating technology, RF heating systems are simpler to configure and have a higher conversion efficiency of electricity to electromagnetic power (Wang et al., 2003). Moreover, RF energy has deeper penetration into a wide array of materials than microwave energy, increasing feasibility of RF heating for industrial scale applications.

Very few publications have been obtained by this alternative heating method, which use a RF heating apparatus (SO6B; Strayfield Fastran, UK). The distance between the two electrodes was fixed at 15 cm. A 150-mL conical flask coupled with a water-cooling reflux condenser was used as a reactor. Schematic diagram and photograph are shown in Fig. 1.

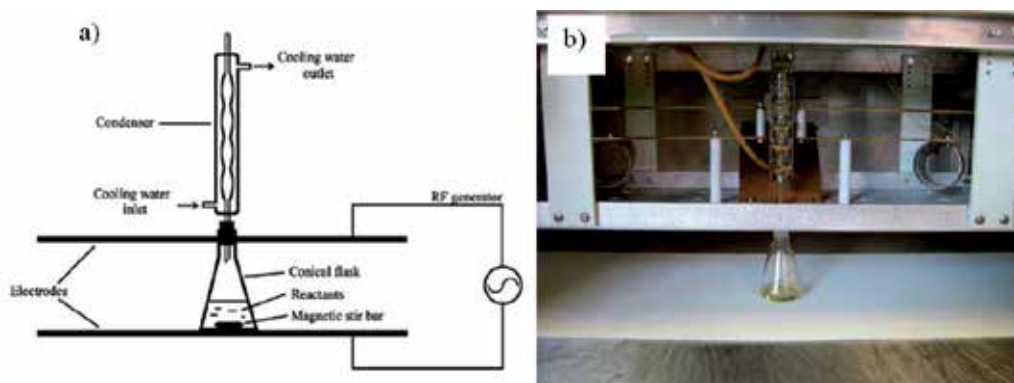


Fig. 1. a) Schematic diagram of RF heating apparatus (Lui et al., 2010) and b) Photograph of RF heating apparatus (Lui et al., 2008).

Applications to obtaining biodiesel using different oils, reaction conditions and catalysts are described below:

3.1 Esterification reactions assisted by RF

Efficient biodiesel conversion from waste cooking oil with high free fatty acids (FFAs) was achieved via a two-stage procedure (an acid-catalyzed esterification followed by an alkali-catalyzed transesterification) assisted by radio frequency (RF) heating. In the first stage, with only 8-min RF heating the acid number of the waste cooking oil was reduced from 68.2 to 1.64 mg KOH/g by reacting with 3.0% H_2SO_4 (w/w, based on oil) and 0.8:1 methanol (weight ratio to waste oil). Then, in the second stage, the esterification product (primarily consisting of triglycerides and fatty acid methyl esters) reacted with 0.91% NaOH (w/w, based on triglycerides) and 14.2:1 methanol (molar ratio to triglycerides) under RF heating for 5 min, and an overall conversion rate of $98.8 \pm 0.1\%$ was achieved. Response surface methodology was employed to evaluate the effects of RF heating time, H_2SO_4 dose and methanol/oil weight ratio on the acid-catalyzed esterification. A significant positive interaction between RF heating time and H_2SO_4 concentration on the esterification was observed (Lui et al., 2010).

3.2 Transesterification reactions assisted by RF

Efficient biodiesel production from beef tallow was achieved with radio frequency (RF) heating. A conversion rate of 96.3% was obtained with a NaOH concentration of 0.6% (based

on tallow), an RF heating for 5 min, and a methanol/tallow molar ratio of 9:1. Response surface methodology was employed to evaluate the influence of NaOH dose, RF heating time, and methanol/tallow ratio. The alkaline concentration showed the largest positive impact on the conversion rate. Similar fast conversion from canola oil to biodiesel was achieved in our previous work, indicating that RF heating, as an accelerating technique for biodiesel production, had a large applying area (Lui et al., 2011).

3.3 Optimization production biodiesel under RF irradiation

Fast transesterification of canola oil and methanol for biodiesel production was achieved using radio frequency (RF) heating. The conversion rate of oil to biodiesel reached 97.3% with RF heating for 3 min, a NaOH concentration (based on oil) of 1.0%, and a methanol/oil molar ratio of 9:1. A central composite design (CCD) and response surface methodology (RSM) were employed to evaluate the impact of RF heating time, NaOH concentration, and molar ratio of methanol to oil on conversion efficiency. Experimental results showed that the three factors all significantly affected the conversion rate. NaOH concentration had the largest influence, with the effect being more pronounced at lower (0.2-0.6%, based on weight of oil) concentration. No evident interaction among the three factors was observed. RF heating efficiency was primarily related to the amount of NaOH and methanol. The scale of the experiment was increased by five times (from 20 to 100 g oil per batch) without decrease of the conversion rate, indicating the scale-up potential of RF heating for biodiesel production (Lui et al., 2008).

4. Fatty acid alkylesters production assisted by ultrasound

Sound waves are the most common example of longitudinal waves. They travel through any material medium with a speed that depends on the properties of the medium. As the waves travel through air, the elements of air vibrate to produce changes in density and pressure along the direction of motion of the wave. If the source of the sound waves vibrates sinusoidally, the pressure variations are also sinusoidal (Serway and Jewett, 2004).

Sound waves are divided into three categories that cover different frequency ranges

(1) Audible waves lie within the range of sensitivity of the human ear. They can be generated in a variety of ways, such as by musical instruments, human voices, or loudspeakers. (2) Infrasonic waves have frequencies below the audible range. Elephants can use infrasonic waves to communicate with each other, even when separated by many kilometers. (3) Ultrasonic waves have frequencies above the audible range. You may have used a “silent” whistle to retrieve your dog. The ultrasonic sound it emits is easily heard by dogs, although humans cannot detect it at all. Ultrasonic waves are also used in medical imaging (Serway and Jewett, 2004).

Sonochemistry is a branch of chemical research dealing with the chemical effects and applications of ultrasonic waves, that is, sound with frequencies above 20 kHz that lie beyond the upper limit of human hearing. The development of ultrasound in organic synthesis began on 1930 when Richards and Loomis, 1927, applied ultrasound (100-500 KHz) in organic synthesis for determine the effect on the solubility of gases for first time. Developments were very slow, then Luche and Damiano, 1980, reported metal activation reactions using ultrasound probes. Thereafter, reaction systems using US to speed up chemical reactions have been developed.

A low frequency ultrasonic irradiation could be useful for transesterification of triglyceride with alcohol. Ultrasonication provides the mechanical energy for mixing and the required activation energy for initiating the transesterification reaction (Singh et al., 2007). Ultrasonication increases the chemical reaction speed and yield of the transesterification of vegetable oils and animal fats into biodiesel. Ultrasonic assisted transesterification method presents advantages such as shorter reaction time and less energy consumption than the conventional mechanical stirring method, efficient molar ratio of methanol to TG, and simplicity (Ji et al., 2006; Siatis et al., 2006).

Many researchers have tried to solve the mass-transfer limitation problem in biodiesel synthesis using ultrasonic cavitation and hydrodynamic cavitation. Cavitation has been shown to efficiently speed up the transesterification reaction because it simultaneously supplies heating as well as the stirring effect as a result of jet formation on bubble collapse. Cavitation is basically the formation, growth, and implosive collapse of gas or vapour filled microbubbles and can be induced acoustically (using ultrasound) or hydrodynamically in a body of liquid. The collapse of these bubbles lead to local transient high temperatures (g 5000 K) and pressures (g 1000 atm), resulting in the generation of highly reactive species, such as $\text{OH}\cdot$, $\text{HO}_2\cdot$, and $\text{H}\cdot$ radicals in water. Cavitation effects also increase the mass and heat transfers in a medium and accelerate the reaction rates and yields (Mahamuni and Adewuyi, 2009).

Main factors that vary the yielding in the production of biodiesel using US are:

Effect of Ultrasonic Frequency on Biodiesel Yield. The frequency of the ultrasound has a significant effect on the cavitation process because it alters the critical size of the cavitation bubble, which in turn changes the intensity of the collapse of the cavitation bubbles.

Effect of Ultrasonic Power on Biodiesel Yield. It is well-known that as the ultrasonic power increases, the size of the cavitation bubbles increase leading to more intense collapse of bubble, which causes better emulsion formation of oil and methanol resulting into higher interfacial surface area for mass transfer and hence the higher biodiesel yield. The BD yield increased with increasing ultrasonic power from 150 to 450 W, but the ME content decreased at ultrasonic powers over 450 W. This is due to the decrease of the real irradiation time caused by the increase in the pulse interval required for tuning the temperature due to the extension of the irradiation power (Lee et al., 2011).

Effect of Catalyst Loading. As the amount of KOH increases, the concentration of methoxide anions, which are responsible for nucleophilic attack on the triglyceride molecules to produce biodiesel, also increase, resulting in higher biodiesel yield.

Effect of Oil/Methanol Molar Ratio. As oil and methanol are not miscible into each other, they form a heterogeneous reaction mixture and mass transfer between these two phases becomes important for the transesterification reaction. The presence of ultrasound can help increase the mass transfer between the two phases by the formation of a fine emulsion, which increases the interfacial area between the two phases. Ultrasound can also increase the mass transfer coefficient due to the presence of acoustic streaming and jet formations at the end of cavitation bubble collapse near the phase boundary between oil and methanol phases.

As shown in Fig. 2, the factors with more contribution to the production of biodiesel are ultrasonic power and catalyst loading, then oil/methanol molar ratio and finally, the frequency.

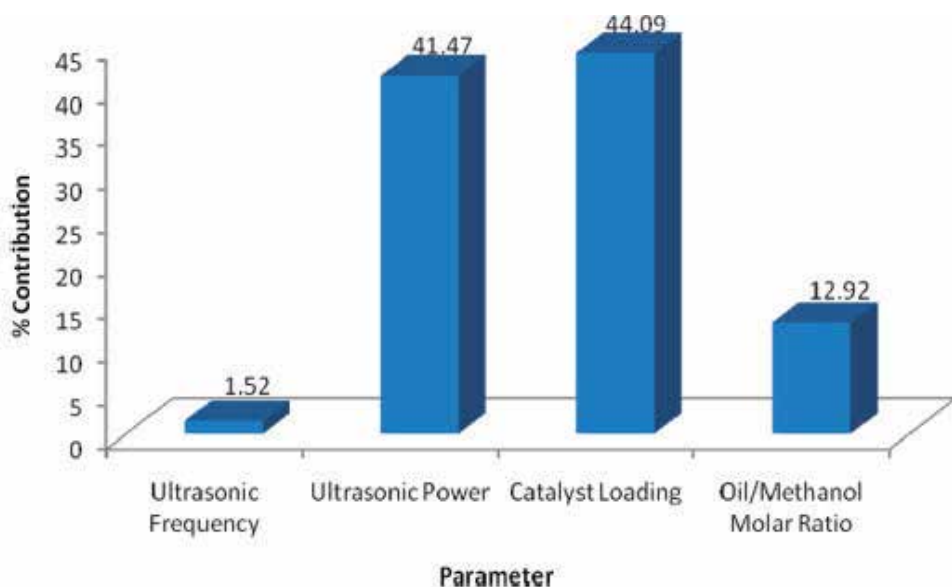


Fig. 2. Percentage contribution of the factors contributing to the production of biodiesel by ultrasound

4.1 Esterification reactions assisted by ultrasound

Not found reports of this methodology for the esterification reaction in the obtaining of biodiesel.

4.2 Transesterification reactions assisted by ultrasound

The works that use US in the transesterification reaction for the obtaining biodiesel use edible oils as soybean, triolein, palm, canola, fish and coconut. Also, use no edible oil as *Jatropha*, homogeneous basic catalysts as KOH, and heterogeneous basic catalysts as CaO, SrO, BaO, Na/SiO₂ and Novozym435 enzymes and lipase. Table 8 shows the work carried out for bio-diesel production from various feedstocks under different conditions using ultrasound irradiation.

The equipments used are conformed by transducer, cleaner and probe used in batch processes. In recent years, chemistry in flowing systems has become more prominent as a method of carrying out chemical transformations, ranging in scale from microchemistry up to kilogram-scale processes. Compared to classic batch ultrasound reactors, flow reactors stand out for their greater efficiency and flexibility as well as lower energy consumption. Cintas et al., 2010, developed a new ultrasonic flow reactor, a pilot system well suited for reaction scale up. This was applied to the transesterification of soybean oil with methanol for biodiesel production. This reaction is mass-transfer-limited initially because the two reactants are immiscible with each other, then because the glycerol phase separates together with most of the catalyst (Na or K methoxide). In our reactor a mixture of oil (1.6 L), methanol and sodium methoxide 30% in methanol (wt/wt ratio 80:19.5:0.5, respectively) was fully transesterified at about 45 C in 1 h (21.5 kHz, 600 W, flow rate 55 mL/min). The same result could be achieved together with a considerable reduction in energy

consumption, by a two-step procedure: first a conventional heating under mechanical stirring (30 min at 45°C), followed by ultrasound irradiation at the same temperature (35 min, 600 W, flow rate 55 mL/min). Our studies confirmed that high-throughput ultrasound applications definitively require flow reactors (Cintas et al., 2010). The detailed scheme of the system is showed in Fig. 3.

Oil	Catalyst	Catalyst amount (%wt)	Alcohol	Oil to Alcohol molar ratio	Ultrasonic reaction condition	Source of ultrasound	Ester conversion (%)	Ref
Soybean	KOH	0.5	MeOH	1:6	611kHz, 139W, 26°C, 30min	Multifrequency transducer UES300C sonochemist	90	(Mahamuni and Adewuyi, 2009)
Triolein	KOH	1.0	MeOH	1:6	40kHz, 1200W, 25°C, 30min	Honda electronic cleaner	99	(Hanh et al., 2008)
Soybean	Novozym 435	6.0	MeOH	1:6	40kHz, 500W (50%), 40°C, 4h 0.5%v/v tert-amyl alcohol/oil	Ultrasonic bath KQ500DV Kunshan	96	(Yu et al., 2010)
Soybean	NaOCH ₃	20g (30% in MeOH)	MeOH	1.6L:80g MeOH	21.5kHz, 600W, 45°C, 1h Flow 55mL/min	3 transducer (21.5kHz)	90	(Cintas et al., 2010)
Jatropha	Na/SiO ₂	3.0	MeOH	1:9	24kHz, 200W, 15min	UP200S Hielscher ultrasonic Gmbht	98.53	(Kumar et al., 2010a)
Canola Soybean Corn	KOH	1.0	MeOH	1:6	450W, 55°C, 30min	Probe type VCX-600	98 97 95	(Lee et al., 2011)
Jatropha	Lipase Chromobacterium viscosum	5.0	MeOH		0.7s, 100W/m ³ , 30min	UP200S Hielscher ultrasonic Gmbht	84.5	(Kumar et al., 2011)
Palm	KOH	20.0	MeOH		Petroleum ether Ethyl methyl ketone 47kHz, 340W, 60°C, 2h	Water bath Bransonic cleaner	75.2 60	(Boey et al., 2011)
Palm	CaO SrO BaO	3.0	MeOH		20kHz, 200W (50%), 65°C, 60min	Transducer and probe	77.3 95.2 95.2	(Mootabadi et al., 2010)
Waste frying	KOH	First stage 0.7 Second stage 0.3	MeOH		20kHz, 25°C, 5min	Horn transducer	81 99	(Thanh et al., 2010)
Fish	NaOC ₂ H ₅	0.8	EtOH		35kHz, 20kHz, 20°C, 30min	Bath Probe	95 95	(Armenta et al., 2007)
Coconut	KOH	0.75	EtOH		24kHz, 200W, 7min	UP200S Hielscher ultrasonic Gmbht	98	(Kumar et al., 2010b)

Table 4. Ultrasound assisted transesterification

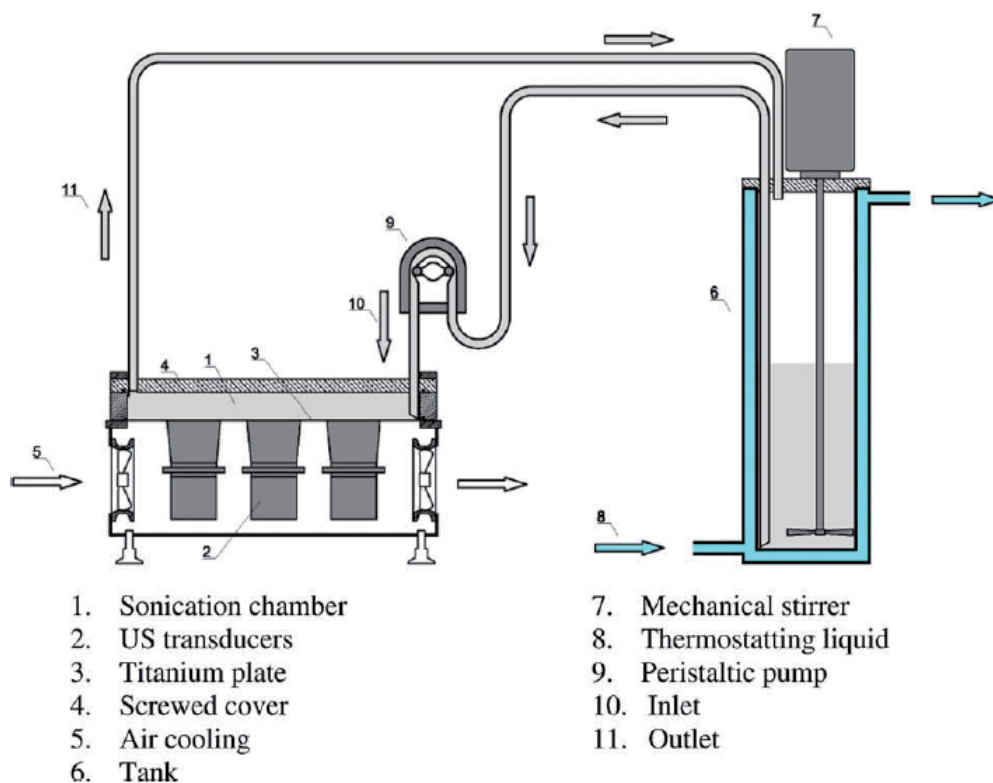


Fig. 3. Detailed scheme of the system for biodiesel production (Cintas et al., 2010).

4.3 Optimization production biodiesel under ultrasound

This paper utilizes the Taguchi optimization methodology (L9 orthogonal array) to optimize various parameters for the ultrasound-assisted, KOH-catalyzed transesterification of soybean oil with methanol. The statistical tool used in the Taguchi method to analyze the results is the analysis of variance (ANOVA). The optimum conditions are determined to be 581 kHz, 143 W, 0.75% (w/w) KOH loading at 1:6 oil/methanol molar ratio, resulting in more than 92.5% biodiesel yield in less than 30 min. Confirmation experiments have been performed to prove the effectiveness of the Taguchi technique after the optimum levels of process parameters are determined. (Mahamuni et al., 2010).

5. Future development

Most reports are aimed to the obtaining of biofuels of first-generation. However, these methodologies of synthesis are directed to the obtaining of fuels of second and third generation to promote sustainable chemistry and the use of renewable raw materials that not compete with foods.

The coupling of biotechnological processes with these new technologies would allow the improvement of existing processes, reducing time and increasing the production.

The development of additives that improve the properties of biodiesel would allow an improvement in cold flow properties for biodiesel from oils as palm, which can be obtained with these technologies.

Efforts must concentrate on developing these technologies at pilot and industrial levels, with continuous processes, low energy consumption, economic and insurance.

6. References

- Armenta, R.E.; Vinatoru, M.; Burja, A.M.; Kralovec, J.A.; Barrow, C.J. (2007) Fish Oil Transesterification of Fish Oil to Produce Fatty Acid Ethyl Esters Using Ultrasonic Energy. *J Am Oil Chem Soc*, Vol.84, No.11, (November 2007), pp.1045–1052 ISSN 0003-021X
- Azcan, N. & Danisman, A. Microwave assisted transesterification of rapeseed oil. *Fuel*, Vol.87, No. 10-11, (August 2008), pp.1781–1788. ISSN: 0016-2361
- Bandow, H. (2010) A two-step continuous ultrasound assisted production of biodiesel fuel from waste cooking oils: A practical and economical approach to produce high quality biodiesel fuel. *Bioresource Technology*, Vol.101, No.14, (July 2010), pp.5394–5401, ISSN 0960-8524
- Barnard, T.M.; Leadbeater, N.E.; Boucher, M.B.; Stencil, L.M. & Wilhite, B.A.(2007) Continuous-Flow Preparation of Biodiesel Using Microwave Heating. *Energy & Fuels*, Vol.21, No.3, pp.1777-1781, ISSN: 0887-0624
- Boey, P.L; Ganesan, S.; Maniam, G.P. & Ali, D.M.H. (2011) Ultrasound aided in situ transesterification of crude palm oil adsorbed on spent bleaching clay. *Energy Conversion and Management*, Vol.52, No.5, (May 2011), pp.2081–2084, ISSN: 0196-8904
- Cintas, P.; Mantegna, S.; Calcio, E. & Cravotto, G. (2010) A new pilot flow reactor for high-intensity ultrasound irradiation. Application to the synthesis of biodiesel. *Ultrasonics Sonochemistry*, Vol.17, No.6 (August 2010) 985–989. ISSN: 1350-4177
- Dharmendra Kumar, Gajendra Kumar, Poonam, C.P. Singh. (2010) Fast, easy ethanolysis of coconut oil for biodiesel production assisted by ultrasonication. *Ultrasonics Sonochemistry*, Vol.17, No.3, (March 2010), pp. 555–559. ISSN: 1350-4177
- Duz, M.Z.; Saydut, A. & Ozturk, G. (2011) Alkali catalyzed transesterification of safflower seed oil assisted by microwave irradiation. *Fuel Processing Technology*, Vol.92, No.3, (March 2011), pp.308–313, ISSN: 0378-3820
- Fangrui, Ma.; & Milford, A. (1999) Biodiesel Production: a Review. *Bioresource Technology*, Vol.70, No.1, (October 1999), pp. 1-15, ISSN 0960-8524
- Gedye, R.; Smith, F.; Westaway K.; Ali, H.; Baldisera, L.; Laberge, L. & Rousell, J. (1986) The use of microwave ovens for rapid organic synthesis. *Tetrahedron Lett*, Vol.27, No.3, pp.279–82, ISSN: 0040-4039
- Geuens, J.; Kremsner, J.M.; Nebel, B.A.; Schober, S.; Dommissse, R.A.; Mittelbach, M.; Tavernier, S.; Kappe, O.; & Maes, B. (2008) Microwave-Assisted Catalyst-Free Transesterification of Triglycerides with 1-Butanol under Supercritical Conditions. *Energy & Fuels*, Vol.22, No.1, pp.643–645, ISSN: 0887-0624
- Giguere, R.J.; Bray, T.L.; Duncan, S.M. & Majetich, G. (1986) Application of commercial microwave ovens to organic synthesis. *Tetrahedron Lett*, Vol.27, No.41, pp.4945–58, ISSN: 0040-4039

- Groisman, Y. & Gedanken, A. (2008) Continuous flow, circulating microwave system and its application in nanoparticle fabrication and biodiesel synthesis. *J Phys Chem C*, Vol.112, No.24, pp.8802-8808, ISSN: 1932-7447.
- Hanh, H.D.; The Dong, N.; Starvarache, C.; Okitsu, K.; Maeda, Y. & Nishimura, R. (2008) Methanolysis of triolein by low frequency ultrasonic irradiation. *Energy Conversion and Management*, Vol.49, No.2, (February 2008), pp. 276–280, ISSN: 0196-8904
- Harvey, B.G & Meylemans, H.A. (2011) The role of butanol in the development of sustainable fuel technologies. *J Chem Technol Biotechnol*, Vol.86, No.1, (January 2011), pp.2–9, ISSN: 0268-2575
- Hideki, F.; Akihiko, K. & Hideo, N. (2001) Biodiesel fuel production by transesterification of oils. *J Biosci Bioeng*, Vol.92, No.5, pp.405-416, ISSN: 1389-1723
- Hsiao, M.C; Lin, C.C. & Chang, Y.H. Microwave irradiation-assisted transesterification of soybean oil to biodiesel catalyzed by nanopowder calcium oxide. *Fuel*, Vol.90, No.3, (March 2011), pp.1963–1967, ISSN: 0016-2361
- Jianbing, J.; Jianli, W.; Yongchao, L.; Yunliang, Y. & Zhichao, X. (2006) Preparation of biodiesel with the help of ultrasonic and hydrodynamic cavitation. *Ultrasonics*, Vol.44, No.1, (December 2006), pp.e411-e414, ISSN: 0041-624X
- Jin, L.; Zhang, Y.; Dombrowski, J.P.; Chen, C.; Pravatas, A.; Xu, L.; Perkins, C. & Suib, S.L. (2011) ZnO/La₂O₂CO₃ layered composite: A new heterogeneous catalyst for the efficient ultra-fast microwave biofuel production. *Applied Catalysis B: Environmental*. In press. ISSN: 0926-3373
- Kappe CO. (2004) Controlled microwave heating in modern organic synthesis. *Angewandte Chemie International Edition*, Vol.43, No.46, (November 2004), pp.6250–84, ISSN: 1521-3773
- Kim, D.; Choi, J.; Kim, G.J.; Seol, S.K.; Ha, Y.C.; Vijayan, M.; Jung, S.; Kim, B.H.; Lee, D. & Park, S.S. (2011) Microwave-accelerated energy-efficient esterification of free fatty acid with a heterogeneous catalyst. *Bioresource Technology*, Vol.102, No.3, (February 2011), pp. 3639–3641, ISSN 0960-8524
- Kim, D.; Choi, J.; Kim, G.; Seol, S.K. & Jung, S. (2011) Accelerated esterification of free fatty acid using pulsed microwaves. *Bioresource Technology*, In press, ISSN 0960-8524
- Koberg, M.; Abu-Much, R. & Gedanken, A. (2011) Optimization of biodiesel production from soybean and wastes of cooked oil: Combining dielectric microwave irradiation and a SrO catalyst. *Bioresource Technology*, Vol.102, No.2, (January 2011), pp. 1073–1078, ISSN 0960-8524
- Kumar, S.A.; Sandun, F. & Hernandez, R. (2007) Base-catalyzed fast transesterification of soybean oil using ultrasonication. *Energy & Fuel*, Vol.21, No.2, pp.1161-1164, ISSN: 0887-0624
- Kumar, R.; Kumar, G.R. & Chandrashekar, N. (2011) Microwave assisted alkali-catalyzed transesterification of *Pongamia pinnata* seed oil for biodiesel production. *Bioresource Technology*, Vol.102, No.11, (June 2011), pp. 6617-6620, ISSN 0960-8524
- Kumar, D.; Kumar, G.; Poonam, & Singh, P. (2010) Ultrasonic-assisted transesterification of *Jatropha curcus* oil using solid catalyst, Na/SiO₂. *Ultrasonics Sonochemistry*, Vol.17, No.5, (June 2010), pp.839–844, ISSN: 1350-4177

- Kumar, G.; Kumar, D.; Poonam, Johari, R. & Singh, C.P. (2011) Enzymatic transesterification of *Jatropha curcas* oil assisted by ultrasonication. *Ultrasonics Sonochemistry*, In press, ISSN: 1350-4177
- Lam, M.K.; Lee, K.T. & Mohamed, A.R. (2010) Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: A review. *Biotechnology Advances*, Vol.28, No.4, (July-August 2010), pp. 500-518, ISSN 0734-9750
- Leadbeater, N.E.; Barnard, M.; & Stencel, M.L. (2008) Batch and Continuous-Flow Preparation of Biodiesel Derived from Butanol and Facilitated by Microwave Heating. *Energy & Fuels*, Vol.22, No.3, pp.2005-2008, ISSN: 0887-0624
- Leadbeater, N.E. & Stencel, L.M. (2006) Fast, Easy Preparation of Biodiesel Using Microwave Heating. *Energy & Fuels*, Vol.20, No.5, pp.2281-2283, ISSN: 0887-0624
- Lee, S.B.; Lee, J.D. & Hong, K. (2011) Ultrasonic energy effect on vegetable oil based biodiesel synthetic process. *Journal of Industrial and Engineering Chemistry*, Vol.17, No.1, (January 2011), pp.138-143 ISSN: 1226-086X
- Lee, I.; Johnson, L.A. & Hammond, E. (1995) Use of branched-chain esters to reduce the crystallization temperature of biodiesel. *J Am Oil Chem Soc*, Vol.72, No.10, (October 1995), pp.1155-1160 ISSN 0003-021X
- Lin, L.; Cunshan, Z.; Vittayapadung, S.; Xiangqian, S. & Mingdong, D. (2011) Opportunities and challenges for biodiesel fuel. *Applied Energy*, Vol.88, No.6, (June 2011), pp.1020-1031. ISSN: 0306-2619
- Liu, S.; Wang, Y.; McDonald, T. & Taylor, S.E. (2008) Efficient Production of Biodiesel Using Radio Frequency Heating. *Energy & Fuels*, Vol.22, No.3, pp.2116-2120, ISSN: 0887-0624
- Liu, S.; McDonald, T. & Wang, Y. (2010) Producing biodiesel from high free fatty acids waste cooking oil assisted by radio frequency heating. *Fuel*, Vol.89, No.10, (October 2010), pp.2735-2740 ISSN: 0016-2361
- Liu, S.; Wang, Y.; Oh, J-H. & Herring, J.L. (2011) Fast biodiesel production from beef tallow with radio frequency heating. *Renewable Energy*, Vol.36, No.3, (March 2011), pp.1003-1007, ISSN: 0960-1481
- Loupy, A. (2002) *Microwave in organic synthesis*, Wiley- VCH Verlag GmbH & Co. KGaA. ISBN:3-527-30514-9, Weinheim, Germany.
- Luche, J.L. and Damiano, J.C. (1980) Ultrasounds in Organic Syntheses. 1. Effect on the Formation of Lithium Organometallic Reagents. *J. Am. Chem. Soc*, Vol.102, No.27, pp.7926-7927, ISSN: 0002-7863
- Mahamuni, N.N. & Adewuyi, Y.G. (2010) Application of Taguchi Method to Investigate the Effects of Process Parameters on the Transesterification of Soybean Oil Using High Frequency Ultrasound. *Energy & Fuels*, Vol.24, No.3, pp.2120-2126, ISSN: 0887-0624
- Mahamuni, N.N & Adewuyi, Y.G. (2009) Optimization of the Synthesis of Biodiesel via Ultrasound-Enhanced Base-Catalyzed Transesterification of Soybean Oil Using a Multifrequency Ultrasonic Reactor. *Energy & Fuels*, Vol.23, No.5, pp.2757-2766, ISSN: 0887-0624
- Marchetti, J.; Miguel, V. & Errazua, A. (2007) Possible methods for biodiesel production. *Renewable and Sustainable Energy Reviews*, Vol.11, No.6, (August 2007), pp.1300-1311. ISSN: 1364-0321

- Mazo, P., Rios, L. (2010) Esterification and transesterification assisted by microwave of crude palm oil. Homogeneous catalysis. *Latin American Applied Research*, Vol.40, No.4, p 337-342, ISSN 0327-0793
- Mazo, P., Rios, L. (2010) Esterification and transesterification assisted by microwave of crude palm oil. Heterogeneous catalysis. *Latin American Applied Research*, Vol.40, No.4, p 343-349, ISSN 0327-0793
- Melo, C.A.; Albuquerque, C.; Carneiro, J.; Dariva, C.; Fortuny, M.; Santos, A.; Egues, S. & Ramos, A. (2010) Solid-Acid-Catalyzed Esterification of Oleic Acid Assisted by Microwave Heating. *Ind. Eng. Chem. Res*, Vol.49, No.23, pp.12135-12139, ISSN: 0888-5885.
- Melo, C.A.; Albuquerque, C.E.R.; Fortuny, M.; Dariva, C.; Egues, S.; Santos, A.F. & Ramos, A.L.D. (2009) Use of Microwave Irradiation in the Noncatalytic Esterification of C18 Fatty Acids. *Energy & Fuels*, Vol.23, No.1, pp.580-585, ISSN: 0887-0624
- Mootabadi, H.; Salamatinia, B.; Bhatia, S. & Abdullah, A.Z. (2010) Ultrasonic-assisted biodiesel production process from palm oil using alkaline earth metal oxides as the heterogeneous catalysts. *Fuel*, Vol.89, No.8, (August 2010), pp.1818-1825, ISSN: 0016-2361
- Mustafa, B. (2011) Potential alternatives to edible oils for biodiesel production – A review of current work. *Energy Conversion and Management*, Vol.52, No.2, (February 2011), pp.1479-1492, ISSN: 0196-8904
- Nogueira, B.M; Carretoni, C.; Cruza, R.; Freitas, S.; Melo, P.A.; Costa-Félix,R.; Pinto, J. & Nele, M. (2010) Microwave activation of enzymatic catalysts for biodiesel production. *Journal of Molecular Catalysis B: Enzymatic*, Vol.67, No.1-1, (November 2010), pp.117-121, ISSN: 1381-1177
- Patil,P.; Gude, V.G.; Pinappu, S. & Deng, S. (2011) Transesterification kinetics of *Camelina sativa* oil on metal oxide catalysts under conventional and microwave heating conditions. *Chemical Engineering Journal*, Vol.168, No.3, (April 2011), pp.1296-1300. ISSN: 1385-8947
- Patil, P.D.; Gude, V.G.; Camacho,L.M. & Deng, S. (2010) Microwave-Assisted Catalytic Transesterification of *Camelina Sativa* Oil. *Energy & Fuels*, Vol.24, No.2, pp. 1298-1304, ISSN: 0887-0624
- Patil, P.D.; Gude, V.G.; Mannarswamy, A.; Cooke, P.; Munson-McGee, S.; Nirmalakhandan, N.; Lammers, P. & Deng, S. (2011) Optimization of microwave-assisted transesterification of dry algal biomass using response surface methodology. *Bioresource Technology*, Vol.102, No.2, (January 2011), pp.1399-1405, ISSN 0960-8524
- Perin, G.; Alvaro, G.; Westphal, E.; Viana, L.H.; Jacob, R.G.; Lenardao, E.J. & D'Oca, M.G.M. (2008) Transesterification of castor oil assisted by microwave irradiation. *Fuel*, Vol.87, No.12, (September 2008), pp.2838-2841, ISSN: 0016-2361
- Piyasena, P.; Dussault, C.; Koutchma, T.; Ramaswamy, H.S. & Awuah, G.B. (2003) Radio frequency heating of foods: principles, applications and related properties—a review. *Crit Rev Food Sci Nutr*, Vol.43, No.6, pp.587-606, ISSN: 1040-8398
- Raymond A. S. & Jewett, J.W. (2004) *Physics for Scientists and Engineers*, Thomson Brooks/Cole, 6th edition, ISBN: 0534408427, Washington, USA.
- Richards, W.T. & Loomis, A.L. (1927) The chemical effects of high frequency sound waves. *J. Am. Chem. Soc*, 1927, Vol.49, No.12, pp.3086-3088. ISSN: 0002-7863

- Richela, A.; Laurenta, P.; Wathelet, B.; Wathelet, J-P. & Paquot, M. (2011) Current perspectives on microwave- enhanced reactions of monosaccharides promoted by heterogeneous catalysts. *Catalysis Today*, In press, ISSN: 0920-5861
- Shakinaz A.E.S.; Refaat, A.A. & Shakinaz T.E.S. (2010) Production of biodiesel using the microwave technique. *Journal of Advanced Research*, Vol.1, No.4, (October 2010), pp. 309–314, ISSN: 2090-1232.
- Siatis, N.G.; Kimbaris, A.C.; Pappas, C.S.; Tarantilis, P.A. & Polissiou, M.G. (2006). Improvement of biodiesel production based on the application of ultrasound: monitoring of the procedure by FTIR spectroscopy. *J Am Oil Chem Soc*, Vol.83, No.1, (January 2006), pp.53-57 ISSN 0003-021X
- Siddiquee, M.N. & Rohani, S. (2011) Lipid extraction and biodiesel production from municipal sewage sludges: A review. *Renewable and Sustainable Energy Reviews*, Vol.15, No.2, (February 2011), pp.1067–1072 ISSN: 1364-0321
- Socha, A. & Sello, J.K. (2010) Efficient conversion of triacylglycerols and fatty acids to biodiesel in a microwave reactor using metal triflate catalysts. *Org. Biomol. Chem*, Vol.8, No.20, pp.4753–4756, ISSN. 1477-0520
- Suppalakpanya, K.; Ratanawilai, S.B. & Tongurai, C. (2010) Production of ethyl ester from esterified crude palm oil by microwave with dry washing by bleaching earth. *Applied Energy*, Vol.87, No.7, (July 2010), pp. 2356–2359, ISSN: 0306-2619
- Suppalakpanya, K.; Ratanawilai, S.B. & Tongurai, C. Production of ethyl ester from crude palm oil by two-step reaction with a microwave system. *Fuel*, Vol.89, No.8, (August 2010), pp. 2140–2144, ISSN: 0016-2361
- Terigar, B.G.; Balasubramanian, S.; Lima, M. & Boldor, D. (2010) Transesterification of Soybean and Rice Bran Oil with Ethanol in a Continuous-Flow Microwave-Assisted System: Yields, Quality, and Reaction Kinetics. *Energy & Fuels*, Vol.24, No.12, pp.6609–6615, ISSN: 0887-0624
- Thostenson, E.T. & Chou, T.W. (1999) Microwave processing: fundamentals and applications. *Composites Part A: Applied Science and Manufacturing*, Vol.30, No.9, (September 1999), pp.1055–1071
- Tierney, J.P. & Lidstrom, P. (2005) *Microwave assisted organic synthesis*, Blackwell Publishing Ltd, ISBN 0-8493-2371-1, Oxford, UK.
- Venkatesh, H.; Regupathi, I. & Saidutta, M.B. Optimization of two step karanja biodiesel synthesis under microwave irradiation. *Fuel Processing Technology*, Vol.92, No.1, (January 2011), pp.100–105, ISSN: 0378-3820
- Vicente, G.; Martínez, M. & Aracil, J. (2004) Integrated biodiesel production: a comparison of different homogeneous catalysts systems. *Bioresource Technology*, Vol.92, No.3, (May 2004), pp. 297-305, ISSN 0960-8524
- Vyas, A.P.; Verma, J.L.; Subrahmanyam, N. A review on FAME production processes. *Fuel*, Vol.89, No.1, (January 2010), pp.1–9, ISSN: 0016-2361
- Wang Y, Wig TD, Tang J, Hallberg LM. (2003) Dielectric properties of foods relevant to RF and microwave pasteurization and sterilization. *J Food Eng*, Vol.57, No.3, (May 2003), pp.257–68, ISSN: 0260-8774
- Yaakob, Z.; Ong, B.H.; Kumar, M.N.S. & Kamarudin, S. K. (2009) Microwave-assisted transesterification of jatropha and waste frying palm oil. *International Journal of Sustainable Energy*, Vol.28, No.4, pp.195-201, ISSN: 1478-646X

- Yuan, H.; Yang, B.L. & Zhu, G.L. (2009) Synthesis of Biodiesel Using Microwave Absorption Catalysts. *Energy & Fuels*, Vol.23, No.1, pp.548–552, ISSN: 0887-0624
- Yu, D.; Tian, L.; Wu, H.; Wang, S.; Wang, Y.; Ma, D. & Fang, X. Ultrasonic irradiation with vibration for biodiesel production from soybean oil by Novozym 435. *Process Biochemistry*, Vol.45, No.4, (April 2010), pp.519–525. ISSN: 1359-5113
- Yu, D.; Tian, L.; Ma, D.; Wu, H.; Wang, Z.; Wang, L. & Fang, X. (2010) Microwave-assisted fatty acid methyl ester production from soybean oil by Novozym 435. *Green Chem*, Vol.12, No.5, pp.844–850. ISSN: 1463-9262
- Yusuf, N.N.A.N.; Kamarudin, S.K. & Yaakub, Z. (2011) Overview on the current trends in biodiesel production. *Energy Conversion and Management*, Vol.52, No7, (July 2011), pp.2741–2751, ISSN: 0196-8904

Transesterification by Reactive Distillation for Synthesis and Characterization of Biodiesel

G.B.Shinde¹, V.S.Sapkal², R.S.Sapkal³ and N.B.Raut⁴

¹*Department of Chemical Engineering,*

Sir Visvesvaraya Institute of Technology, Nashik, M.S.,

²*Sant Tukadoji Maharaj Nagpur University, Nagpur, M.S.,*

³*University Department of Chemical Technology,*

Sant Gadgebaba Amravati University, Amravati, M.S.,

⁴*Faculty of Engineering, Sohar University, Sultanate of Oman,*

^{1,2,3}*India*

⁴*Oman*

1. Introduction


Rising world fuel prices, the growing demand for energy, and concerns about global warming are the key factors driving renewed interest in renewable energy sources and in bioenergy. Nowadays, the world energy demand has increased significantly due to the global industrialization and increase of population. As a result, the current limited reservoirs will soon be depleted at the current rate of consumption. So, the research in energy focuses on finding an alternative source of energy to the petroleum derived diesel.

India imported about 2/3rd of its petroleum requirement last year, which involved a cost of approximately Rs. 80,000 crores in foreign exchange. Even 5% replacement of petroleum fuel by bio-fuel can help India and save Rs. 4000 corers per year in foreign exchange. It is utmost important that the options for substitution of petroleum fuels be explored to control this import bill. Biodiesel is a suitable substitute for petroleum-derived diesel. It is biodegradable, almost sulfur less and a renewable fuel, though still not produced by environmentally friendly routes. This alternative fuel consists of methyl or ethyl esters, a result of either transesterification of triglycerides (TG) or esterification of free fatty acids (FFAs). Biodiesel fuel has become more attractive because of its environmental benefits, due to the fact that plants and vegetable oils and animal fats are renewable biomass sources.

Currently, most of the biodiesel comes up from transesterification of edible resources such as animal fats, vegetable oils, and even waste cooking oils, under alkaline catalysis conditions. However, the high consumption of catalysts, the formation of soaps, and the low yields, make biodiesel currently more expensive than petroleum-derived fuel. In addition, the plants from which the vegetable oils are produced capture more CO₂ from the atmosphere than the amount that these oils release during their combustion [1].

The three basic routes to biodiesel production from oils and fats are Base catalyzed transesterification of the oil, Direct acid catalyzed transesterification of the oil and conversion of the oil to its fatty acids and then to biodiesel. Out of these three routes the major production of biodiesel is done with the base catalyzed reaction process.

The stoichiometric equation for transesterification reaction [9] in general can be represented as follows:

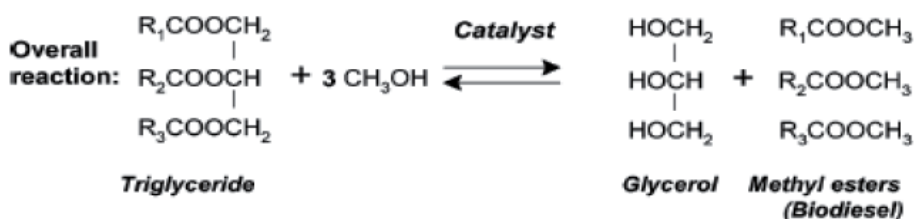

2. Biodiesel scenarios worldwide

Sr.No	Region/Country	2005	2006	2007	2008	2009
1	North America	6.1	17.1	33.7	45.9	35.2
2	United States	5.9	16.3	32.0	44.1	32.9
3	Central and south America	0.5	2.2	15.2	38.6	57.9
4	Brazil	0.0	1.2	7.0	20.1	27.7
5	Europe	68.1	113.2	137.5	155.0	172.6
6	France	8.4	11.6	18.7	34.4	41.1
7	Germany	39.0	70.4	78.3	61.7	51.2
8	Italy	7.7	11.6	9.2	13.1	13.1
9	Eurasia	0.3	0.3	0.7	2.5	3.8
10	Lithuania	0.1	0.2	0.5	1.3	1.9
11	Asia and Oceania	2.2	9.1	15.8	28.8	38.5
12	China	0.8	4.0	6.0	8.0	8.0
13	India	0.2	0.4	0.2	0.2	0.4
14	Korea South	0.2	0.6	1.7	3.2	5.0
15	Malaysia	0.0	1.1	2.5	4.5	5.7
16	Thailand	0.4	0.4	1.2	7.7	10.5
WORLD		77.2	142.0	202.9	270.9	308.2

Source- U.S. Energy Information Administration, International Energy Statistics, Biofuels Production

Table 1. World biodiesel productions by region and selected countries 2005-2009 (Thousand barrels per day)

3. Reactive distillation

Reactive distillation is a chemical unit operation in which chemical reaction and product separation occurs simultaneously in one unit. Reactive distillation column consists of a reactive section in the middle with non-reactive rectifying and stripping sections at the top and bottom.

Let us begin by considering a reversible reaction scheme where A and B react to give C and D. The boiling point of the components follows the sequence A, C, D and B. The traditional flow sheet for this process consists of a reactor followed by a sequence of distillation columns. The mixture of A and B is fed to the reactor, where the reaction takes place in the presence of a catalyst and reaches equilibrium. A distillation train is required to produce pure products C and D. The unreacted components, A and B, are recycled back to the reactor.

The Reactive distillation technology offers many benefits as well as restrictions over the conventional process of reaction followed by distillation or other separation approaches. Reducing capital cost, higher conversion, improving selectivity, lower energy consumption, the reduction or elimination of solvents in the process and avoidance of azeotropes are a few of the potential advantages offered by Reactive distillation. Conversion can be increased far beyond what is expected by the equilibrium due to the continuous removal of reaction products from the reactive zone. This helps to reduce capital and investment costs and may be important for sustainable development due to a lower consumption of resources.[7]

The fig.1 represents the general configuration of reactive distillation.

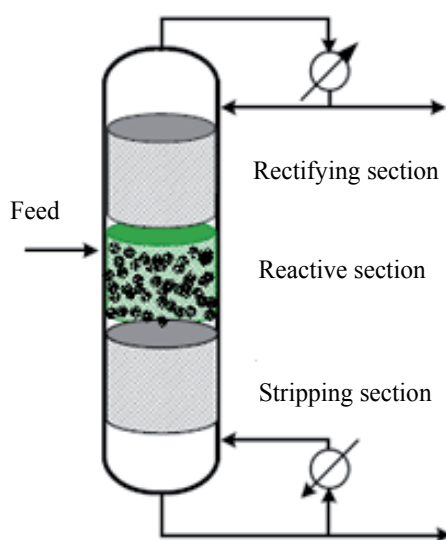


Fig. 1. The general configuration of Reactive Distillation

Based on the applied separation technology, reactive distillation, reactive extraction, reactive adsorption and other combined processes have been distinguished. The combined simultaneous performance of chemical reaction and a multi-component distillation process is an alternative, which has been increasingly used for the large-scale production of relevant chemicals. The use of reactive distillation process can have several advantages such as reduced downstream processing, utilization of heat of reaction for evaporation of liquid phase, simple temperature control of reactor, possibility of influencing chemical equilibria by removal of products and limitations imposed by azeotropic mixture. Several commercially important processes in reactive distillation have been identified in some recent reviews. [7]


Reactive distillation has been successfully applied for the etherification reaction to produce fuel ethers such as methyl tert-butyl ether (MTBE), tert-amyl methyl ether (TAME) and ethyl tertbutyl ether (ETBE). These have been the model reactions for the studies in reactive distillation in the last two decades. A small number of industrial applications of reactive distillation have been around for many decades. Low chemical equilibrium constants can be overcome and high conversions achieved by the removal of products from the location where the reaction is occurring. [6]

It may be advantageous for liquid-phase reaction systems when the reaction must be carried out with a large excess of one or more of the reactants, when a reaction can be driven to completion by removal of one or more of the products as they are formed, or when the product recovery or by-product recycle scheme is complicated or made infeasible by azeotrope formation. Novel processes were proposed based on catalytic reactive distillation and reactive absorption to biodiesel production from esterification and transesterification reactions. The major benefits of this approach were: investment costs reducing about 45% energy savings compared to conventional reactive distillation, very high conversions, increased unit productivity, no excess of alcohol required and no catalyst neutralization step. The advantage of reactive distillation can be summarized as follows [3]

- a. Simplification: From design view point the combinations of reaction system and separation system can lead to significant capital saving.
- b. Improved conversion of reactant approaches 100%. This increase in conversion gives a benefit in reduced recycle costs.
- c. Improved selectivity: where, removing one of the products from the reaction mixture or maintaining a low concentration of one of the reagents can lead to reduction of the rates of side reactions and hence improved selectivity for the desired products.
- d. Significantly reduced catalyst requirement for the same degree of conversion.
- e. Avoidance of azeotropes: RD is particularly advantageous when the reactor product is a mixture of species that can form several azeotropes with each other. RD conditions can allow the azeotropes to be “reacted away” in a single vessel.
- f. There is a reduced by-product formation.
- g. Heat integration benefits: If the reaction is exothermic, the heat of reaction can be used to provide the heat of vaporization and reduce the reboiler duty.
- h. Removal of the product from a system at equilibrium will cause more products to form. Therefore reactive distillation is capable to increase the conversion of equilibrium limited reaction.

Biodiesel production by reactive distillation

As the reaction and separation occurs simultaneously in the same unit in reactive distillation, it is attractive in those systems where certain chemical and phase equilibrium conditions exist. Because there are many types of reactions, there are many types of reactive distillation columns. In this section we describe the ideal classical situation, which will serve to outline the basics of reactive distillation. Consider the system in which the chemical reaction involves two reactants (A and B) producing two products (C and D). The reaction takes place in the liquid phase and is reversible.



The number of the separation steps depends on the number of products, catalysts, solvents as well as reactants which are not converted. The main objective functions to increase process economics are selectivity as well as reaction yield what influences the reactor design.

Usually, each unit operation is typically performed in individual items of equipment, which, when arranged together in sequence, make up the complete process plant. As reaction and separation stages are carried out in discrete equipment units, equipment and energy costs are added up from these major steps. However, this historical view of plant design is now being challenged by seeking for combination of two or more unit operations into the one plant unit [4].

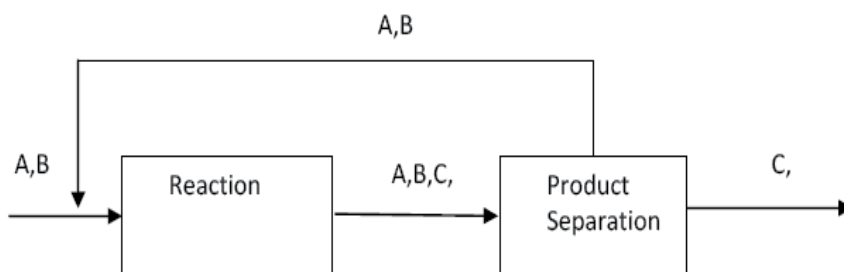


Fig. 2. Standard process scheme for reversible reactions in which the conversion is limited by the chemical equilibrium [9]

For reactive distillation to work, we should be able to remove the products from the reactants by distillation. This implies that the products should be lighter and/or heavier than the reactants. In terms of the relative volatilities of the four components, an ideal case is when one product is the lightest and the other product is the heaviest, with the reactants being the intermediate boiling components.

$$\alpha C > \alpha D > \alpha A$$

The most obvious way to improve the reaction yield in an integrated unit is a continuous separation of one product out of the reaction zone. This allows for getting a 100% conversion in case of reversible reactions [9].

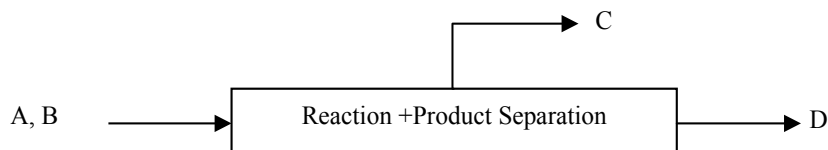



Fig. 3. Complete conversions of reactants in case of equilibrium reaction [7]

Figure 4 presents the flow sheet of this ideal reactive distillation column. In this situation the lighter reactant A is fed into the lower section of the column but not at the very bottom. The heavier reactant B is fed into the upper section of the column but not at the very top. The middle of the column is the reactive section and contains number of reaction trays. The vapor flow rates through the reaction section change from tray to tray because of the heat of the reaction. As component A flows up the column, it reacts with descending B. Very light product C is quickly removed in the vapor phase from the reaction zone and flows up the column. Likewise, very heavy product D is quickly removed in the liquid phase and flows down the column. The section of the column above where the fresh feed of B is introduced (the rectifying section with NR trays) separates light product C from all of the heavier components, so a distillate is produced that is fairly pure product C.

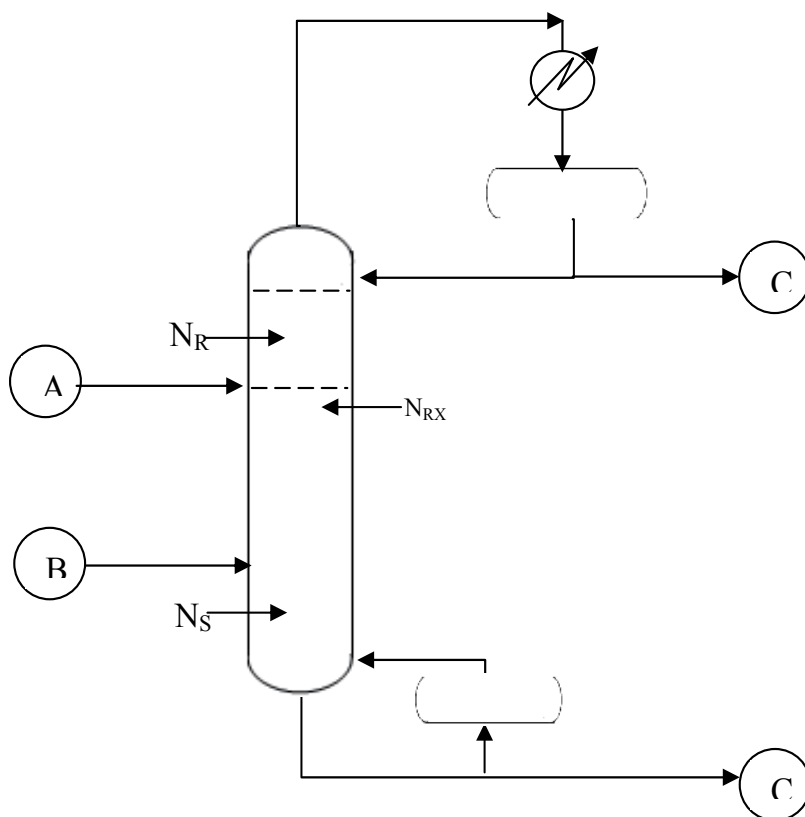


Fig. 4. Flow sheet of ideal reactive distillation column

The section of the column below where the fresh feed of A is introduced (the stripping section with N_S trays) separates heavy product D from all of the lighter components, so a bottom is produced that is fairly pure product D. The reflux flow rate and the reboiler heat input can be manipulated to maintain these product purities. The specific numerical case has 30 total trays, consisting of 10 stripping trays, 10 reactive trays, and 10 rectifying trays. Trays are numbered from the bottom. Note that the concentrations of the reactants peak at their respective feed trays. The purities of the two products are both 95 mol%, with B the major impurity in the bottoms and A the major impurity in the distillate [7].

Reactive distillation column must be adjusted to achieve these specifications while optimizing some objective function such as total annual cost (TAC). These design degrees of freedom include pressure, reactive tray holdup, number of reactive trays, location of reactant feed streams, number of stripping trays, number of rectifying trays, reflux ratio, and reboiler heat input [9].

Tray holdup is another design aspect of reactive distillation that is different from conventional. Holdup has no effect on the steady-state design of a conventional column. It certainly affects dynamics but not steady-state design. Column diameter is determined from maximum vapor loading correlations after vapor rates have been determined that achieve the desired separation. Typical design specifications are the concentration of the heavy key component in the distillate and the concentration of the light key component in the bottoms.

However, holdup is very important in reactive distillation because reaction rates directly depend on holdup (or the amount of catalyst) on each tray. This means that the holdup must be known before the column can be designed and before the column diameter is known. As a result, the design procedure for reactive distillation is iterative. A tray holdup is assumed and the column is designed to achieve the desired conversion and product purities. The diameter of the column is calculated from maximum vapor-loading correlations. Then the required height of liquid on the reactive trays to give the assumed tray holdup is calculated. Liquid heights greater than 10–15 cm are undesirable because of hydraulic pressure drop limitations. Thus, if the calculated liquid height is too large, a new and smaller tray holdup is assumed and the design calculations repeated. An alternative, which may be more expensive in terms of capital cost, is to make the column diameter larger than that required by vapor loading [9].

4. Case study - Transesterification by reactive distillation for synthesis and characterization of biodiesel

4.1 Materials and methods

Materials:

a. Oil Feed stocks:

In this study, three commercially available feed stocks of vegetable oils are used. They are

1. Castor seed oil
2. Cottonseed oil
3. Coconut oil

Sample	Kinematic Viscosity, cst (mm ² /s)	Density (Kg/m ³ at 288K)	Flash point °C	Pour point °C	Saponification value
Castor oil	115 (at 60°C)	938	229	-33	182
Coconut oil	24.85 (at 40°C)	907	225	20	191.1
Cottonseed oil	35.42 (at 40°C)	904	15	-15.5	192

Table 2. Physical Properties of Vegetable Oil Feed stocks Used For Transesterification

b. Methanol:

Methanol (Merck) of 99.5% purity (density: 0.785 g/mL at 30°C) was used in this transesterification process.

c. Catalyst:

In this study the catalysts used are:

1. Homogeneous base catalysts (KOH & NaOH)
2. Heterogeneous solid acid catalysts (Amberlyst 15)

The two homogeneous basic catalysts (KOH & NaOH) used for reactive distillation were purchased from local Chemical store at Amravati, M.S. The heterogeneous catalyst used for transesterification Amberlyst BD15 was purchased from Dayo Scientific Laboratory, Nashik Road, Nashik, M.S. India.

Amberlyst-15:

Amberlyst 15 wet is a macro reticular, strongly acidic, polymeric catalyst. Its continuous open pore structure makes it an excellent heterogeneous acid catalyst for a wide variety of organic reactions. Amberlyst 15 is extremely resistant to mechanical and thermal shocks. It

also possesses greater resistance to oxidants such as chloride, oxygen and chromates than most other polymeric catalyst. It can use directly in the aqueous system or in organic medium after conditioning with a water miscible solvent. Amberlyst 15 has optimal balance of surface area, acid capacity and pore diameter to make it the catalyst of choice for esterification reactions.



Physical forms	Opaque beads
Ionic form as shipped	Hydrogen
Total exchange capacity	≥ 1.7 eq /L
Moisture holding capacity	52-57%
Harmonic mean size	600-850 μm
Fine contents	< 0.355 mm :1.0%
Coarse beads	> 1.180 mm :5.0%
Average pore diameter	24 nm
Surface area	45 m ² / gm
Shrinkage water to methanol	4.0%

Table 3. Characteristics of Amberlyst-15 catalyst

4.2 Transesterification



Transesterification also called alcoholysis is the most common way to produce biodiesel. This involves a catalyzed chemical reaction between vegetable oil and an alcohol to yield fatty acid alkyl esters (i.e., biodiesel) and glycerol. Transesterification is the displacement of alcohol from an ester by another alcohol in a process similar to hydrolysis, except that an alcohol is employed instead of water. Triglycerides, as the main component of vegetable oil, consist of three long chain fatty acids esterified to a glycerol backbone. When triglycerides react with an alcohol (e.g., methanol), the three fatty acid chains are released from the glycerol skeleton and combine with the alcohol to yield fatty acid alkyl esters (e.g., fatty acid methyl esters or biodiesel). Glycerol is produced as a by-product.

The mechanism of transesterification can be represented as follows:



4.2.1 Transesterification of vegetables oils

In the transesterification of different types of oils, triglycerides react with an alcohol, generally methanol or ethanol, to produce esters and glycerin. To make it possible, a catalyst is added to the reaction. The overall process is normally a sequence of three consecutive steps, which are reversible reactions. In the first step, from triglycerides diglyceride is obtained, from diglyceride monoglyceride is produced and in the last step, from monoglycerides glycerin is obtained. In all these reactions esters are produced. The stoichiometric relation between alcohol and the oil is 3:1. However, an excess of alcohol is usually more appropriate to improve the reaction towards the desired product:



Startup Procedures of transesterification using reactive distillation:

To start of each experiment, approximate 2 L of oil and 250 mL of methanol were injected into the column. The reboiler heater was set to 120°C and allowed to heat for approximately 1.5 hours till the temperature of the top column reached 62°C.

Steady-operation:

The inputs, both oil at 55°C and methanol at 30°C, were pumped into a short tube mixer to mix the oil with the methanol/catalyst solution. Then the reactant mixture at 62°C was entered to the top of the RD column. In the RD column, triglyceride in the reactant mixture further reacted with the present methanol. The product mixture was withdrawn from the reboiler section and sent to a glycerol ester separator, where the glycerol and esters were separated by gravity in a continuous mode. Every hour, samples were collected from reboiler to analyze the biodiesel composition and methanol content.

In this experimentation reaction parameters has been optimized and an optimized process has been investigated for biodiesel production by transesterification of vegetable oil using reactive distillation technique

Calculations:

The ester content (C) expressed as a fraction in percent, is calculated using the following formula:

$$C = \frac{(\sum A) - A_{EI}}{A_{EI}} \times \frac{C_{EI} \times V_{EI}}{m} \times 100\% \quad (4)$$

$\sum A$ = the total peak area from the FAME C_{14:0} to C_{24:1}

A_{EI} = the peak area of methyl heptadecanoate

C_{EI} = the concentration, in mg/ml of the methyl heptadecanoate solution

V_{EI} = the volume, in ml of the methyl heptadecanoate solution

m = the mass, in mg of the sample

5. Experimental setup

The system consists of a reactive distillation column fed at the top with the initial reactive solution (oil, alcohol, catalyst). This solution slowly travels down between the plates. When the solution exits the column, the alcohol that has not reacted is recuperated by evaporation. Then, the vapors are re-circulated in the reactive distillation column in the upward direction passing through the plates. As the vapors travel through, interactions between the gaseous alcohol and the liquid solution occur. This then would increase the effective oil to alcohol ratio up to 20:1 (He, Singh et al.2006), thus shifting the reaction equilibrium to the product side and therefore increasing the reaction efficiency. Finally, once the alcohol vapors have reached the top of the reactive distillation column, they are condensed through a condenser

allowing the remaining alcohol fraction to re-enter the system. The experimental setup is shown in fig.5 below.


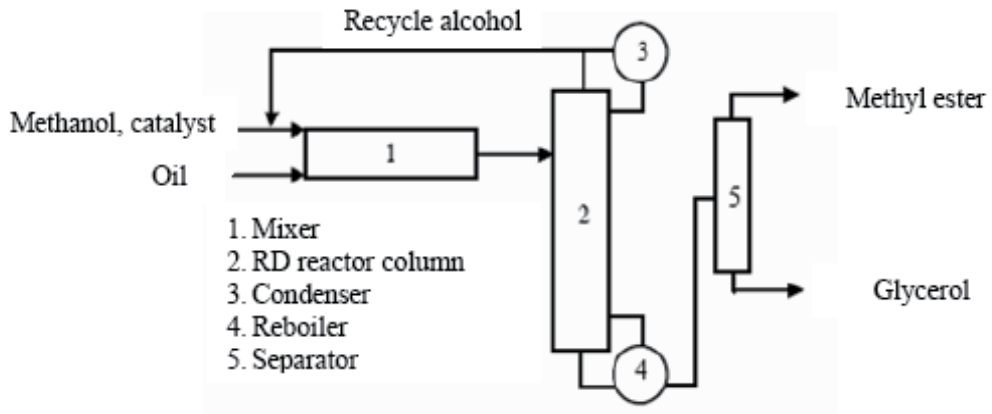


Fig. 5. Schematic of Reactive distillation column for biodiesel

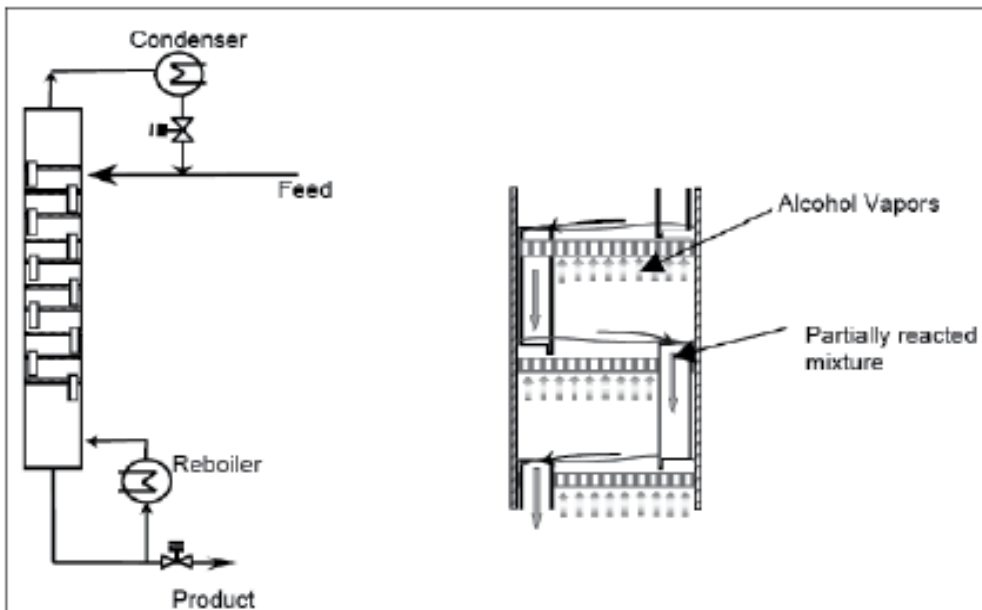

Singh, Thompson Et Al. 2004; Thompson and He 2007

Fig. 6. Operation in Reactive Distillation column



Fig. 7. a) View of experimental lab apparatus of Reactive distillation

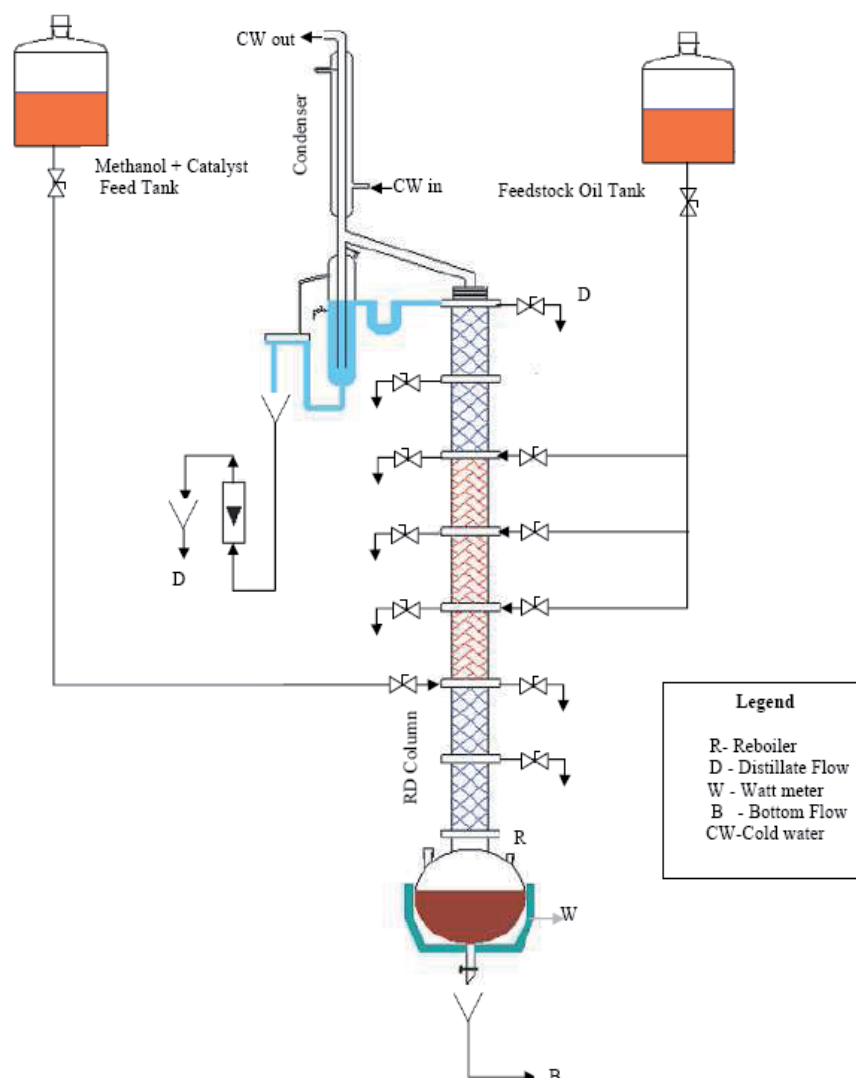


Fig. 7. b) Schematic Diagram of Experimental Setup of Continuous Reactive Distillation Column for biodiesel

In the present experimental study, packed bed Lab-scale reactive distillation column is designed and constructed. This column made up of glass (Inner dia: 30mm, Height of column: 210mm) has been used. The RD column packings used were glass packing. The feed reactants entering into the column were distributed over the packings by the use of distributor plates. The process parameters studied here are alcohol-to-oil ratio. {3:1, 4:1 and 9:1, Optimum methanol-to-oil molar ratio = 4:1}, Flow rates of reactants {2, 4, 6 ml/min, Optimum flow rate = 4ml/min}, Reaction time {Residence time of 2min, 3min., 6min, optimum residence time = 3min}, Temperature {55, 60, 65 °C, Optimum temperature = 65 °C}.

The RD reactor consists of perforated plates or packed sections. For packed columns the packing holds certain amount of reacting liquid in it, forming mini-reactors. Un-reacted

alcohol is vaporized from the reboiler, flows upward constantly, and bubbles through the liquid in the packing, which provides a uniform mixing. The thru-vapor is condensed at the top of the RD column and refluxes partially back to the column and the rest combines with the feeding stream

In this study, three non edible vegetable oils namely, castor seed oil, coconut oil and cottonseed oil were used one by one for transesterification.

5.1 Physical and chemical characteristics of the feedstock vegetable oils used for the production of biodiesel

Sample	Kinematic Viscosity, cst(mm ² /s)	Density (Kg/m ³ at 288K)	Flash point °C	Pour point °C	Saponification value
Castor oil	115 (at 60°C)	938.8	229	-33	182
Cottonseed oil	35.42 (at 40 °C)	904	15	-15.5	192
Coconut oil	24.85 (at 40 °C)	907	225	20	191.1

Table 4. Physical Properties of Vegetable Oil Feed stocks Used for Transesterification:

Oil Sample	Palmitic acid(16:0)	16:1 (Palmitoleic)	Stearic acid(18:0)	Oleic acid (18:1)	Linoleic acid (18:2)	Linolenic acid (18:3)	Other
Castor oil ^a	1.1	0	3.1	4.9	1.3	0	89.6
Cottonseed oil	28.7	0	0.9	13.0	57.4	0	0
Coconut oil	9.7	0.1	3.0	6.9	2.2	0	65.7

Castor oil contains 89.6% ricinoleic acid

Table 5. Table Fatty acids composition of vegetable oils samples under consideration

Physical and chemical characteristics of castor oil

Sr no.	Parameters	Values
1	Appearance	Pale dark yellow
2	Density (at 15°C)	938.8 kg/m ³
3	Iodine value	82 -90
4	Saponification value	182
5	Flash Point	229 °C
6	Pour point	-33 °C
7	Acid value	2.0 max
8	Moisture and Volatiles	0.50% max
9	Specific gravity at 20°C	0.954 - 0.967
10	Kinematic Viscosity ,cst(mm ² /s)	115 (at 60°C)
	<i>Fatty acids content (%)</i>	
11	Ricinoleic acid	89.6
12	Linoleic acid	4.2%
13	Oleic acid	3%
14	Stearic acid	1%
15	Palmitic acid	1%
16	Linolenic acid	0.3%

Table 6. Physical and chemical characteristics of castor oil

Physical and chemical characteristics of cottonseed oil

Its fatty acid profile generally consists of 70% unsaturated fatty acids including 18% monounsaturated (oleic), 52% polyunsaturated (linoleic) and 26% saturated (primarily palmitic and stearic).

Sr. no.	Parameters	Values
1	Appearance	Golden yellow
2	Density	904
3	Kinematic viscosity(at 40°C)	35.42 cSt
4	Saponification value	192
5	Flash point	15°C
6	Pour point	-15.5 °C
7	Acid value	0.6518 mg of KOH/gm of oil
8	Free fatty acids	0.3258%
9	Molecular weight	863
10	Specific gravity at 20°C	0.9406 gm/ml

Table 7. Physical and chemical characteristics of cottonseed oil

Sr no.	Parameters	Values
1	Palmitic acid	23%
2	Oleic acid	18%
3	Linoleic acid	52%
4	Aleic acid	19%
5	Alpha lenoleic acid	1%
6	Stearic acid	3%

Table 8. Fatty acids composition of cottonseed oil

Physical and chemical characteristics of coconut oil

Sr no.	Parameters	Values
1	Melting point(°C)	24
2	Moisture %	<0.1
3	Kinematic viscosity(mm ² /s)	24.85 (at 40 °C)
4	Density (at 15°C)	907 kg/m ³)
3	Iodine value(cgI ₂ /g)	12-15
5	Saponification value	191.1
6	Flash Point	225 °C
7	Pour point	20 °C
8	Total phenolics(mg/kg)	620
<i>Fatty acids content (%)</i>		
9	Saturates	92.0
10	Monosaturates	6.0
11	Polyunsaturates	2.0

Table 9. Physical and chemical characteristics of coconut oil

5.2 Continuous transesterification by reactive distillation for synthesis of biodiesel

The process parameters studied here are alcohol-to-oil ratio. {3:1, 6:1 and 9:1 ,Optimum methanol-to-oil molar ratio =6:1}, Reaction time {Residence time of 2min, 3min., 6min, optimum residence time = 3min}, Temperature {55, 60, 65°C, Optimum temperature = 65°C }, catalyst loading (1,1.5 and 2 % by wt of oil).

5.2.1 Effect of methanol to oil molar ratio on methyl ester conversion

Feedstock oil was held in a separate heated reservoir maintained at 50°C. The methanol-to-oil molar ratios used were 3.0, 6.0 and 9.0. From several trials, it was found that an overall flow rate of 5-6 ml/min with the column temperature at 64°C provided residence time of about 6min without any significant operational difficulties. The column temperature was maintained by controlling the reboiler heat input. Temperatures above 64°C caused excessive entrainment and a reduction in methanol concentrations in the liquid phase. In preparation for each trial, stock alcoholic KOH was prepared on a stirring plate at a ratio that corresponded to 1, 1.5 and 2 % KOH w/w of oil for each given methanol-to-oil molar ratio, and placed in a holding reservoir next to the RD column. Optimum reaction time in biodiesel formation (1min in prereactor +5min in RD column=6min.). Reaction time by using RD column is 20 times shorter than that in typical batch processes. Also productivity of RD reactor system is 6 to 10 times higher than that of batch and existing continuous flow processes.


The main process parameters examined in this study were as shown below:

For individual oils (Castor, Cottonseed and Coconut oil) under consideration

Methanol/oil molar Ratio (mol/mol)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
3	56	68	55
6	68	72	88
9	72	74	89

Temperature = 64°C, Flow rate =6ml/min, Reaction time = 6min., Catalyst (KOH) =1% by wt. of oil)

Table 10. (a) Effect of Methanol to oil Molar ratio on methyl esters conversion

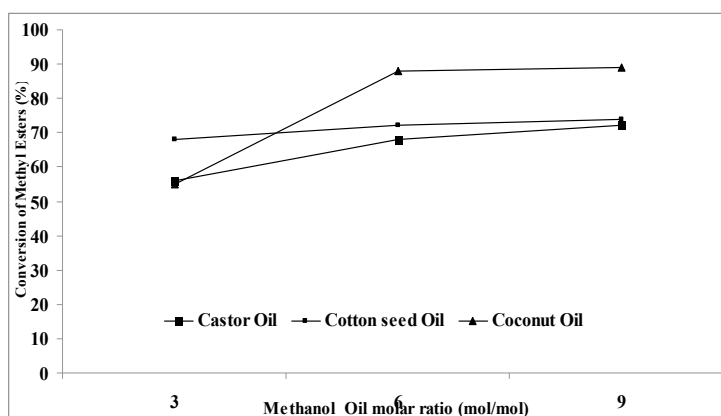

Optimum Molar ratio of Methanol- to- oil= 6:1

Fig. 8. Effect of Methanol to oil Molar ratio on methyl ester conversion

Reaction Time(min.)	Methanol/oil molar Ratio (mol/mol)=3	Methanol/oil molar Ratio (mol/mol)=6	Methanol/oil molar Ratio (mol/mol)=9
2	68	72	55
6	89	96	88
8	91	94	89

Reaction temperature =60°C, Catalyst concentration =1 wt%, Methanol to mixed oil molar ratio = 3:1, 6:1, 9:1

Table 10. (b) Effect of methanol-to-mixed oil feed molar ratio on methyl ester conversion

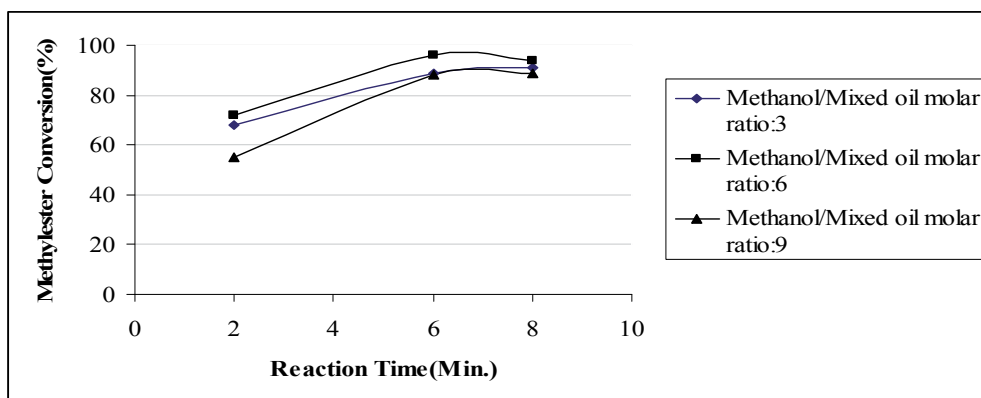


Fig. 9. Effect of Methanol to Mixed oil Molar ratio on methyl ester conversion

The three vegetable oil feedstock's under consideration were mixed and three mixed feed oils were prepared for the experimental runs. The effect of Methanol to Mixed oil Molar ratio on methyl ester conversion was observed as shown in fig.9. The conversion of methyl esters was found to increase with increase in molar ratio during initial reaction time. Also the highest conversion o e 6min in RD column. Thus it can be concluded that the mixed oils can be used for synthesis of biodiesel. This would help in reduction in overall cost of biodiesel synthesis by cutting down the cost of expensive oil by replacing the portion of expensive oils by cheaper oils or the oils which are easily available in abundance.

Reaction Time(min.)	Methyl ester conversion (%) Mixed oil 1	Methyl ester conversion (%) Mixed oil 2	Methyl ester conversion (%) Mixed oil 3
2	65	77	78
6	89	92	95
8	90	93	95

Reaction temperature =60°C, Catalyst concentration =1 wt%, Methanol to mixed oil molar ratio = 6:1, Mixed oil 1= 50% Castor oil+50% Cottonseed oil, Mixed oil 2 = 50% Castor oil+ 50% Coconut oil, Mixed oil 3 = 50% Coconut oil + 50% Cottonseed oil

Table 10. (c) Effect of reaction time using different mixed oils on methyl ester conversion

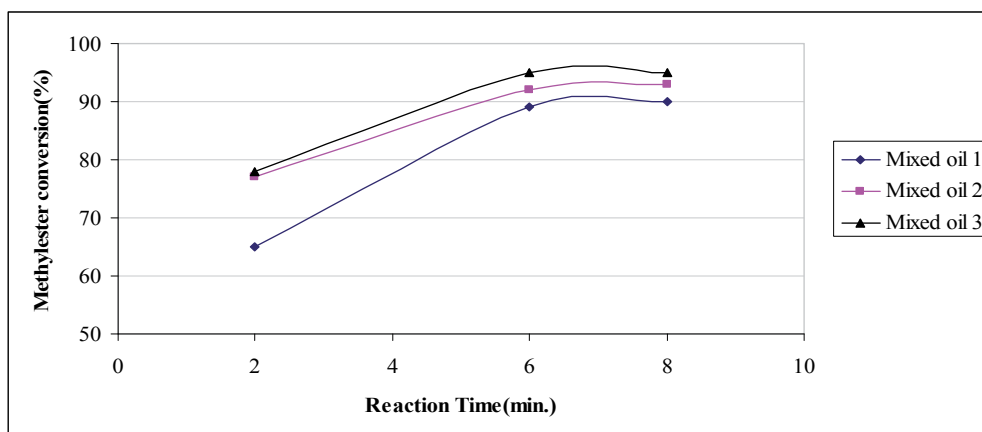


Fig. 10. Effect of reaction time using different mixed oils on methyl ester conversion


It was observed that mixed oil 3 i.e. 50% Coconut oil + 50% Cottonseed oil showed the maximum methyl ester conversion.

5.2.2 Effect of flow rates on methyl ester conversion

Flow rate, ml/min	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
5	90	92	90
6	94	96	93
7	94	95	93

Molar ratio of Methanol to Oil = 6:1, Reaction time = 6min., Catalyst (KOH) =1% (by wt. of oil), Temperature = 60°C

Table 11. Effect of Flow rates on methyl ester conversion

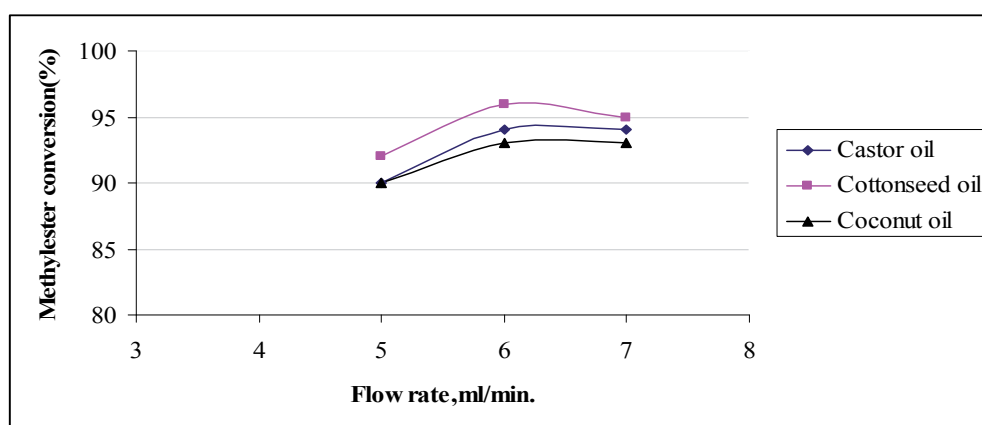

Optimum flow rate = 6ml/min

Fig. 11. Effect of Flow rates on methyl ester conversion


The feed stream flow rates for the test run were chosen carefully in order to avoid any column flooding problem. The flow rate, which is inversely related to retention time, is used as an experimental factor to interpret the reaction conversion with the liquid retention time. The flow rate achieved in the experimental runs varied from 5 to 7 mL/min. The retention time varied from about 4 to 8 min. These values may not be the actual reaction time because of some reaction that takes place in the reboiler. Since the concentrations of methanol and catalyst were very small in the liquid phase of the reboiler, it was not possible to determine the actual retention time of reactants and catalyst in the reboiler. The effect of flow rate was mainly on the production of methyl ester of the reactor. The % weight of methyl ester decreased while the flow rate increased since the retention time is less. For the RD operation of setup in this study, the feed flow rate should not be higher 6mL/min in order to avoid flooding in column and this rate were considered as optimum range of operation.

5.2.3 Effect of reaction time on methyl ester conversion

Reaction Time (min.)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
4	92	95	89
6	94	96	93
8	94	96	93

Molar ratio of Methanol to Oil = 6:1, Catalyst (KOH) = 1% (by wt. of oil), Flow rate = 6ml/min, Temperature = 60°C

Table 12. Effect of Reaction time on methyl ester conversion

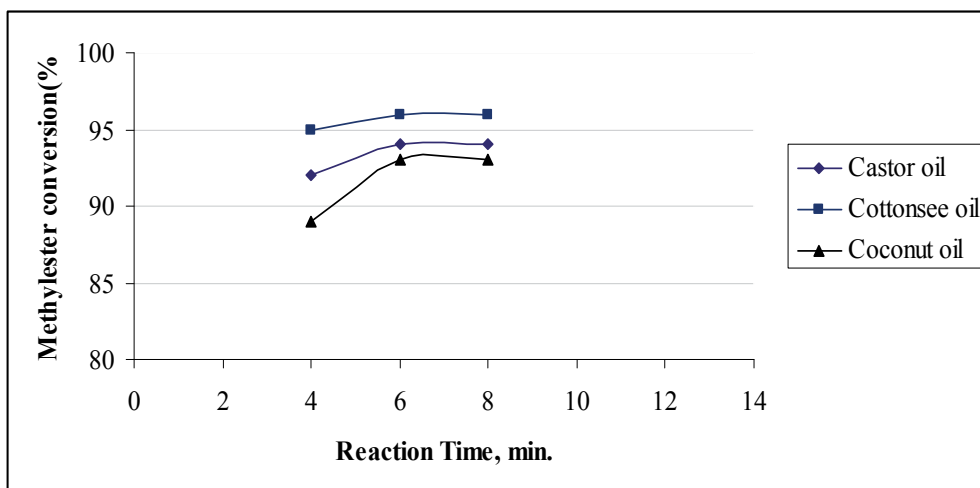

Optimum Reaction time = 6min.

Fig. 12. Effect of reaction time on methyl ester conversion

The rate of transesterification depends on the time of reaction as shown in fig.12 The reaction was slow during the first few minutes due to time taken for mixing and dispersion of methanol with the triglycerides in the oil. However the rate of reaction increased steadily from 6 min of the reaction. The residence time of the reactants in the RD Column was 6min. at which the highest ME conversion was achieved. Thus the reaction time clearly influences the conversion rate of methyl esters.

5.2.4 Effect of catalyst loading on methyl esters conversion

The type of catalyst and the amount of catalyst has a great impact on formation of biodiesel. The adequate catalyst loading is necessary to obtain the maximum conversion of triglycerides to methyl esters. In the above experimentation, different types of catalysts with different catalyst loadings were utilized for transesterification reaction and their effects were studied. In the course of the tests, it is observed that addition of excess amount of catalyst, give rise to the formation of an emulsion, which has increased the viscosity and led to the formation of gel.

a. Effect of catalyst (KOH) loading on methyl ester conversion

KOH Catalyst loading (wt.%)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
1	80	92	95
1.5	78	93	96
2	60	93	96

Methanol to oil molar ratio = 6, Temperature =60°C, Catalyst loadings used for experimentation = 1% , 1.5% and 2% KOH by wt of oil

Table 13. Effect of catalysts loadings on methyl ester conversion

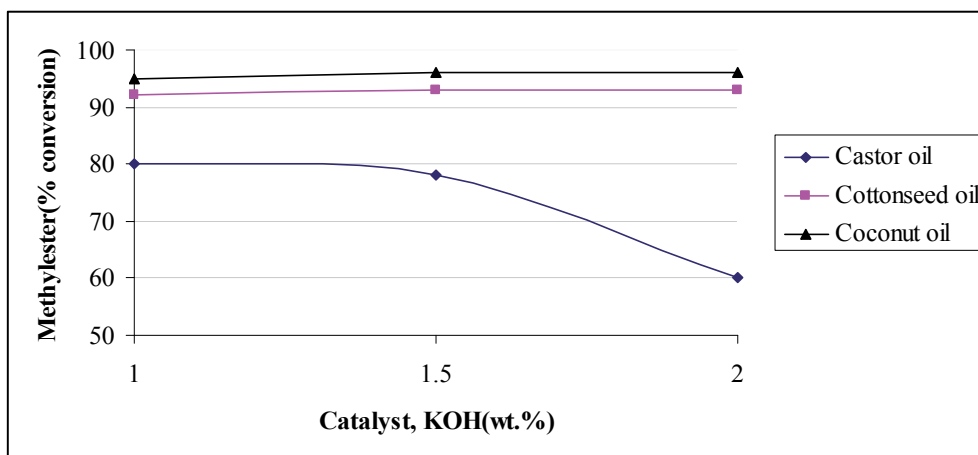


Fig. 13. Effect of catalyst (KOH) loading on Methyl ester Conversion

b. Effect of catalyst (NaOH) loading on methyl ester conversion

NaOH Catalyst loading (wt.%)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
0.5	72	89	94
1	80	80	95
1.5	78	91	96
2	60	91	97

Methanol to oil molar ratio= 6, Temperature =60°C, Catalyst loadings used for experimentation = 0.5%, 1%, 1.5% and 2% NaOH

Table 14. Effect of Catalyst (NaOH) loadings on Methyl ester Conversion

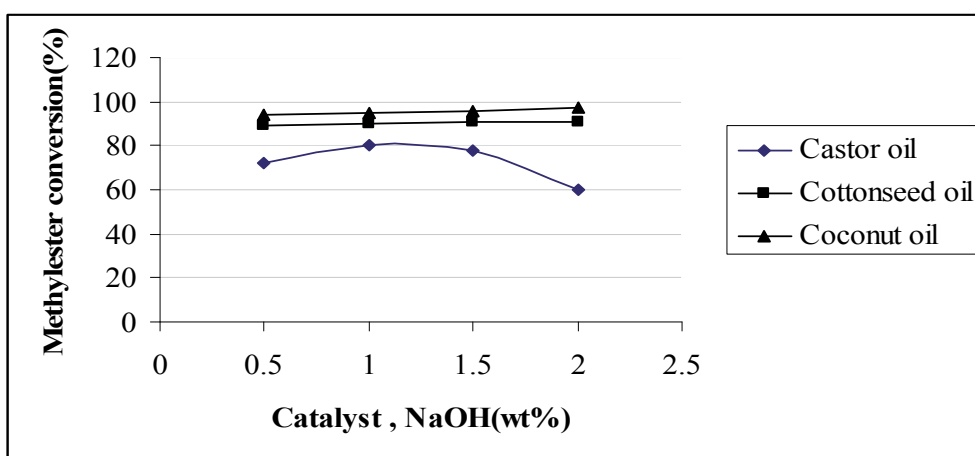


Fig. 14. Effect of catalyst (NaOH) loading on Methyl ester Conversion


It can be seen that the conversion of triglyceride to methyl ester increased as the catalyst loading increased from 0.5 to 1 wt.%. However, with the increase of the catalyst loading from 1% to 2 wt.%, the conversion of triglyceride to methyl ester decreased. Since the conversions of triglycerides to methyl esters did not change significantly for the catalyst loadings from 1wt.%, the optimum catalyst loading for this reaction was 1wt.%.

c. Effect of catalyst (Amberlyst-15) loading on Methyl ester Conversion

Amberlyst-15 Catalyst loading (wt.%)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
3	89	90	88
4.5	77	80	76
6	56	65	60

Methanol to oil molar ratio= 6, Reaction temperature =60°C, Reaction time = 1.5 hrs

Table 15. Effect of catalyst (Amberlyst-15) loading on Methyl ester Conversion

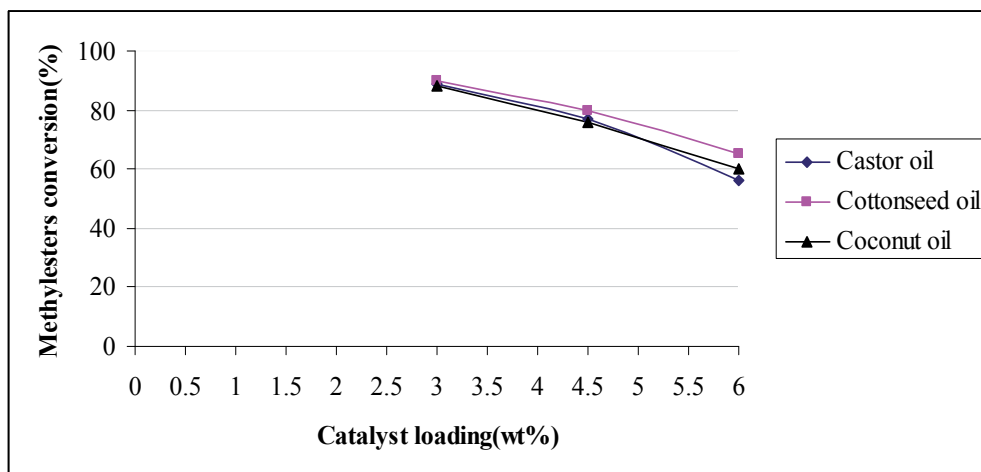

Optimum catalyst loading = 3wt%

Fig. 15. Effect of catalyst (Amberlyst-15) loading on Methyl ester Conversion

It can be observed that there was no rise in ME conversion when catalyst loading was increased from 3 to 6 wt%. The highest conversion was achieved at catalyst loading of 3 wt%.

5.2.5 Effect of reaction time on methyl ester conversion using amberlyst -15 catalyst


Amberlyst-15 a solid acid catalysts been studied for transesterification for production of methyl esters. However, mild reaction conditions are necessary to avoid degradation of the catalyst. At a relatively low temperature (60 °C), the conversion of castor, cottonseed and coconut oil was reported to be only between 2% to 5%, when carrying out the reaction at atmospheric pressure and a 6:1 methanol-to-oil initial molar ratio.

Reaction Time(hrs)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
0.5	60	65	55
1	76	79	74
1.5	80	85	82
3	72	80	76
3.5	65	62	60
4	56	50	52

Methanol to oil molar ratio= 6, Reaction temperature =60°C, Catalyst loading=3wt.% Amberlyst-15

Table 16. Effect of Reaction time on Methyl ester Conversion using Amberlyst -15 Catalyst

During the initial 30 minutes reaction time the percent conversion was less. But as the reaction time progressed the conversion of triglycerides to methyl esters was increased till further one hour. After 1.5 hrs of reaction time, there was no significant rise in conversion. But the ME conversion decreased after 1.5 hrs. So, 1.5 hrs is obtained as the optimum reaction time for this study.

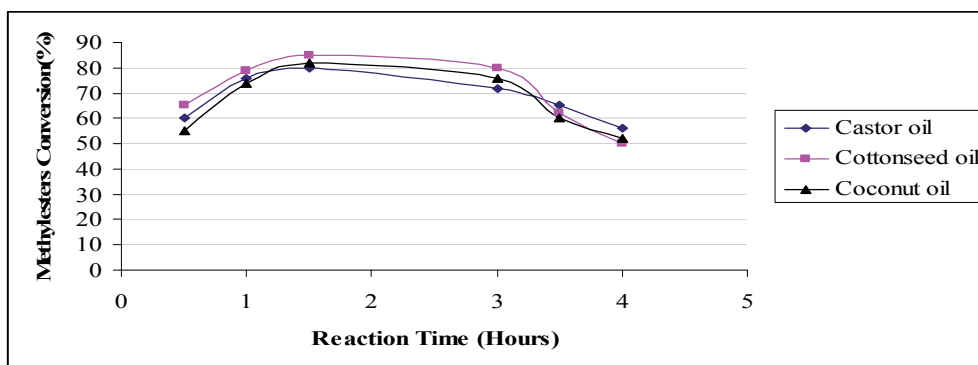

Optimum reaction time = 1.5 hours


Fig. 16. Effect of reaction time on Methyl ester Conversion using Amberlyst -15 Catalyst

5.2.6 Effect of methanol to oil molar ratio on methyl ester conversion using Amberlyst-15 catalyst

Methanol-t-oil molar ratio	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
6	89	92	90
9	76	84	77
12	44	73	39

Reaction time = 1.5 hrs, Reaction temperature = 60°C, Catalyst loading = 3wt. % Amberlyst-15

Table 17. Effect of methanol to oil molar ratio on Methyl ester conversion using Amberlyst-15 catalyst

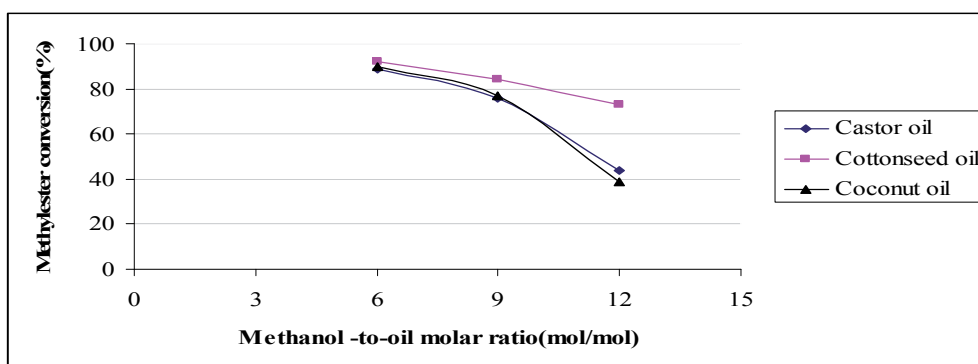

Optimum methanol to oil molar ratio = 6:1

Fig. 17. Effect of methanol to oil molar ratio on methyl ester conversion using Amberlyst-15 catalyst

It can be observed that there was no rise in ME conversion when methanol to oil molar ratio was increased from 6:1 to 12:1. The highest conversion was achieved at methanol to oil molar ratio of 6:1. So, it is considered as optimum methanol to oil molar ratio.


5.2.7 Evaluation of column operating conditions

Effect of reaction temperature on methyl ester conversion

Temperature (°C)	Methyl esters Conversion (%), Castor oil	Methyl esters Conversion (%), Cottonseed oil	Methyl esters Conversion (%), Coconut oil
55	89	84	90
60	92	96	96
65	94	97	96

Molar ratio of Methanol to Oil = 6:1, Catalyst (KOH) = 1% (by wt. of oil), Flow rate = 6ml/min, reaction time = 6min

Table 18. Effect of reaction temperature on methyl ester conversion

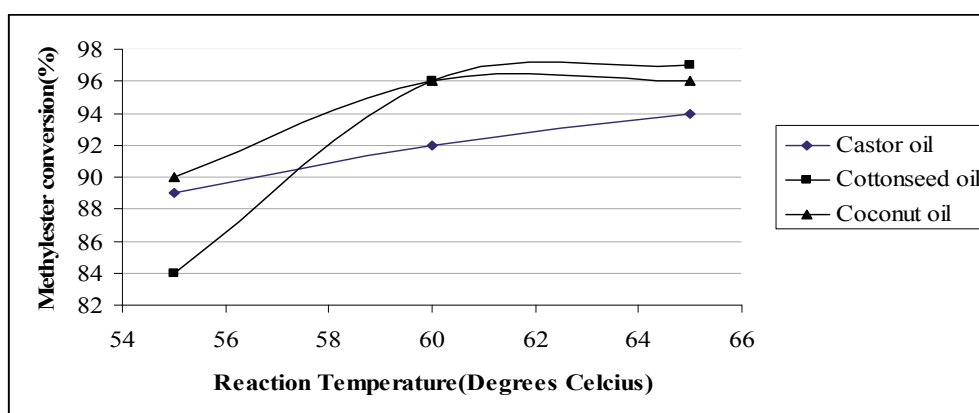

Optimum reaction Temperature = 60°C

Fig. 18. Effect of Temperature on Methyl ester conversion (%)

The effect of temperature on methyl ester conversion was studied by transesterification at different temperature i.e. 55 °C, 60 °C and 65 °C. It was observed that the conversion increased with increase in temperature from 55 °C to 60 °C. But there was no significant rise in conversion after 60 °C upto 65 °C. So, the optimum value of temperature for this transesterification reaction was considered as 60 °C.

5.2.8 Effect of reboiler temperature on methyl ester content of the product

The function of reboiler is to vaporize the residual methanol present in the liquid reaching the bottom of the column. At steady state, the boiling-up rate of methanol is determined by the heat load on the reboiler, heat transfer efficiency and the amount of methanol in the reboiler. Methanol boils at 64.7°C, however, according to the experiments, sufficient methanol vapors were generated only with reboiler temperature higher than 90°C. Depending upon the methanol concentrations, therefore, reboiler temperature in the experimental design varied from 80°C to 120°C in order to produce smooth and consistent methanol vapor flow rates. It was found that the lower reboiler temperatures are favorable for better reactor performance. A possible reason is that with higher operating temperatures, the rates of soap formation increase more rapidly than that of transesterification.

Time (hrs)	%Methyl ester at 120°C	%Methyl ester at 100°C	%Methyl ester at 90°C	%Methyl ester (at 85°C)
0	0	0	0	0
1	25	34	10	33
2	44	55	28	63
3	56	67	49	68
4	62	74	68	70
5	66	78	80	72
6	68	80	87	72
8	68	83	90	74
10	66	86	91	75
12	66	88	93	75
14	67	87	92	73
15	67	87	92	74

Molar ratio of Methanol to Oil = 6:1, Flow rate =6ml/min, Reaction time = 6min., Catalyst (KOH) =1% by wt. of oil)

Table 19. Effect of reboiler temperature on methyl ester content of the product

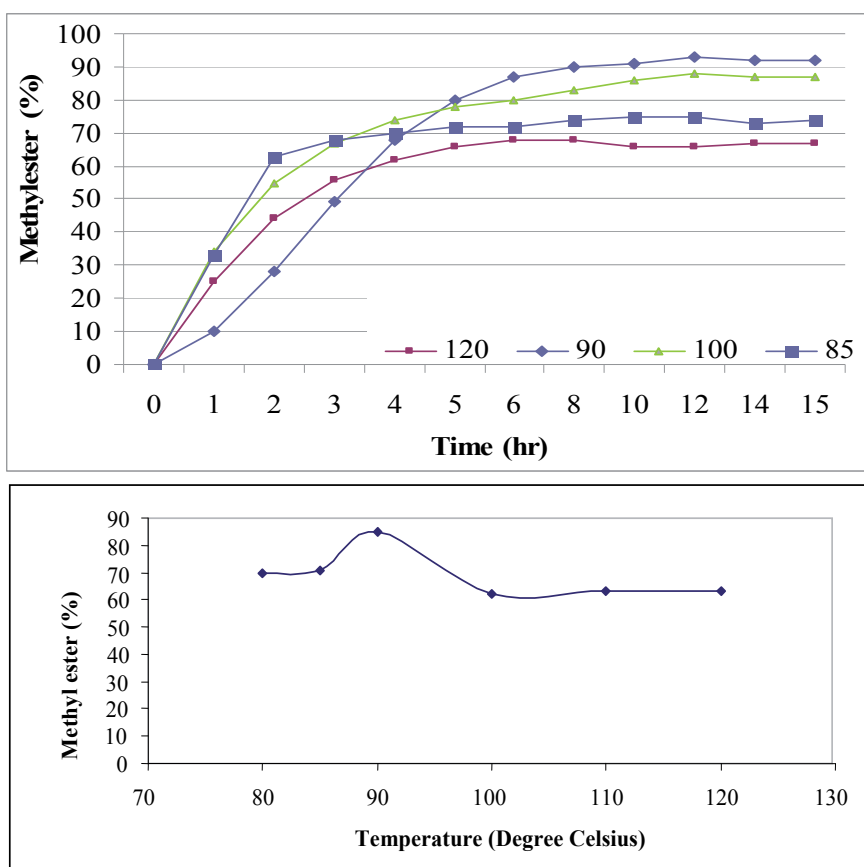


Fig. 19. The effect of the reboiler temperature on methyl esters content in product

5.2.9 Biodiesel yield

The biodiesel yield was determined indirectly from the triglyceride as discussed in the materials and methods section. The percentage composition of the triglyceride consumed was assumed to be converted to methyl ester. Therefore, the amount of biodiesel produced was calculated from the difference in composition of triglyceride in the original oil and final biodiesel.

6. Conclusions

From the experimental investigation done in this research work, the following conclusions can be drawn:

Reactive distillation can be used as a techno economical process for synthesis of biodiesel from vegetable oil by transesterification process. The process proposed here can dramatically improve the economics of current biodiesel synthesis and reduce the number of downstream steps.

Using reactive distillation for synthesis of methyl ester has several advantages such as high unit productivity, up to 6–10 times higher than of the current process, lower excess alcohol requirements, reduced capital and operating costs, due to less units and lower energy consumption, Sulfur-free fuel, since solid acids do not leach into the product, no waste streams because no salts are produced. Also there is significant reduction in reaction time as well as in number of equipment units compared to that in conventional batch and continuous transesterification processes.

The feasibility of using mixture of two different vegetable oils was tested and it was found that coconut oil and cottonseed oil if mixed in equal proportion and used for transesterification reaction, the methyl esters conversion as high as 95% can be achieved.

From the experimental results the optimization of parameters obtained was as follows:

Transesterification reaction is affected by methanol to oil molar ratio, catalyst loading, reaction temperature, flow rate of reactant streams, reaction time, mixing intensity. In the present study reaction was carried out using three values of Methanol to oil molar ratios (3:1, 6:1 and 9:1) for individual oils (castor, cottonseed and coconut oil) and KOH catalyst for synthesis of biodiesel the highest ME conversions obtained for castor, cottonseed and coconut oil transesterification were 68%, 72% and 88% respectively. The highest ME conversion was obtained for coconut oil in this case. Whereas by using the heterogeneous catalyst Amberlyst -15, the highest ME conversions obtained for castor, cottonseed and coconut oil transesterification were 89%, 92% and 90% respectively for methanol to oil molar ratio of 6:1.

Also the possibility of using mixed oils was investigated by using three seed oils in 3 different proportions, such as mixed oil 1 (50% castor oil+50% cottonseed oil), mixed oil 2 (50% castor oil+50% coconut oil) and mixed oil 3(50% coconut oil+50% cottonseed oil).The highest ME conversion (95%) was obtained for mixed oil 3 at methanol to oil molar ratio of 6:1.Thus the option of using mixed oils is feasible in case of scarcity of one of particular feed stock oil in particular region. Also the application can be further investigated to reduce the cost of production of biodiesel by using cheaper feed stocks in more proportion in mixed oil feed.

The flow rate of reactants has an impact on reaction rate of biodiesel production. Out of 5ml/min, 6ml/min and 7ml/min flow rates of reactants to the RD column transesterification reaction. The highest ME conversion (96%) was obtained for cottonseed oil at reactants flow rate of 6ml/min.

For a practical and economic feasible transesterification process, it is necessary to limit the reaction time at a certain period. Longer reaction time could also permit reversible transesterification reaction to occur, which eventually could reduce the yield of fatty acid alkyl esters. Thus, optimization of reaction time is also necessary. In this study, the reaction time was varied from 4 min, 6min and 8min. It was observed that the highest ME conversion (96%) was obtained for cottonseed oil at 6min reaction time. Whereas for heterogeneous catalyst, reaction times of 0.5,1, 1.5, 3, 3.5 and 4 hrs using catalyst Amberlyst-15 for Methanol to oil molar ratio 6:1, Reaction temperature of 60°C, Catalyst loading of 3wt.% were used and the highest ME conversion (85%) was obtained for cottonseed oil after 1.5 hrs reaction time. There was no significant rise in conversion rate after 1.5 hrs.

The catalyst plays an important role in transesterification reaction. The type and quantity of catalyst usually depend upon the quality of feed stock and method applied for transesterification. Three values of catalyst loadings of 1, 1.5 and 2 wt% KOH were used for Methanol to oil molar ratio 6:1 at 60°C. The highest ME conversion (96%) was observed for coconut oil at 1.5 wt% KOH catalyst loading.

Similarly the second homogeneous catalyst NaOH also resulted in the same conversion for the same experimental conditions. Whereas the heterogeneous catalyst Amberlyst-15 was used in three catalyst loadings of 3, 4.5 and 6 wt% Amberlyst-15 for Methanol to oil molar ratio of 6:1, Reaction temperature of 60°C, Reaction time of 1.5 hrs, the highest ME conversion (90%) was obtained for cottonseed oil at 3wt% Amberlyst-15 catalyst loading.

The transesterification was carried out at reaction temperatures of 55, 60 and 65°C for individual oils-castor, cottonseed and coconut oil and the highest ME conversions obtained for castor, cottonseed and coconut oil transesterification were 92%, 96% and 96% respectively for 60°C temperature using KOH catalyst. For homogeneous catalyst, moderate reaction temperature is enough to commence the reaction whereas for heterogeneous catalyst the operating temperature varies depending upon activation energy and conditions to produce the high yield of methyl esters. For NaOH catalyst the same optimum value of 60 °C temperature was obtained in batch transesterification process with maximum ME conversion of 96%.

The sufficient methanol vapors were generated only with reboiler temperature higher than 90°C. Depending upon the methanol concentrations, therefore, reboiler temperature in the experimental design was varied from 80°C to 120°C in order to produce smooth and consistent methanol vapor flow rates. It was found that the lower reboiler temperatures are favorable for better reactor performance. A possible reason is that with higher operating temperatures, the rates of soap formation increase more rapidly than that of transesterification.

It was found that cottonseed oil resulted into maximum yield of biodiesel. Usually crude cottonseed oil contains palmitic acid (22- 26%), oleic acid (15-20%), linoleic acid (49- 58%) and approximately 10% mixture of arachidic acid, behenic acid and lignoceric acid, as well as about 1% sterculic and malvalic acids. In this study, the used crude cottonseed oil contained 24.60% of palmitic acid, 17.09% of oleic acid, and 50.50% of linoleic acid. Since higher amount of free fatty acids (FFA) (>1% w/w) in the feedstock can directly react with the alkaline catalyst to form soaps, which are subject to form stable emulsions and thus prevent separation of the biodiesel from the glycerol fraction and decrease the yield, it is better to select reactant oils with low FFA content or to remove FFA from the oil to an acceptable level before the reaction. Nevertheless, the FFA (calculated as oleic acid) content of the crude cottonseed oil used in this experiment was only 0.8%, which was in an allowed level for being directly used for reaction with the alkaline catalyst to produce biodiesel.

The castor oil showed yield of biodiesel less than that of cottonseed oil due to its high acid value. High acid value leads to neutralization of part of catalyst present thus producing soaps within the reaction medium which reduce mass transfer during the reaction. Also in basic medium, the hydroxyl group at C-12 of ricinoleic acid is converted into an alcoholoxide derivative that can compete with the generation of methoxide species and compromise the conversion reaction. The Coconut oil contains approximately 92.1% saturated fatty acids, 6.2% monounsaturated fatty acids, 1.6% polyunsaturated fatty acids. Different fatty acids in coconut oil range from C6 - C18 carbon atom chains. It contains Lauric acid (over 50%) higher in composition So, it was concluded that cottonseed oil was the most feasible feedstock among the three vegetable oil feed stocks under consideration for this study.

The production of biodiesel using transesterification by reactive distillation can be considered as technically as well as economically feasible process and its scale up at industrial level should be recommended to meet the future energy demand.

7. Acknowledgement

First of all, I wish to express my deepest gratitude to my supervisor Hon'ble, **Dr.V.S.Sapkal**, Vice Chancellor, Rashtrasant Tukadoji Maharaj Nagpur University, Nagpur, whose guidance, encouragement, wisdom, motivation, and expectations are indispensable to my achievements and will serve as a continuous inspiration for my future career.

My deepest thanks also go to respected **Dr.R.S.Sapkal**, Head, Department of Chemical Technology, Sant Gadgebaba Amravati University, Amravati, who gave me a lot of helpful ideas, suggestions, and discussions that contribute to the remarkable success achieved in this work.

No thanks are enough to **Dr.N.B.Raut**, Assistant Professor, Faculty of Engineering, Sohar University (Affiliated to Queensland University), Sultanate of Oman, Oman for his valuable direction, motivation and constant support in accomplishment of my research.

I would like to thank **Dr.C.V.Rode**, **Dr.M.G.Sane**, Senior Scientists from NCL, Pune for their technical support and guidance to my research. Thanks go to all the members in my laboratory as well as librarians of NCL, Pune, SGBAU, Amravati, SVIT, Nashik, KKW College of Engineering, Nashik for their help out in literature survey and analytical facilities in this research.

I also appreciate all my colleagues and other faculties at SVIT, Nashik, **Prof.R.N.Vaidya**, Brahma Valley College of Engineering, Nashik and **Prof.M.G.Shinde**, MET's Institute Of Engineering, BKC, Nashik for their precious direct and indirect assistance in this research work. I would thank lab assistants and staff of UDCT, Amravati for their kind cooperation during the experimentation phases. A special thanks goes to **Mr.P.R.Wankhade** for his valuable support during the experimentation phases at UDCT, Amravati.

Finally, I would like to thank my family and friends for their patience, motivation and admiration. My success is directly related to their love and strong support.

8. References

- Chuaohuymak Pojanalai, Sookkumnerd Terasut, Kinetics of Homogeneous Transesterification Reaction of Palm oil and Methanol, Technology p. 1-6,2005.
- Demirbas Ayhan, Biodiesel A Realistic Fuel Alternative. Trabzon: Springer-Verlag London Limited, 2008.

- Drapcho, Caye, Nghiem Phu Nhuan and Terry H.Walker. Biofuels Engineering Process Technology. New York Chicago San Fr: The McGraw-Hill Companies, Inc, 2008.
- Kalayasiri, P., Jayashke, N. and Krisnangkura, K. "Survey of seed oils for use as diesel fuels." Journal of American Oil Chemical Society (1996): 73:471-474.
- Noshadi I, A Review of Biodiesel Production Via Reactive Distillation AICHE Conference, Spring Session, 2011
- Richardson, Colson and. Particle Technology and Separation Processes. Newcastle: Library of Congress Cataloguing in Publication Data, 1991.
- Sharma Y.C, Singh Bhaskar, A hybrid feedstock for a very efficient preparation of biodiesel, Technology, Volume, Pages 1267-1273, 2010
- Sundmacher, Kai and Achim Kienle. Reactive Distillation Status and Future Directions. Mhar. Achim Kienle Kai Sundmacher. Megdeburg: Wiley-VCH, 2002.
- Viswanathan B. and A.V.Ramaswamy, 'Selection Of Solid Heterogeneous Catalysts For Transesterification Reaction', National Centre for Catalysis Research, Indian Institute of Technology, Madras, Chennai 600 036
- Zhang Y, Dube M A, McLean D D, Kates D, analysis, Bioresource Technology 90 (3) p. 229-240, 2003
- <http://www.crnindia.com>
- <http://www.castoroil.in>
- <http://www.mcxindia.com>
- <http://www.biodiesel.org>
- <http://www.coconutboard.nic.in>
- <http://www.biodiesel.com>
- <http://www.teriin.org>
- <http://www.indexmundi.com>

Gas-Liquid Process, Thermodynamic Characteristics (19 Blends), Efficiency & Environmental Impacts, SEM Particulate Matter Analysis and On-Road Bus Trial of a Proven NO_x Less Biodiesel

Kandukalpatti Chinnaraj Velappan and Nagarajan Vedaraman
*Chemical Engineering Department,
Central Leather Research Institute,
Council of Scientific and Industrial Research,
Adyar, Chennai
India*

1. Introduction

Biodiesel has gained worldwide attention as renewable and blending agent with some lower gas emissions, besides a slight increase of NO_x emission (Michael & Robert ,1998)in the exhaust gas compared to the petroleum diesel. Vegetable oils (Srivastava & Prasad,2000; Prasad & Mohan,2003) namely soybean, sunflower, cottonseed and rapeseed have been examined for fuel without/ with a small modification in the engine. A number of problems, mainly high viscosity, are associated with vegetable oils when directly used as fuel in the CI engines (Agarwal , 1998; Sinha & Misra , 1997; Roger & Jaiduk 1985). It is difficult to reduce particulate matter (PM) and oxides of nitrogen (NO_x) (Mohamad and et al., 2002) simultaneously owing the trade-off between NO_x and PM. Moreover, methyl esters of vegetable oils are sulphur free and possess good lubricating properties (De-Gang et al., 2005). Depending upon the climate and the soil conditions, different countries looking for different type of vegetable oil (Goering et al., 1982; Fernando et al., 2003; Antolin et al., 2002; Freedom et al., 1986; Nouredini & Zhu, 1997; Mohamad et al., 2002; Yi-Hsu & Shaik, 2005; Sukumar et al., 2005) used for the biodiesel production; soybean oil in US, rapeseed oil in Europe, palm oil in Malaysia and Indonesia, and coconut oil in the Philippine are being considered (Barnwal & Sharma , 2005).

In India, out of more than 125 million tons (Arumugam et al., 2003) of rice production, about 6 million tons of rice bran and 1 million ton of RBOBD is produced annually (Table 1). General characteristics of refined rice bran oil are as follows: sp gr, 0.916 kg/m³; ref index 1.47; Cloud index, 17; iodine value, 99-108; saponification value, 180-190; unsaponifiable matter, 3.5(%); smoke point, 213 °C; and fire point, 352 °C. General properties of vegetable oil based biodiesel (Table 2) show many variations that might be due to the conversion to biodiesel through different raw materials and different processes.

Country	Rice	Rice bran	Oil
China	181	14.5	2.47
India	137	6.8	1.02
Indonesia	50	4.0	0.68
Bangladesh	38	3.0	0.51
Vietnam	32	2.6	0.44
Thailand	24	1.9	0.32
Myanmar	20	1.6	0.27
Philippines	13	1.0	0.17
Japan	11	0.9	0.15
Brazil	10	0.8	0.14

Table 1. Annual production (metric million tons) of rice, rice bran and oil in the world.

This chapter presents process for rice bran oil biodiesel (RBOBD) production, composition and physico-chemical properties of RBOBD, engine test results, scanning electron microscope (SEM) image, particulate matter in exhaust gas and emission reductions.

Oil Name	ρ (kg/m ³)	μ (mm ² /s)	Cetane No:	Calorific value (MJ/kg)	Flash point (°C)
Pea	0.883	4.9	54	33.6	176
Soya	0.885	4.5	45	33.5	178
Bab	0.875	3.6	63	31.8	117
Palm	0.880	5.7	62	33.5	164
Sun	0.860	4.6	49	33.5	183
Diesel	0.855	3.06	50	43.8	76
B20	0.859	3.2	51	43.2	128
Range	0.85-0.88	3.2-5	45-62	32-44	76-183

Table 2. Properties of Biodiesel from vegetable oils.

2. Process description

Oil having specific gravity in the range of 0.85 – 0.96 and iodine value not exceeding 208 is heated to a temperature not exceeding 120°C for not less than 2hrs to adjust the moisture content at a level not exceeding 0.5% and is transesterified using 8 to 42% w/w, of alcohol of general formula R-OH, where R represents (C_nH_{2n+1}) , n being any integer between 1 and 5, by known method in presence of not more than 0.5% w/w, of a known catalyst, at a temperature higher than the boiling point of the alcohol but not exceeding 215°C for not

less than 30 minutes under continuous turbulent condition at rpm in the range of 100-150 to get a mixture of ester and glycerol. The Reynolds number (N_{Re}) is maintained at not less than 4000 irrespective of the type of the reactor. The mixture of ester and glycerol is subjected to separation by known method for a period of not less than 4 hrs and the top layer ester is purified by conventional method for a period of not less than 8hrs. The process of separation as well as purification is repeated for not less than three times in succession to get biodiesel.



Fig. 1. Lab scale experimental setup

In lab scale experimental setup Fig.1, RBO was taken in the continuous stirred tank glass reactor (1 l) with reflux condenser, temperature control and agitation control setup. In another reactor, NaOH (50 g) was dissolved in methanol (300 ml). This solution was added slowly at the reactor maintained at 65-70 °C for 150 min. Then the entire mixture kept in the separating funnel. The top layer, biodiesel, is taken for the removal of methanol in the ROTO vacuum distiller. Then the methyl ester washed of distilled water (1 l) in the same reactor for 30 min. After washing, top layer in the separating funnel has to be washed with saline water for two times. Finally, clear biodiesel was kept in the oven for 4 h at 100°C. The ready to use biodiesel few samples shown in Fig.2.



Fig. 2. Ready to use biodiesel samples

In the bench scale level, Rice Bran Oil (RBO) experiments were carried out with standardized process conditions in high-pressure Parr Reactor (Fig.3.) inbuilt sophisticated controlling systems of reactor (20 l). Rice Bran Oil Biodiesel RBOBD (>150 l) was produced.



Fig. 3. Bench Scale lab Parr Reactor

In each lot, biodiesel sample has been analyzed for the conversion, fuel properties and composition. Quality consistency conformed by C_{13} and Proton of JEOL ECA 500 MHz NMR analysis and the composition by GCMS. All chemicals used were of LR/AR grade. A typical NMR spectrum show in Fig.4.

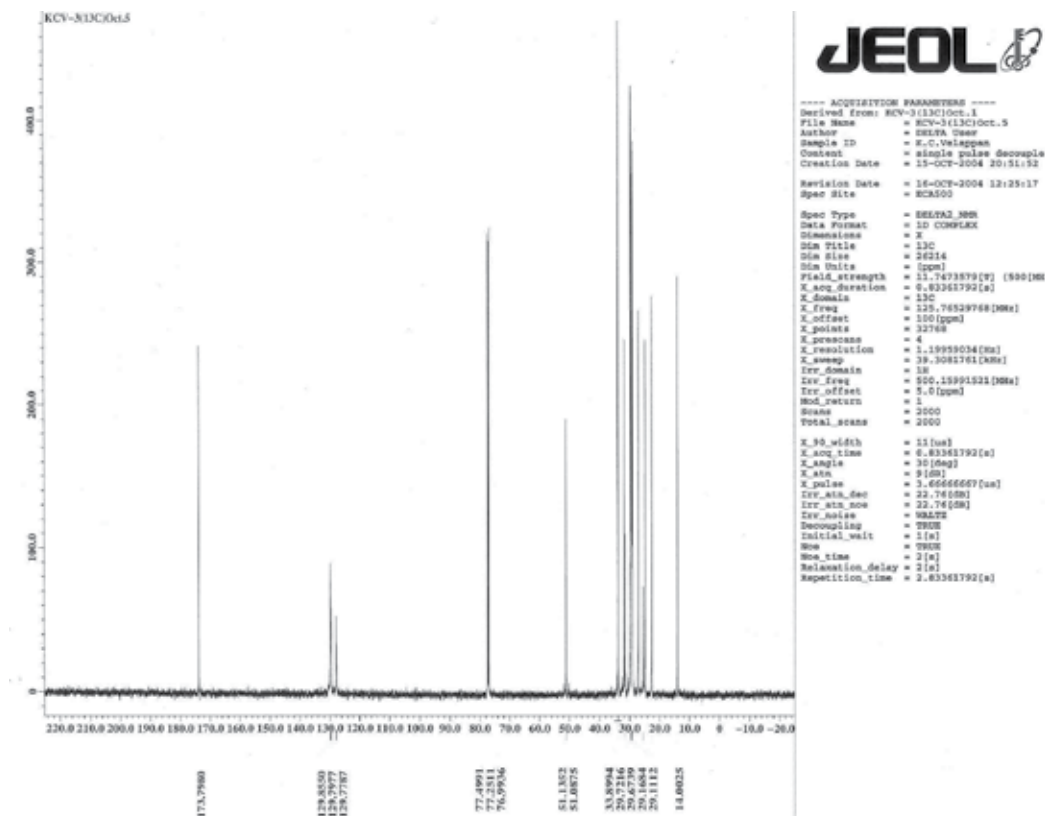


Fig. 4. A Typical C13, NMR Spectrum

The brief process description has been followed at the Pilot-scale preparation of biodiesel (Fig. 5. (a)), which was used for on-road trails from rice bran oil is following.

Rice bran oil is filtered to remove any impurities. 69 lit. of moisture free refined oil is taken in a Pilot Plant scale reactor (Fig. 5. (b)) of capacity 120 lit. Fitted with a reflux condenser and heated with agitation to 65°C. Then 345 gms of sodium hydroxide, 20.7 lit. of methanol are mixed separately and the mixture is slowly added to oil at 65°C.

The reaction mixture is mixed well, temperature is maintained at 65-70°C throughout the reaction and the reaction time is 150 min. When the reaction is complete, the contents are allowed to cool and transferred to a separating tank. After overnight settling, the mixture gets separated into two layers due to density difference.

The bottom layer-Glycerol is separated. The top layer - biodiesel is distilled at 65°C to recover unreacted alcohol. Then the methyl ester is washed for 30 minutes at 50°C with equal volumes of 0.1% dil. acetic acid to remove any traces of un reacted alkali. In case of emulsion formation after washing, saline water is used for second washing. The pH of the ester layer is adjusted to neutral while washing. After washing, the layers are allowed to settle for 30 min. The top layer is separated and biodiesel is dried in a pan drier for 2 hrs at 110°C. Then it is filtered to separate any traces of impurities. The final ready to use biodiesel product is found to be 60 lit.



Fig. 5. (a) Pilot-scale preparation of biodiesel (Fig. 5. (b))

Few thousand liters of Biodiesel produced in the pilot level which is used as fuel in the on-Road bus trails. More than 26000 km experimental trials were carried out in the Metropolitan Transport Corporation (MTC) buses in Chennai, Government of Tamil Nadu. Few clippings of MTC bus trails are shown in Fig.6. Initially four buses have been taken for on-road trials in a single route but fuelled with different biodiesel percentage namely, B5, B10, B20 and B50. Then all the buses fuelled with 100% Biodiesel. The MTC, government of Tamil Nadu, has submitted the official report about the on-road trials. The Fig. 7 showing the highlights signed by the MTC high officials of the report in the regional language namely TAMIL and Fig 8. Showing its translation in English.

3. Engine testing and exhaust gas analysis

RBOBD was tested in Kirloskar four stroke, single cylinder, water cooled, direct injection IC engine (Fig.9) with following parameters: bore, 80 mm; stroke, 110 mm; swept volume, 553 cm³; clearance volume, 36.87 cm³; compression ratio, 16.5:1; rated output, 3.7 kW at 1500 rpm; rated speed, 1500 rpm; injection pressure, 240 bar; fuel injection timing, 24 BTDC; type of combustion chamber, hemispherical open; lubricating oil, SAE 40; connecting rod length, 235 mm; valve diam, 33.7 mm; and maximum valve lift, 10.2 mm.



Fig. 5. (b) Pilot Plant scale reactor



Fig. 6. Few clippings of MTC bus trials

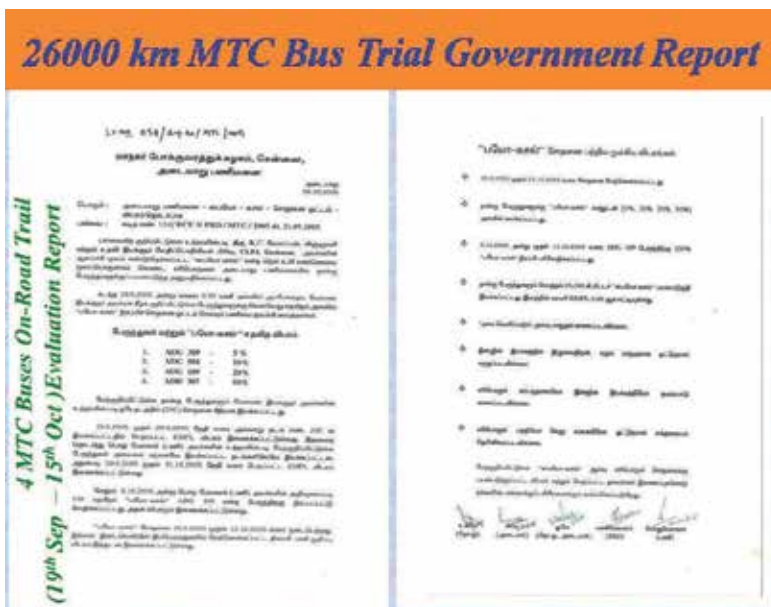


Fig. 7. Showing the highlights signed by the MTC highre officials

MTC Bus On-Road

Translation

Importance of Biodiesel On-Road Trial at a Glance

4 MTC Buses On-Road Trail (19th Sep – 15th Oct) Evaluation Report

- Experimental run 19.09.2005 to 13.10.2005
- 4 buses with Biodiesel- Diesel blend (5%, 10%, 20%, 50%)
- 100% Biodiesel in Bus ADG 109 – 9.10.2005 to 13.10.2005)
- Total on-road trail in the 4 buses – 26,066 km
- Average KMPL- 3.96
- No change in emission
- During trails no difference found by the drivers
- No negatives in fuel aspects and engine motion
- No negative remarks from drivers

**Asst. Branch Manager (Tech), Branch Manager,
Divisional Manager (Tech), Works Manager
General Manager**

Fig. 8. Highlights Translation in English



Fig. 9. A Test engine

DYNALOG, PCI 1050 system has been used for digital data acquisition during the engine trial. Online engine calibration (Fig.10) with a special software namey “Engine-soft”. The very brief specifications are Number of channels (16); Resolution (12- bit A/D); Input range (± 10 V, ± 5 V, 0 -10 V); Accuracy (0.025%) and Conversion time (8 μ s).

Engine was coupled to a swinging field separating exciting type DC generator and loaded by electrical resistance bank to apply various load. An iron-constantan thermocouple measured exhaust gas temperature and mercury thermometer measured cooling water temperature. Carbon monoxide (CO), nitrous oxide (NO_x) and hydrocarbons (HC) were measured by DELTA 1600-L and MRU OPTRANS 1600, a fully microprocessor controlled system employing nondestructive IR technique. A U-tube manometer measured specific fuel consumption. TI diesel tune, 114-smoke density tester measured smoke particulate number.

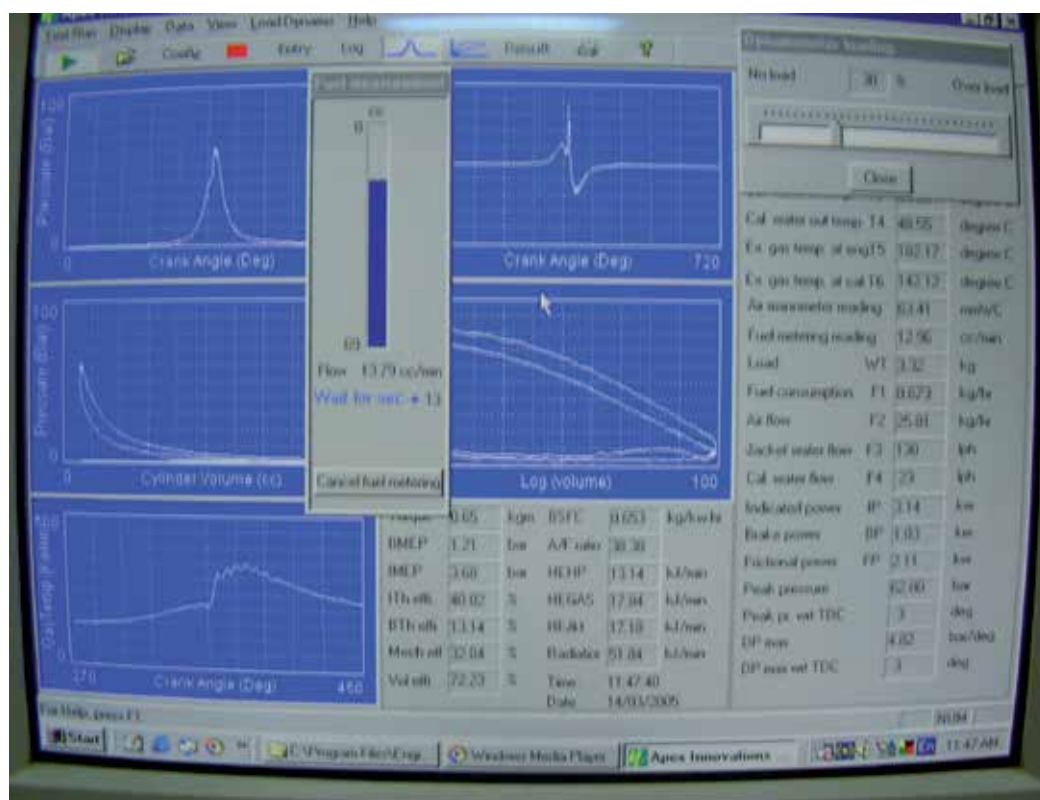


Fig. 10. Engine Calibration with “Engine-Soft”

The engine was started on neat diesel fuel and warmed up till liquid cooling water temperature was stabilized. During the performance of each trail, data were collected on time taken for 10 ml of fuel, load, exhaust gas temperature, cooling water inlet and outlet temperature, CO, CO₂, O₂, HC, NO_x, smoke and sound. Graphical comparisons are described in the results and discussion. Smoke samples were collected in a white filter paper; this was taken for Scanning Electron Microscope (SEM) analysis to find the size of the particulate matter and to visualize the quantity of agglomeration. The SEM image is shown

in Fig 10. Based on the data, specific fuel consumption, indicative thermal efficiency, brake thermal efficiency, mechanical efficiency and total fuel consumption were estimated. Similar procedures were repeated for RBOBD.

4. Results and discussion

4.1 Process conditions and compositions

RBOBD contains (GC-MS) esters of following acids: palmitic, 16; stearic, 2; oleic, 42; linoleic, 38; linolenic, 1.4; and arachidic, 0.6%. Quality consistency was conformed by C_{13} and Proton of JEOL ECA 500 MHz NMR. Physico-chemical characteristics of RBOBD and its 19 blends (Table 3) show that most of the parameters comply with international standards of biodiesel. An NMR spectrum is already shown in Fig 4.

4.2 Comparison of Brake Power and Specific Fuel Consumption (SFC)

SFC of diesel, RBOBD and its various blends at different load (0-3.78 kW) were estimated and graphical representation is shown in Fig 11. In comparison to diesel, a slight increase (10-15%) of SFC was found for RBOBD, B40, B50, B60 and B80 throughout all loads. At the maximum load (3.78 kW), SFC of B60 was found higher in comparison to the other blends. In particular to B20, the result shows that SFC was lower than diesel and other RBOBD and its blends in all the loads. The maximum increase (11.6%) was found at load 1.89 kW.

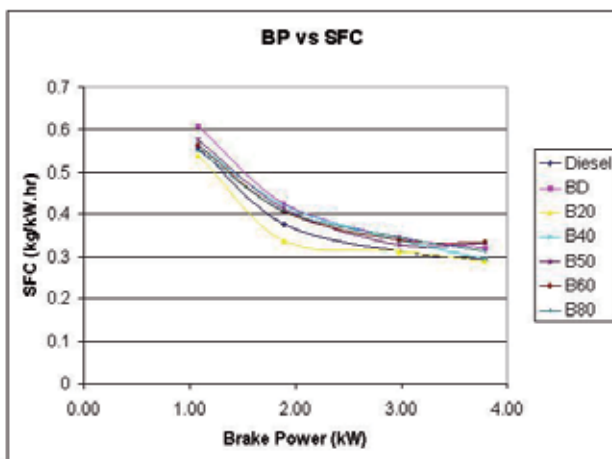


Fig. 11. Comparison of brake power and specific fuel consumption

4.3 Comparison of Brake Power and Fuel Consumption Time (FCT)

FCT of RBOBD and its various blends have been found less than the FCT of diesel, graphical representation is shown in Fig 12. Slight decrease (5-10 %) of FCT was found for all fuels. Maximum decrease of FCT (12.5 %) was found at the brake power of 3.78 kW for B50 and B60. But, in particular, for B20, there was slight increase of FCT for the entire range of brake power. Maximum increase of FCT (12 %) was at 1.89 kW and minimum (3 %) at 3.78 kW.

Parameters	BD5	BD10	BD15	BD20	BD25	BD30	BD35	BD40	BD45	BD50
Acid value	0.27	0.3	0.31	0.49	0.5	0.57	3.49	0.74	0.54	0.87
Ash Content	0.0005	0.0006	0.0008	0.0010	0.0013	0.0051	0.0068	0.0051	0.0034	0.0038
Calcium	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil
Carbon	82.27	82.17	82.07	81.97	81.90	81.85	81.80	81.90	81.98	82.01
Carbon residue (%)	0.00	0.0026	0.0030	0.0036	0.0041	0.0071	0.0096	0.011	0.01	0.012
Cetane Number	49	50	49	49	48	48	49	48	50	49
Cloud Point (C)	22	20	20	14	16	15	21	23	24	19
Density @ 15 C	0.8288	0.8335	0.8351	0.8391	0.8414	0.8437	0.8475	0.8520	0.8556	0.8588
Distillation 85	330	333	334	338	342	343	345	343	343	348
Distillation 95	344	347	347	350	356	358	360	358	360	361
Ester content	11.6	20.5	29.3	39.3	49.87	62.6	73.4	85.7	96.2	106.1
Flash Point	40	40	42	42	42	42	44	44	46	44
Free Glycerol	0.008	0.0091	0.010	0.011	0.009	0.012	0.014	0.013	0.016	0.015
G.C.V	10850	10720	10600	10610	10530	10500	10390	10300	10270	10210
Hydrogen	12.62	12.54	12.60	12.58	12.63	12.60	12.59	12.62	12.65	12.56
Iodine Value	10.2	14.1	17.9	23.3	28.7	32.5	35.5	42.3	46.2	49.5
N.C.V.	10181	10055	9932	9943	9860	9832	9723	9631	9600	9544
Nitrogen	0.031	0.030	0.030	0.034	0.031	0.033	0.034	0.032	0.030	0.032
Oxygen	5.063	5.245	5.285	5.402	5.426	5.505	5.564	5.436	5.33	5.308
Phosphorus	0.0006	0.00071	0.010	0.0015	0.0023	0.0029	0.0034	0.0043	0.0051	0.0058
Potassium	2.0	1.9	1.8	1.7	1.8	1.65	1.70	1.90	1.80	1.6
Pour point C	-22	-20	-20	-18	-15	-15	-16	15	-14	-13
Sodium	2.1	2.0	1.8	1.9	1.6	1.8	1.50	1.50	1.60	1.4
Sulphated Ash	0.0010	0.0013	0.0015	0.0022	0.0031	0.0068	0.0094	0.0064	0.0050	0.0064
Sulphur	0.016	0.015	0.015	0.014	0.013	0.012	0.012	0.012	0.010	0.009
Sulphur	0.016	0.015	0.015	0.014	0.013	0.012	0.012	0.012	0.010	0.009
Total contamination	0.096	0.009	0.011	0.011	0.011	0.012	0.009	0.0098	0.011	0.013
Total Glycerol	0.013	0.018	0.019	0.022	0.025	0.033	0.036	0.043	0.051	0.054
Viscosity @ 40 C	2.6	2.7	2.9	3.0	3.1	3.4	3.4	3.5	3.7	3.9
Water & sediments	0.022	0.026	0.048	0.029	0.024	0.027	0.030	0.029	0.029	0.031
Water content	0.021	0.024	0.045	0.026	0.022	0.022	0.026	0.027	0.027	0.0281
Acid value	1.08	0.97	1.07	1.08	1.2	1.27	1.4	1.41	1.43	1.54

Parameters	BD5	BD10	BD15	BD20	BD25	BD30	BD35	BD40	BD45	BD50
Ash Content	0.0037	0.0047	0.0045	0.0039	0.0076	0.0080	0.0081	0.0086	0.0093	0.0096
Calcium	Nil	Nil	Nil	Nil	Nil	Nil	-	-	-	-
Carbon	83.17	85.10	83.01	82.96	82.90	82.79	82.80	82.70	82.56	82.42
Carbon residue (%)	0.02	0.021	0.031	0.019	0.021	0.016	0.025	0.029	0.029	0.036
Cetane Number	49	50	48	49	48	47	47	46	46	45
Cloud Point Deg.C	9	9	12	14	14	13	16	14	19	23
Density @ 15 Deg.C	0.8625	0.8635	0.8666	0.8704	0.8748	0.8794	0.8814	0.8854	0.8889	0.8901
Distillation 85	342	326	340	342	344	345	344	343	347	348
Distillation 95	350	342	350	352	356	357	356	355	359	361
Ester content	111.7	120.2	130.3	132.2	150.5	156.2	164.9	164.9	181.1	192
Flash Point	43	46	64	60	64	70	68	90	90	124
Free Glycerol	0.016	0.015	0.018	0.017	0.019	0.018	0.020	0.021	0.024	0.025
G.C.V	10190	10090	10050	9970	9920	9860	9750	9690	9610	9810
Hydrogen	12.84	12.94	12.89	12.80	12.76	12.80	12.70	12.69	12.72	12.60
Iodine Value	51.3	56.2	57.2	63.2	67.7	72.7	77.3	80.7	85.6	86.4
N.C.V.	9509	9364	9367	9242	9284	9241	9187	9077	9016	8942
Nitrogen	0.030	0.032	0.031	0.029	0.028	0.028	0.029	0.029	0.031	0.030
Oxygen	3.936	3.904	3.904	4.188	4.271	4.362	4.451	4.563	4.672	4.933
Phosphorus	0.062	0.064	0.0068	0.0078	0.0076	0.0084	0.0083	0.0074	0.0095	0.0097
Potassium	1.2	2.0	2.1	2.1	2.0	2.2	2.9	2.2	2.1	1.9
Pour point Deg.C	-13	-13	-12	-12	-11	-11	-10	-10	-9	-8
Sodium	3.1	3.6	3.6	3.5	3.4	3.7	3.4	3.0	2.9	2.2
Sulphated Ash	0.0073	0.0080	0.0064	0.0057	0.0081	0.0061	0.0069	0.0053	0.012	0.013
Sulphur	0.024	0.024	0.023	0.023	0.021	0.020	0.020	0.018	0.017	0.017
Sulphur	0.024	0.024	0.023	0.023	0.021	0.020	0.020	0.018	0.017	0.017
Total contamination	0.015	0.018	0.022	0.021	0.024	0.025	0.029	0.030	0.035	0.044
Total Glycerol	0.064	0.069	0.070	0.074	0.075	0.083	0.088	0.096	0.099	0.10
Viscosity @ 40 Deg.C	4.0	4.2	4.40	4.60	4.8	5.0	5.2	5.5	5.7	6.0
Water & sediments	0.014	0.018	0.021	0.021	0.0034	0.024	0.028	0.031	0.035	0.041
Water content	0.012	0.017	0.020	0.020	0.021	0.022	0.028	0.029	0.035	0.041

Table 3. Physico-chemical characteristics of RBOBD and its 19 blends

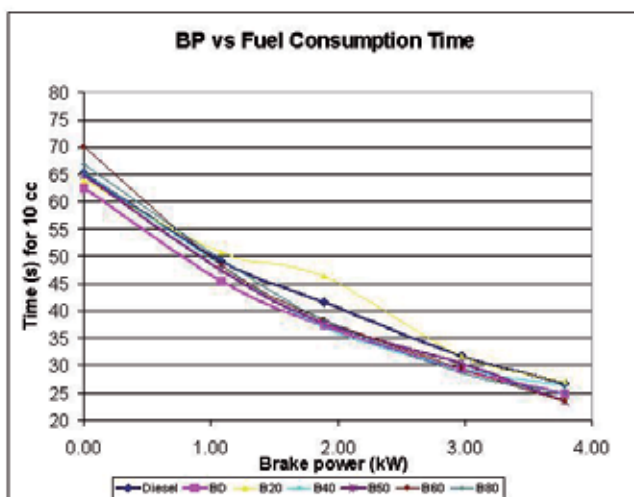


Fig. 12. Comparison of brake power and fuel consumption time

4.4 Comparison of Brake Power and Total Fuel Consumption (TFC)

TFC increased with increase of brake power, graphical representation is shown in Fig 13. A maximum increase (13%) was at the load 1.89 kW. TFC's of RBOBD blends, B40, B50, B60 and B80, are higher (5-10%) than the TFC of diesel. But B20's TFC is slightly lesser than diesel and all the other RBOBD blends from the minimum load to the maximum load. Maximum TFC decrease (10%) was observed for B20 at 1.89 kW. Overall trend shows that the percentage decrease in TFC is inversely proportional to the brake power. At the maximum load, the increasing order of TFC is B20, Diesel, B40, B80, RBOBD and B60.

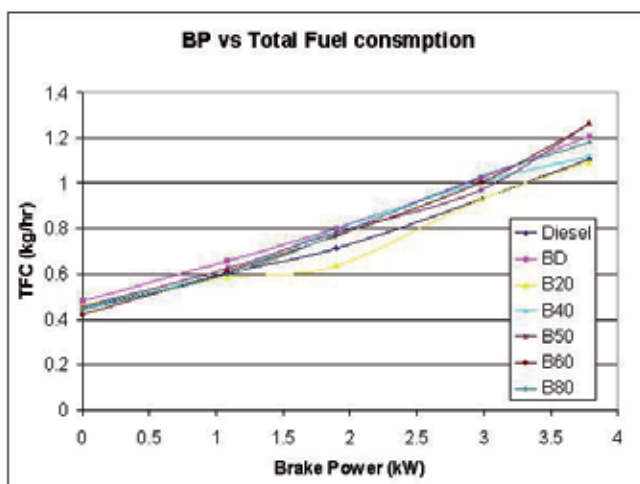


Fig. 13. Comparison of brake power and total fuel consumption

4.5 Comparison of Brake Power and Exhaust Gas Temperature (EGT)

EGT increases with increase of brake power, graphical representation is shown in Fig 14.

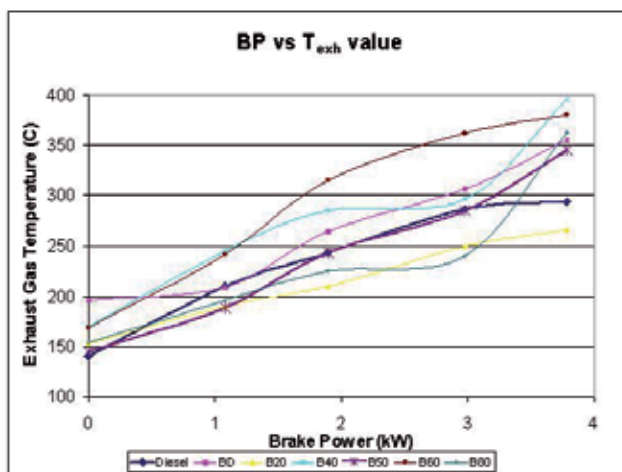


Fig. 14. Comparison of brake power and exhaust gas Temperature

In comparison with EGT of diesel in each load, EGT of RBOBD and all the blends were higher. The highest value of EGT (395°C) was found with B40 at the maximum load of 3.78 kW, whereas corresponding value of normal diesel was 294°C only. Percentage increase of EGT of RBOBD decreased with the increase of load. Maximum increase (40%) of EGT was found at lower load of zero brake power. EGT of B40, B50, B60 and B80 were 350-400°C at the maximum load. The percentage increase (20-40%) of EGT of B60 was higher than all the loads. EGT of B20 was found to be slightly lower than EGT of normal diesel in all loads (0-3.78 kW). The minimum EGT decrease (9.5%) and maximum decrease (16.3%) of RBOBD and blends were found at 1.1 Kw and 2.98 kW respectively as compared to diesel. EGT of B20, B50 and B80 were found to be lower than EGT of diesel at 0-2.97 kW.

4.6 Comparison of Brake Power and Brake Thermal Efficiency (BTE)

BTE increases with increase of load, graphical representation is shown in Fig 15.

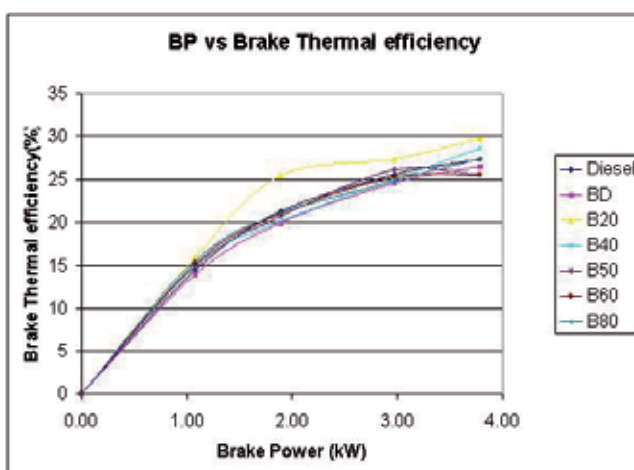


Fig. 15. Comparison of brake power and brake thermal efficiency

BTE of RBOBD was less (5%) than diesel with respect to all loads. All other RBOBD blends (B40, B50, B60 and B80) were within 5 % only. Maximum reduction (20%) of BTE was found at 1.89 kW and minimum increase (7%) at 2.9765 kW. BTE of B20 was found higher than BTE of normal diesel in all loads. At maximum load (3.78 kW), BTE for B20 (29.7%), B40 (28.6%), B50 (25.6%) and B60 & B80 (25.5%) are higher than BTE of diesel.

4.7 Comparison of Brake Power and Indicative Thermal Efficiency (ITE)

ITE of RBOBD, B50, B60 and B80 were found lower than ITE of diesel, graphical representation is shown in Fig 16 . ITE of B20 and B40 were slightly more than ITE of diesel. Maximum ITE (57.9%) was found for B20 at 1.89 kW. Reduction (5-15%) was observed in ITE of various blends. But the ITE of all fuels shows that values are almost steady throughout the entire brake power.

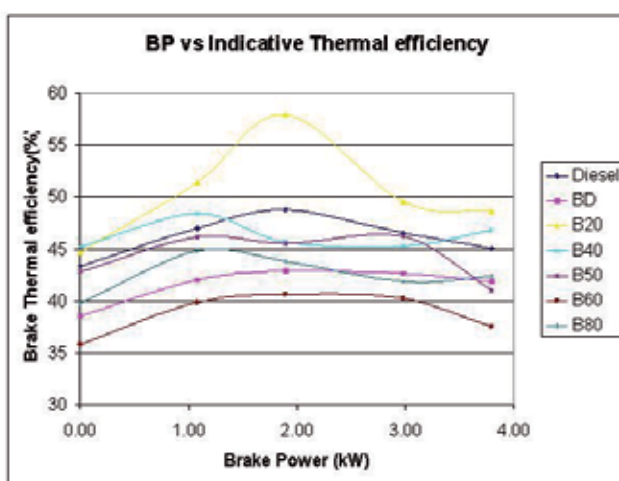


Fig. 16. Comparison of brake power and indicative thermal efficiency

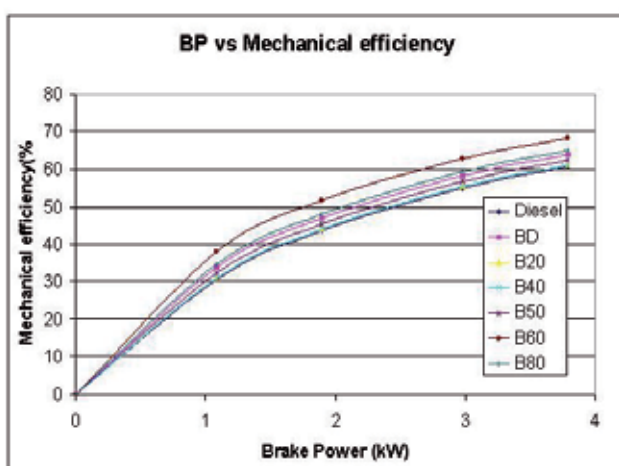


Fig. 17. Comparison of brake power and mechanical efficiency

4.8 Comparison of Brake Power And Mechanical Efficiency (ME)

ME of the engine run with RBOBD and various blends increases with increase of brake power in comparison with normal diesel, graphical representation is shown in Fig 17. ME of RBOBD was less (5%) than diesel with respect to all loads. There was a slight increase of ME for all RBOBD blends in the order of B40, B50, B20, B80 and B60. Highest ME (68%) observed for B60 was at the maximum load. Overall trend shows that percentage increase of ME was decreased with increase of load. The result of B60 shows that the minimum increase (12%) was found at maximum load and maximum increase (24%) at minimum load.

4.9 Comparison of Brake Power and Hydrocarbons (HC)

HC increased with increase of brake power, graphical representation is shown in Fig 18. RBOBD and its five blends showed lower HC (50-100%) than diesel. Reduction of HC (60%) of RBOBD and its blends are at the maximum load; B50 shows higher HC reduction than other blends at all loads.

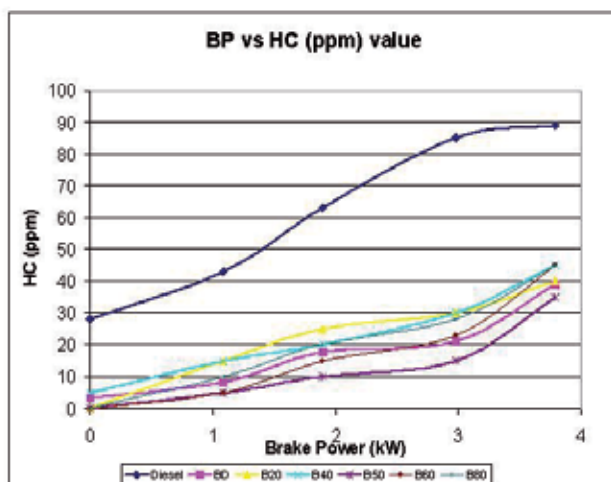


Fig. 18. Comparison of brake power and hydrocarbons

4.10 Comparison of Brake Power and CO emission

CO emission increased with increase of brake power, graphical representation is shown in Fig 19. There was decrease of CO emission (50-80%) of RBOBD and its all five blends in comparison with CO emission of diesel. Reduction (>50%) of CO emission was found at 2.97 kW. Within blends, B20 shows lower CO emission (70-80%), which decreased with increase of load.

4.11 Comparison of Brake Power and CO₂ emission

CO₂ emission increased with increase of brake power, graphical representation is shown in Fig 20. There was slight increase in CO₂ emission of RBOBD and its blends as compared to diesel. More variation of percentage increase was found within all RBOBD blends at the load 1.89 kW. The overall trend shows that the CO₂ emissions are similar to diesel at each load.

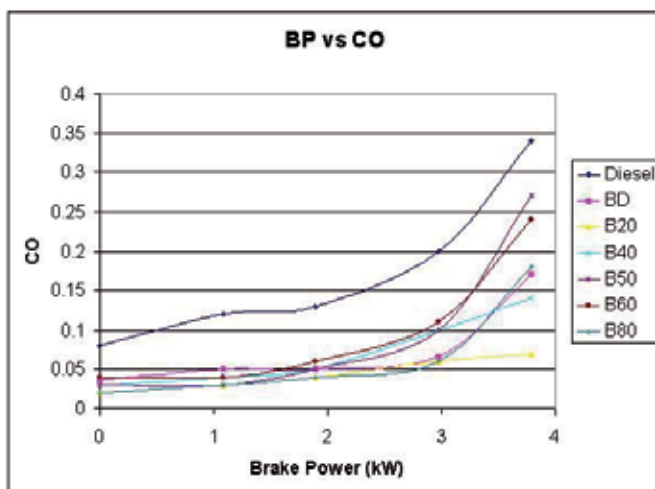


Fig. 19. Comparison of brake power and carbon monoxide emission

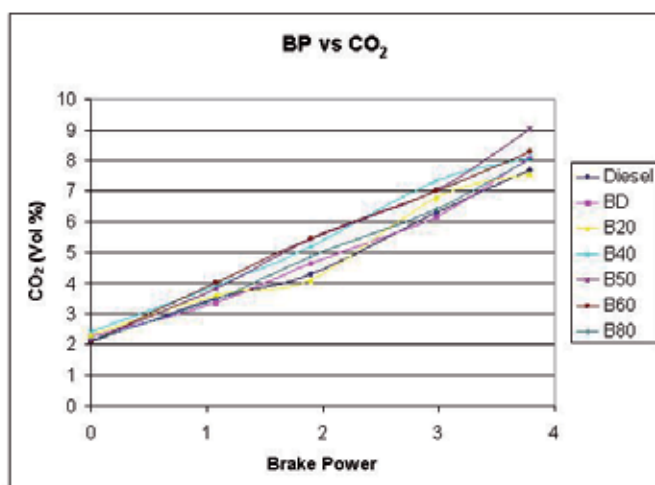


Fig. 20. Comparison of brake power and carbon dioxide emission

4.12 Comparison of Brake Power and NO_x emission

NO_x increased with increase of brake power, graphical representation is shown in Fig 21. There was a reduction (10-55%) of NO_x of RBOBD and its blends in comparison with NO_x values of diesel in each load. The trend shows that at minimum load, percentage reduction was maximum and at the maximum load, the percentage reduction of NO_x was minimum. The percentage reduction of NO_x decreased with increase of brake power. NO_x values at maximum load (3.78 kW) were found to be: diesel, 942; B80, 858; B50, 782; RBOBD, 753; B20, 677; and B60, 660 ppm. At 3.78 kW, maximum reduction (28%) was found for B20 and minimum (8.9%) for B80.

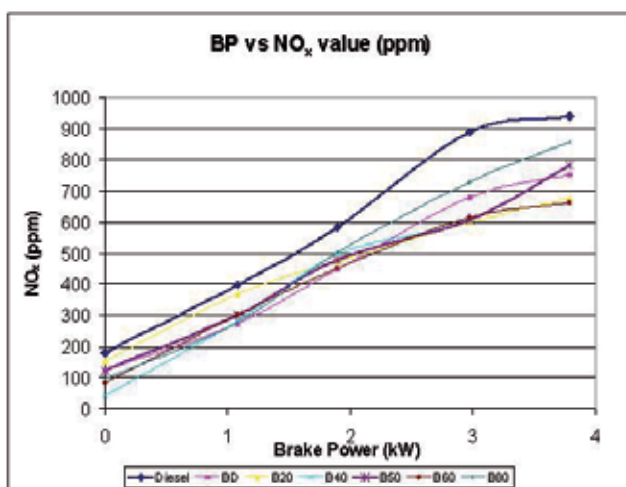


Fig. 21. Comparison of brake power and nitrogen oxides emission

4.13 Comparison of Brake Power and O₂

O₂ decreased with increase of brake power, graphical representation is shown in Fig 22. Deviations (5-10%) were found for RBOBD and its blends. At maximum load, O₂ (6.5) in B50 was less (25%) than O₂ (9.1) of diesel.

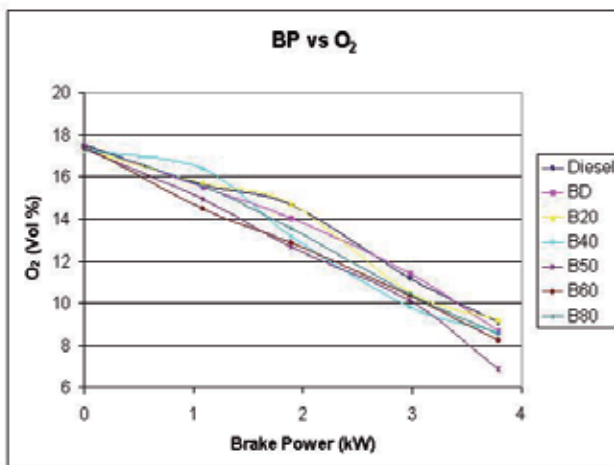


Fig. 22. Comparison of brake power and Oxygen

4.14 Comparison of Brake Power and sound

Sound or noise increased with increase of load, graphical representation is shown in Fig 23. Sound values of RBOBD and its blends are found lower (15-30%) than the sound values of diesel throughout the brake power. Within comparison of RBOBD and its blends, there was not much change in sound in all the loads. The minimum decrease (13.6%) was observed at the minimum load, and the maximum decrease (30%) at the maximum load (3.78 kW). At the higher load, sound reduction (21-30%) for RBOBD and all of its blends compared to diesel.

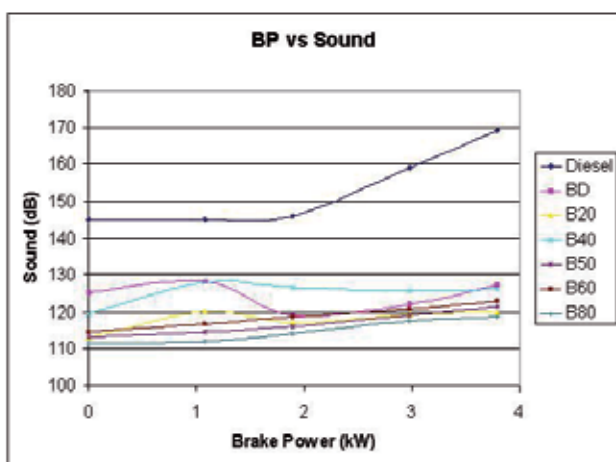


Fig. 23. Comparison of brake power and sound

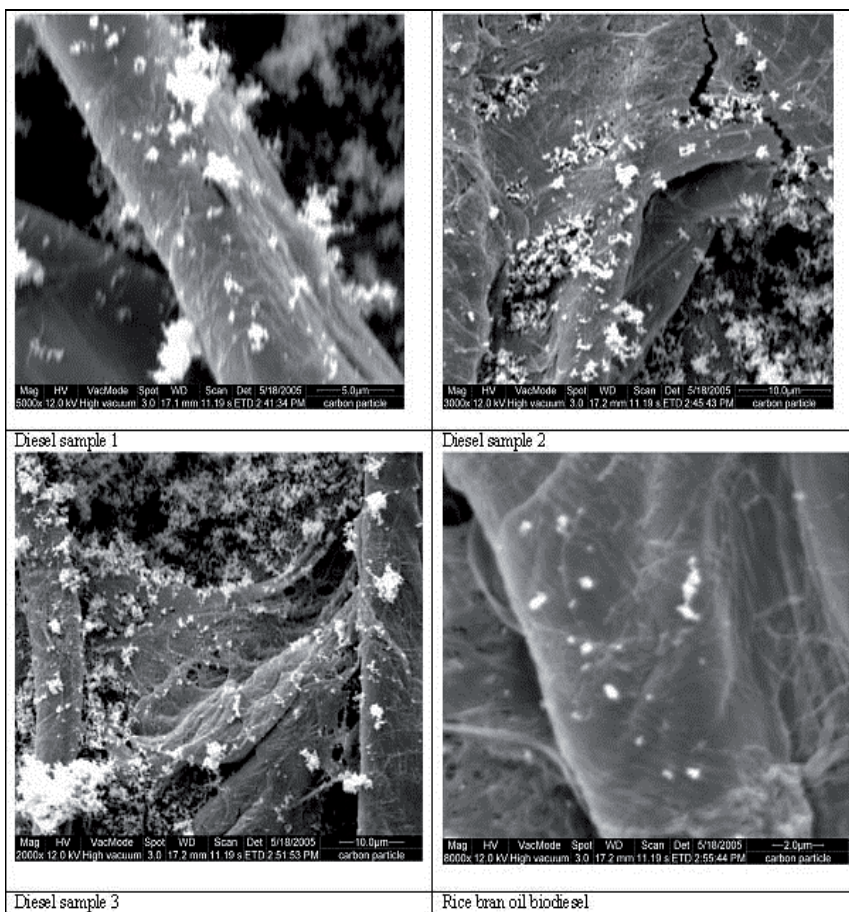


Fig. 24. Comparison of Scanning Electron Microscope Image (SEM) of Diesel and RBOBD

4.15 Comparison of SEM image

During the engine trials, smoke was collected in the white filter paper. Few samples at the maximum load were taken for SEM analysis at different resolutions. SEM shows much reduction in the particulate matter in the biodiesel as compared to diesel (Fig. 24). The particle size in the smoke of RBOBD is less than 0.5 μm .

5. Conclusions

This is most ambitious and successful technology development initiative for alternative energy options, which is the important global agenda, and will be good for the environment. These are the key component for energy security and have positive economic, social and environmental impacts. The conventional fossil fuel energy sources are the major cause of climatic changes, this biodiesel leads to minimize the emission to the environment and sustainable society. The biodiesel production with this technology may cut fossil fuel imports and dependency and thus, free up funds that can be invested in social and economic development. This is the process innovation for the less NO_x emitting Biodiesel. An international Patent has been filed through the Intellectual Property Management Division of Council of Scientific and Industrial Research (CSIR), New Delhi in the year 2003. (*Ref No. IMPD. 0290 NF 2003, PCT / IB 03/ 05349 (21.11.2003, US & JP 20050108927 and World Intellectual Property Organization-WO/2005/052103)*), Patent granted First in Singapore, Patent Number 119411 on 31st May 2006 and then Australia , patent Number-2003282270 and Sri Lanka Patent Number - 13950. In India, this is the first technological breakthrough in On-Road trials fuelled with biodiesel were successfully carried out in state government metropolitan Transport corporation (MTC) buses more than 26000 km without any engine modifications. There are 15% increases in the KMPL found after the trials. The MTC bus trials prove that this Biodiesel is substitute for diesel in the real conditions. On-Road trials fuelled with 100% Biodiesel (free biodiesel samples) by owner-driven in different vehicle models, namely, *Toyota Qualis, Mitsubishi Lancer, Bolero, Hyundai Acent etc.*

RBOBD was obtained by the optimized process conditions of transesterification and purification. RBOBD (> 150 l) is produced in Bench-Scale Parr reactor. RBOBD showed 15% increase in SFC, 25% increase in BTE, less exhaust gas temperature, 12% increase in FCT, more ITE and ME, 60% reduction in HC, more than 75% reduction in CO, minimum of 10% reduction in NO_x and 30 % sound reduction. The combustion of RBOBD and its blends are found to be lesser pollutants than compared to diesel. SEM shows reduction of particulate matter and the size of the solid particle is less than 0.5 μm . This study proves that RBOBD is environment friendly alternate fuel for diesel without any engine modification.

6. Acknowledgements

Author acknowledges Director, Central Leather Research Institute, Chennai, for all support and Director, Indian Institute of Petroleum, Dehradun for the support provided for all the fuel properties analysis. The efforts of Dr Nagarajan, Anna University, Chennai for engine trials are highly acknowledged. The author acknowledges The Managing Director and other officials of MTC, Government of Tamil Nadu for their support provided for the successful on-road trials in buses.

7. References

- Agarwal A K, Vegetable oils verses diesel fuels: Development and use of biodiesel in compression ignition engine, *TIDE*, 8 (1998) 191-204.
- Antolin G, Tinaut F V, Briceno Y, Castano V, Perez C & Ramirez A I, Optimization of biodiesel production by sunflower oil transesterification, *Biores Technol*, 83 (2002) 111-114.
- Arumugam C, Kumar S, Rajam L & Sundarresan A, Integrated technology for refining rice bran oil and by-products recovery, *6thNat Semin on Rice Bran Oil*, Lucknow, 2003.
- Barnwal B K & Sharma M P, Prospects of biodiesel production from vegetable oils in India, *Renewable & Sustainable Energy Rev*, 9 (2005) 363-378.
- De-Gang Li, Huang Zhen, Lu Xingcai, Zhang Wu-gao & Yang Jian-guang, Physico-chemical properties of ethanol-diesel blend fuel and its effect on performance and emissions of diesel engines, *Renewable Energy*, 30 (2005) 967-976.
- Fernando Neto da Silva, Antonio S P & Jorge R T, Technical feasibility assessment of oleic sunflower methyl ester Utilisation in diesel bus engine, *Energy Convers & Manage*, 44 (2003) 2857-2878.
- Freedam B, Butterfield R O & Pryde E H, Transesterification kinetics of soyabean oil, *J Am Oil Chem Soc*, 63 (1986) 1375-1380.
- Goering C E, Schwab A, Dougherty M, Pryde M & Heakin A, Fuel properties of eleven vegetable oils, *Trans ASAE*, 85 (1982)1472-1483.
- Michael S G & Robert L M, Combustion of fat and vegetable oil derived fuels in diesel engines, *Prog Energy Combust Sci*, 24(1998) 125-164.
- Mohamad I, Al-Widyan & Ali O A, Experimental evaluation of the transesterification of waste palm oil into biodiesel, *Biores Technol*, 85 (2002) 253-256.
- Mohamad I, Al-widyan, Ghassan T & Moh'd A Q, Utilization of ethyl ester of waste oils as fuel in diesel engines, *Fuel Processing Technol*, 76 (2002) 91-103.
- Noureddini H & Zhu D, Kinetics of transesterification of soybean oil, *J Am Chem Soc*, 74 (1997) 1457-1463.
- Prasad Rao G A & Rama Mohan P, Effect of supercharging on performance of a DI diesel engine with cotton seed oil, *Int J Energy Conserv & Manage*, 44 937-940.
- Roger A K & Jaiduk J O, A rapid engine test to measure injector fouling in diesel engine using vegetable oil fuels, *J Am Oil Chem Soc*, 62 (1985) 1563-1564.
- Sinha S & Misra N C, Diesel fuel alternative from vegetable oils, *Chem Engg World*, 32 (1997) 77-80.
- Srivastava A & Prasad R, Triglycerides-based diesel fuels, *Renewable & Sustainable Energy Rev*, 4 (2000) 111-133.
- Sukumar P, Vedaraman N, Rambrahamam B V & Nagarajan G, Mahua (*Madhuca indica*) seed oil: A source of renewable energy in India, *J Sci Ind Res*, 64 (2005) 890-896.
- Yi-Hsu J & Shaik R V, Rice bran oil as potential resource for biodiesel: A review, *J Sci Ind Res*, 64 (2005) 866-882.

Biodiesel Production with Solid Catalysts

Feng Guo and Zhen Fang
*Chinese Academy of Sciences, Biomass Group,
Xishuangbanna Tropical Botanical Garden,
China*

1. Introduction

Biodiesel is usually produced by transesterification of vegetable oils or animal fats with chemical catalysts, especially in the presence of strong acidic or basic solutions, such as hydrochloric acid, sulphuric acid, sodium hydroxide, sodium methoxide and potassium hydroxide. Homogeneous alkali catalysts can convert triglycerides to their corresponding fatty acid methyl esters (FAMES) with high yield, less time and low cost. However, separating the catalyst from the product mixture for recycling is technically difficult. After reaction, the catalyst should be neutralized or removed with a large amount of hot water, which will produce a large amount of industrial wastewater.

Typical plant oils, such as soybean oil, rapeseed oil and palm oil, are the main edible oils. They are not suitable as raw materials, particularly in developing countries due to limited supply and high cost. Therefore, low-cost lipids, such as non-edible oils (e.g., *Jatropha* oil), animal fats and waste oils, are used as ideal feedstocks. Such oils usually contain some water and free fatty acids (FFAs) that will form soap when homogeneous base catalysts are used. On the other hand, homogeneous acid catalysts are corrosive to equipment. Solid heterogeneous catalysts are used to overcome these problems, because they are non-corrosive, non-toxic, and easily-separated for recycling. Reusability of heterogeneous catalysts makes continuous fixed-bed operation possible. Such continuous process can minimize product separation and purification costs, make it economically viable to compete with commercial petroleum-based diesel fuel. This chapter describes solid heterogeneous catalysts for biodiesel production and their typical catalytic mechanism.

2. Heterogeneous solid catalysts

In laboratory-scale experiment, heterogeneous processes could be run in a continuous mode with a packed-bed continuous flow reactor. Heterogeneous catalysts were easily separated from the products, water-washing process and neutralization steps were avoided. Contaminated water from this process was greatly reduced, and the sewage treatment fees were also minimized. New types of heterogeneous catalysts have mushroomed and developed in recent years.

2.1 Heterogeneous acid catalysts

Acid catalysts can simultaneously catalyze both esterification and transesterification, showing a much higher tolerance to FFAs and water than basic homogeneous catalysts (e.g.,

NaOH and KOH). Homogeneous acid-catalyzed reaction is about 4000 times slower than the homogeneous base-catalyzed reaction (Lotero et al., 2005). Heterogeneous acid catalysts performed less actively, but they are favorable for low-qualified oil feedstocks with high FFAs. Now, synthetic solid acids have already amounted to hundreds of species, most of them can be used in esterification and transesterification reactions. Solid acids keep stable activity in conversion of low-qualified oils or fats to biodiesel. Currently developed solid acid catalysts are introduced in the following sections: cation exchange resin (i.e. Amberlyst-15 and NR50), mineral salts (i.e. ferric sulfate, zirconium sulfate, alum phosphate and zirconium tungsten), supported solid acid and heteropolyacid catalysts.

2.1.1 Ion-exchange resins

Ion-exchange resins are widely used in important industrial processes for both separation and reaction applications. They are less expensive than lipase and supercritical methanol. Ion exchange resins also help to separate biodiesel and glycerol. Shibasaki-Kitakawa et al. (2007) found catalytic activity of anion-exchange resins correlated positively with cross-linking degree and particle size. The activity of acid ion-exchange resins for the esterification reaction is influenced by the accessibility of reactants to the matrix anchored sulfuric acid groups located at the surface or inside the resins. Mass-transfer restriction is another factor affecting catalytic activity. Internal diffusion was found to cause mass-transfer restriction and is rate-limiting for regular resins. Most of the active sites are embedded in the gel matrix, so the resins with macro-pores have high catalytic activity. Furthermore, the catalytic activity decreased when the cross-linking degree of polymeric matrix increased. Reusability is an important evaluation index for industrial applications of resins. Mechanical strength and thermo-stability are important for the large-scale applications of resins in biodiesel production. Ion exchange resins usually don't change catalytic property for long time operation at low temperature (< 100 °C).

Caetano et al. (2009) studied esterification of palmitic acid with methanol using poly(vinyl alcohol) cross-linked with sulfosuccinic acid (SSA) resin at 60°C, about 90% conversion rate was achieved after 2 h. Only about 5% sulfosuccinic acid was leached after 7 recycles. Activity of NKC-9 resin even slightly increased at the first 10 runs, due to breakdown of resin particles under mechanical agitation (Feng et al., 2010). Continuous production of biodiesel in a fixed-bed reactor packed with resins was successively operated (Shibasaki-Kitakawa et al., 2007; Liu et al., 2009; Feng et al., 2011). After 500 h, conversion yield of FFAs still kept over 98%. Amberlyst-15 performed high activity at 100 °C in the fixed-bed, and a 97.5% FAMES yield was achieved (Son et al. 2011). Combination of fixed-bed reactor with supercritical CO₂ may develop a continuous process that is preferred for massive biodiesel production. Catalyst deactivation is caused by salt contaminants and water-swelling. Catalytic active sites on acidic resins can exchange with salt ions contained in oil. Traces of Na, K, Mg and Ca lead to a continuous activity loss (Russbuedt and Hoelderich, 2009). Deactivated catalyst can be recovered to its original activity by acid washing. It was found that temperature has negligible effect on water-swelling, but the water absorbed on the resin surface can be extracted by excessive methanol (Tesser et al., 2010)..

2.1.2 Zeolites

Zeolites are crystalline aluminosilicates with a three-dimensional porous structure. They can be synthesized with different crystal structures, definitive pore sizes, framework Si/Al ratios and adjustable acid centers to have some important catalytic properties. Aluminum

atoms and ions in skeletons and porosity supply the acidic sites. Zeolites have extremely high internal surface area (600 m²/s) and high thermal-stability (1000 °C), as the most popular solid catalysts. Acidic-shape selectivity is a significant feature of zeolite, derived from the influence of pore size and shape on a reaction. Zeolites were used in biodiesel production as a heterogeneous catalyst. Pérez-Pariente et al. (2003) studied the selective synthesis of fatty monoglycerides with Zeolites. Compared with reaction parameters, catalyst properties have more effects on monoglyceride yield.

Zeolite β is a high silica zeolite with both Lewis-acid sites and Brønsted-acid sites, containing an intersecting three-dimensional structure of 12-membered ring channels (Shu et al., 2007). Lewis-acid sites are mainly present in the micro-porous walls. On the contrast, Brønsted-acid sites are present on the internal and external surface. Zeolite β does not exhibit high activity in transesterification, but it can be used for selective removal of FFAs in waste oil (Chung et al., 2008).

HY zeolite has a large number of weak acid sites. When one Si⁴⁺ is substituted by an Al³⁺, the zeolite framework generates one Brønsted acid site. On the other hand, one Na⁺ cation neutralizes one acid site. Furthermore, hydroxyl groups formed by ion exchange of HY zeolite with ions, such as Ca²⁺, Mg²⁺ and La³⁺, can strengthen the acidic sites. Acidity of zeolite can also be adjusted by introducing protons with dilute hydrochloric acid. Sasidharan and Kumar (2004) found that large-pore zeolites such as Y, mordenite, and β showed higher activity (biodiesel yield 92%) than the medium-pore ZSM-5 and aluminum containing mesoporous MCM-41 (biodiesel yield < 30%). The high pore volume of large-pore zeolites favored reaction by rendering the active sites more accessible to the bulky triglyceride molecules. However, H β -Zeolite catalyzed transesterification of crude *Pongamia pinnata* oil gave low yield of 59% at a long reaction time (24 h) (Karmee and Chadha, 2005). Internal diffusion resistances are considered to limit reaction rate significantly. Thus, large-pore zeolites are active for the reaction with satisfactory reaction rate.

Most of zeolites exhibit not only acidic property, but they also provide high activity and selectivity in various acid catalysts as carrier. Bifunctional catalyst can usually be prepared by combining active catalytic sites on an acid zeolite. Shu et al. (2007) introduced La ion into zeolite β with La(NO₃)₃ as the ion exchange precursor. La/zeolite β resulted in higher conversion with higher stability than zeolite β because it has more external Brønsted acid sites available for the reactants. Triglyceride conversion yield of 48.9 wt% was obtained at 60 °C for reaction time of 4 h.

2.1.3 Heteropoly acids (HPAs)

A heteropoly acid is a class of acid made up of a particular combination of hydrogen and oxygen with certain metals (i.e., tungsten, molybdenum and vanadium) and non-metals (i.e., silicon, phosphorus). Heteropoly acid is frequently used as a re-usable acid catalyst in chemical reactions, but their long term stability and performances are not yet fully characterized. With inherent advantages of strong Brønsted acidity, stability and high proton mobility, HPAs are favorable as environmentally benign and economical solid catalysts. Owing to their unique physicochemical properties, HPAs are profitably used in homogeneous, biphasic and heterogeneous systems. There are many types of heteropolyacids, and the Keggin (H_nXM₁₂O₄₀) and Dawson (H_nX₂M₁₈O₆₂) structures are two of the better known groups (Kozhevnikov, 1998). HPAs (e.g., H₃PW₁₂O₄₀) are soluble in water and possess acidic strength as strong as sulfuric acid. HPAs solubility can be changed via alkali-exchange, and modified HPAs exhibiting significantly higher activity.

HPAs are excellent and environmentally benign acid catalyst for the production of biodiesel, which are tolerant to contaminations contained in oil resources such as FFAs and water. The Keggin HPA (i.e., $H_3PW_{12}O_{40}$) is soluble in methanol, and the use of Keggin heteropolyacids for triglyceride (trans)esterification has been reported. Alsalmeh et al. (2008) studied the intrinsic catalytic activity of Keggin HPAs, indicating activity of HPAs is significantly higher than that of the conventional acid catalysts in (trans)esterification. Their acid strength in the descending order is as follows: $H_3PW_{12}O_{40} > Cs_{2.5}H_{0.5}PW_{12}O_{40} > H_4SiW_{12}O_{40} > 15\%H_3PW_{12}O_{40}/Nb_2O_5, 15\%H_3PW_{12}O_{40}/ZrO_2, 15\%H_3PW_{12}O_{40}/TiO_2 > H_2SO_4 > HY, H\text{-Beta} > Amberlyst-15$. HPA is able to efficiently promote the esterification with a similar performance to sulfuric acid. However, the recovery and reutilization of HPAs is difficult.

The main disadvantage of HPAs is their solubility in water and polar solvents. This problem can be overcome by converting it into its salt (e.g., ammonium salt) with decreases of acidity and catalytic activity. It is reported that partial exchange of ammonium salt in 12-tungstophosphoric acid with offers more acidic strength to the catalyst than the fully exchanged ammonium salt (Giri et al., 2005). Exchange of protons in HPA can help promote its activity in transesterification of triglycerides. The protons replacement has similar effects on activity as cations concentration increase. $Cs_xH_{3-x}PW_{12}O_{40}$ ($x = 0.9-3$), one kind of insoluble Keggin HPAs, offers excellent performance in (trans)esterification (Narasimharao et al., 2007). The catalytic activity of Cs-salts decreases as the content of Cs in HPW grows, due to the decrease of pH and the increase of conductivity of colloidal solutions in direct relation with the acidity of surface layers of primary particles. Furthermore, low-Cs loading on HPAs shows some dissolution of an active acid component after reflux in hot methanol, while high-Cs loading on HPAs is stable in hot methanol.

Immobilization of HPAs on carrier is also an efficiency method to obtain insoluble catalyst. Such supported solid acids performed high thermal-stability even under reaction conditions of 200 °C. Caetano et al. (2008) used tungstophosphoric acid, molybdophosphoric acid and tungstosilicic acid immobilized by sol-gel technique on silica to catalyze esterification of palmitic acid with methanol. The higher heteropolyacids load on silica, the lower the catalytic activity is observed. Tungstophosphoric acid-silica (with 4.2 wt.%) showed the highest catalytic activity, 100% palmitic acid conversion was achieved after 30 h reaction time with methanol. Zięba et al. (2010) tested catalytic performance of Amberlyst-15, Nafion-SAC-13, polyaniline-sulfate, silver and cesium salts of HPAs in transesterification of triglycerides with methanol. $Cs_2HPW_{12}O_{40}$ was the most active catalyst due to its highest strength of acid sites, but the great affinity toward glycerol led to its deactivation during recycling process.

2.1.4 Supported acid catalysts

Supports can provide higher surface area through the existence of pores where acidic sites can be anchored. Supports should be modified during preparation of catalysts to anchor catalytic species and obtain reusability. Furthermore, some amorphous carriers also showed good activity for (trans)esterification. Metal oxides are widely used as catalyst supports because of their thermal and mechanical stability, high specific surface area, and large pore size and pore volume. Because solid acids function the same as H^+ in sulfuric acid for (trans)esterification, sulfonated metal oxides, such as $SO_4^{2-}/Al_2O_3, SO_4^{2-}/TiO_2, SO_4^{2-}/ZrO_2, SO_4^{2-}/SnO_2$ and SO_4^{2-}/V_2O_5 (Garcia et al., 2008) can supply more acid species. Such solid acids are usually prepared by impregnating the hydroxides from ammonia precipitation of corresponding metal salt solutions with aqueous sulfuric acids followed by calcination. In

addition to acid amount and acid strength adjustment, the catalysts are satisfactorily active in a heterogeneous liquid–solid system and are recoverable and reusable.

A cheap and high efficiency solid acid catalyst (SAC) derived from sulfonation of carbonized D-glucose or sucrose was reported, and used in transesterification of vegetable oil with alcohol (Shu et al., 2009; Toda et al., 2005; Zong et al., 2007). The catalyst was prepared from carbohydrates by carbonizing at 400 °C under N₂ atmosphere and then sulfonating at 150 °C. The solid acid catalyst can also be prepared by direct sulphonation of lignin consisting of polyethers and C-C linked phenylpropanes as shown in Fig. 1. The carbon carriers are amorphous, polycyclic aromatic carbon sheets containing SO₃H groups as active sites (Shu et al., 2009; Toda et al., 2005). The polycyclic carbon sheets can absorb long-chain hydrocarbon for reactants in solution to access SO₃H groups. Hydrolysis of cellulose to saccharides using such amorphous carbon bearing SO₃H, COOH, and OH function was studied (Suganuma et al., 2008). Phenolic OH groups bonded to the grapheme sheets can absorb β-1,4 glycosidic bonds and provide good access of reactants in solution to the SO₃H groups in the carbon material.

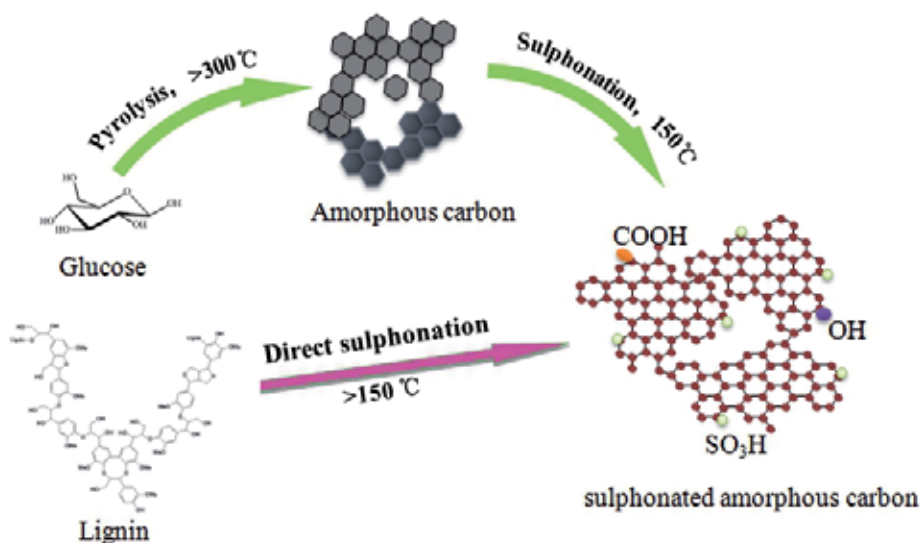


Fig. 1. Preparation process of sulphonated amorphous carbon from glucose and lignin.

Zong et al. (2007) utilized SAC as a solid acid catalyst for transesterification of waste oil (27.8% FFAs) with methanol. The reaction was carried out at 80 °C for 15 h, a high yield of above 90% obtained as compared with below 80% yield when sulfated ZrO₂, Amberlyst-15 and niobic acid were used. SAC was also used for other types of organics reactions, such as oxidations of organic compounds (e.g., sulfides, tertiary amines, aldehydes) with hydrogen peroxide (Shokrolahi et al., 2008). Specific surface area, pore size, pore volume and active site concentration on the surface of catalyst are effective factors on catalytic activity. Stability of the active sites is important for their industrial applications.

2.2 Heterogeneous base catalysts

The transesterification of vegetable oils or animal fats to biodiesel by chemical catalysts, especially in the presence of a strong basic solution, such as sodium hydroxide and

potassium hydroxide, has been widely used in industrial production of biodiesel. Such basic solutions can transform triglycerides to their corresponding FAMES with higher yield at lower temperature and shorter time than those by acid catalysts. However, separating the catalysts from products is technically difficult. Moreover, natural vegetable oils and animal fats usually contain small amounts of FFAs and water, which can have significant negative effects on the transesterification of glycerides with alcohols, and also hinder the separation of FAMES and glycerol due to saponification of FFAs. Compared with basic solutions, solid base catalyst is preferred due to easy separation.

Heterogeneous base catalysis has a shorter history than that of heterogeneous acid catalysis. Solid bases refer mainly to solids with Brønsted basic and Lewis basic activity centers, that can supply electrons (or accept protons) for (or from) reactants. Heterogeneous base-catalyzed transesterification for biodiesel synthesis has been studied intensively over the last decade. Low-qualified oil or fat with FFAs and water can be used. However, the catalytic efficiency of conventional heterogeneous base catalysts is relative low and needs to be improved. Various types of catalytic materials have been studied to improve the transesterification of glycerides. Heterogeneous base catalysts, such as hydrotalcites, metal oxides, metallic salt, supported base catalyst and zeolites are introduced herein details.

2.2.1 Hydrotalcites

Hydrotalcites (HTs) are a class of anionic and basic clays known as layered double hydroxides (LDHs) with the formula $Mg_6Al_2(OH)_{16}CO_3 \cdot 4H_2O$. HTs consist of positively charged brucite-like layers and interstitial layers formed by CO_3^{2-} anions, and water molecules compensate the positive charge resulting from the substitution. LDHs have strong alkali sites and high stability with good adjustability of composition and structure. However, low surface area affected its catalytic activity. Mg/Al mole ratio and calcination temperature are the determining factors for the base-catalyzed activities. HTs with a 3:1 molar ratio of Mg to Al have the highest basicity and activity (Xie et al., 2006). Decomposition of HTs after calcination yields a high surface area Mg-Al mixed oxide, which presumably exposes strong Lewis basic sites. During calcination process, the interlayer water is lost first, followed by dehydroxylation and decomposition of interlayer carbonate to CO_2 , which generate a porous structure and specific surface area ranging from 150 to 300 m^2/g (Lee et al., 2009). Furthermore, Mg^{2+} can be replaced by Zn^{2+} , Fe^{3+} , Co^{2+} , Ni^{2+} , and Al^{3+} by Cr^{3+} , Ga^{3+} , Fe^{3+} . HTs substituted with copper have a relatively uniform porous structure with decreased specific surface area. For iron substituted HTs, microporosity features developed, pore size decreased and specific surface area increased. The initial study by Cantrell et al. (2005) on biodiesel synthesis with HTs indicated magnesium content has obvious effects on catalytic activity. Increase of both magnesium content and electron-density enhances alkaline of HTs and finally increases biodiesel yield.

As classical solid base materials, calcined HTs were widely used as catalyst in the production of biodiesel (Brito et al., 2009; Deng et al., 2010). The basicity and surface area of HTs can be tuned by modifying chemical composition and preparation procedure. A co-precipitation method usually used to synthesize HTs with Mg/Al molar ratio of 3/1 using urea as precipitating agent. In previous work (Xie et al., 2006), transesterification process was carried out with reflux of methanol, methanol/soybean-oil molar ratio of 15/1, reaction time of 9 h and catalyst amount of 7.5%, and oil conversion rate was only 67%. In the work of Brito et al. (2009), waste oil as feedstock, biodiesel production was performed at temperatures ranging from 80 to 160 °C, methanol/oil molar ratio from 12/1

to 48/1 and catalyst concentration from 3 to 12%, respectively, and 90% biodiesel yield was achieved.

It is known that HTs present lamellar structure thus not pose accessibility restrictions of vegetable oil molecules to catalyst sites. Improvement of specific surface area becomes necessary to obtain high catalytic activity. Deng et al. (2011) synthesized a series of nanosized HTs by a modified co-precipitation method. SEM images of HTs and calcined HTs were given in Fig. 2. Variables of temperature, solution pH and ageing time have a strong influence on the final basicity of the mixed oxides. Mg-Al ratio in the precursor HT depends on the basic properties of these sites. In the transesterification experiment using Mg-Al HT catalysts, 95% biodiesel yield was achieved from *Jatropha* oil in 1.5 h. Pre-mixture of HTs with methanol is essential to optimize catalyst activity to avoid lagging in reaction activity due to mass diffusion. Xi et al. (2008) tested influence of water on the activity and stability of activated Mg-Al HTs. In the presence of certain amount of interlayer water, Brønsted base sites were active. However, high degree of hydration caused rapid deactivation of the catalyst. Mg-Al HT shows relatively robust activity in the presence of water or FFAs tolerate, which is an attractive feature for biodiesel production.

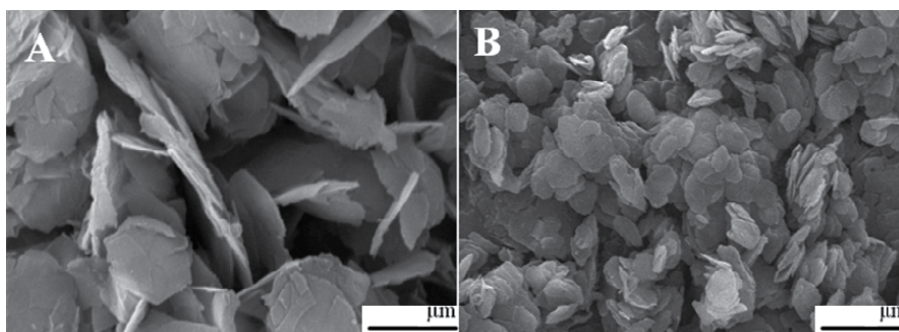


Fig. 2. SEM images of (A) hydrotalcite and (B) calcined hydrotalcite at 500 °C for 6 h.

2.2.2 Metal oxides

Metal oxides are composed of cations possessing Lewis acid and anions with Brønsted base. Metal oxides used in transesterification are classified as single metal oxides (e.g., MgO, CaO and SrO) and mixed metal oxides [A-B-O type metal oxides, where A is an alkaline-earth metal (Ca, Ba, Mg), alkaline metal (Li), or rare earth metal (La) and B is a transition metal (Ti, Mn, Fe, Zr, Ce)] (Kawashima et al., 2008; Liu et al., 2007; Liu et al., 2008; Montero et al., 2009). Early studies on heterogeneously catalyzed transesterification were focused on the catalysis by single metal oxides. The basicity of oxides (especially, basic sites) directly depends on reaction rate. A comparison of several metal oxides (MgO, CeO₂, La₂O₃ and ZnO) indicated that the most basic one is La₂O₃, followed by MgO, CeO₂ and ZnO (Bancquart et al., 2001).

The order of activity among alkaline earth oxide catalysts is BaO > SrO > CaO > MgO. CaO is the most frequently applied metal oxide catalyst for biodiesel preparation, due to its cheap price, relatively high basic strength and less environmental impacts. Reddy et al. (2006) used CaO as solid base catalyst in the transesterification of soybean oil, only 2% biodiesel yield achieved. However, the intrinsic basicity of nano-CaO is much higher, 99% biodiesel yield was obtained with nano-CaO. In addition to specific surface area, other


variables such as temperature and molar ratio of methanol to oil also influenced the catalytic activity. A measured amount of water in oil is wonderful for promotion of catalytic activity. Study showed 95% biodiesel yield was obtained using CaO as catalyst in present of about 2 wt% water (Xi et al., 2008). SrO has basic sites stronger than $H_0 = 26$. It can catalyze many chemical reactions, such as oxidative coupling of methane, selective oxidation of propane, nitro-Aldol reactions and mixed Tishchenko reactions. Liu et al (2007) reported SrO performed high catalytic activity to convert soybean oil to biodiesel with a yield over 95% at temperature below 70 °C for 30 min. MgO has weak basic strength and low solubility in methanol. It is usually produced by direct heating of magnesium carbonate or magnesium hydroxide. There is a striking linear correspondence between the catalytic activity and surface basicity of MgO. High reaction temperature (e.g., 523 °C) and high pressure (e.g., 24 MPa) are usually needed for achieving a high biodiesel yield (Wang and Yang, 2007).

To increase the basic strength of a single metal oxide, mixed metal oxides are synthesized. Peterson et al. (1984) prepared CaO-MgO and found that it provided higher catalytic activity than CaO powders for transforming rapeseed oil to biodiesel. Catalytic activity tests were performed for CaO-TiO₂, CaO-MnO₂, (CaO)₂-Fe₂O₃, CaO-ZrO₂ and CaO-CeO₂ samples, approximately 90% biodiesel yield were obtained (Kawashima et al., 2008). The Ca catalysts were found to have higher basicity and activity. Such catalysts performed noticeably decreased activity in transesterification when ethanol or branched alcohols was used, attributed to the steric effects on the catalytic activity of these catalysts. Furthermore, active sites of metal oxides are easily blocked by adsorbing intermediates (diglyceride, monoglyceride) or products. Deactivated catalysts can be recovered nearly to the initial value through calcination.

2.2.3 Metallic salts

Inorganic solid bases, such as sodium silicate (Guo et al., 2010), vanadyl phosphate (Serio et al., 2007), calcium zincate (Rubio-Caballero et al., 2009) and calcium methoxide (Liu et al., 2008), are low-cost and easy-to-use heterogeneous catalysts. Reports on metallic salts catalyzed conversion in biodiesel preparation are rare. Here, only sodium silicate, vanadyl phosphate (VOP) and calcium zincate are reviewed.

Sodium silicate was used as starting materials to synthesize γ -zeolite, NaY zeolite, and NaX zeolite. Guo et al. (2010) used sodium silicate to catalyze the transesterification reaction for the first time. It catalyzed soybean oil to biodiesel with a yield of almost 100% under the conditions: sodium silicate of 3.0 wt %, a molar ratio of methanol/oil of 7.5:1, reaction time of 60 min, reaction temperature of 60 °C, and stirring rate of 250 rpm. In addition to high catalyst activity, sodium silicate also has other similar characteristics to supported-solid base catalysts. Most of basic sites were in the interior of the solid catalyst due to low surface area and high density of the basic sites. The calcined sodium silicate could tolerate 4.0 wt% water or 2.5 wt% FFAs contained in soybean oil. The water tolerance is related to its special crystal and porous structure. In the presence of high amount of water, a sequential hydration will occur in three steps:



As a result, Si-O-Si bridges would be hydrolyzed and H_4SiO_4 monomers are sequentially released. Such series of reactions not only produce OH^- , but also avoid the formation of soap. Furthermore, sodium silicate could also be used to catalyze dehydration of glycerol. Long et al. (2011) used sodium silicate as catalyst for transesterification of rapeseed oil for several recycles, and subsequently the used sodium silicate without any modification was catalyzed for the hydrothermal production of lactic acid from glycerol at 300 °C. A yield of 80.5% lactic acid and only minor amounts of formic, acetic acid and acrylic acid were produced.

Previous applications of VOP were mainly in hydrocarbon oxidation, dehydration and isomerization (Serio et al., 2006). Serio et al. (2007) confirmed that VOP-based catalysts were very active in the transesterification of vegetable oil with methanol despite their low specific surface area. VOP was deactivated due to a progressive reduction of vanadium (V) species from V^{5+} to V^{4+} and V^{3+} by methanol. Because the deactivation is reversible and catalyst activity can easily be restored by calcination. Rubio-Caballero et al. (2009) investigated the use of calcium zincate in the methanolysis of sunflower oil for biodiesel production. The activated calcium zincate at 400 °C is stable against lixiviation, attributed to its strong interaction with a much less soluble zinc oxide. But, calcium zincate is more sensitive to water (> 0.2 wt.%) rather than FFAs. Calcium methoxide has a moderate surface area, relative broad particle size distribution, narrow pore size distribution, strong basicity, long catalyst lifetime and better stability in organic solvent (Liu et al., 2008). It has tremendous potential to replace some homogeneous catalysts.

2.2.4 Supported base catalysts

Alkali metals (Li, Na, K) and alkaline earth metals (Mg, Ca, Ba) are the most common sources of super basicity, and selected as the active species of supported catalysts for biodiesel synthesis. They are frequently used in the metallic form or as various ionic forms of hydroxide, halide, carbonate and nitrate, such as K^+ , Li^+ , La^{3+} , KOH , NaOH , KF , K_2CO_3 , KNO_3 (Shu et al., 2007; Sun et al., 2008; Vyas et al., 2009). Alumina, silica, zinc oxide, zirconium oxide and zeolite were used as supports for these catalysts. Surface basicity is the primary determinant of catalyst activity, then the specific surface area and pore volume (Sun et al., 2008). During the preparation of such catalysts, the mechanical intensity and surface area of carriers can be adjusted to obtain different basic intensities and activity sites.

Almost all supported base catalysts were synthesized via loading of active species on carriers by covalent bond, ionic bond or physical adsorption. Despite of formation of M-O-carrier (e.g., Al-O-K, Si-O-Na and Ca-O-K), other possible interactions of the alkali species with supports include formation of solid solutions and acid-base reactions. Hydroxyl groups introduced to the surface of solids play an important role in transesterification reaction (Xie et al. 2006). The hydroxyls with alkali species enhance the catalytic activity.

As a most popular carrier, Al_2O_3 has almost all noteworthy properties such as high temperature resistant, high surface area, high porosity, low density and transition crystalline phase existed in a wide temperature range. Furthermore, it serves as carrier with both solid acid and base. Most super basicity sources can be well dispersed on the Al_2O_3 support in the form of a monolayer at a low loading. Furthermore, alumina is more resistant than other supports (e.g., SiO_2 , CaO and zeolite) for alkali species. Taking $\text{KNO}_3/\text{Al}_2\text{O}_3$ as an example, it is usually prepared by impregnation and subsequent calcination at 500 °C (Xie et al. 2006). K^+ ions replaced protons of isolated hydroxyl groups to form Al-O-K groups. The Al-O-K groups and K_2O derived from KNO_3 are active basic species. The base strength could be

tentatively denoted as $15 < H_0 < 18.4$ by using Hammett indicator. Basic strength of KNO_3/Al_2O_3 was influenced by KNO_3 loading and temperature. The 35% KNO_3/Al_2O_3 sample calcined at 500 °C had the highest basicity. However, the sample prepared at 700 °C was most stable. Because part of potassium species are loss by a solid-solid reaction leading to formation of spinels or penetration into the subsurface.

Aends and Sheldon (2001) indicated that such kind of catalyst is unstable during reaction, mainly due to M-O-Al decomposed in present of methanol. Arzamendi et al (2007) confirmed that NaOH reacted with the support to form aluminates during preparation of NaOH/ Al_2O_3 . Leaching of sodium species from Al_2O_3 was also found. Furthermore, problems of high cost, difficult preparation and easy poisoning by absorption of H_2O and CO_2 should be solved. The supported solid base catalysts are excellent for transesterification of triglyceride, but a higher temperature is needed.

3. Catalytic mechanism

3.1 Heterogeneous solid acid-catalyzed esterification mechanism

Low-cost feedstocks need pretreatment (esterification) to remove FFAs before base-catalyzed transesterification reaction. The esterification path is relatively simple reversible reaction as follows:



In the reaction (2), FFA is converted to FAME. When homogenous acid (e.g., sulfonate acid, phosphorus acid and hydrochloric acid) was used, esterification reaction is a process that FFA supply hydroxide and methanol supply proton without intermediate process.

Different to homogeneous catalysis, heterogeneous catalytic process is known to follow a carbonium ion mechanism. The mechanism of solid acid-catalyzed esterification consists of following steps as shown in Fig. 3. Firstly, solid catalysts provided protons, and carbonyl carbon was protonated. Next, nucleophilic attack of CH_3OH on the carbonium ion formed a tetrahedral intermediate. Finally, FAME was produced after proton migrated and the intermediate broke down, and proton was reformed.

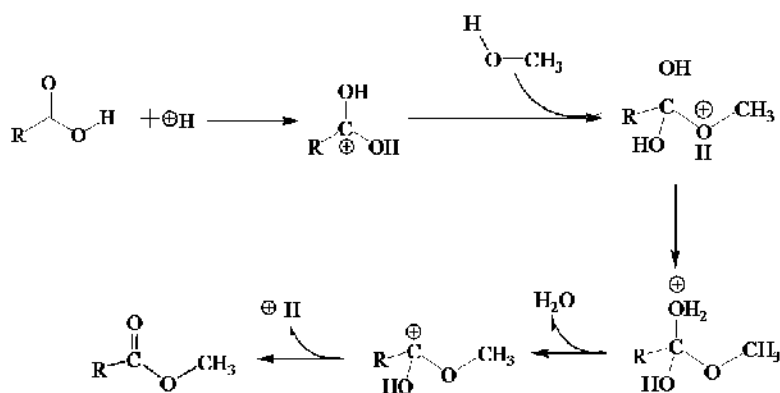


Fig. 3. Solid acid-catalyzed reaction mechanism of esterification.

The esterification reaction path is slightly different in various acidic species types. The whole reaction process is through proton-exchange. Tesser et al. (2005) proposed a kinetic model based on the following hypotheses: (1) major part of the active sites are occupied by methanol in a protonated form, and the rest part are also occupied; (2) fatty acid, water and methyl ester reach proton-exchange equilibrium with the protonated methanol; (3) inside the resin particles, an Eley-Rideal mechanism occurs between protonated fatty acid and the methanol. Deviate from the mechanism shown in Fig. 3, steps of protonation of carbonyl carbon, nucleophilic attack, proton migration and breakdown of intermediate are undergoing in a proton-exchange way.

3.2 Transesterification mechanism

The transesterification reaction involves catalytic reaction between triglyceride and alcohol (e.g., methanol, ethanol, propanol and butanol) to form biodiesel (FAMES) and glycerol (Fig. 4). In the reaction, three consecutive reactions are required to complete the transesterification of a triglyceride molecule. In the presence of acid or base, a triglyceride molecule reacts with an alcohol molecule to produce a diglyceride and FAME. Then, a diglyceride reacts with alcohol to form a monoglyceride and FAME. Finally, an monoglyceride reacts with alcohol to form FAME and glycerol. Diglyceride and monoglyceride are the intermediates in this process.

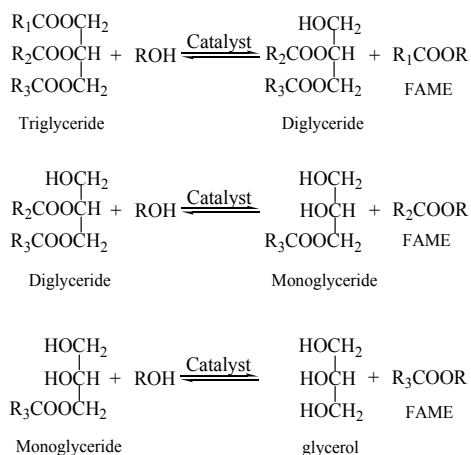


Fig. 4. Transesterification reactions of glycosides with alcohol.

3.2.1 Mechanism for heterogeneous acid-catalyzed transesterification

Acidic or basic functional groups in the active sites of solid catalysts catalyze the reaction by donating or accepting protons. Acid-catalyzed reaction mechanism for the transesterification of triglycerides is shown in Fig. 5. Firstly, triglycerides are protonated at the carbonyl group on the surface of solid acid. Then, a nucleophilic attack of the alcohol to carbocation forms a tetrahedral intermediate (hemiacetal species). Unstable tetrahedral intermediate leads to proton migration, followed by breakdown of the tetrahedral intermediate with assistance of solvent. After repeating twice, three new FAME as products were produced and the catalyst was regenerate. During the catalytic process, protonation of carbonyl group boosts the catalytic effect of solid acid catalyst by increasing the electrophilicity of the adjacent carbonyl carbon atom.

Different with Brønsted acids, Lewis acids [e.g., $\text{Fe}_2(\text{SO}_4)_3$, titanate complexes, carboxylic salts, divalent metal pyrone] act as electron-acceptors via the formation of a four-membered ring transition state (Abreu et al., 2004; Di Serio et al., 2005). The reactant triglyceride and metal form a Lewis complex, which assists solid Lewis acids during process of the carbonyl groups activating for a nucleophilic attack by the reactant alcohol. The triglyceride carbonyl coordinates at a vacant site in the catalytic active specie. Formation of a more electrophilic species is responsible for the catalytic activity. Stearate metals (Ca, Ba, Mg, Cd, Mn, Pb, Zn, Co and Ni) were tested as catalysts for methanolysis of soybean oil (2.0 g) with methanol (0.88 g) at 200 °C (Di Serio et al., 2005). A high FAMES yield (96%) and a low final FFAs concentration (<1%) were obtained in a relatively short reaction time (200 min).

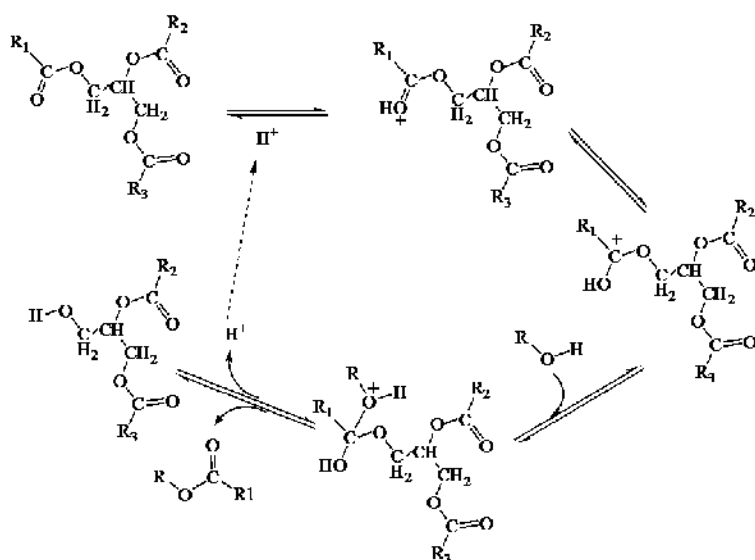


Fig. 5. Acid-catalyzed reaction mechanism of transesterification.

3.2.2 Mechanism for heterogeneous base-catalyzed transesterification

Base-catalyzed crude oil to biodiesel gets more studies than acid-catalyzed method. In base-catalyzed process, OH^- or CH_3O^- ions performed as active species. Catalytic reactions started on the surface of heterogeneous base (Fig. 6). The mechanistic pathway for solid base-catalyzed transesterification seems to follow a similar mechanism to that of a homogeneous base catalyst. First, ion-exchange proceeded after methanol absorbed on the surface of solid base, producing catalytic active specie (CH_3O^-) which is strongly basic and highly catalytic active. Secondly, nucleophilic attack of CH_3O^- on the carbonyl carbon of triglyceride formed a tetrahedral intermediate. Thirdly, rearrangement of the intermediate resulted in the formation of FAME. Finally, protons were converted to diglyceride ion to generate diglyceride. This sequence was then repeated twice to yield glycerol and biodiesel.

Formation of CH_3O^- is different according to solid base types. Taking CaO as an example, surface O^{2-} is the basic site, which can extract H^+ from H_2O to form OH^- , and OH^- extracts H^+ from methanol to generate CH_3O^- (Liu et al., 2008). It is interesting that CaO generates more methoxide anions in the presence of a little water (less than 2.8% by weight of crude oil), avoiding formation of soap. Surface oxides or hydroxide groups depend on the basicity

and catalytic activities. The basic strengths of Na/CaO and K/CaO are slightly lower than that of Li/CaO (Ma and Hanna, 1999). The presence of the electron-deficient M^+ on the support enhances the basicity and activity of the catalysts towards the transesterification reaction.

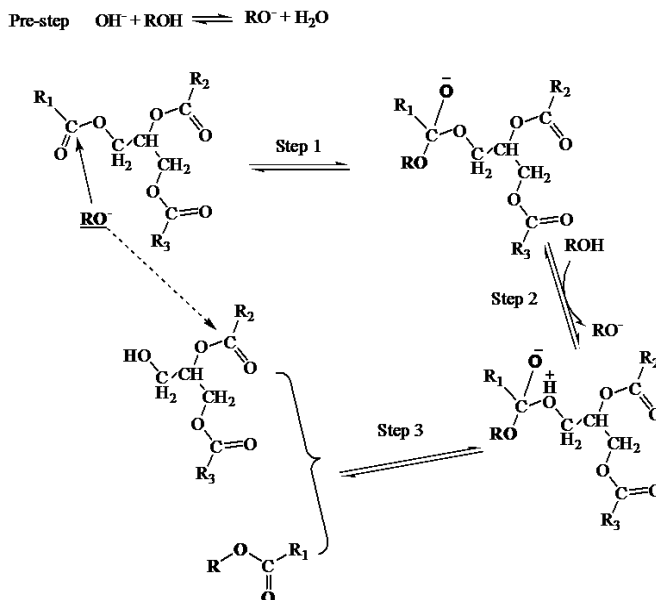


Fig. 6. Base-catalyzed reaction mechanism of transesterification.

4. Other methods or technologies

4.1 Microwave technology

Microwave heating has been widely used in many areas to affect chemical reaction pathways and accelerate chemical reaction rates. Microwave irradiation can accelerate the chemical reaction, and high product yield can be achieved in a short time. Microwave irradiation assisted biodiesel synthesis is a physicochemical process since both thermal and non-thermal effects are often involved, which activates the smallest degree of variance of polar molecules and ions such as alcohol with the continuously changing magnetic field. Upon microwave heating, rapid rising of temperature would result in interactions of changing electrical field with the molecular dipoles and charged ion, leading to a rapid generation of rotation and heat due to molecular friction. Dielectric properties are important in both the design calculations for high frequency and microwave heating equipment. Furthermore, dielectric constant depends on frequency, and is strongly influenced by temperature, mixed ratio and solvent type.

In Azcan and Danisman's work (2007), microwave heating effectively reduced reaction time from 30 min (for a conventional heating system) to 7 min. Ozturk et al. (2010) studied microwave assisted transesterification of maize oil, using a molar ratio alcohol/maize-oil of 10:1, and 1.5% w/w NaOH as catalyst. A 98.3% conversion rate is obtained using methanol for 5 min. Based on special heating manner, microwave irradiation performed well in transesterification of vegetable oil with heterogeneous base. Hsiao et al. (2011) introduced

nano-powder calcium oxide as solid base in converting soybean oil to biodiesel. A 96.6% of conversion rate was obtained under conditions of methanol/oil molar ratio of 7:1, amount of catalyst of 3.0 wt.%, reaction temperature of 65 °C and reaction time of 60 min. While a biodiesel conversion rate exceeded 95% was achieved under conditions of 12:1 molar ratio of methanol to oil, 8 wt.% catalyst, 65 °C reaction temperature and 2.0% water content for 3 h (Xie et al., 2008). Microwave irradiation is also used for extraction of bioactive compounds for value-added products, including oil extraction systems. Microwave heating can be used for biodiesel production by in-situ simultaneous extraction and transesterification from oil seeds.

4.2 Ultrasonic technology

There are three primary effects on an object under ultrasound: (1) Mechanical effects; (2) Cavity effects; (3) Thermal effects. The above effects of ultrasound not only change the structure of the object, but also lead to chemical reactions. Ultrasonic radiation is a relative new technique that results in the formation and collapse of micro-scale bubbles in liquid to generate local high temperature and high pressure. So, it is used as alternative energy source to promote reactions. The cavitation in ultrasonic wavelength is the phenomenon of expansion and contraction of the transfer media bubbles. Ultrasonic energy is propagated into solution by the destruction of pressurized micro-bubbles into small droplets. Furthermore, ultrasonication device placed near the liquid-liquid interface in a two-phase reaction system benefited for producing large interfacial areas (Wu et al., 2007). Cavitation induced by ultrasound has significant effects on liquid phase reactions. When ultrasound irradiation increased from 30 to 70 W, the mean droplet size decreased from 156 nm to 146 nm. Nevertheless, effect of droplet size on biodiesel yield was not studied.

Ultrasound has a short wavelength, slow transfer rate, and high energy transmittance as the vibrating type energy. Irradiation of ultrasonic energy has been used for the (trans)esterification of vegetable oils to shorten reaction time and to increase product yield (Deng et al., 2010). A comparison study between conventional and ultrasonic preparation of beef tallow biodiesel was carried out (Teixeira et al., 2009). The results showed that conversion rate and biodiesel quality were similar. The use of ultrasonic irradiation decreased reaction time from 1 h to 70 s. In addition to the mentioned advantages, ultrasonic can promote the deposition of glycerol at the bottom of reactor. Stavarache et al. (2007) investigated a bench-scale continuous process for biodiesel synthesis from neat vegetable oils under high power, low frequency ultrasonic irradiation. Reaction time and alcohol-oil molar ratio were mainly variables affecting the transesterification. Their research confirmed that ultrasonic irradiation is suitable for large-scale processing of vegetable oils since relatively simple devices can be used to perform the reaction. In the process, however, real irradiation time decreased during increasing pulse interval for tuning temperature, leading to biodiesel yield decrease. To reduce the effect of irradiation time loss, reaction temperature should be kept constant.

Mass transfer resistance is one of the main reasons for poor catalytic performance of solid catalysts in (trans)esterification. Very fine ultrasonic emulsions greatly improve the interfacial area available for reaction, increase the effective local concentration of reactive species, and enhance the mass-transfer in interfacial region. Therefore it leads to a remarkable increase in reaction rate under phase-transfer conditions transesterification with solid catalyst. Ultrasonication could reduce the transesterification reaction time to around 10 min compared with over 6 h for conventional processing.

4.3 Ionic liquids

Ionic liquids (ILs) are defined as salts that are in the state of liquid at low temperatures (below 100 °C). They are composed solely of cations and anions, and were used as solvents/catalysts for reactions. ILs are nonvolatile and thermal stable, hence they are excellent alternatives to traditional solvents. Some ILs are Lewis and Franklin acids. Acidic ILs are new-type of catalysts with high-density active sites as liquid acids but non-volatilization as solid acids. Furthermore, cations and anions of ILs can be designed to bind a series of groups with specific properties, so as to achieve the purpose of regulating the acidity. Recently, they have been used to replace traditional liquid acids such as sulfuric acid and hydrochloric acid for biomass conversion (Qi et al., 2010).

ILs were originally used as solvents for biodiesel synthesis with high biodiesel yield in short reaction time, by forming an effective biphasic catalytic system for the transesterification reaction. Neto et al. (2007) introduced a complex $[\text{Sn}(3\text{-hydroxy-2-methyl-4-pyrone})_2(\text{H}_2\text{O})_2]$ immobilized in $\text{BMI}\cdot\text{InCl}_4$ with high price metal salts, and a maximum biodiesel yield of 83% was achieved. Later, biodiesel synthesis from vegetable oils using imidazolium-based ionic liquids under multiphase acidic and basic conditions was reported (Lapis et al., 2008). It is found that the acid is almost completely retained in ionic liquid phase, and ILs could be reused at least six times without any significant loss in the biodiesel yield or selectivity. However, the ILs is expensive and was only used for neutral vegetable oils. Brønsted acidic ILs were highly efficient catalysts for biodiesel synthesis from vegetable oils. Sulfuric acid groups in these ILs are the active sites for transesterification. Dicationic ILs exhibited better stability than the traditional ones. The acidic dicationic ILs with an alkane sulfuric acid group gave a superior catalytic performance in esterification reaction. Neto et al. (2007) assumed that the use of ILs with inherent Lewis acidity may constitute a more stable and robust catalytic system for the transesterification reaction. Guo et al. (2011) used 7 low-cost commercial ILs as both catalysts and solvents for the direct production of biodiesel from un-pretreated *Jatropha* oil. It was found that $[\text{BMIm}][\text{CH}_3\text{SO}_3]$ had the highest catalytic activity with 93% of oleic acid being converted into ethyl oleate. When FeCl_3 was added to $[\text{BMIm}][\text{CH}_3\text{SO}_3]$, a maximum biodiesel yield of 99.7% was achieved from un-pretreated *Jatropha* oil. However, it is complicated to synthesize these functional ILs and their cost is too high for industrial applications. Therefore, further investigation is necessary to synthesize inexpensive, stable and highly-active ILs.

5. Conclusions and future perspectives

Currently, homogeneous catalysis is a predominant method for transesterification reaction. Separating the catalyst from a mixture of reactants and product is technically difficult. Compared with liquid acid catalysts, solid acid catalysts have distinct advantages in recycling, separation, and environmental friendliness. Solid acid catalysts are easily separated from the products mixture for reuse after reaction. Both Lewis acid-base sites and Brønsted acid-base sites have the ability to catalyze oil transesterification reaction. Besides specific surface area, pore size and pore volume, the active site concentration and acidic type are important factors for solid acid performance. Moreover, types of active precursor have significant effect on the catalyst activity of supported catalysts. However active site concentration was found to be the most important factor for solid catalyst performance. Solid acids with a large potential for synthesis of biodiesel should have a large number of Brønsted acid sites and good thermal stability. A good solid catalyst with sufficient catalytic

activity combined with appropriate reactor design should make it possible to realize biodiesel production on a practical scale.

Among solid catalysts introduced in this chapter, Solid acid (i.e. ion-exchange resins, HPAs and supported acid catalysts) and Solid base (i.e. hydrotalcites, metallic salts and supported base catalysts) are promising material for study. Low-cost catalysts that still retain the advantages of a supported base catalyst should be developed to simplify the preparation process. Design of solid catalysts with higher activity is an important step for clean production of biodiesel. Innovation and breakthrough in hydrolysis process is a key for commercialization of solid acid catalysts. In the near future, through the combination of green solvents, chemical process, biotechnology and catalysis, it can be expected that novel solid catalysts will replace the current-used homogeneous catalysts in biodiesel production.

6. References

- Abreu, F.R., Lima, D.G., Hamúa, E.H., Wolf, C., Suarez, P.A.Z. (2004) Utilization of metal complexes as catalysts in the transesterification of Brazilian vegetable oils with different alcohols. *Journal of Molecular Catalysis A: Chemical*, Vol.209, No.1-2, pp. 29-33.
- Aends, I.W.C.E., Sheldon, R.A. (2001) Activities and stabilities of heterogeneous catalysts in selective liquid phase oxidations: recent developments. *Applied catalysis A: General*, Vol.212, No.1-2, pp. 175-187.
- Alsalmé, A., Kozhevnikova, E.F., Kozhevnikov, I.V. (2008) Heteropoly acids as catalysts for liquid-phase esterification and transesterification. *Applied Catalysis A: General*, Vol.349, pp. 170-176.
- Arzamendi, G., Campo, I., Arguñarena, E., Sánchez, M., Montes, M., Gandá, L.M. (2007) Synthesis of biodiesel with heterogeneous NaOH/alumina catalysts: Comparison with homogeneous NaOH. *Chemical Engineering Journal*, Vol.134, pp 123-130.
- Azcan, N., Danisman, A. (2007) Alkali catalyzed transesterification of cottonseed oil by microwave irradiation. *Fuel*, Vol.86, pp. 2639-2644.
- Bancquart, S., Vanhove, C., Pouilloux, Y., Barrault, J. (2001) Glycerol transesterification with methyl stearate over solid basic catalysts: I. Relationship between activity and basicity. *Applied Catalysis A: General*, Vol.218, pp 1-11.
- Brito, A., Borges, M.E., Garín, M., Hernández, A. (2009) Biodiesel production from waste oil using Mg-Al layered doublehydrotalcite catalysts. *Energy&Fuels*, Vol.23, pp. 2952-2958.
- Caetano, C.S., Fonseca, I.M., Ramos, A.M., Vital, J., Castanheiro, J.E. (2008) Esterification of free fatty acids with methanol using heteropolyacids immobilized on silica. *Catalysis Communications*, Vol.9, pp. 1996-1999.
- Caetano, C.S., Guerreiro, L., Fonseca, I.M., Ramos, A.M., Vital, J., Castanheiro, J.E. (2009) Esterification of fatty acids to biodiesel over polymers with sulfonic acid groups. *Applied Catalysis A: General*, Vol.359, No.1-2, pp. 41-46.
- Cantrell, D.G., Gilie, L.J., Lee, A.F., Wilson, K. (2005) Structure-reactivity correlations in Mg-Al hydrotalcite catalysts for biodiesel synthesis. *Applied Catalysis A: General*, Vol.287, No. 2, pp. 183-190.
- Chung, K.H., Chang, D.R., Park, B.G. (2008) Removal of free fatty acid in waste frying oil by esterification with methanol on zeolite catalysts. *Bioresource Technology*, Vol.99, pp. 7438-7443.

- Deng, X., Fang, Z., Liu, Y.H. (2010) Ultrasonic transesterification of *Jatropha curcas* L. oil to biodiesel by a two-step process. *Energy Conversion and Management*, Vol.51, pp. 2802-2807.
- Deng, X., Fang, Z., Liu, Y.H., Yu, C.L. (2011) Production of biodiesel from *Jatropha* oil catalyzed by nanosized solid basic catalyst. *Energy*, Vol.36, No.2, pp. 777-784.
- Di Serio, M., Dimiccoli, M., Cammarota, F., Nastasi, M., Santacesaria, E. (2005) Synthesis of biodiesel via homogeneous Lewis acid catalyst. *Journal of Molecular Catalysis A: Chemical*, Vol.239, pp.111-115.
- Feng, Y.H., He, B.Q., Cao, Y.H., Li, J.X., Liu, M., Yan, F., Liang, X.P. (2010) Biodiesel production using cation-exchange resin as heterogeneous catalyst. *Bioresource Technology*, Vol.101, pp. 1518-1521.
- Feng, Y.H., Zhang, A.Q., Li, J.X., He, B.Q. (2011) A continuous process for biodiesel production in a fixed bed reactor packed with cation-exchange resin as heterogeneous catalyst. *Bioresource Technology*, Vol. 102, pp.3607-3609.
- Garcia, C.M., Teixeira, S., Marciniuk, L.L., Schuchardt, U. (2008) Transesterification of soybean oil catalyzed by sulfated zirconia. *Bioresource Technology*, Vol. 99, pp. 6608-6613.
- Giri, B.Y., Rao, K.N., Devi, B.L.A.P., Lingaiah, N., Suryanarayana, I., Prasad, R.B.N., Prasad, P.S.S. (2005) Esterification of palmitic acid on the ammonium salt of 12-tungstophosphoric acid: The influence of partial proton exchange on the activity of the catalyst. *Catalysis Communications*, Vol. 6, pp. 788-792.
- Guo, F., Fang, Z., Tian, X.F., Long, Y.D., Jiang, L.Q. (2011) One-step production of biodiesel from *Jatropha* oil with high-acid value in ionic liquids. *Bioresource Technology*, Vol.102, No.11, pp.6469-6472.
- Guo, F., Peng, Z.G., Dai, J.Y., Xiu, Z.L. (2010) Calcined sodium silicate as solid base catalyst for biodiesel production. *Fuel Processing Technology*, Vol. 91, No.33, pp.322-328.
- Hsiao, M.C., Lin, C.C., Chang, Y.H. (2011) Microwave irradiation-assisted transesterification of soybean oil to biodiesel catalyzed by nanopowder calcium oxide. *Fuel*, Vol.90, pp.1963-1967.
- Karmee, K.S., Chadha, A. (2005) Preparation of biodiesel from crude oil of *Pongamia pinnata*. *Bioresource Technology*, Vol.96, pp.1425-1429.
- Kawashima, A., Matsubara, K., Honda, K. (2008) Development of heterogeneous base catalysts for biodiesel production. *Bioresource Technology*, Vol.99, pp.3439-3443.
- Kozhevnikov, I.V. (1998) Catalysis by heteropoly acids and multicomponent polyoxometalates in liquid-phase reactions. *Chemical Reviews*, 98: 171-198.
- Lapis, A.A., Oliveira, L.F., Neto, B.A.D., Dupont, J. (2008) Ionic liquid supported acid/base-catalyzed production of biodiesel. *ChemSusChem*, Vol.1, pp.759-762.
- Lee, D.W., Park, Y.M., Lee, K.Y. (2009) Heterogeneous Base Catalysts for Transesterification in biodiesel synthesis. *Catal Surv Asia*, Vol.13, pp.63-77.
- Liu, X., He, H., Wang, Y., Zhu, S.L. (2007) Transesterification of soybean oil to biodiesel using SrO as a solid base catalyst. *Catalysis Communications*, Vol.8, pp. 1107-1111.
- Liu, X.J., He, H.Y., Wang, Y.J., Zhu, S.L., Piao, X. (2008) Transesterification of soybean oil to biodiesel using CaO as a solid base catalyst. *Fuel*, Vol.87, pp.216-221.
- Liu, X.J., Piao, X.G., Wang, Y.J., Zhu, S.L., He, H.Y. (2008) Calcium methoxide as a solid base catalyst for the transesterification of soybean oil to biodiesel with methanol. *Fuel*, Vol.87, pp.1076-1082.

- Liu, Y., Wang, L., Yan, Y. (2009) Biodiesel synthesis combining pre-esterification with alkali catalyzed process from rapeseed oil deodorizer distillate. *Fuel Processing Technology*, Vol.90, pp. 857-862.
- Lotero, E., Liu, Y.J., Lopez, D.E. (2005) Suwannakarn K, Bruce DA, Goodwin JG. Synthesis of biodiesel via acid catalysis. *Industrial & Engineering Chemistry Research*, Vol.44, No.14, pp. 5353-5363.
- Long, Y.D., Guo, F., Fang, Z., Tian, X.F., Jiang, L.Q., Deng, X., Zhang, F. (2011) Production of biodiesel and lactic acid from rapeseed oil using sodium silicate as catalyst. *Bioresource Technology*, Vol.102, pp.6884-6886.
- Ma, F., Hanna, M.A. (1999) Biodiesel production: a review. *Bioresource Technology*, 70: 1-15.
- Montero, J.M., Gai, P., Wilson, K., Lee, A.F. (2009) Structure-sensitive biodiesel synthesis over MgO nanocrystals. *Green Chemistry*, Vol.11, pp. 265-268.
- Narasimharao, K., Brown, D.R., Lee, A.F., Newman, A.D., Siril, P.F., Tavener, S.J., Wilsona, K. (2007) Structure-activity relations in Cs-doped heteropolyacid catalysts for biodiesel production. *Journal of Catalysis*, Vol.248, pp.226-234.
- Neto, B.A.D., Alves, M.B., Lapis, A.A.M., Nachtigall, F.M., Eberlin, M.N., Dupont, J., Suarez, P.A.Z. (2007) 1-n-Butyl-3-methylimidazolium tetrachloro-indate (BMI InCl_4) as a media for the synthesis of biodiesel from vegetable oils. *Journal of Catalysis*, Vol.249, pp.154-161.
- Noiroj, K., Intarapong, P., Luengnaruemitchai, A., Jai-In, S. (2009) A comparative study of $\text{KOH}/\text{Al}_2\text{O}_3$ and KOH/NaY catalysts for biodiesel production via transesterification from palm oil. *Renewable Energy*, Vol.34, pp.1145-1150.
- Okuhara, T., Nishimura, T., Watanabea, H., Misono, M. (1992) Insoluble heteropoly compounds as highly active catalysts for liquid-phase reactions. *Journal of Molecular Catalysis*, Vol.74, No.1-3, pp. 247-256.
- Ozturk, G., Kafadar, A.B., Duz, M.Z., Saydut, A., Hamamci, C. (2010) Microwave assisted transesterification of maize (*Zea mays L.*) oil as a biodiesel fuel. *Energy Exploration & Exploitation*, Vol.28, No.1, pp.47-57.
- Peterson, G.R., Scarrach, W.P. (1984) Rapeseed oil transesterification by heterogeneous catalysis. *Journal of the American Oil Chemists' Society*, Vol.61, pp.1593-1596.
- Pérez-Pariente, J., Díaz, I., Mohino, F., Sastre, E. (2003) Selective synthesis of fatty monoglycerides by using functionalised mesoporous catalysts. *Applied Catalysis A: General*, Vol.254, pp.173-188.
- Qi, X.H., Watanabe, M., Aida, T.M., Smith Jr., R.L. (2010) Efficient one-pot production of 5-hydroxymethylfurfural from inulin in ionic liquids. *Green Chemistry*, Vol.12, pp.1855-1860.
- Reddy, C.R.V., Oshel, R., Verkase, J.G. (2006) Room-temperature conversion of soybean oil and poultry fat to biodiesel catalyzed by nanocrystalline calcium oxides. *Energy & Fuels*, Vol.20, No.3, pp.1310-1314.
- Rubio-Caballero, J.M., Santamaría-González, J., Moreno-Tost, R., Jiménez-López, A., Maireles-Torres, P. (2009) Calcium zincate as precursor of active catalysts for biodiesel production under mild conditions. *Applied Catalysis B: Environmental*, Vol.91, pp.339-346.
- Russbuedt, B.M.E., Hoelderich, W.F. (2009) New sulfonic acid ion-exchange resins for the preesterification of different oils and fats with high content of free fatty acids. *Applied Catalysis A: General*, Vol.362, pp.47-57.

- Sasidharan, M., Kumar, R. (2004) Transesterification over various zeolites under liquid-phase conditions. *Journal of Molecular Catalysis A: Chemical*, Vol.210, pp.93-98.
- Serio, M.D., Cozzolino, M., Tesser, R., Patrono, P., Pinzarij Bonelli, B., Santacesaria, E. (2007) Vanadyl phosphate catalysts in biodiesel production. *Applied Catalysis A: General*, Vol.320, pp.1-7.
- Serio, M.D., Ledda, M., Cozzolino, M., Minutillo, G., Tesser, R., Santacesaria, E. (2006) Transesterification of soybean oil to biodiesel by using heterogeneous basic catalysts. *Industrial & Engineering Chemistry Research*, Vol.45, No.9, pp.3009-3014.
- Shibasaki-Kitakawa, N., Honda, H., Kuribayashi, H., Toda, T., Fukumura, T., Yonemoto, T. (2007) Biodiesel production using anionic ion-exchange resin as heterogeneous catalyst. *Bioresource Technology*, Vol.98, pp. 416-421.
- Shokrolahi, A., Zali, A., Pouretdal, H.R., Mahdavi, M. (2008) Carbon-based solid acid catalyzed highly efficient oxidations of organic compounds with hydrogen peroxide. *Catalysis Communications*, Vol.9, pp. 859-863.
- Shu, Q., Yang, B., Yuan, H., Qing, S., Zhu, G. (2007) Synthesis of biodiesel from soybean oil and methanol catalyzed by zeolite beta modified with La^{3+} . *Catalysis Communications*, Vol.8, pp.2159-2165.
- Shu, Q., Zhang, Q., Xu, G.H., Nawaz, Z., Wang, D.Z., Wang, J.F. (2009) Synthesis of biodiesel from a model waste oil feedstock using a carbon-based solid acid catalyst: reaction and separation. *Fuel Processing Technology*, Vol.90, pp.1002-1008.
- Son, S.M., Kimura, H., Kusakabe, K. (2011) Esterification of oleic acid in a three-phase, fixed-bed reactor packed with a cation exchange resin catalyst. *Bioresource Technology*, Vol.102, pp.2130-2132.
- Stavarache, C., Vinatoru, M., Bandow, H. (2007) Ultrasonically driven continuous process for vegetable oil transesterification. *Ultrasonics Sonochemistry*, Vol.14, pp.413-417.
- Suganuma, S., Nakajima, K., Kitano, M., Yamaguchi, D., Kato, H., Hayashi, S., Hara, M. (2008) Hydrolysis of cellulose by amorphous carbon bearing SO_3H , COOH , and OH groups. *JACS*, Vol.130, pp.12787-12793.
- Sun, H., Hu, K., Lou, H., Zheng, X.M. (2008) Biodiesel production from transesterification of rapeseed oil using $\text{KF}/\text{Eu}_2\text{O}_3$ as a catalyst. *Energy Fuels*, Vol.22, No.4, pp.2756-2760.
- Teixeira, L.S.D., Assis, J.C.R., Mendonça, D.R., Santos, I.T.V., Guimarães, P.R.B., Pontes, L.A.M., Teixeira, J.S.R. (2009) Comparison between conventional and ultrasonic preparation of beef tallow biodiesel. *Fuel Processing Technology*, Vol.90, pp.1164-1166.
- Tesser, R., Serio, M.D., Carotenuto, G., Santacesaria, E. (2010) Absorption of water/methanol binary system on ion-exchange resins. *Canadian journal of chemical engineering*, Vol.88, No.6, pp.1044-1053.
- Toda, M., Takagaki, A., Okamura, M., Kondo, J.N., Hayashi, S., Domen, K., Hara, M. (2005) Biodiesel made with sugar catalyst. *Nature*, Vol.438, pp.178.
- Vyas, A.P., Subrahmanyam, N., Patel, P.A. (2009) Production of biodiesel through transesterification of Jatropha oil using $\text{KNO}_3/\text{Al}_2\text{O}_3$ solid catalyst. *Fuel*, Vol.88, No.4, pp. 625-628.
- Wang, L., Yang, J. (2007) Transesterification of soybean oil with nano-MgO or not in supercritical and subcritical methanol. *Fuel*, Vol.86, pp. 328-333.
- Wu, P., Yang, Y., Colucci, J.A., Grulke, E.A. (2007) Effect of ultrasonication on droplet size in biodiesel mixtures. *Journal of the American Oil Chemist's Society*, Vol.84, pp. 877-884.

- Xi, Y.Z., Davis, R.J. (2008) Influence of water on the activity and stability of activated Mg–Al hydrotalcites for the transesterification of tributyrin with methanol. *Journal of Catalysis*, Vol.254, pp. 190-197.
- Xie, W.L., Peng, H., Chen, L.G. (2006) Calcined Mg-Al hydrotalcites as solid base catalysts for methanolysis of soybean oil. *Journal of Molecular Catalysis A: Chemical*, Vol.246, pp.24-32.
- Xie, W.L., Peng, H., Chen, L.G. (2006) Transesterification of soybean oil catalyzed by potassium loaded on alumina as a solid-base catalyst. *Applied Catalysis A: General*, Vol.300, pp.67-74.
- Xu, L.L., Li, W., Hu, J.L., Yang, X., Guo, Y.H. (2009) Biodiesel production from soybean oil catalyzed by multifunctionalized Ta₂O₅/SiO₂-[H₃PW₁₂O₄₀/R] (R = Me or Ph) hybrid catalyst. *Applied Catalysis B: Environmental*, Vol.90, pp.587-594.
- Zięba, A., Drelinkiewicz, A., Chmielarz, P., Matachowski, L., Stejskal, J. (2010) Transesterification of triacetin with methanol on various solid acid catalysts: A role of catalyst properties. *Applied Catalysis A: General*, Vol.387, pp.13-25.
- Zong, M.H., Duan, Z.Q., Lou, W.Y., Smith, T.J., Wu, H. (2007) Preparation of a sugar catalyst and its use for highly efficient production of biodiesel. *Green Chemistry*, Vol.7, pp.434-437.

Heterogeneous Catalysts Based on $H_3PW_{12}O_{40}$ Heteropolyacid for Free Fatty Acids Esterification

Marcio Jose da Silva¹, Abiney Lemos Cardoso¹, Fernanda de Lima Menezes¹,
Aline Mendes de Andrade¹ and Manuel Gonzalo Hernandez Terrones²

¹*Federal University of Viçosa/Chemistry Department,*

²*Federal University of Uberlândia/Chemistry Institute,
Brazil*

1. Introduction

1.1 Biodiesel chemical background

The inevitable exhaustion of the fossil diesel reserves, besides the environmental impact generated by the green-house effect gas emission by these fuels has provoked the search by renewable feedstocks for energy production (Srivastava & Prasad, 2000; Sakay et al., 2009). Due to this crescent demand, the industry chemistry in all parts of world has search to develop environment friendly technologies for the production of alternative fuels (Di Serio et al., 2008; Marchetti et al., 2007). Biodiesel is a “green” alternative fuel that has arisen as an attractive option, mainly because it is less pollutant than its counterpart fossil and can be obtained from renewable sources (Maa & Hanna, 1999).

Although it is undeniable that biodiesel is a more environmentally benign fuel, its actual production process cannot be classified as “green chemistry process” (Kulkarni et al., 2006). The major of the biodiesel manufacture processes are carry out under alkaline or acid homogeneous catalysis conditions, where is not possible the recycling catalyst, resulting in a greater generation of effluents and salts from neutralization steps of the products and wastes (Kawashima et al., 2008). Moreover, there are some important points related to raw materials commonly used, such as high costs, besides to crescent requirements of large land reserves for its cultivation.

1.2 Production of biodiesel from triglycerides transesterification reactions

Currently, the biodiesel is manufactured from alkaline transesterification of edible or non-edible vegetable oils via a well-established industrial process (Maa & Hanna, 1999). The transesterification reaction proceeds well in the presence of some homogeneous catalysts such as alkaline metal hydroxides and Brønsted acids (Demirbas, 2003). Traditionally, sulfuric acid, hydrochloric acid, and sulfonic acid are usually preferred as acid catalysts. (Haas, 2005). The catalyst is dissolved into alcohol (methanol or ethanol) by vigorous stirring in a reactor. The vegetal oil is transferred into the biodiesel reactor and then the catalyst/alcohol mixture is pumped into the oil (Demirbas, 2003). However, the use them usually require drastic reaction conditions, i.e., high temperature and elevated pressure

(Lotero et al., 2005). In addition, serious drawbacks related to its conventional production have aroused a special attention to biodiesel industry. Some of the natural oils or animal fats contain considerable amounts of free fatty acids (FFA), which are undesirable for the transesterification processes. These important features have hardly affected the final cost to biodiesel production (Haas, 2005).

1.3 Production of biodiesel from FFA esterification reactions

An attractive alternative for lower biodiesel price is produce it directly from domestic reject such as used cooking oil and waterwastes generated by food industry (Lou et al., 2008). Nevertheless, since these low cost lipidic feedstokes are rich in FFA, it's conversion into biodiesel is not compatible with alkaline catalysts. Nevertheless, different approaches have been proposed to get rid of this problem, and frequently, two alternative pathways have been employed for produces biodiesel from these kinds of resources. At first, a two-stage process that requires an initial acid-catalyzed esterification of the FFA followed by a base-catalyzed transesterification of the triglycerides; and secondly, a single-process that makes exclusive use of acid catalysts that promote both reactions simultaneously (Dussadee et al., 2010; Zullaikah et al., 2005).

Nowadays, the catalysts conventionally used in the FFA esterification reactions are Brønsted acids and work in a homogeneous phase (Lotero et al., 2005). Acids can catalyze the reaction by donating a proton to the FFA carbonyl group, thus making it more reactive. It should be mentioned that even though traditional mineral acids catalysts are an inexpensive catalysts able to those processes, they are highly corrosive, are not reusable, and results in a large generation of acid effluents which should be neutralized leaving greater amount of salts and residues to be disposed off into environment (Di Serio, 2007). Indeed, the reduction of environmentally unacceptable wastes is a key factor for developing less pollutants and advanced catalytic processes (Haas, 2005).

Thus, to develop alternative catalysts for the direct conversion into biodiesel of lipid wastes which are basically constituted of FFA, or yet for the pre-esterification of feedstokes that has high acidity seem be also a challenge to be overcome (Demirbas, 2008). Lewis acids can be interesting alternative catalysts for biodiesel production (Corma & Garcia, 2003). Nevertheless, their high cost, the manipulation difficult and the intolerance to water of compounds traditionally used such as BF_3 and others common reagents of organic synthesis, also does not favor the use of these later in FFA esterification at industrial scale (Di Serio et al., 2005).

For all these reasons, to develop recyclable alternative catalysts for FFA esterification presents on inexpensive raw materials and food industry rejects can be an option strategically important, and undoubtedly can make the biodiesel with more competitive price using a cleaner technology (Lotero at al., 2005).

1.4 Lewis or Brønsted acids heterogeneous catalysts for biodiesel production

Recent advance in heterogeneous catalysis for biodiesel production has the potential to offer some relief to the biodiesel industry by improving its ability to process alternative cheaper raw material, and to use a shortened and low cost manufacture process. Even though many alkaline heterogeneous catalysts have been reported as highly active for biodiesel synthesis, they still cannot tolerate acidic oils with FFA content 3.5%, which are frequently used as raw material (DiMaggio et al., 2010). Contrarily, solid acids catalysts are more tolerant to FFA and are potentially less corrosive for the reactors. Consequently, these catalysts have been increasingly used in biodiesel production processes (Hattori, 2010).

A plethora of works have described the development of heterogeneous catalysts based on acids solids, which appear to offer an attractive perspective to turn the biodiesel production more environment friendly (Kiss et al., 2006; Jothiramalingam & Wang, 2009; Refaat, 2011). These solid catalysts, which normally present Lewis acidity, are easily separated from the reaction medium and are potentially less corrosive for the reactors. Normally, these processes focus on transesterification reactions of the triglycerides presents in the vegetable oils, which after react with methanol are converted into biodiesel. However, serious technological drawbacks such as drastic conditions reaction, the strict control of raw material quality in relation to water content, beyond of the leaching catalyst provoked by presence of alcohol besides water generated into reaction medium seems suggest that those process yet are hard to become effective (Kozhevnikov, 2009).

Particularly, the authors have concentrating efforts in developing alternative processes of esterification based on two recyclable catalysts linked to both acid types:

- i. heteropolyacids, with a special highlighted for the dodecatungstophosphoric acid ($H_3PW_{12}O_{40} \cdot 12H_2O$) (Silva et al., 2010; Cardoso et al., 2008);
- ii. tin chloride, an simple, easily handling, water tolerant and inexpensive Lewis acid (Cardoso et al., 2009; da Silva et al., 2010).

On the hand, catalysis by heteropolyacids of the Keggin's structure such as $H_3PW_{12}O_{40}$ is one of the most important and growing areas of research in recent years (Timofeeva, 2003). They have been extensively used in both homogeneous and heterogeneous catalysis (Misono et al, 2000; Sharma et al., 2011).

On the other hand, the use $SnCl_2$ catalyst is also most attractive, because it is solid, commercially available, and easy to handle. Moreover, its display remarkably tolerance to water, has an economically cost effective, and can be used in recyclable processes (Cardoso et al., 2008). Herein, the authors investigate the catalytic activity of heterogeneous catalysts based on acid solids composites (e.g. $H_3PW_{12}O_{40}$ supported on silicon, niobium and zirconium oxides) towards the esterification of oleic acid with ethanol.

1.5 Keggin heteropolyacid catalysts: a brief introduction

Tungstophosphoric acid ($H_3PW_{12}O_{40}$) is a heteropolyacid largely used, in special under heterogeneous catalysis conditions. As a homogeneous catalyst the $H_3PW_{12}O_{40}$ has showed higher activity, selectivity and safety in handling in comparison to conventional mineral acids (Cardoso et al., 2008). Recent works have shown that the Keggin-type $H_3PW_{12}O_{40}$, for which the physicochemical and catalytic properties have been fully described, is an efficient super-acid that can be used in homogeneous or heterogeneous phase (Kozhevnikov, 1998). Moreover, in the heterogeneous phase, supported on several solid matrixes, heteropolyacid composites also have showed highly efficient as catalysts in several types of reactions (Pizzio et al., 1998; Timofeeva et al., 2003; Sepulveda et al., 2005).

The activity of $H_3PW_{12}O_{40}$ catalyst supported on zirconia was assessed in transesterification reactions with methanol (Sunita et al., 2008); high yields FAMES were achieved in reactions performed at temperatures of 200 °C. On the other hand, impregnated $H_3PW_{12}O_{40}$ heteropolyacid on four different supports (i.e. hydrous zirconia, silica, alumina, and activated carbon) also were investigated and converting low quality canola oil containing to biodiesel at 200 °C temperature (Kulkarni et al., 2006). Recently, the use of an impregnation route to support $H_3PW_{12}O_{40}$ on zirconia in acidic aqueous solution and further applied in the oleic acid esterification with ethanol was described (Oliveira et al., 2010). Those authors verified that 20% w/w $H_3PW_{12}O_{40}/ZrO_2$ was the most active catalyst (ca. 88% conversion,

4 h reaction, with 1:6 FA:ethanol molar ratio and 10% w/w of the catalyst in relation to FA. However, a minor leaching of catalyst (*ca.* 8% w/w related to the initial loading), affected drastically its efficiency, resulting in decreases yielding obtained from its reuse.

2. Results and discussion

2.1 General aspects

Herein the $\text{H}_3\text{PW}_{12}\text{O}_{40}$ catalyst were supported on three different solid matrixes (i.e. silicon, niobium, and zirconium oxides) by impregnation in ethanol solutions under different loads (*ca.* 10, 30 and 50% w/w). The solids were characterized by FTIR spectroscopy and the $\text{H}_3\text{PW}_{12}\text{O}_{40}$ catalyst content was determined by UV-Vis and AAS spectroscopy analysis.

2.2 Syntheses of the $\text{H}_3\text{PW}_{12}\text{O}_{40}$ catalysts

Differently than others supports, which were used as received, zirconium oxide was obtained from thermal treatment of $\text{ZrOCl}_2 \cdot 8\text{H}_2\text{O}$ salt at 300 °C during 4 hours. Composites of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ supported on silicon, niobium and zirconium oxides were prepared via impregnation method (Pizzio et al., 1998). During preparation, ethanol solutions of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ in hydrochloric acid 0.01 mol L⁻¹ were used to avoid any hydrolysis. All composites were prepared with concentrations depending upon the loading required to the support (e.g. 10, 30 and 50% w/w $\text{H}_3\text{PW}_{12}\text{O}_{40}$) using 10 ml of the solution per gram of support. The addition of the support to the solution formed a suspension, which after stirred, was evaporated at 80 °C until dryness. All samples of supported heteropolyacid were dried at 100 °C for 12 h and then thermally treated for 4 h at 200 or 300 °C in air.

2.3 FTIR spectra of the supported heteropolyacid catalysts: $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{SiO}_2$, $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{Nb}_2\text{O}_5$ and $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{ZrO}_2$

The supported $\text{H}_3\text{PW}_{12}\text{O}_{40}$ composites were analyzed by FTIR aims to confirm the presence of the Keggin anion structure on support employed. The $\text{PW}_{12}\text{O}_{40}^{3-}$ Keggin ion structure is well known, and consists of a PO_4 tetrahedron surround by four W_3O_{13} groups formed by edge-sharing octahedral (Pope, 1983). These groups are bonded each other by corner-sharing oxygens. This structure gives rise to four types of oxygen atoms, being responsible for the fingerprint bands of the $\text{PW}_{12}\text{O}_{40}^{3-}$ Keggin ion (*ca.* 1200 - 700 cm⁻¹). FTIR spectra were obtained from all samples with different content of HPW (*ca.* 10, 30 and 50% w/w). However, the typical bands of the Keggin ions were more evident for samples with HPW contents of 30 and 50 % w/w. Herein, only the FTIR spectra of the composites with 30 % w/w $\text{H}_3\text{PW}_{12}\text{O}_{40}$, which were thermally treated at temperature of 100, 200 and 300 °C are shown. Figures 1-3 shows the characteristic bands for absorptions of ν (P-O) and ν (W-O) bonds existent on $\text{H}_3\text{PW}_{12}\text{O}_{40}$ composites. All FTIR spectra of both supported $\text{H}_3\text{PW}_{12}\text{O}_{40}$ catalyst or pure are displayed in Figures 1-3.

When niobium oxide was the support, only a stronger band at 1080 cm⁻¹ relative to ν (P-O) bond was easily observed (Figure 1). All others bands were overlapping by support bands. Conversely, when the support employed was the SiO_2 , all the bands related to others oxygen atoms were observed ν (W = $\text{O}_{\text{tetrahedric}}$) bond at 985 cm⁻¹; ν (W-O_{cubic}-W) bond, at 895 cm⁻¹, and ν (W-O-W) bond, at 795 cm⁻¹; only the band of ν (P-O) bond was not visible.

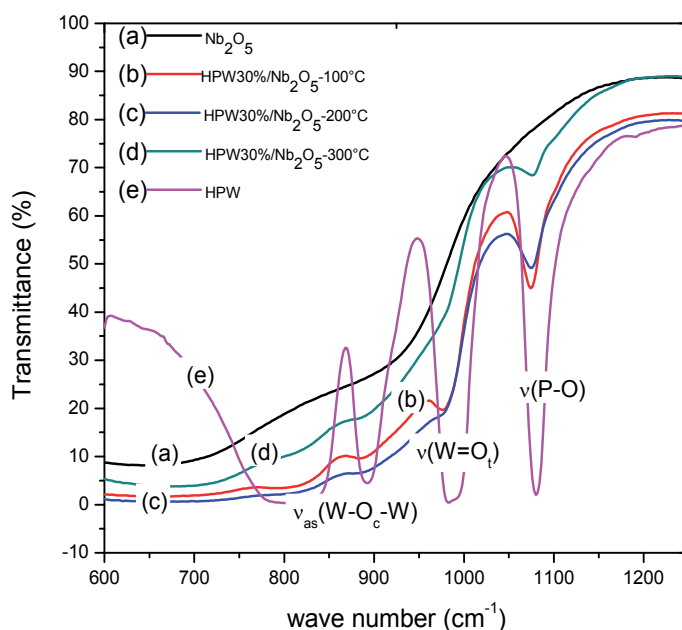


Fig. 1. FTIR spectra of (30% w/w HPW) $H_3PW_{12}O_{40}$ composites (a) Nb_2O_5 ; (b) HPW 30% / Nb_2O_5 -100°C; (c) HPW 30% Nb_2O_5 -200°C; (d) HPW 30% / Nb_2O_5 -300°C; (e) HPW

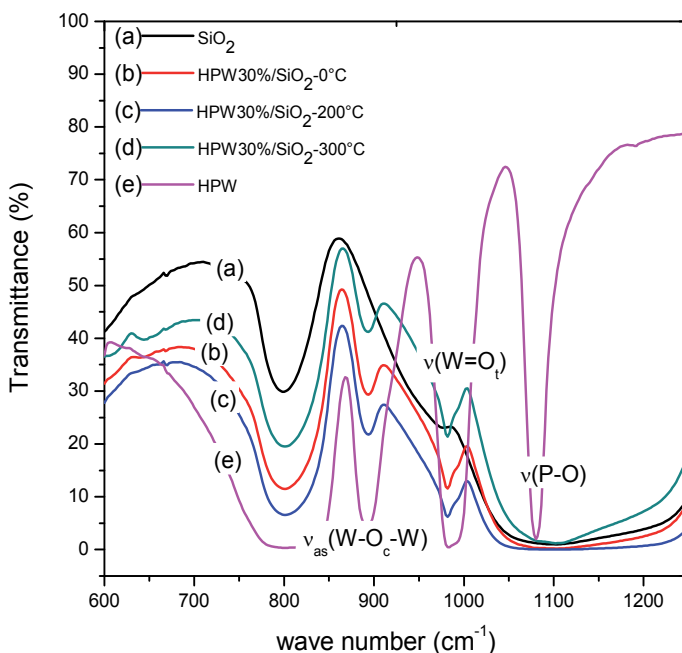


Fig. 2. FTIR spectra of (30 %w/w HPW) $H_3PW_{12}O_{40}$ composites (a)- SiO_2 ; (b)- HPW 30%/ SiO_2 -100°C; (c) HPW 30%/ SiO_2 -200°C; (d) HPW 30%/ SiO_2 -300°C; (e)- HPW.

These bands are preserved on the silicon-supported catalyst samples, but they are slightly broadened and partly obscured because of the strong absorptions of silica at 1100 and 800 cm^{-1} region.

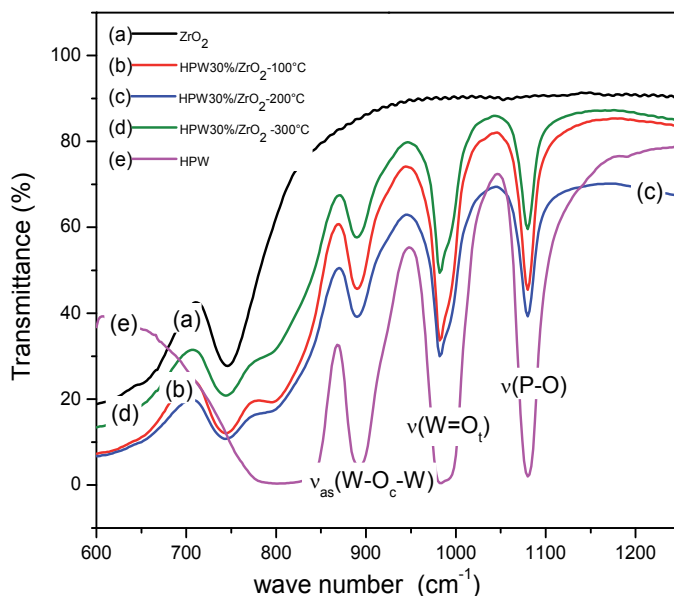


Fig. 3. FTIR spectra of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ (30% HPW) composites (a)- ZrO_2 ; (b)- HPW/ZrO_2 -100 °C (c) HPW 30%/ ZrO_2 -200°C; (d) HPW 30%/ ZrO_2 -300°C; (e)- HPW .

In Figure 3, where FTIR spectra obtained from HPW composites supported on ZrO_2 are shown, all characteristics bands of the Keggin anion are present.

In general, FTIR spectra of the HPW composites on different supports were not affected by temperature of thermal treatment. On the temperature range studied herein, all they have shown similar characteristics. However, a measure of interaction strength of HPW with support may be obtained from shift of more well defined bands to a region of lower wave number in comparison with the same band present on HPW pure (Figures 1-3).

2.4 UV-Vis spectra of the supported heteropolyacid catalysts: $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{SiO}_2$, $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{Nb}_2\text{O}_5$ and $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{ZrO}_2$

Beckman DU-650 UV-Vis spectrophotometer and quartz cells of 1.0 and 0.1 cm pathlength were employed for the adsorption experiment and measurements of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ spectra, respectively (Oliveira et al., 2010). The concentration of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ on catalysts was measured by UV-Vis spectroscopy before and after 6 hours of adsorption. The content of HPW in the solid was determined by AAS. In all composites yielding upper of 95% of impregnation were achieved.

2.5 Catalytic tests

2.5.1 Reaction conditions

The reactions conditions used were based on typical heterogeneous process (Figure 4). The catalyst is recovered from solution from simple filtration; the ethanol used in excess is

dried and reused in other catalytic run, similarly to solid catalyst. As will show on next section, ethanol in excess not favors the ester formation under these reaction conditions. The load catalyst used when the composites have 50% w/w HPW is corresponding to *ca.* 1 mol % in relation to oleic acid; in all reactions 1 mmol of oleic acid is used against 0.0087 mmols of HPW present in 50 mg of catalyst.

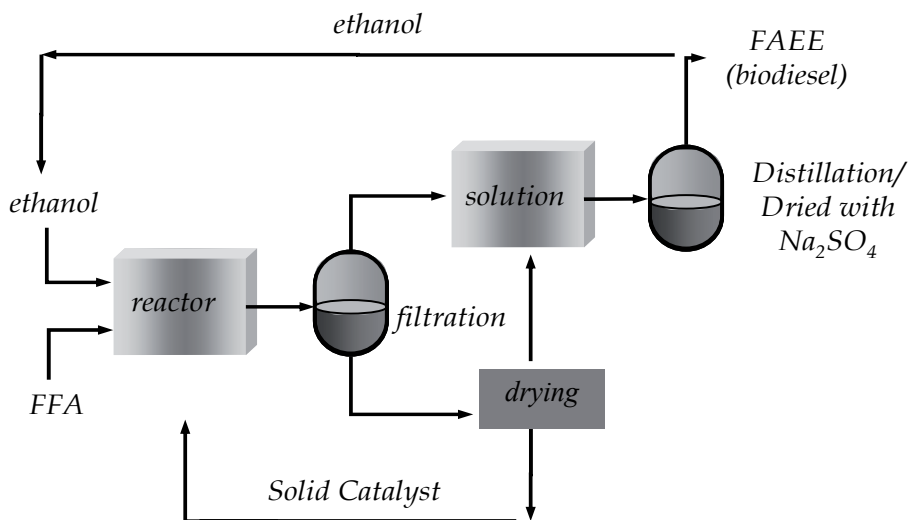


Fig. 4. Scheme of a typical acid solid-catalyzed process of FFA esterification in liquid phase

2.5.2 The effect of support on catalytic activity of HPW composites


The low surface area of solid $H_3PW_{12}O_{40}$, which implies a small amount of H^+ ions available on the surface; for circumvent these problems, three supports with a higher surface area were selected on this study. When solid supported heterogeneous catalyst are prepared, important aspects such as temperature of the thermal treatment, method of synthesis, type and precursor nature and also of the support, besides catalyst loading can affect drastically the efficiency of catalyst (Hattori, 2010).

Herein the temperature of thermal treatment was the parameter selected for an adequate comparison between the catalytic activities of different HPW composites. High temperatures may favor the reduction of support surface area (300 °C) and lower temperatures (100 °C) may favor catalyst leaching when impregnation is synthesis method; for these reasons, the authors selected results obtained with catalyst treated at 200 °C as displayed in Figure 5.

However, another important aspect that can be affected by thermal treatment is the water content on both support and HPW catalyst. All solid supports were completely dried (*ca.* 120 °C) before of the HPW composite synthesis. Conversely, termogravimetry analysis results described in literature (Essayem et al., 1999) revealed that for the zirconium containing HPW, the loss of crystallization water upon the thermal treatment at 120 °C

which retains six water mols per mols Keggin ion. After activation at 200 °C, HPW still retains some crystallization water molecules. (Morim et al., 2007).

The thermal treatment herein employed was the same for all supported-composite; so is reasonable conclude that although not quantitatively determined, water effect act equally onto both composites.

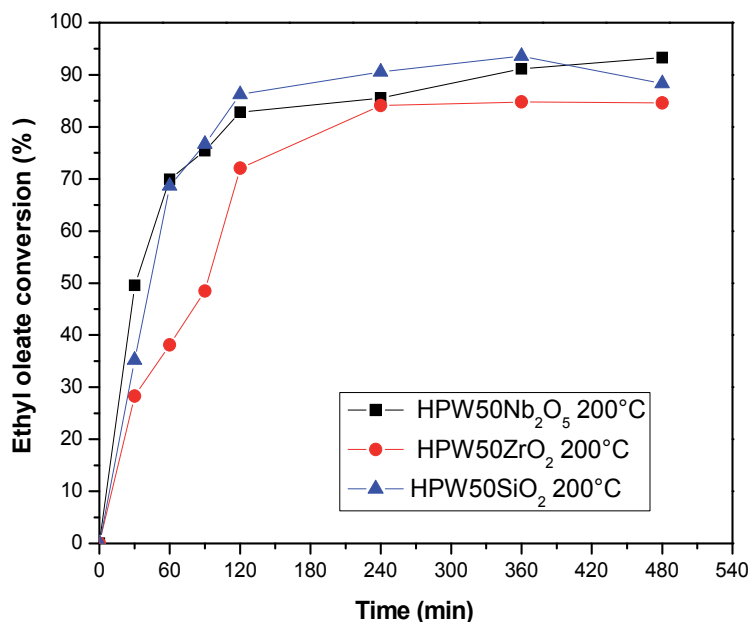

Reaction conditions: oleic acid (1.0 mmol); ethanol (155.0 mmols); catalyst (50.0 mg); 60 °C

Fig. 5. Oleic acid esterification with ethanol catalyzed by HPW 50% w/w composites supported on niobium, zirconium and silicon treated at 200 °C temperature


The HPW 50% w/w/niobium composite is strongest Lewis acid support; nevertheless, Figure 5 reveals the all catalyst have a very close behavior. The HPW/Nb₂O₅ composite was the catalyst selected to assess the effects of others reaction parameters because there are scarce data on literature; moreover, as will showed it was the catalyst more efficient and less leached in reactions. All results obtained on HPW/niobium-catalyzed oleic acid esterification with ethanol are highlighted in next sections.

2.5.3 Temperature effects of the thermal treatment on catalytic activity of the HPW/niobium composites

The esterification of oleic acid with ethanol conducted in the absence of the acidic catalysts (HPW) produced no significance yields of the corresponding ethyl oleate in spite of the high molar ratio of ethanol/oleic acid used. For instance, only a very low oleic acid to ethyl oleate conversion (*ca.* 10%) was achieved even after a reaction time as long as 8 h (Figure 6). Moreover, despite Lewis acidity of the support, when in presence only of niobium, a poor conversion of oleic acid into ethyl oleate was also reached (Figure 6).

Conversely, in the presence of $\text{H}_3\text{PW}_{12}\text{O}_{40}$ pure or niobium-supported and after a reaction time of 8 h much greater yields (*ca.* 86%) were attained, as concisely displayed in Figure 5. In all reactions, a high selectivity for the ethyl oleate greater than 90 % (analysis) was achieved, determined by GC analyses (no showed herein). Investigating the performance of supported HPW can be observed that the best and worst results were obtained when the HPW/niobium composites were treated at 100 and 300 °C temperatures. A possible leaching of catalyst (see next section) and the reduction of surface area provoked by high temperature of thermal treatment may be reasonable explanations.

On the other hand, the highest conversion was obtained when a mechanic mixture of niobium and $\text{H}_3\text{PW}_{12}\text{O}_{40}$ was used, probably due the simultaneous presence of the first and second catalyst; this later soluble and consequently more reactive (Lewis and Brønsted acids respectively).

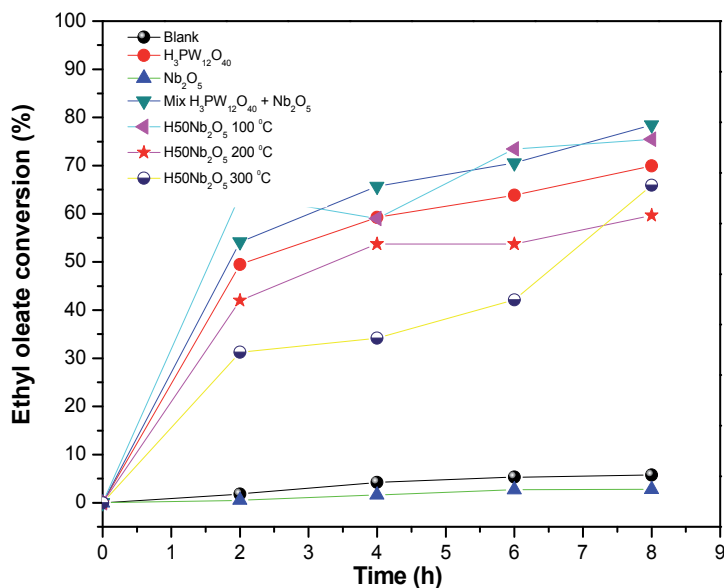


Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.

Fig. 6. $\text{H}_3\text{PW}_{12}\text{O}_{40}/\text{Nb}_2\text{O}_5$ -catalyzed oleic acid esterification with ethanol


2.5.4 The effect of HPW loading on catalytic activity of the HPW/niobium composites

In many cases, there are obvious approaches to improving and optimizing the yielding of catalytic reactions. Among the mains, is highlighted an increase on amount of reactants and of the catalyst. Recognized, the catalyst load can affect remarkably the efficiency of catalyst. Kinetic curves obtained from HPW/niobium-catalyzed esterification reactions with loads of HPW equal to 10, 30 and 50 % w/w respectively are shown in Figures 7-9. Because the temperature used on the thermal treatment may also affect both stability and activity of catalyst, three results obtained at three different temperatures are reported.

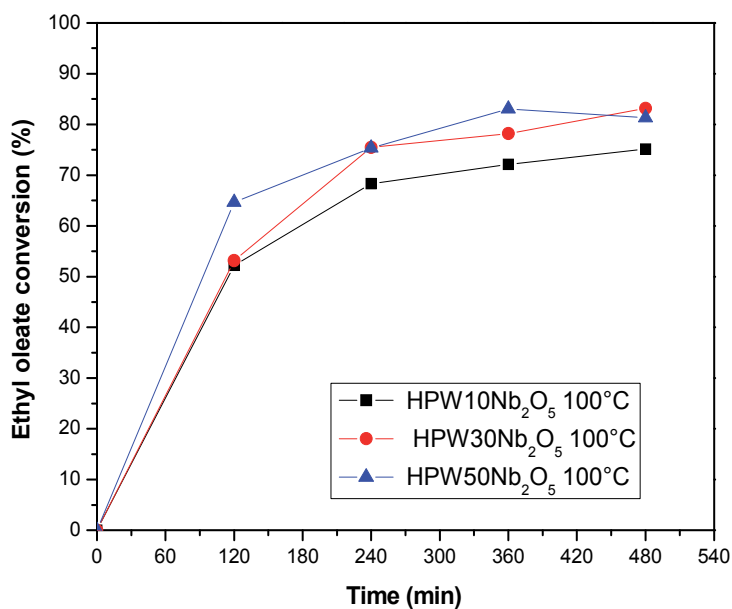


Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.

Fig. 7. Effect of the HPW load on HPW/Nb₂O₅-100 °C-catalyzed oleic acid esterification with ethanol

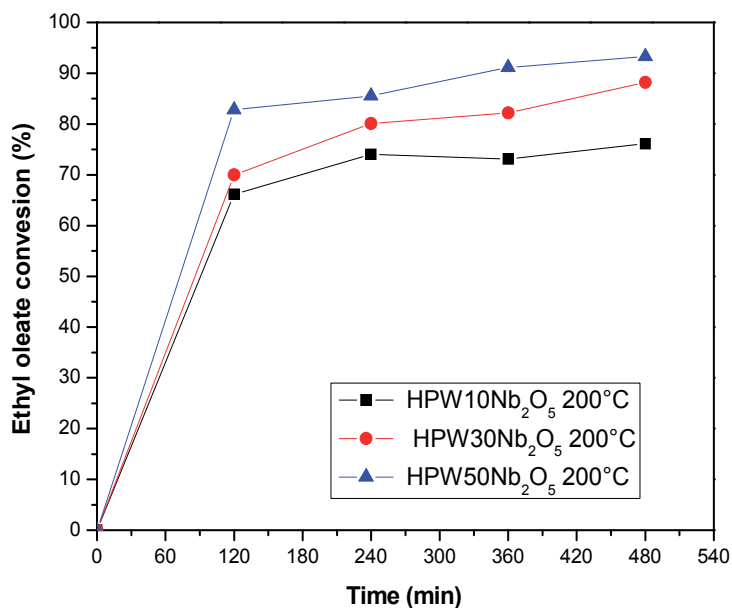

Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.

Fig. 8. Effect of the HPW load on HPW/Nb₂O₅-200 °C-catalyzed oleic acid esterification with ethanol

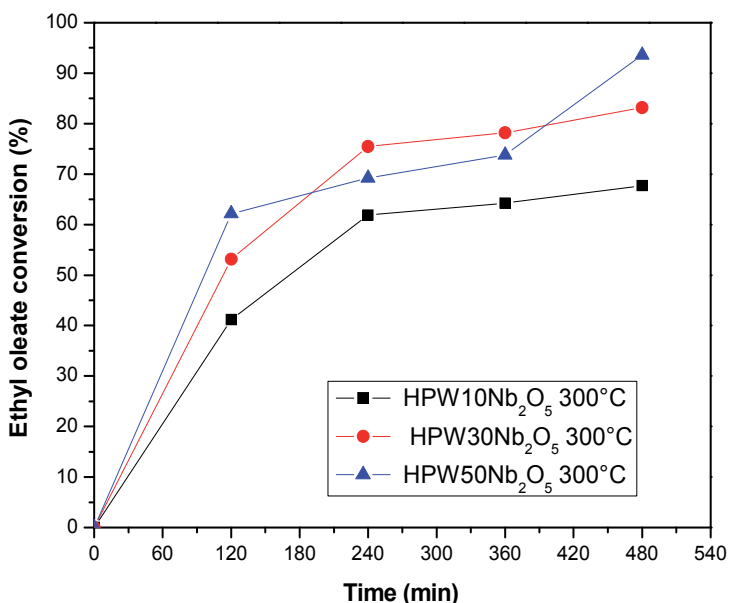

Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.


Fig. 9. Effect of the HPW load on HPW/ Nb_2O_5 -300 °C-catalyzed oleic acid esterification with ethanol

Although literature data described that occur a significance decreases on surface area with an increase of acid content, which may then reduce its catalytic activity (Dias et al., 2003), results displayed in Figures 6 to 8 suggest that a higher HPW load increases the efficiency of HPW/ Nb_2O_5 catalyst. Interestingly, it's occurred independently of the thermal treatment employed on synthesis of these catalysts (Figures 7-9).

2.5.5 Evaluating catalyst leaching


Leaching affects the industrial application as extensive leaching may threaten the reusability and the environmental sustainability of catalyst (Di Serio et al., 2010). Conceptually, catalyst leaching is usually associated with a phase boundary. For example, the active component of an insoluble acid solid catalyst might slowly leach into solution by some mechanism, perhaps involving bond breaking. When the catalyst has leached into a product phase, the sample should exhibit some catalytic activity. Thus, an efficient procedure that allows evaluates if there is any leaching is remove the catalyst out of the reaction and continue to run in your absence. Figures 10 to 12 displayed kinetic curves of reactions catalyzed by HPW/niohium composite before and after its remove.

It was found that the composites obtained at temperatures of 200 or 300 °C, seems be more stable under reactions conditions; noticeably, after catalyst remove the conversion of oleic acid into ethyl oleate remains constant. However, when the catalyst was synthesized at 100 °C, there was an increase in the conversion of oleic acid, suggesting that possibly a part of HPW can has been lixiviated to reaction solution. Interesting, the same occurred for the catalyst supported on zirconium and silicon (Figures 13 and 14).

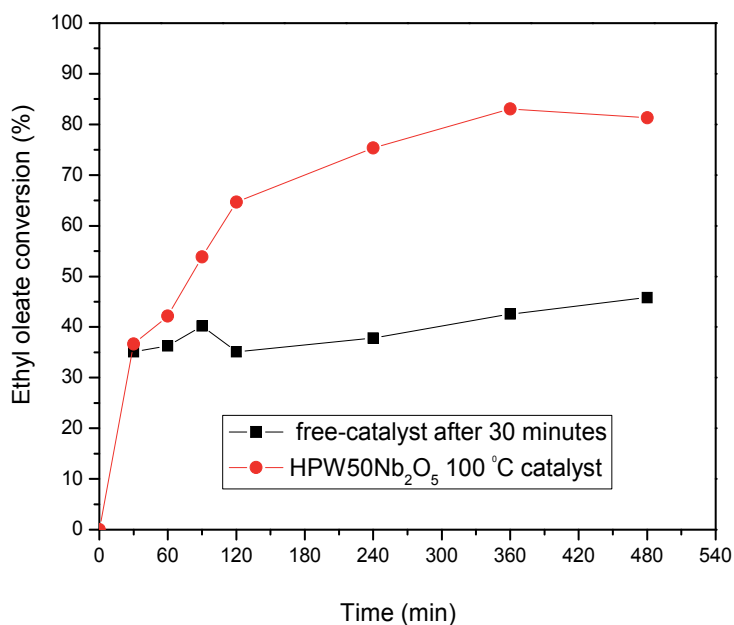


Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.

Fig. 10. Effect of the HPW leaching on HPW/Nb₂O₅-100 °C-catalyzed oleic acid esterification with ethanol

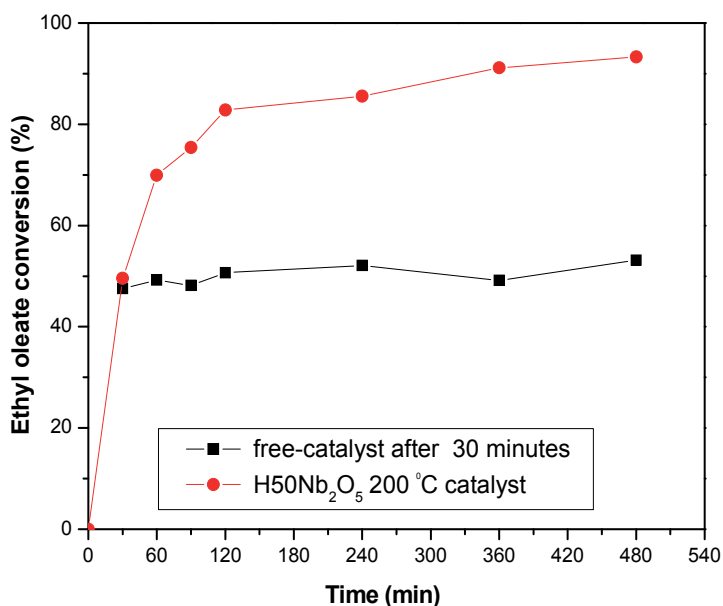


Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60°C.

Fig. 11. Effect of the HPW leaching on HPW/Nb₂O₅-200 °C-catalyzed oleic acid esterification with ethanol

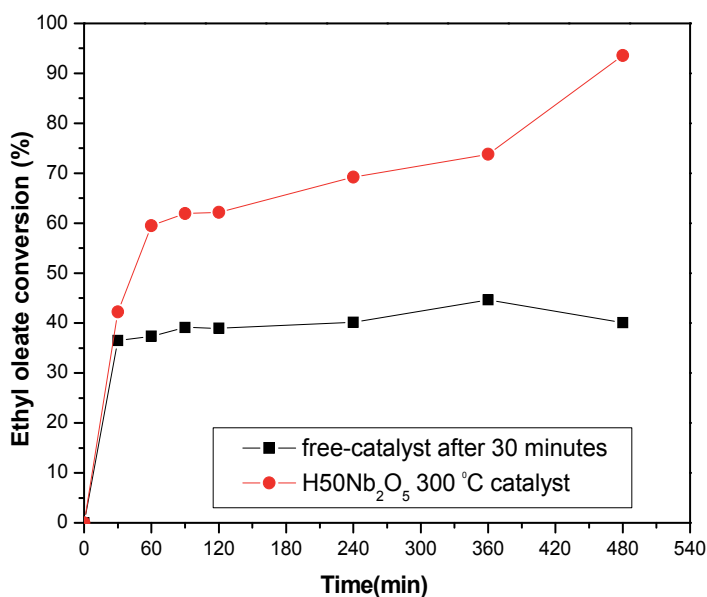


Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60 °C.

Fig. 12. Effect of the HPW leaching on HPW/ Nb_2O_5 -300 °C-catalyzed oleic acid esterification with ethanol

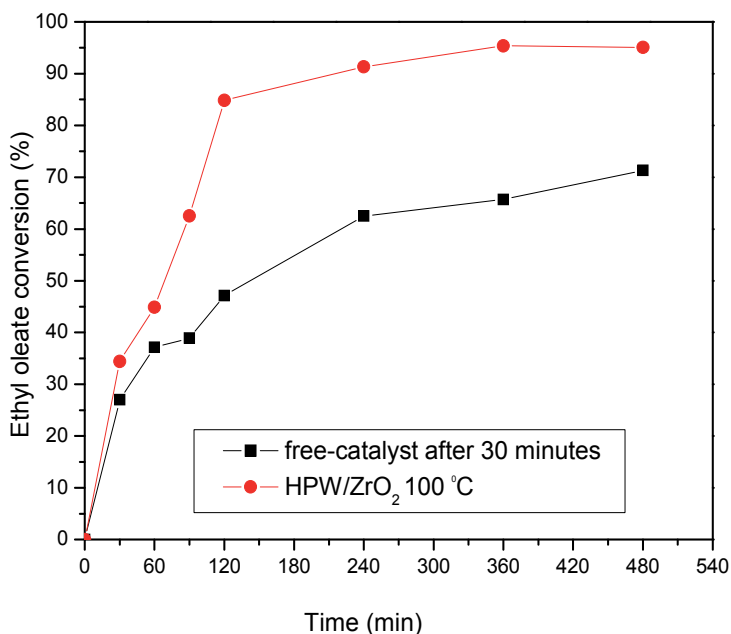

Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60 °C

Fig. 13. Effect of the HPW leaching on HPW/ ZrO_2 -100 °C-catalyzed oleic acid esterification with ethanol

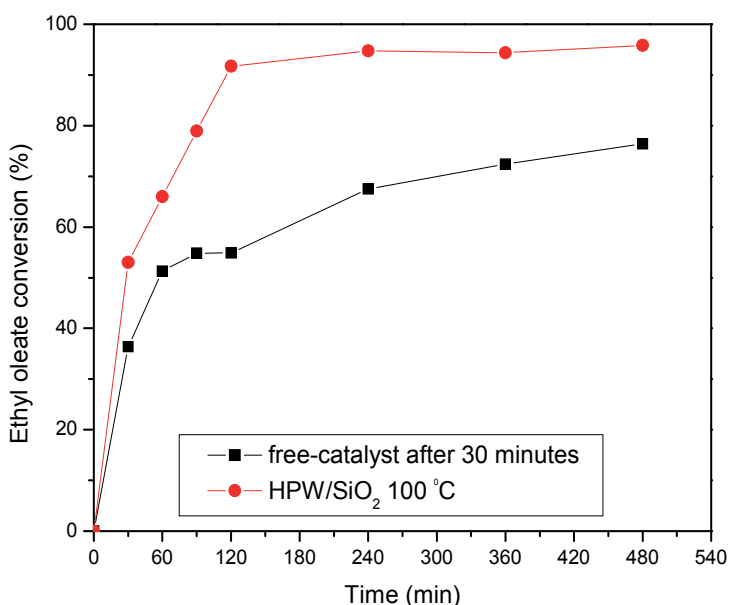

Reaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60 °C

Fig. 14. Effect of the HPW leaching on HPW/SiO₂-100 °C-catalyzed oleic acid esterification with ethanol


Various measures of catalyst leaching must be interpreted based in others contexts. For example, atomic absorption spectroscopy and ICP-MS are very sensitive analytical methods. However, a simple qualitative procedure can be used based only on visual observation; the addition of ascorbic acid to a solution containing HPW soluble assume blue color. Herein, its procedure allows easily confirm the catalyst leaching treated at 100 °C temperature; contrarily, in the runs with HPW/niobium-200 °C catalyst the solution remained with color unaltered (pale yellow).

2.5.6 Recovery and reuse of catalyst

The greatest advantage of the heterogeneous goal of this study over the homogeneous catalyst is the prolonged lifetime of the solid catalyst for ethyl esters production. However, leaching of catalyst components can cause its deactivation quickly. Herein, the stability of HPW 50 % w/w/niobium-200 °C after successive protocols of recovery/reuse was assessed (Figure 15). The recovery yields of solid catalyst isolated from procedure of filtration are most commonly determined gravimetrically.

A remarkable result was observed as the HPW/niobium catalytic activity stayed almost unaltered even after three recovery/reutilization cycles. However, it should be noted that a weights of catalyst fresh (ca. 20% in relation to started weight).

It was found that although recovery rate has been kept constant (ca. 72-75 %) in all catalytic runs, its suggest that the catalyst leach to solution; however, in Figures 10 to 12 it was demonstrated that oleic acid conversion remains unaltered after catalyst remove. This observation suggests an absence of leaching of catalyst. Probably, the procedure used is not efficient as desired.

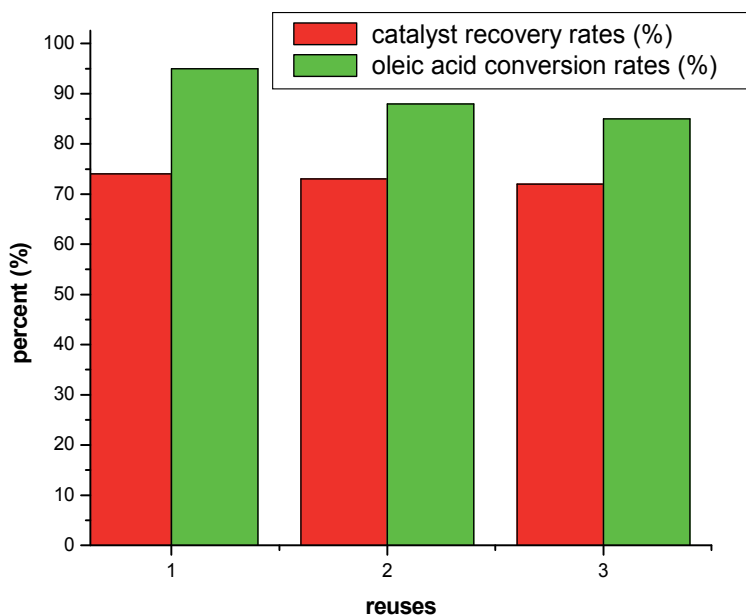

^aReaction conditions: catalyst (50.0 mg); oleic acid (1.0 mmol); ethanol (155.0 mmols); 60 °C

^bRates recovery calculated from initial catalyst mass

^cIn all runs fresh catalyst was added to reaches 50.0 mg mass

Fig. 15. Recovery Yields of HPW 50% w/w/niobium catalyst obtained by the filtration^{a,b,c} procedures and oleic acid conversion rates obtained from its esterification with ethanol

The procedure employed for catalyst recovery involves its separation from reaction by filtration, washed with ethyl ether and drying at 100 °C; then the catalyst has its mass determined. Losses of mass through of these several steps may be occurring. A more detailed treatment of the recovery procedure of catalyst may lead to efficient methods, which can reaches higher recovery rates. The authors are developing studies on this direction.

2.5.7 Mechanistic insights

Tunstophosphoric acid (H₃PW₁₂O₄₀) is strongest heteropolyacid of Keggin series being completely ionizable in water. Measurements of pKa in organic solvents showed that it is 100 units of pKa more acid than sulfuric acid (Kozhevnikov, 1998); therefore is almost probably that its ionization in ethanol occur in greater extension. Thus, is possible that HPW/niobium catalyst undergoes at least a partial ionization along oleic acid esterification reaction in ethanol as described on equilibrium displayed in Figure 16.




Fig. 16. Partial ionization equilibrium of HPW/niobium catalyst in ethanol solution

Consequently, if this part of the reaction pathway is similar to homogeneous systems, the others steps commonly involved in esterification reactions (e.g. protonation carbonyl group FA, attack of the alcohol molecule on protonated FA, water elimination, etc) may then proceed as described in Figure 16.

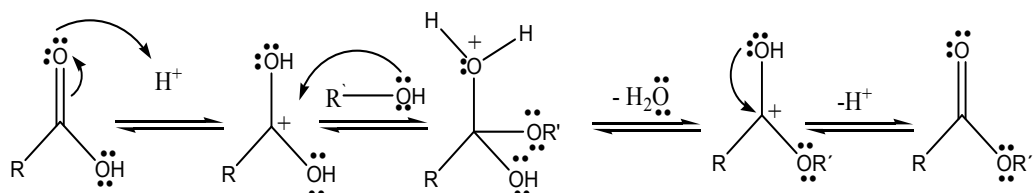


Fig. 17. Mechanism of formation ester catalyzed by free H^+ ion in solution

Conversely, is also possible that other FA molecules can be activated via protonation on surface of supported-catalyst. Thus, an alternative proposal is displayed in Figure 18.

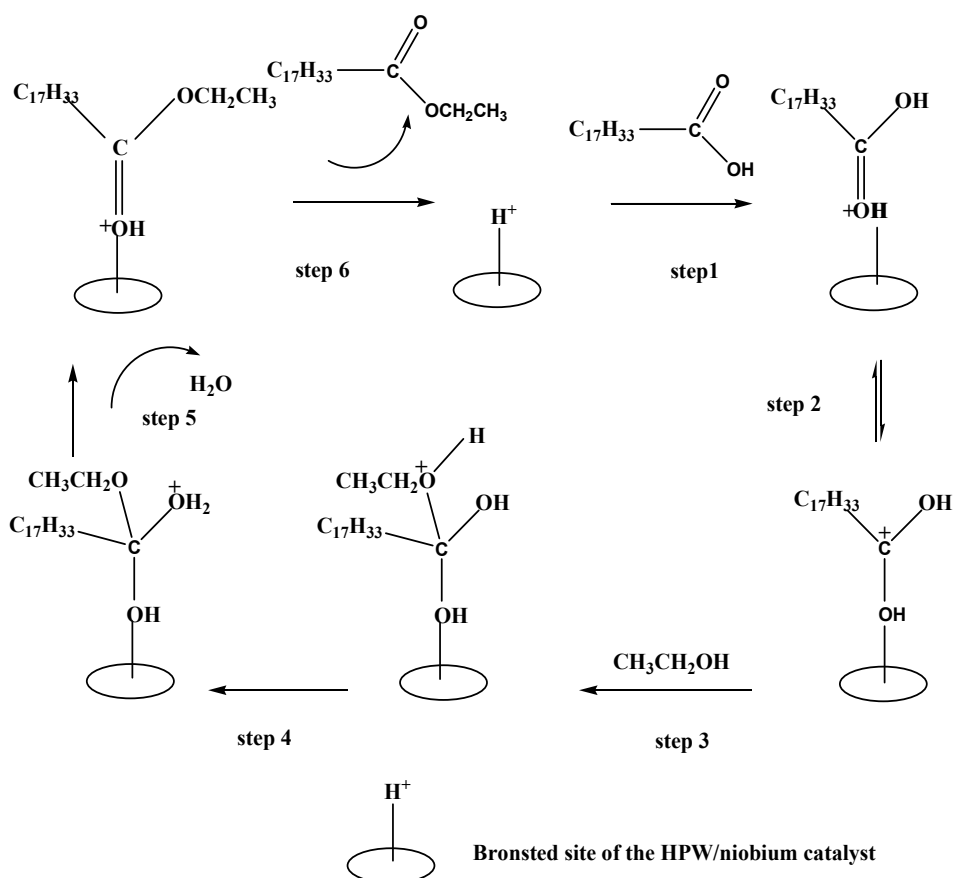


Fig. 18. Proposal of an alternative mechanism of formation ester catalyzed by free H^+ ion in the solution

In according with this mechanism (Figure 18), all steps of oleic acid esterification reaction with ethanol occur on surface of HPW/niobium catalyst. Nevertheless, is also possible that ethyl oleate formation may occur by both pathways of reaction. Although both proposal are plausible, is important to note that studies in situ are require for a better and more detailed description of these mechanism of this reaction.

3. Conclusion

The efficiency of tungstophosphoric acid ($H_3PW_{12}O_{40}$) immobilized by impregnation method on silicon, zirconium and niobium oxides was assessed in the esterification of oleic acid with ethanol, at 60 °C temperature. As a general tendency, it was observed that the catalytic activity decreases in the series $HPW/Nb_2O_5 > HPW/ZrO_2 > HPW/SiO_2$ with all catalyst being treated on temperature range 100 to 300 °C. Moreover, good yielding of recovery of HPW 50% w/w/ Nb_2O_5 catalyst (ca. 75 %) and high conversions of acid oleic were obtained in recycle experiments. From leaching tests and of the rates of recovery may be concluded that the HPW/Nb_2O_5 catalysts are stable under reaction conditions used; however the recovery procedure employed it should be enhanced. Thus, it can be concluded that although yet non-finished, present methodology offers several advantages such as high yields, simple procedure for recovery and reuse of catalyst and mild reaction conditions. The authors hope that with this work a significant advance on the field of recoverable catalysts can has been proved.

4. Acknowledgment

The Federal University of Viçosa, Federal University of Uberlândia and Arthur Bernardes Foundation are warmly thanked for financial support. Moreover, CAPES, CNPq and FAPEMIG deserves our special thanks.

5. References

- Anton, A. K.; Alexandre, C. D.; & Gadi, R. (2006) Solid Acid Catalysts for Biodiesel Production - Towards Sustainable Energy. *Advances Synthesis Catalysis*, Vol.348, pp. 75 - 81
- Ayhan D.; Biodiesel A Realistic Fuel Alternative for Diesel Engines; ISBN-13: 9781846289941 2008 Springer-Verlag London Limited
- Ayhan, D. (2003). Biodiesel fuels from vegetable oils via catalytic and non-catalytic supercritical alcohol transesterifications and other methods: a survey. *Energy Conversion and Management*, Vol.44, (September 2007), pp. 2093–2109, ISSN 0196-8904
- Cardoso, A.L.; Neves, S.C.G.; & da Silva, M.J. (2009). Kinetic Study of Alcoholysis of the Fatty Acids Catalyzed by Tin Chloride(II): An Alternative Catalyst for Biodiesel Production. *Energy Fuels*, Vol.23 (January 2009), No. 3, pp. 1718–1722, ISSN 0887-0624
- Chongkhong, S.; Tongurai, C.; Chetpattananondh, P. (2009). Continuous esterification for biodiesel production from palm fatty acid distillate using economical process. *Renewable Energies*, Vol.34, (April 2009), pp.1059- 1063, ISSN 0960-1481

- Di Serio, M.; M. Cozzolino, M. Giordano, R. Tesser, P. Patrono, & E. Santacesaria. (2007). From Homogeneous to Heterogeneous Catalysts in Biodiesel Production. *Industrial Engineering Chemistry Researches* Vol.46, (August de 2007), pp 6379–6384, ISSN 0088-5885
- Di Serio, M.; Tesser, R.; Casale, L.; D'Angelo, A.; Trifuoggi, M. & Santacesaria, E., (2010). Heterogeneous catalysis in biodiesel production: The influence of leaching. *Topics in Catalysis*, Vol.53 (July 2010), pp.811-819 ISSN 1022-5528
- Di Serio, M.; Tesser, R.; Pengmei, L.; & Santacesaria, E. (2008) Heterogeneous Catalysts for Biodiesel Production. *Energy and Fuels*, Vol.22, (December 2007), pp. 207–217, ISSN 0887-0624
- Essayem, N.; Coudurier, G.; Vedrine, J.C.; Habermarcher, D.; Sommer, J. (1999). Activation of Small Alkanes by Heteropolyacids, a H/D Exchange Study: The Key Role of Hydration Water. *Journal of Catalysis*, Vol.183, (April 1999), pp. 292-299, ISSN 00219517
- Haas, M. J. (2005). Improving the economics of biodiesel production through the use of low value lipids as feedstocks: vegetable oil soapstock. *Fuel Processing Technologies*, Vol.86, (June 2005), pp. 1087–1096, ISSN: 0378-3820
- Hideshi H. (2010). Solid Acid Catalysts: Roles in Chemical Industries and New Concepts. *Topics in Catalysis*, Vol.53, (June 2010), pp.432–438, ISSN 1022-5528
- Kawashima, A.; Matsubara, K.; Honda, K. (2008). Development of heterogeneous basecatalysts for biodiesel production. *Bioresource Technology*, Vol.99, pp. 3439–3443, ISSN 0960-8524
- Kozhevnikov I.V. (1998). Catalysis by heteropoly acids and multicomponent polyoxometalates in liquid-phase reactions. *Chemical Reviews*, Vol.98, (February 1998), No.1, pp.171–198
- Kozhevnikov, I.V. J. (2009) Heterogeneous acid catalysis by heteropoly acids: approaches to catalyst deactivation. *Journal of Molecular Catalysis A*, Vol.305, (june 2009), pp. 104–111, ISSN 1381-1169
- Kulkarni, M. G.; Gopinath, R.; Meher, L.C.; & Dalai, A. K. (2006). Solid Acid Catalyzed Biodiesel Production by Simultaneous Esterification and Transesterification. *Green Chemistry*, Vol.8, (September 2006), pp. 1056–1062, ISSN 1463-9262
- Lotero E.; Liu, Y.; Lopez, D. E.; Suwannakarn, K.; Bruce, D. A. & Goodwin, J. G. (2005) Synthesis of biodiesel via acid catalysis. *Industrial Engineering Chemistry Researches*, Vol.44, (January 2005), pp. 5353–5363, ISSN 0088-5885
- Lou, W. Y.; Zong, M. H.; & Duan, Z. Q. (2008). Efficient production of biodiesel from high free fatty acid-containing waste oils using various carbohydrate-derived solid acid catalysts. *Bioresource Technology* Vol.99, (December 2008), pp. 8752–8758, ISSN: 0960-8524
- Maa, F.; & Hanna, M.A. (1999). Biodiesel production—a review. *Bioresource Technology*, Vol.70, (February 2007), pp. 1–15, ISSN 0960-8524
- Makoto M.; Izumi O.; Gaku K.; & Atsushi A. (2000). Heteropolyacids. Versatile green catalysts usable in a variety of reaction media. *Pure Applied Chemistry*, Vol. 72, No. 7, pp. 1305-1311, ISSN 0033-4545
- Marchetti, J. M.; Miguel, V. U.; & Errazu A. F. (2007). Possible methods for biodiesel productions. *Renewable Sustainable Energies Reviews*, Vol.11, pp.1300- 1311, ISSN 1364-0321

- Morin, P. B.; Hamad, G.; Sapaly, M. G.; Carneiro, R.; Pries, P.G. O.; Gonzalez, W. A.; Sales, A. E.; Essayem, N. (2007). Transesterification of rapeseed oil with ethanol I. Catalysis with homogeneous Keggin heteropolyacids. *Applied Catalysis A: General*, Vol. 330, (October 2007), pp. 69–76, ISSN: 0926-860X
- Oliveira, C. F.; Dezaneti, L. M.; Garcia, F. A. C.; Macedo, J. L.; Dias, J. A.; Dias, S. C. L.; Alvim, K. S. P. (2010). Esterification of oleic acid with ethanol by 12-tungstophosphoric acid supported on zirconia. *Applied Catalysis A: General*, Vol.372, (January 2010), pp. 153–161, ISSN: 0926-860X
- Patil, P.D.; & Deng. (2009) Optimization of biodiesel production from edible and non-edible vegetable oils. *Fuel*, Vol.88, pp. 1302–1306. ISSN 00162361
- Pizzio, L. R.; Caceres, C. V.; Blanco, M. N. (1998). Acid catalysts prepared by impregnation of tungstophosphoric acid solutions on different supports. *Applied Catalysis A: General*, Vol.167, (February 1998,) pp.283-294, ISSN: 0926-860X
- Pope, M.T. *Heteropoly and Isopoly Oxometalates*, Springer-Verlag, Berlin, 1983. ISBN 3-540-11889-6
- Prasad, R; & Srivastava, A. (2000). Triglycerides-based diesel fuels. *Renewable and Sustainable Energy Reviews*, Vol.4, (July 1999), pp. 111-133, ISSN 1364-0321
- Rajabathar, J.; & Ming K. W. (2009). Review of Recent Developments in Solid Acid, Base, and Enzyme Catalysts (Heterogeneous) for Biodiesel Production via Transesterification. *Industrial Engineering Chemistry Researches*, Vol.48, No.13, pp. 6162–6172, ISSN 0088-5885
- Rattanaphra, D.; Harvey, A. & Srinophakun, P. (2010). Simultaneous Conversion of Triglyceride/Free Fatty Acid Mixtures into Biodiesel Using Sulfated Zirconia. *Topics in Catalysis*, Vol.53, (March 2010), pp.773–782, ISSN 1022-5528
- Sakai, T.; Kawashima, A.; & Koshikawa, T. (2009). Economic assessment of batch biodiesel production processes using homogeneous and heterogeneous alkali catalysts. *Bioresource Technology* Vol.100, (July 2009), pp.3268–3276, ISSN 0960-8524
- Sepulveda, J.H.; Yori, J.C.; Vera, C.R. (2005). Repeated use of supported $H_3PW_{12}O_{40}$ catalysts in the liquid phase esterification of acetic acid with butanol. *Applied Catalysis A: General*, Vol.288, (July 2005), pp.18–24, ISSN: 0926-860X
- Shuli Y. C. D.; Siddharth, M.; Manhoe K.; Steven O. S.; & Simon, K. Y. N. (2010). Advancements in Heterogeneous Catalysis for Biodiesel Synthesis. *Topics in Catalysis*, Vol.53, (July 2010), pp.721–736, ISSN 1022-5528
- Silva, G. W. V.; Lair, O. L.; da Silva, J. M. (2011). Novel $H_3PW_{12}O_{40}$ Catalysed Esterification Reactions of Fatty Acids at Room Temperature for Biodiesel Production. *Catalysis Letters*, Vol.135 (January 2010), pp.207-211, ISSN: 1011-372X
- Silva, M. L.; Figueiredo A. P.; Cardoso, A. L.; Natalino, R.; da Silva, M. J. (2011) Effect of Water on the Ethanolysis of Waste Cooking Soybean Oil Using a Tin(II) Chloride Catalyst. *Journal American Oil Chemistry Society*, Vol. 88, (march 2011), pp.1431-1437, ISSN 0003-021X
- Sunita, G; Devassy, B.M.; Vinu, A.; Sawant, D.P.; Balasubramanian, V.V.; & Halligudi, S.B. (2008). Synthesis of biodiesel over zirconia-supported isopoly and heteropoly tungstate catalysts. *Catalysis Communications*, Vol.9, (March 2008), pp.696-702, ISSN: 1566-7367
- Timofeeva, M.N. (2003). Acid catalysis by heteropoly acids. *Applied Catalysis A: General*, Vol.256, (December 2003), pp.19–35, ISSN 0926-860X

- Timofeeva, M.N.; Matrosova M.M.; Ilinich, G.N.; Reshetenko, T.V.; Avdeeva, L.B.; Kvon R.I.; Chuvilin A.L.; Budneva, A.A.; Paukshtis, E.A.; Likholobov, V.A . (2003). Esterification of n-butanol with acetic acid in the presence of $H_3PW_{12}O_{40}$ supported on mesoporous carbon materials. *Kinetic Catalysis* Vol.44, (November 2003) No.3, pp.778–787, ISSN 0023-1584
- Yogesh C. S.; & Bhaskar S. (2011). Advancements in solid acid catalysts for ecofriendly and economically viable synthesis of biodiesel. *Biofuels, Bioproducts Biorefinerie*, Vol.5, (September 2010), pp. 69–92, ISSN 1932-104X
- Zullaikah, S.; Lai C, C.; Vali, S. R. & Ju, Y.H. (2005). A two-step acid-catalyzed process for the production of biodiesel from rice bran oil. *Bioresource Technology*, Vol.96, (November 2005), pp. 1889–1896, ISSN: 0960-8524


An Alternative Eco-Friendly Avenue for Castor Oil Biodiesel: Use of Solid Supported Acidic Salt Catalyst

Amrit Goswami

*Chemical Science Block, CSIR- North-East Institute of Science & Technology,
(A Constituent Establishment of Council of Scientific and Industrial Research,
Govt. of India), Jorhat-785006, Assam,
India*

1. Introduction

Year back in 1885, when Rudolf Diesel first invented the diesel engine, it was intended to run it on oil from vegetative sources and in the course of time with gradual depletion of the fossil fuel has now become a mandate of the day. Because it will play an important part in sustainable fuel and energy production solution for the future. Vegetable oil which remains in the form of triglyceride(1) of long chain fatty acid with carbon chain C_{16} - C_{18} is not fit to use directly but needs certain transformation such as pyrolysis, microemulsion formation, transesterification etc. to suit it to use as diesel fuel




(1)

R= Long Chain Fatty acid moiety
Triglyceride


The transformed oil is termed as biodiesel due to its original biological source. Finite fossil fuel reserve, political, economic, biodegradability, low toxicity, health and environmental issues have led it to consider as the alternative and more importantly renewable and eco-friendly fuel. It has been found to show its ability to meet the world energy demand in transportation along with agricultural and other industrial sectors (Akoh et al. 2007). Since the source is plant, it is green as it does not have ash content, sulphur, aromatic ring compounds, renewable and so it has come out as superlative alternative and can be used in compression ignition engine with minor or no modification of the engine (Xu and Wu, 2005). A breakthrough in the process of converting vegetable oil into useful form promises a cheaper way to go green as it contributes mitigating global warming also. However the slow pace of progress in this direction in alternative fuel technologies has prevented the vision

from materializing. On the other hand vegetable oil as such is expensive and direct use of it in diesel engine is not possible. Because, firstly the vegetable oils are very viscous. High viscosity in fuel causes transportation problems, carbon deposits in engine, suffering of engine liner, injection nozzle failure, and gum formation, lubricating oil thickening and high cloud and pour point. Secondly, the glyceride moiety in the triglyceride form of the vegetable oil during combustion could lead to formation of acrolein (2) and this in turn lead to formation of different aromatics (3) as polluting by-products. This is one of the reasons why fatty esters of vegetable oils are preferred over triglycerides.

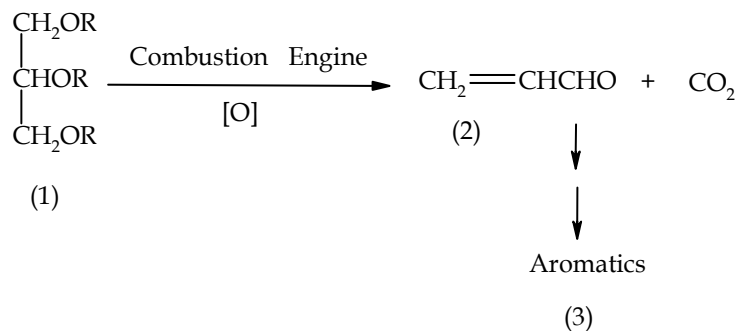

Scheme 1.

In 1970 it was discovered that reduction of viscosity of vegetable oils could be made by simple chemical process called transesterification by which the vegetable oil is treated with a low alkyl alcohol such as methanol or ethanol in presence of a suitable catalyst to form low alkyl esters whereby it could perform as petro diesel in modern engine. Glycerol that is produced during transesterification as by-product can be utilised in other industries. Thus by definition, biodiesel is low alkyl esters of long hydrocarbon chain fatty acids prepared from vegetable oils and animal fats through chemical or by biochemical process of transesterification.

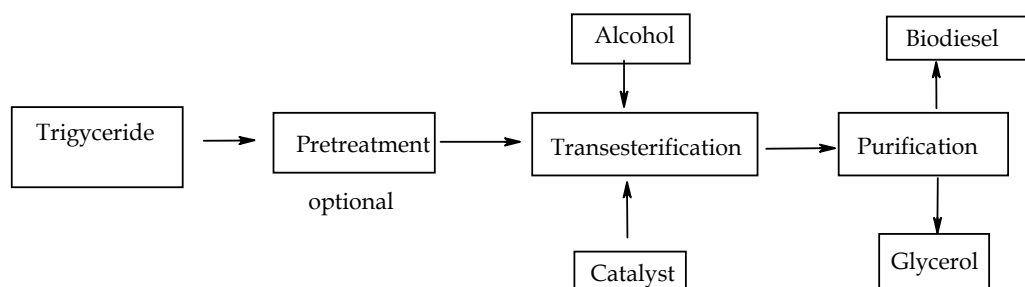

Scheme 2.

2. Feedstock of biodiesel

Different feedstocks have been explored for extraction of vegetable oils in order to transform it to biodiesel. The feedstocks are animal fats, renewable plant resources basically from Euphorbiace family viz. *Jatropha caracas*, Soya, Sunflower, Castor seeds etc. besides waste

cooking oils from different restaurants and food processing industries. Considering several aspects castor oil from castor seeds seem to be an alternative promising feedstock for commercial production of biodiesel particularly for cold climatic regions.

2.1 Why castor oil

Although from the economic point of view waste cooking oils from different sources is a better choice for biodiesel preparation compared to all other sources and vegetable oils, considering the multifarious advantages oil from castor seeds from *Ricinus Communis* (Palma christi)- a species from Euphorbeace family is believed to be a better option. Because castor oil is possibly the plant oil which is industry's most unappreciated asset that contains about 90% ricinolic acid as the major constituent. The plant originates in Africa but now is available in all the tropical and subtropical countries. The plant can stand long periods of drought. The oil has versatile utility such as cosmetics, lubricants, brake fluids, softener in tanning, solar cell, textile company, small components of PC, mobile phones, boots and shoe manufacturing etc. Presently India is the largest producer of castor oil in the world with China and Brazil being the next two. India exports about 15000 tonnes castor seeds per year and 1,00,000 tonnes of castor oil annually to European Union and the domain has been increasing rapidly. In the seed, the oil content is about 50% of the total weight. It is the only unique oil which has an unusual chemical composition of triglyceride of fatty acid. It is the only source of an 18-carbon hydroxylated fatty acid *viz* ricinoleic acid with one double bond. It is reported that fuels having fatty acids with 18 or more carbon atoms and one double bond have viscosity low, higher cetane number and lower cloud and pour point properties are better. From that point of view alkyl ester from castor oil satisfies most of the criteria with the exception of viscosity and cetane number to stand as promising biodiesel candidate. The chemical composition of castor oil triglyceride (castoroil.in - the Home of castor oil in Internet) is

1. Ricinolic acid- 89.5%
2. Linoleic acid- 4.2%
3. Oleic acid- 3%
4. Stearic acid- 1%
5. Palmitic acid- 1%
6. Dihydroxy stearic acid- 0.7%
7. Eicosanoic acid- 0.3%
8. Free fatty acid in refined castor oil- 8.45%

Although considerable researches have been done on palm oil, soya oil, sunflower oil, coconut oil, rapeseed oil, tung oil, jatropha oil etc not much informations are available on castor oil as biodiesel even though it is currently undergoing a phase of active research in several institutions.

Production of castor oil worldwide is 0.5 million tonnes per annum. Consumption of petrodiesel per day is approximately 10 million tonnes. If the entire petrodiesel is to be replaced by castor biodiesel it needs to produce 7000 times the castor oil that is being produced today. However, since it is one of the oldest traded goods mankind has been trading a few thousand years ago, it has a lot of industrial usages and therefore market is already in existences. Further, as the plantation of castor plant has been cultivated commercially, its biology is well understood and high yield hybrid is available. It can also be found in medium climate areas as an annual crop or in tropical area as a small tree. It gives faster oil yield and can be planted as marginal plant in unattended idle areas. The gestation period of harvesting the plant for oil is 4-6 months only.

2.2 Properties of biodiesel from castor oil

The biodiesel prepared from castor oil has certain properties that are attractive particularly for cold climate. It may be mentioned that it has flash point of 190.7°C which is much higher than petrodiesel and other vegetable oil biodiesel. The oil is stable at low temperature and makes it an ideal combustible for region of extreme seasonal weather. From cost point of view although 100% biodiesel from castor oil (B₁₀₀) seems to be expensive its 10% (B₁₀) or 20% (B₂₀) blending with petrodiesel show good flow properties and further lowers the cloud and pour point. Further, due to its ability of displaying as a solvent, sedimentation does not occur which could otherwise potentially obstruct pipes and filters. However, the oil is sensitive to contamination by ferrous salts and rusts particles. Its higher cooling capacity is a key factor in the conservation of engine components. Considering the technical features, castor oil biodiesel is advisable taking into account its renewable resources. Because of its biodegradability and lower emissions, it presents a favourable impact on the environment. Moreover, it could be used as a crop substitution program turning it into a factor that promotes growth in many regions affected by several economic problems. Awareness is there in recent times for cultivation of castor plants boosting rural economy by government and private agencies by establishment of transesterification plant with million tonnes capacity per day, trial run using biodiesel from castor oil by Indian Railways, roadways, IOCL, HPLC etc. In addition to it a national mission on biodiesel has been proposed by the government of India with six micro missions to cover different aspects.


3. Transesterification of vegetable oils

Transesterification of vegetable oils has now come a long way for preparation of biodiesel. There are four basic methods for biodiesel production. These are acid catalysed, base catalysed, enzymatic/microbial transesterification and conversion of the oil to its fatty acids and then esterification to have ester as biodiesel.

3.1 Transesterification catalysts

The transesterification reactions require a catalyst in order to obtain a reasonable conversion rate and the nature of the catalyst must conform to the feedstock. Further, the reaction condition and post separation steps are predetermined by the nature of the catalyst.

Generally, transesterification of vegetable oil is done with methanol or ethanol in presence of a base catalyst such as NaOH, KOH, K₂CO₃, NaOMe, NaOEt, NaOPr, NaOBu etc. A minimum content of water and free fatty acid result in the saponification with consequent formation of soap. Presence of large content of water results in hydrolysis of the product formed. Theoretically 3 moles of methanol are required per mole of triglyceride. As the transesterification reaction of triglyceride is a reversible reaction, the excess of methanol shifts the equilibrium towards the direction of ester formation. Freedman et al (Freedman et al, 1984) suggested that 6:1 molar ratio of alcohol to oil is necessary to get the maximum ester yield thus minimising the concentration of tri, di and mono glycerides.

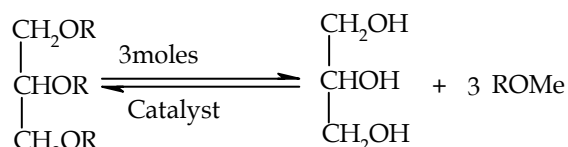

Scheme 3.

3.2 Solid catalysts for transesterification reactions:

3.2.1 Solid base catalysts

There are reports of many solid base catalysts to be active in transesterification reactions such as supported CaO catalysts (Yan et al, 2008), supported VO₂ catalysts (Kim et al, 2008) various other metal oxides such as BaO, SrO, MgO etc to have transesterified camaelina sativa oil as biodiesel with upto 80-89% yield (Patil and Deng, 2009). However, these solid base catalysts show much lower activity than traditional homogeneous catalysts. Potassium nitrate supported on alumina as solid base catalyst was reported by Vyas et al (Vyas et al, 2009) for production of biodiesel from jatropha oil and has been successful in getting 84% yield. Certain of these catalysts are very much sensitive to trace amount of free fatty acid present. Reports of lanthanum based (Kurian et al, 1998) strong basic catalysts have appeared for transesterification and esterification reaction.

3.2.2 Enzyme catalysis

Over the last few decades considerable research have been done on the use of enzyme in transesterification using lipase enzyme from filamentous fungi and recombinant bacteria under various condition. However not considerable attention has been received except in China where 20,000 tonnes of biodiesel per year (Du et al, 2008) is produced. But due to large reaction volume, time, higher conc. of catalyst, cost (\$1000 per kg), loosening of catalyst activity on repeated use the process is not commercially viable although friendly to the environment.

3.2.3 Acid catalysts

Homogenous acid catalysts such as H₂SO₄, HCl, sulfonic acid etc. have the potentials to replace base catalysts since they do not show measurable susceptibility to free fatty acid (FFA) and can catalyse esterification and transesterification simultaneously (Kulkarni et al, 2006). However, separation problem, requirement of high temperature, high molar ratio of oil and alcohol, serious environmental and corrosion related problem make their use non practical for biodiesel production.

The demanding feedstock specification for base catalysed reactions have led researchers to seek catalytic process alternative that can ease this difficulty and lower production cost. To eliminate the corrosion, environment problem and time saving for multiple reaction, solid acid catalysts have recently replaced liquid acids for biodiesel production by simultaneous esterification and transesterification. Methodologies based on acid catalysed reaction have the potential to achieve this since acid catalysts did not show measurable susceptibility to FFAs. Compared to homogenous acid catalysts heterogeneous solid acid catalysts have great potential due to advantage in separation and corrosion related problems and such catalysts having large-pores, moderate to strong acid sites and a hydrophobic surface are idea for biodiesel production.

3.2.4 Solid acid catalysts

There have appeared in the literature several solid supported acid catalysts such as heteropolyacid, having Keggin structure viz-12-tungsto-phosphoric acid impregnated on various solid supports like hydrous zirconia (Kulkarni et al. 2006), silica, alumina, and activated carbonate using as solid acid catalyst for biodiesel preparation from different feedstock with achievement of more than 77% yield of biodiesel. Zeolites (Lotero E et al, 2005, Wang et al, 2009) with large pore size have been used with success with fatty acid esterification

but at higher temperature. Few other solid supported catalysts for esterification and transesterification of vegetable oils are zeolites with different pore size framework of Si/Al ratio and proton exchange level. These characteristics permit tailoring important catalytic properties such as acid strength. It was observed that zeolite catalysis in transesterification/esterification reaction using large molecules takes place on the external surface of the zeolite catalysts. However, it requires high temperature and the reaction rate is slow. The reactivity on such solid surface catalysts depends upon acid site strength and hydrophobicity of the surface. In fact, pore size, dimensionality of the catalyst channel system related to the diffusion of the reagents and products and aluminium content of zeolite framework strongly affect the zeolite catalytic activity for esterification. Related to zeolites, but with amorphous pore walls, silica molecular sieves such as MCM-41, mesoporous materials are generally not sufficiently acidic to catalyse esterification reaction due to pure silica structure. However introducing aluminium, zirconium, titanium or tin compounds into silica matrix of these solids can significantly improve their acidic properties. However, metal doped materials behave more like weak acids and can only be used for reactions that do not require a strong acid catalyst. It has also been reported that $\text{SO}_4^{2-}/\text{ZrO}_2$ has been shown to have applicability for several acid catalysed reactions. However the problem is that $\text{SO}_4^{2-}/\text{ZrO}_2$ deactivates in presence of water due to leaching of SO_4^{2-} either in the form of H_2SO_4 or HSO_4^- . Sulphated tin oxide ($\text{SO}_4^{2-}/\text{SnO}_2$) prepared from *m*-stannic acid has shown activity superior to that of $\text{SO}_4^{2-}/\text{ZnO}_2$ for esterification of octanoic acid by methanol at 150°C due to superior acid strength (Furuta, S. et al 2004). The use of solid catalyst to produce biodiesel requires a better understanding of the factors that govern their reactivity. Thus, an ideal solid catalyst should show some underlying characteristics such as an interconnected system of large pores, moderate to high concentration of high acid sites and a hydrophobic surface. Large interconnected pores would minimise diffusion problem of molecules having long alkyl chain and strong acid sites are needed for the reaction to proceed at an acceptable rate. It is recently attracted considerable attention for solid acid catalyst such as Bronsted acid zeolites, ion exchange resin, metal oxides viz sulphated zirconia WO_3/ZrO_2 , $\text{MoO}_3/\text{ZrO}_2$, sugar based catalyst (Zong et al, 2007). It has been noted that Bronsted acid catalysts are active mainly in esterification while Lewis acid catalysts are active in transesterification reaction. Therefore, preparation of such solid supported catalysts that contain both Bronsted acid and Lewis acid catalyst site having enhanced water tolerance and large pores, hydrophobic surface and low cost is still a challenge. National Chemical Laboratory, Pune India has developed a novel solid double metal composition for transesterification of vegetable oils containing up to 18% FFA to biodiesel (Sree Prasanth et al, 2006). A series of layered aluminosilicates with H_2SO_4 impregnation has been reported for transesterification. Activated montmorillonite KSF showed 100% conversion of transesterification within 4 hour at 200°C and 52 bar pressure. However problem encountered is leaching, for which reimpregnation of H_2SO_4 on the clay surface is required for reusability. Several other solid acid catalysts were reported but needed higher temperature (>200°C) for conversion. The use of age old polymer matrix Amberlyst-15 has also been reported but need mild condition to avoid degradation (Vicente et al,1998).

4. Materials and methods

In view of the above and having observed certain advantages of castor oil over others it was studied the transesterification of it using a simple, cheap and easily prepared solid supported acidic catalyst considering the positives of this clean catalysts.

KHSO_4 , an acidic salt is ordinarily used as dehydrating agent of alcohol to olefinic compounds at high temperature. It was observed in our earlier study (Goswami et al, 2007) that treatment of it as such with an ester in presence of an alcohol, the ester undergoes partial transesterification very slowly. Dispersing this acidic salt on microporous surface silica gel uniformly triggers transesterification (Goswami et al, 2007) of esters in simple alcohol very satisfactorily giving the product yield more than 95%. The system behaves in a completely different manner on treatment with olefin (Das et al, 2010) leading to dimerization through C-C bond formation or addition product with alcohols depending upon the condition applied. Application of this system to castor oil triglyceride in methanol at its boiling point in 5-6 hours transform it into methyl ester of ricinoleic acid the primary constituent of castor oil along with other fatty acid methyl esters present in it with more than 95% yield.

4.1 Experimental condition

Instruments : The GC was recorded on Chemito 1000 GC using column OVIE+SP2401 (2mX10.635 cm, od) glass column and nitrogen as carrier gas. The textural properties were recorded on Quantachrome Automated Gas Sorption system. The FTIR was recorded on Perkin Elmer System-2000 and FT NMR was recorded on Bruker Avance-DPX-300MHz instrument. Reagents: Castor oil was obtained from local grocery shop (Dabur, 99%), methanol (99.8%) from Fisher Scientific, potassium bisulphate (98%) from Rankem and silica gel (60-100 mesh) were taken from Aldrich Chemicals. Methanol taken was made super dry following standard method:

4.1.1 Catalyst preparation

Potassium bisulphate (KHSO_4) 20 gm (144mmol) was dissolved in 100ml distilled water to have a clear saturated solution. The solution was soaked completely in microporous silica (40gm). The soaked mixture was thoroughly mixed and dried in a hot air oven at 150°C for 24 hours to have a free flowing powdery solid. The dried solid mixture was than kept in vacuum desiccator to use as a stock solid supported catalyst (A) in different reactions.

4.1.2 Experimental procedure

25 ml of refined castor oil containing 8.4% FFA was charged with 1 litre dry methanol in a 1.5 litres round-bottomed flask fitted with a condenser and fused calcium chloride guard tube on a preheated oil bath under vigorous stirring. To it was added 1.25gm (5%) catalyst A and stirred at 600 rpm under heating at 70°C (external) for 5 hours. Occasionally TLC was monitored to check the progress of the reaction. After completion, the reaction mixture was distilled to recover methanol. The product with the catalyst remained after separation of methanol was obtained with glycerol as a separate layer. Methyl ester of castor oil along with glycerol layer was decanted out from the solid catalyst surface. Glycerol separated as the bottom layer was taken out from the methyl ester of castor oil (CastMe) layer. The solid catalyst was washed several times with petroleum ether and dried at 150°C for 24 hours in a hot air oven for subsequent runs. The product isolated was found to have yield 95%. During the period of the reactions, samples were taken out at regular intervals and analysed on GC (Fig. 1) using carrier gas nitrogen at flow rate of 2.5kg/cm². Triglyceride, diglyceride, monoglyceride and methyl ester CastMe as transesterified product were quantified by comparing the peak areas of their corresponding standard.

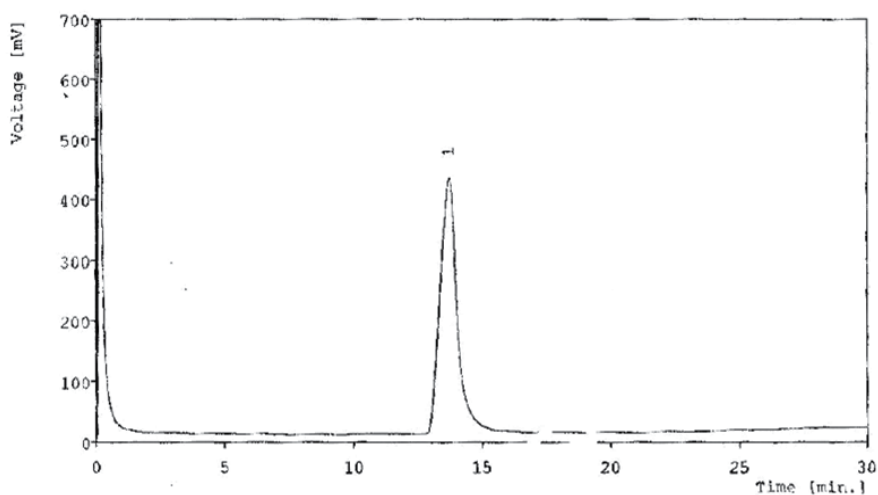


Fig. 1. GC of standard ricinoleic acid methyl ester

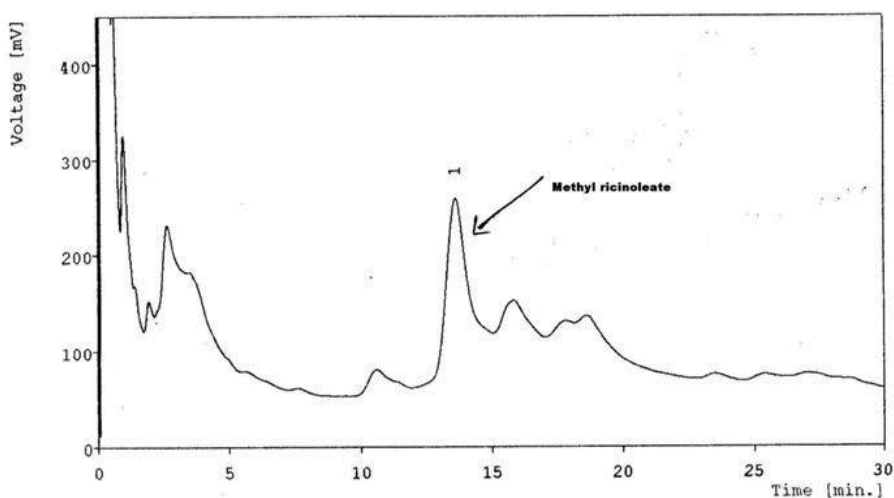


Fig. 2. GC of CastMe

4.1.3 Physical properties of CastMe determined by ASTM D6751 standard

The physical properties of CastMe viz. kinematic viscosity, density, pour point, and cloud point have been determined following standard ASTM D675 method and given in the Table 1 along with reported (Forero, C.L.B., 2004) values of corresponding castor oil, petrodiesel and methyl esters of few other vegetable oils. In Table 2 suggested ASTM standard for pure biodiesel (100%) were given. The properties of CastMe are comparable to those of petrodiesel and acceptable within what is specified for 100 % pure biodiesel as per ASTM standard except that of viscosity and cetane numbers which are the bottlenecks. However, 10% or 20% blended CastMe with petrodiesel that are known as B₁₀ and B₂₀ have their kinetic viscosity 4.54 & 4.97 mm²/s and are within ASTM standard.

The corresponding significant FT IR frequencies (Fig 3) and superimposable FTIR spectra of CastMe and standard methyl ricinoleate (Fig 4) and 300 MHz NMR spectral data (Fig5) of methyl ester of castor oil (CastMe) have been as given below.

FT IR (Cm⁻¹, thin film): 1742 (COOMe str), 2855 & 2928 (CH str), 3407 (OH str) (Fig 3):

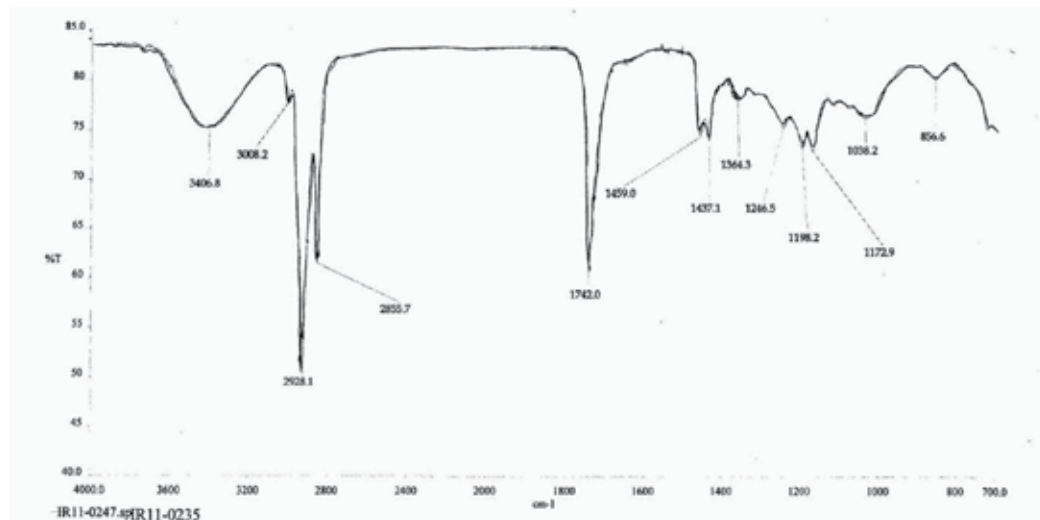


Fig. 3. FTIR of CastMe

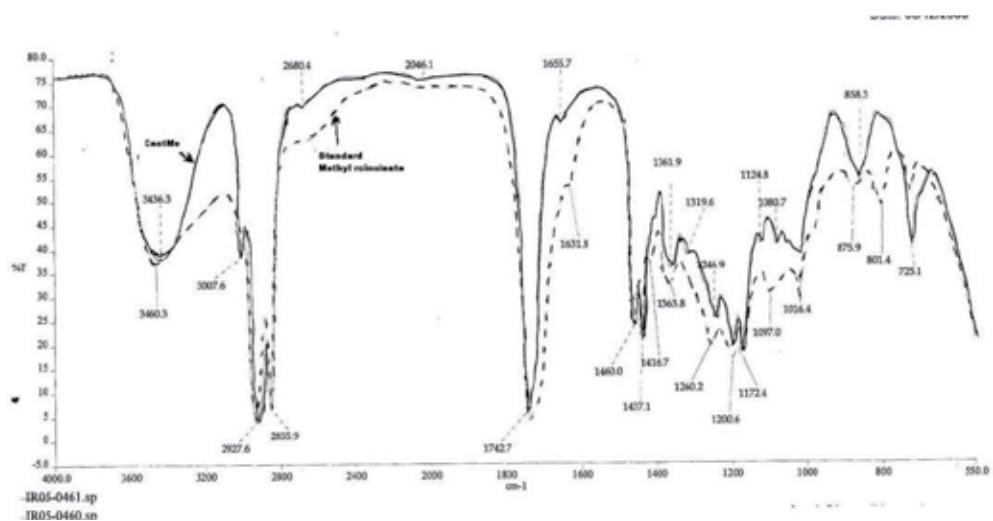


Fig. 4. Superimposable FTIR spectra of CastMe and standard methyl ricinoleate

¹H NMR (δ ppm, CDCl₃) : 1.96 (s, 1H, OH), 1.23-2.24 (m, nH, (CH₂)_nMe), 3.55-3.57 (m, 1H, CH-OH), 3.57 (s, 3H, COOMe), 5.25-5.47 (m, nH, olefinic protons), (n = different numbers of protons of fatty acids), the hydroxyl group present in ricinoleic acid, the major constituent of castor oil imparts unique properties. Because of the branching created by it causes the low cetane number and higher viscosity (Knothe et al, 2008). However the advantage of the present method is that unlike other acidic catalyst, this catalyst system does not facilitate any

methanol olefin etherification (Goodwin et al,2002) even though the constituent of the oil do possess olefinic bonds .

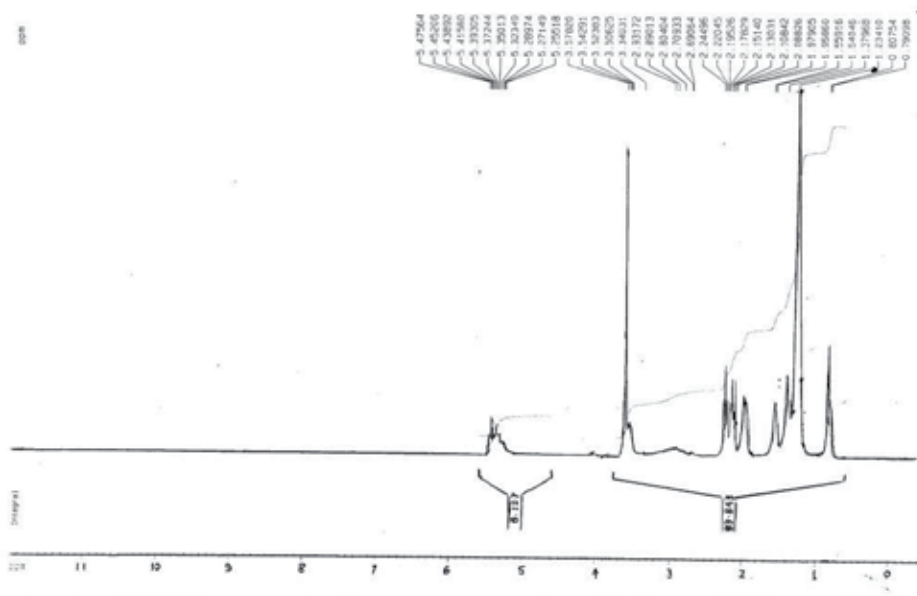


Fig. 5. ^1H NMR (300MHz) of CastMe

Item	Density (g/cc)	Kinematic Viscosity (CST)(38°C)	Pour point (°C)	Cloud point (°C)	Flash point	Cetane no.
Castor oil	0.963	297	-32	-20	260	
CastMe	0.34	9.4	-45	-23	190.7	42
Petrodiesel	0.86-0.95	3.81	-6	-15	68.3	47
Soy ME	0.885	4.8-4.3	-3.8	-0.5	131	48
Rape ME	0.883	4.53	-10.8	-4.0	170	48
Tallow ME	0.876	51.15	9	13.9	117	35
Canola ME	0.88		-9	1	163	48

Table 1. Physical values of castor oil methyl ester (CastMe) determined along with values of other vegetable oil methyl esters

Property	ASTM standard	limit	units
Flash point	93	100	°C
Carbon residue	4530	0.050	wt%
Sulphated ash	874	0.020	wt%
Kinematic viscosity	445	1.9-6.0	mm ² /s
Sulphur	2622	0.05	wt%
cetane	613	40	°C
Cloud point	2500	By customer	°C
Free glycerol	GC	0	wt%

Table 2. Suggested standard for pure (100%) biodiesel as per ASTM.

5. Results and discussion

Potassium bisulphate (PBS) impregnated microporous silica has been evaluated as solid acid catalyst for biodiesel production from refined castor oil containing 8.4% FFA compared to other support viz. alumina with 95% yield. The determination of surface area, pore volume and pore diameter and also FTIR spectra of KHSO_4 supported on microporous silica revealed that KHSO_4 is well dispersed very evenly generating Bronsted acid site that is responsible for its higher activity. The FT IR spectrum of pure KHSO_4 , pure silica gel and KHSO_4 supported silica gel (Fig-6) have been depicted below.

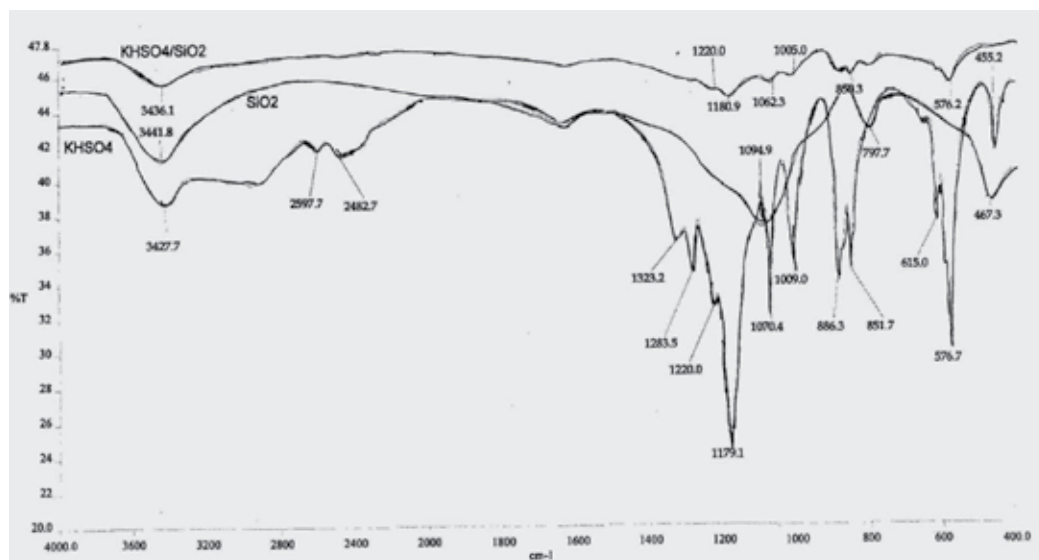


Fig. 6. FT IR spectra of pure KHSO_4 , Pure SiO_2 and KHSO_4 supported on SiO_2

The pure silica FTIR spectra of KHSO_4 exhibited typically six major bands located at 577, 852, 886, 1009, 1070 and 1179 cm^{-1} which are stretching modes of oxygen bonded to sulphur and hydrogen. In supported KHSO_4 catalyst no clear bands were observed. These results indicated that KHSO_4 is highly dispersed on the surface of support SiO_2 . A 40:1 alcohol to oil ratio at 70°C (external) temperature and 5 wt% catalysts loading gave a maximum yield of CastMe up to 95%.

The textural properties (Kulkarni et al, 2006) of the catalyst were summarized in Table 3. The surface area of microporous silica of 60-100 mesh particle size has $300\text{m}^2/\text{g}$ and pore volume $1.15\text{cm}^3/\text{g}$ and its average pore diameter is 150Å . After loading 50 wt% of KHSO_4 the accessible surface area of silica gel left was only $55.45\text{m}^2/\text{g}$ and pore volume and average pore diameter were reduced to $0.13\text{cm}^3/\text{g}$ and 98.9Å . The reason is attributed to uniform dispersing of KHSO_4 on the surface leaving only $55.45\text{m}^2/\text{g}$ surface and pore plugging of the support. The same reaction when carried out in a similar fashion supporting KHSO_4 on alumina surface, the reaction gives very poor or no yield at all. It may be due to too narrow micropores of alumina which cannot accommodate KHSO_4 molecule to disperse uniformly to enhance catalytic activity (Kulkarni et al, 2006) although its surface area is higher ($260\text{m}^2/\text{g}$). Even though alumina is an interesting support it is assumed that the surface basicity could bring about decomposition of KHSO_4 . It means that particles of


KHSO_4 conform to silica gel particles in order to disperse on its surface. Large pores can easily accommodate a bulky triglyceride molecule giving $\text{KHSO}_4/\text{SiO}_2$ large active site and surface area resulting in highest activity (Igarashi et al, 1979; Furuta, 2004 and Lecleroq et al, 2001).

Solid support	Surface area (m^2/g)	Pore volume (cm^3/g)	Pore diameter (\AA)
SiO_2	300	1.15	150
$\text{KHSO}_4/\text{SiO}_2$	55.45	0.13	98.9

Table 3. The textural properties determined for SiO_2 and $\text{KHSO}_4/\text{SiO}_2$

6. Mechanism

The mechanism of the reaction has been shown in Scheme 4. The interaction of the carbonyl oxygen of the ester with the conjugate acid potassium ion from the silica surface of the catalyst forms carbocation by enolizing it. The carbocation is stabilized by the bisulphate ion and facilitates nucleophilic attack methanol on the carbocation producing a tetrahedral intermediate (c).

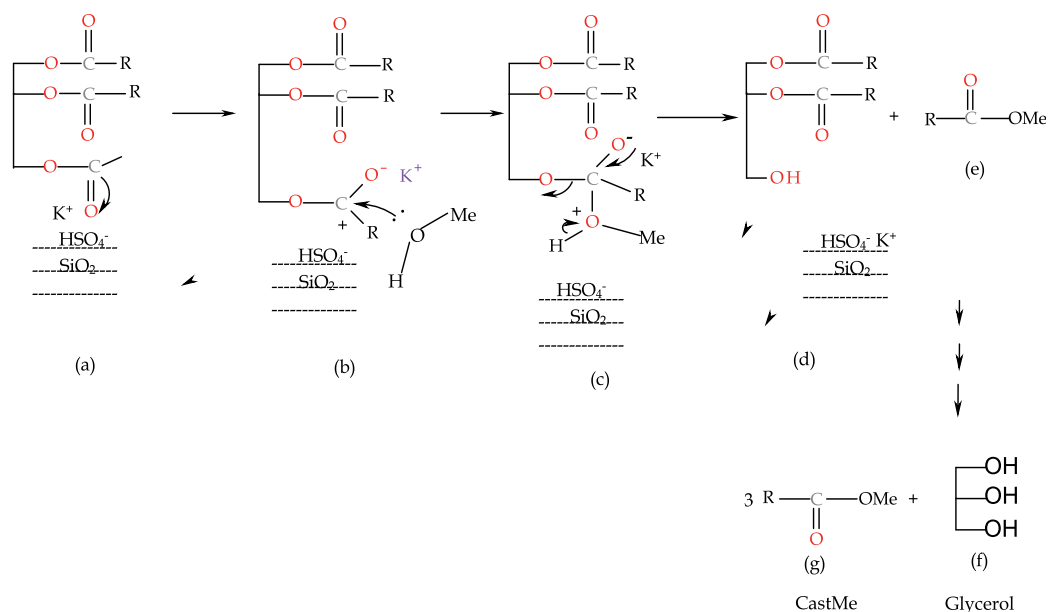

Scheme 4.

In the reaction sequence the triglyceride was converted stepwise to di and mono glyceride and finally to glycerol. The tetrahedral intermediate (c) formed during the reaction eliminate di, monoglyceride and glycerol when tri, di and monoglyceride came in contact with the acidic site respectively to give one mole of ester in each step. It has been reported (Freedman, B, 1986) in fact that the rate limiting step varied over time and in three stages in accordance with the observed reaction rate could categorize the overall reaction progress. In the first stage the reaction was characterized by a mass transfer controlled phase in which the low miscibility of the catalyst and the reagent or the non-polar oil was separated from

the polar alcohol phase. The second phase is product formation stage whereby the product formed acts as an emulsifier. It is a kinetically controlled stage and is characterised by abrupt range of product formation. Finally the equilibrium is reached at the completion stage. It was found in castor oil transesterification with 40:1 alcohol to oil ratio acceptable reaction rate was achieved. Thus from this observation it can be stated that the forward reaction is pseudo first order kinetics while the backward or the reverse reaction is second order kinetics.

7. Influence of reaction parameters

The transesterification of castor oil in presence of KHSO_4 supported on silica gel in methanol is influenced by certain reaction parameters which have been studied thoroughly varying the conditions at different stages and the results have been appended below..

7.1 Reaction temperature

Initially the transesterification reaction was attempted at room temperature under stirring at 600 rpm for more than 48 hours. However the reaction rate at room temperature was found to be very slow and only 30-35% conversion was observed. It means that the rate of reaction is influenced by the reaction temperature. Gradually when the reaction temperature was raised by 10°C the reaction rate is increased with increase of product formation and at 70°C (external) temperature the formation of the product was found to be maximum of 95%. Beyond this temperature there was found to be no further increase of yield (Fig. 7).

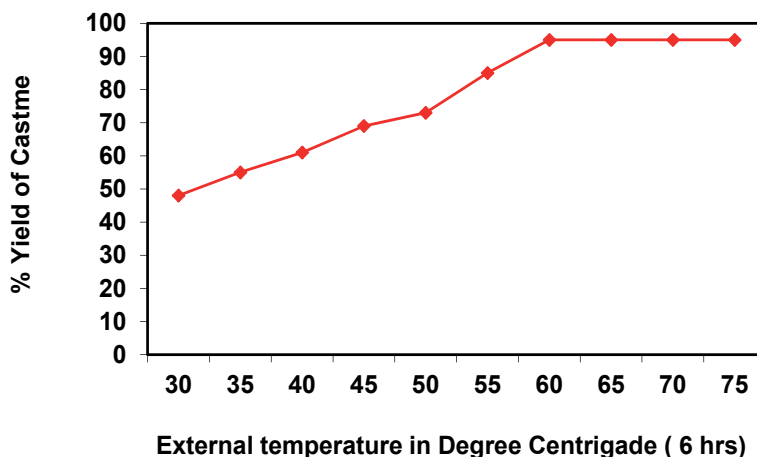


Fig. 7. Effect of external temperature on the reaction course

7.2 Effect of time

The effect of reaction time was studied and result was shown in Fig. 8. It was found that increasing the reaction time upto 5 hours enhanced the castor oil methyl ester yield and

beyond it there found to be no further improvement. It means 5 hours time is optimum period required.

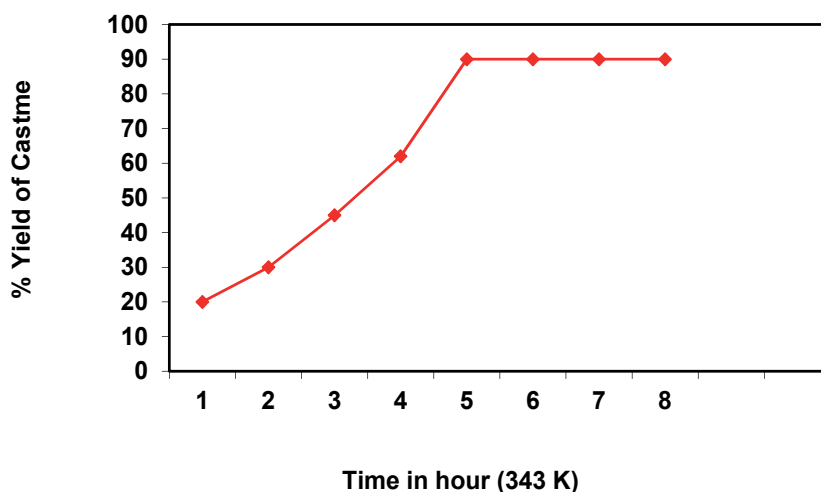


Fig. 8. Effect of time duration on the reaction course

7.3 Effect of alcohol to castor oil ratio

Methanol to castor oil weight ratio is one of the important parameters that affect the yield of methyl ester of castor oil. Theoretically the transesterification reaction requires 3 moles of methanol per mole of triglyceride (Lotero et al, 2005). Since the reaction is a reversible one, the excess methanol shifts the equilibrium towards the direction of ester formation (Cannkei et al, 1999). Generally heterogeneous acid catalytic of transesterification reaction is well known for slow reaction rate. In order to improve the rate of this reaction, use of excess alcohol is an option. It was reported (Xie et al, 2005) that increase of the ratio up to 275:1 of alcohol to oil improves the rate of transesterification reaction. In the present work with preoptimized reaction parameters the methanol to castor oil ratio was varied in the range 5:1 to 40:1 and its influence on the yield of CastMe was investigated at the end of 5 hours. It was clearly observed that at 70°C (external) temperature with increase in ratio of alcohol to oil from 5:1 to 40:1 increased the yield of CastMe from 75% to 95%. Presence of 8.4% FFA in the refined castor oil did not affect the activity of the catalyst. Further increase of methanol did not show any significant improvement (Fig 9). The excess methanol can be recovered for reuse and low cost of methanol makes it the first choice for transesterification.

7.4 Effect of catalyst amount

The catalyst amount is also an important parameter that needs to be optimized for increasing the yield of castor oil methyl ester (CastMe). The effect of $\text{KHSO}_4/\text{SiO}_2$ wt/wt of castor oil on the reaction was studied. At low catalyst amount (< 5 wt %) there were not enough active site for reaction. The optimum amount of catalyst employed was found to be 5 wt% of castor oil to isolate a yield of 95% of the product (Fig. 10).

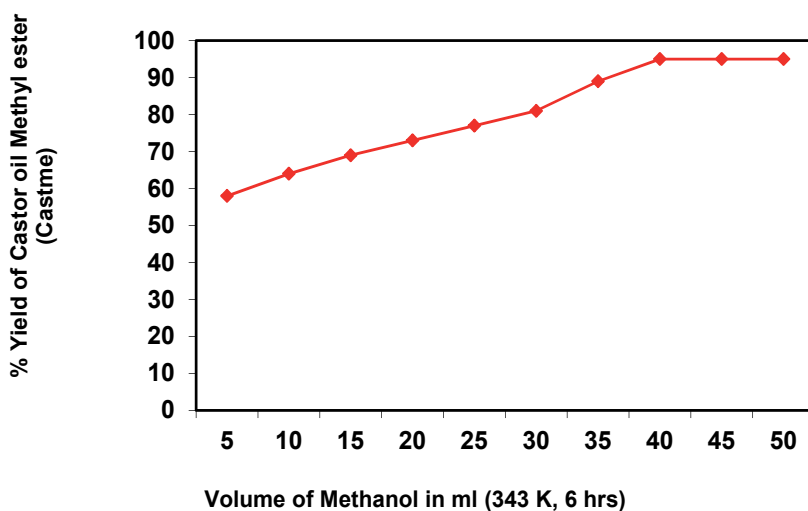


Fig. 9. Effect of volume of alcohol on the reaction course

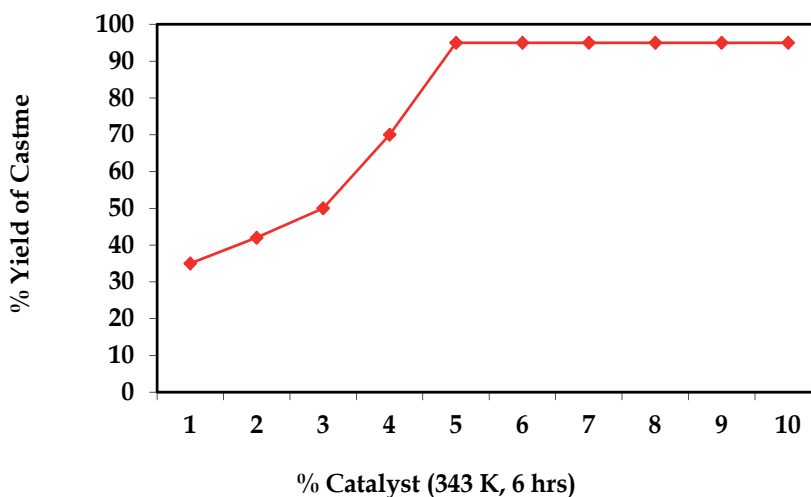


Fig. 10. Effect of catalyst amount

7.5 Catalyst recycling

The cost of a process depends upon the recyclability of a catalyst. It has been found that the dispersed catalyst KHSO_4 on silica gel surface after the transesterification reaction of castor oil in methanol, a certain amount gets leached out with methanol either in the form of H_2SO_4 or in HSO_4^- . However, after the completion of the reaction, methanol is distilled out completely and methyl ester of castor oil (CastMe) was extracted in dichloromethane

whereby KHSO_4 is retained on the surface of silica. The catalyst was washed several times with petroleum ether and then dried completely at 150°C for 8-10 hours. On use of this catalyst for 5 runs with same amount of castor oil and methanol the yield of CastMe decreased was subtle even at fifth reuse (Fig. 11).

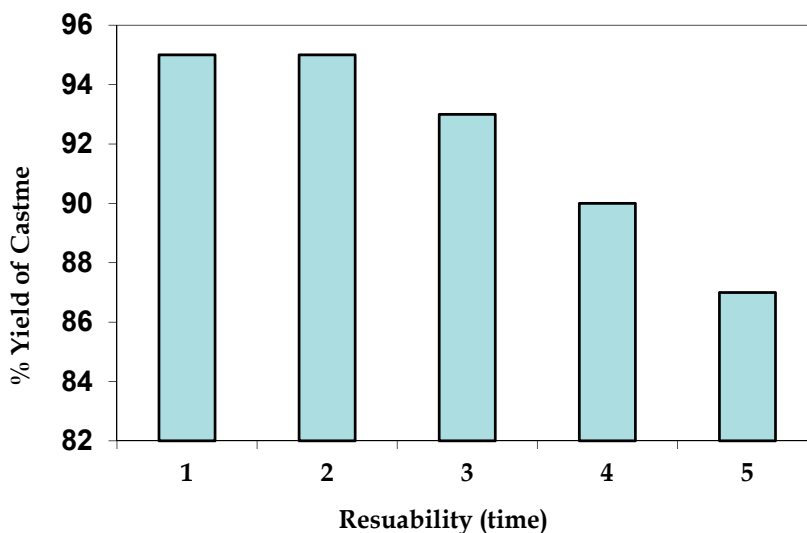


Fig. 11. Catalyst recycling

8. Conclusion

Silica gel supported KHSO_4 acidic catalyst prepared for production of biodiesel from refined castor oil containing 8.4% free fatty acid has been found to be a simple, cheap, ecofriendly and recyclable catalyst system for excellent yield of castor oil biodiesel under mild condition. The activity of the catalyst system is not affected by the presence of free fatty acid. The system is so simple that it does not require any special design compared to other solid supported acidic catalysts.

It may be mentioned in this context that the leading oil companies in the whole world are looking to tap the business opportunities of biodiesel. In the developed process such as the one discussed in this chapter is scaled up to commercial levels by more and more oil companies, it could be a major step towards creation of an eco-friendly transportation fuel that is relatively clean on combustion and provides farmers with substantial income.

9. References

- Akoh, C.C., Chang, S.W., Lee, G.C. and Shaw, J.F. (2007). Enzymatic approach to biodiesel production. *J. Agric. Food. Chem.*, 55, 8995-9005. DOI: 10, 1021/jf071724y
- Canakei, M. and Van, G.J. (1999). Biodiesel production via acid catalysis *Trans. ASAE*, 49, 1203-1210.

- <http://www.castoroil.in>-The Home of Castor oil in the Internet. (2010). Castor oil chemicals and derivatives: Chapter3 ,*Comprehensive Castor Oil Report*.,pp 10
- Das, R.N., Sarma, K. and Goswami, A. (2010). Silica supported potassium bisulphate: an efficient system for activation of aromatic terminal olefins, *Synlett*,19,2908-2912
- Du, W., Li,W., Sun,T.,Chen,X. And Liu, D. (2008). Perspectives for biotechnological production of biodiesel and impacts, *Applied Microbiol.Biotechnol*, 79,331-337, DOI: 10.1007/c00253-008-1448-8
- Forero, C.L.B. (2004). Biodiesel from castor oil : a promising fuel for cold weather, *Report from Francisco de Paula Santander University, Columbia*, www.icrepq.com
- Freedman, B; Butterfield, R.O. Pryde B.H.(1986). Transesterification kinetics of soyabean oil,*J. Am. Oil. Chem. Soc.* 63, 1375-1380.
- Freedman, B., Pryde, E.H and Mounts, T.L. (1984). Variables affecting the yields of fatty esters from transesterifies vegetable oils. *J.Oil.Chem Society.* 61, 1638-1643, DOI: 10.1007/B IO 2541649, 2008.
- Furuta, S, Matsushashi,H, Arata K. (2004). Catalytic action of sulphated tin oxide for etherification and esterification in comparison with sulphated zirconia. *Appl-Catal A.* 269, 187-191.
- Furuta, S., Matsushashi ,H. and Arata ,K. (2004).Performance evaluation of biodiesel production by solid/liquid catalysts, *Catalysis Commun.*, 5,5721-5723
- Ghaly, A.E., Dave , D., Brooks,M.S. and Budge, S. (2010). Production of biodiesel by Enzymatic transesterification: Review. *American Journal of Biochem. and Biotech* 6(2) 54-76.
- Goodain, J.G.; Natesalehawat. S; Nikolopolous A.A Kim. S.Y. (2002). Etherification on zeolites: MTBE Synthesis, *Catal., Rev. Sci. Eng.* 44,287-320
- Goswami,A., Das,R.N. and Borthakur,N. (2007). An efficient selective solid supported system for deprotection of alcohols from esters, *Ind,J Chem*,46B,1893-1895
- Igarashi, S., Matsuda, T and Ogino, Y. (1979). Catalysis for vapour phase synthesis of methyl tertiary butyl ether,*J. Jpn Petrol.Ins.* 22, No, 331-336.
- Kim, M., Yan,S.,Wang,H., Wilson, J.,Salley,S.O., Simon Ng, K.Y. (2008). Catalytic activities of vanadia loaded heterogenous catalysts on transesterification of soyabean oil with methanol, *99th AOCS Annual Meeting* in Seattle, Washington
- Knothe, G. (2008). 'Designer' Biodiesel, optimizing fatty ester composition to improve fuel properties, *Energy & Fuels*, 22, 1358-1364.
- Kulkarni, M.G, Gopinath, R., Meher, L.C. and Dalai A,K. (2006). Solid acid catalysed biodiesel production by simultaneous esterification and transesterification, *Green Chem*, 1056-1062.
- Kurian J.V., Liang,Y. (1998). Transesterification process using lanthanum compound catalyst, *US Patent* 5840957
- Lecleroq, E. Finiels, A. and Moreau,C.(2001). Transesterification of Sunflower oil over zeolite using different metal loading: A case of leaching and agglomeration studies,*J. Am Oil Chem Soc.*,11,1161.
- Lotero, E., Liu,Y., Lopez, D.E., Suwannakarn K, Bruce, D. A and Goodwin, Jr. J.G. (2005). Synthesis of biodiesel via acid catalysis, *Ind.Eng. Chem. Rev*, 44, 5353-5363.
- Lou, W.Y. Zong,M.H. and Duan Z.Q. (2008). Efficient production of biodiesel from high free fatty acid containing waste oils using various carbohydrate-derived solid acid catalysts, *Bioresource Technology*, 99(18), 8752-8758.


- Patil, P.D. and Deng, S. (2009). Transesterification of *Cassia sativa* oil using heterogeneous metal oxide catalysts, *Energy Fuels*, 23, 4619-4624
- Robels-Medina, A., Gonzalez-Moreno, P.A., Esteban-Cerdan, L. and Molina-Grima, E. (2009). *Biocatalysis Towards Ever Greener Biodiesel Production*. *Biotechnol Adv.*, 27, 398-408. DOI: 10.1016/j.biotechadv, 2008, 10.008.
- Singh, A.K. and Fernando, S.D. (2008). Transesterification of soyabean oil using heterogeneous catalysts, *Energy & Fuels*, 22, 2067-2069
- Sreeprasanth, P.S., Srivastava, R., Srinivas, D and Ratnaswami P. (2006). Hydrophobic solid acid catalysts for production of biofuel and lubricantst *Appl. Catal A. General* 314, 148-159.
- Vicente, G., Coteron, A., Martinez, M., Aracil, J. (1998). Application of the factorial design of experiments and response surface methodology to optimize biodiesel production, *Ind. Crop Products*, 8, 29-35
- Vyas, A.P., Subramanyam, N. and Patel, P.A. (2009). Production of biodiesel through transesterification of *Jatropha* oil using potassium nitrate supported on alumina solid catalyst, *Fuel*, 88, 625-628
- Xie, W; Peng, H and Chen, L. (2006). Calcined Mg-Al hydrotalcites as solid base catalysts for methanolysis of soyabean oil *J. Mol. Catal A: Chem*, 246, 24-32.
- Xu, G. And Wu, G.Y. (2003). The investigation of blending properties of biodiesel and no. O diesel fuel. *J. Jiangsu Polytechnique University*, 15; 16-18.
- Wang, J., Chem, Y, Wang, X and CaO, F. (2009). Aluminium dodecatungstophosphate ($\text{Al}_{10.9}\text{H}_{0.3}\text{PW}_{12}\text{O}_{40}$) nanotube as a solid acid catalyst one pot production of biodiesel from waste cooking oil, *BioResources*, 4(11), 1477-1486.
- Yan, S., Lu, H. and Liang, B. (2008). Supported calcium oxide catalysts used in the transesterification of rapeseed oil for the purpose of biodiesel production, *Energy and Fuel*, 22(1), 646-651
- Zong, M.H., Duan Z.Q., Lou, W.Y., Smith, T.J. and Wu, H. (2007). Preparation of a sugar catalyst and its use for highly efficient production of biodiesel, *Green Chem.* 9(5), 434-437.

The Immobilized Lipases in Biodiesel Production

Margarita Stoytcheva¹, Gisela Montero¹,
Lydia Toscano¹, Velizar Gochev² and Benjamin Valdez¹
¹Universidad Autónoma de Baja California, Instituto de Ingeniería,
²Plovdiv University "Paisii Hilendarski,
¹México
²Bulgaria

1. Introduction

The leading standard setting organization ASTM International, formerly ASTM (American Society of Testing and Materials), defines biodiesel as a fuel comprised of mono-alkyl esters of long chain fatty acids (ASTM D6751). It is usually manufactured by triglycerides transesterification with methanol or ethanol in the presence of a catalyst, according to the following reaction:

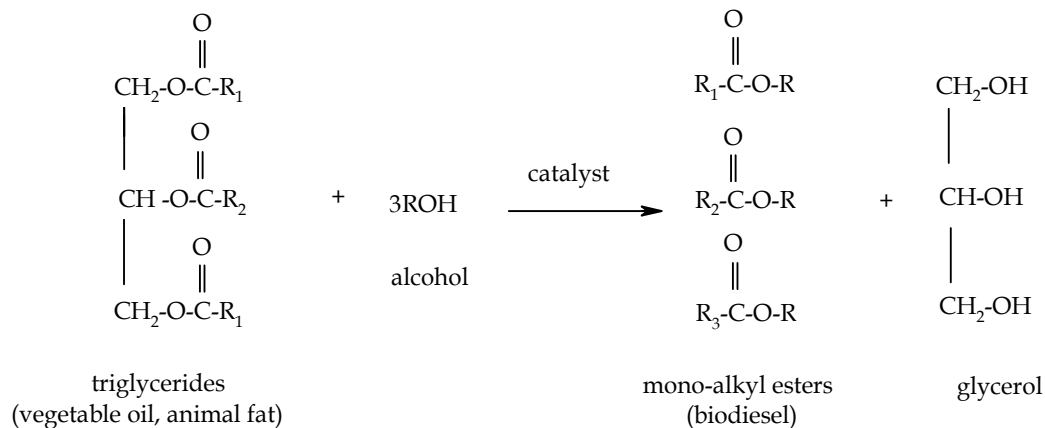

Recently, biodiesel production by lipase catalyzed transesterification has been suggested as a promising alternative to the conventional chemical catalysis, in spite of the high conversion and reaction rates of the latter (Akoh et al., 2007; Bajaj et al., 2010; Bisen et al., 2010; Demirbas, 2009; Fjerbaek et al., 2009; Fukuda et al., 2001, 2009; Ghaly et al., 2010; Helwani et al., 2009; Jegannathan & Abang, 2008; Man Xi Ao et al., 2009; Marchetti et al., 2007; Ranganathan et al., 2008; Robles-Medina et al., 2009; Semwal et al., 2011). The enzymatic process enables eliminating the drawbacks of the alkali- or acid-catalyzed transesterification, namely: product contamination, wastewater release, free fatty acids and water interferences, and difficult glycerol recovery. Nevertheless, the commercialization of

& Gupta, 2007), *Penicillium* (Chahinian et al, 2000; Lima et al., 2003; Vardanega et al., 2010), and *Trichoderma* (Kashmiri et al., 2006; Rajesh et al., 2010) are described as the most prospective lipase producers. Only microbial lipases are a matter of practical interest for biodiesel production, because only microbial lipases are produced in industrial scale. The application of the microbial lipases, all together with their immobilization which allows the regeneration and the reuse of the enzyme preparation in several working cycles reduces the production costs, and respectively the final cost of biodiesel. A review on microbial lipase production with emphasis on lipase engineering and use of mathematical models for process improvement and control is provided by Treichel et al. (2010). Some fungi cultured by the authors as powerful producers of lipase of use in biodiesel synthesis are shown in Fig. 1.

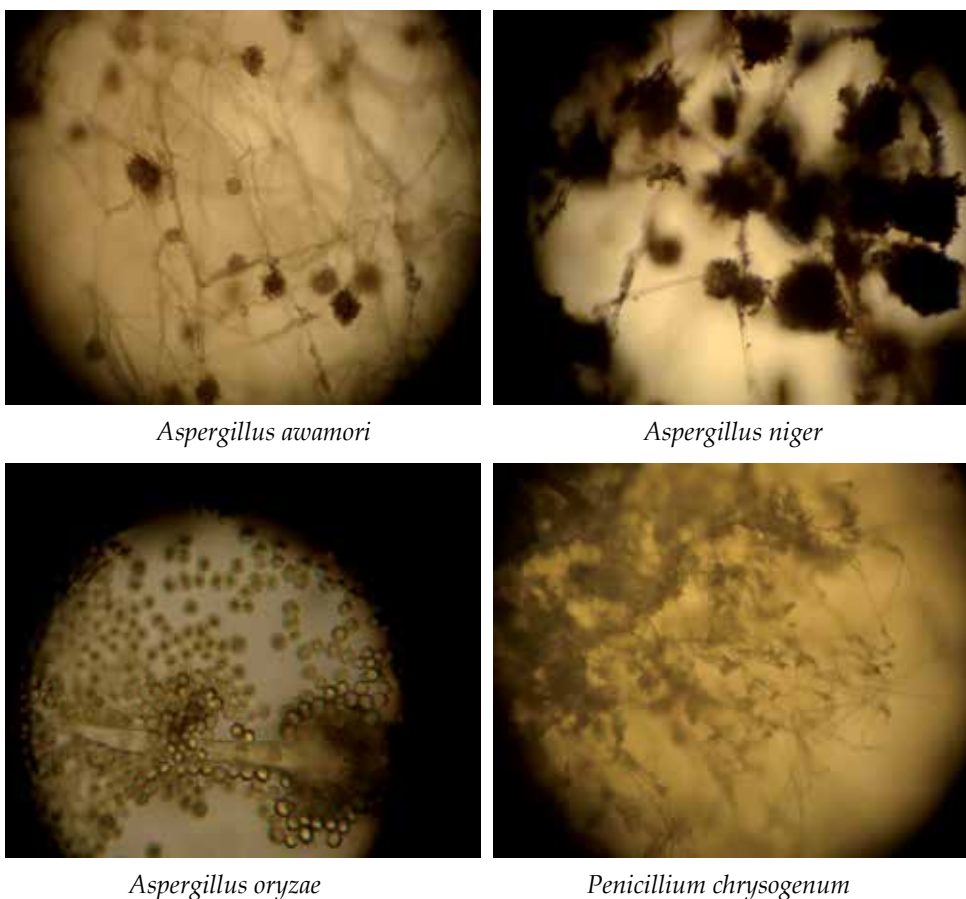


Fig. 1. Filamentous fungi belonging to various species of genera *Aspergillus* and *Penicillium*, considered as prospective lipase producers.

3. The immobilized lipases in biodiesel production

The term “enzyme immobilization” was defined at the first Enzyme Engineering Conference held at Hennicker, NH, USA, in 1971. It describes “enzymes physically confined at or

localized in a certain region of space with retention of their catalytic activity and which can be used repeatedly and continuously” (Powel, 1996). It is considered that lipase immobilization induces the enzyme conformational change required to enable the free access of substrate to the active centre. Especially, hydrophobic supports allow the adsorption of the open form of the lipases via interfacial activation, mimicking the lipophilic substrate (Ahn et al., 2010; Rodrigues & Fernandez-Lafuente, 2010; Salis et al., 2008; Séverac et al., 2011).

The revision of the literature covering the period 2005-2011 demonstrates that a large variety of matrices have been used for lipases immobilization, and that the main methods applied include adsorption, entrapment and/or encapsulation, and covalent attachment.

3.1 Lipases immobilization by adsorption

Physical adsorption is considered as the simplest method for enzyme immobilization. Enzyme fixation is performed through hydrogen bonds, salt linkages, and Van der Waal's forces. The process is carried out in mild conditions, without or with minimum support activation and clean up procedures application, and in the absence of additional reagents. Thus, it is economic and allows preserving enzyme activity and specificity. The chemical composition of the carrier, the molar ratio of hydrophilic to hydrophobic groups, as well as the particle size and the surface area determine the amount of enzyme bound and the enzyme behaviour after immobilization. Some of the most commonly used carriers for lipases immobilization by adsorption are listed in Table 1.

Data shown in Table 1 indicate that among the variety of lipase immobilization supports, Accurel has found a large application. Accurel is the trade name of a group of macroporous polymers. As carriers for lipase immobilization are used the polypropylene based hydrophobic Accurel MP (MP1000 with particle size below 1500 μm , Accurel MP1001 with particle size below 1000 μm and Accurel MP1004 with particle size below 400 μm), and Accurel EP-100. On the most hydrophobic support tested, Accurel MP1001, no glycerol adsorption was observed (Séverac et al., 2011). It has been demonstrated (Salis et al., 2009) comparing the catalytic efficiencies (activity/loading) of eight lipases, that they show a different level of adaptation to the support. Immobilized *Pseudomonas fluorescens* lipase is the most active biocatalyst, followed by immobilized *Pseudomonas cepacia* lipase. The other lipases tested (from *Rhizopus oryzae*, *Candida rugosa*, *Mucor javanicus*, *Penicillium roqueforti*, *Aspergillus niger*, *Penicillium camembertii*), are inactive toward biodiesel synthesis in the described conditions.

Enzyme immobilization on Accurel could be performed by direct contact between the lipase solution and the support (Cheirsilp et al., 2008). However, it has been confirmed that ethanol pre-treatment improves the immobilization process by inducing a better penetration of the enzyme solution inside the hydrophobic Accurel and by reducing the enzyme thermodynamic activity, thus forcing the adsorption process (Foresti, & Ferreira, 2004). Enzyme adsorption with previous ethanol treatment of the support is carried out via: (i) wetting the support with, sequentially: ethanol, aqueous ethanol solution and finally with water, with intermediary filtration, or (ii) a single wetting with ethanol and then a direct contact with the enzyme solution without removing ethanol.

Accurel, due to its hydrophobic properties, should stabilise the enzyme in its open (active) conformation. Thus, it is considered as efficient for lipase immobilization.

Other synthetic polymers used for lipases immobilization comprise: hydrophobic polystyrene macroporous resin (Li & Yan, 2010), electrospun polyacrylonitrile nanofibers

with higher porosity and interconnectivity compared with other nanostructured carriers (Sakai et al., 2010), polymethacrylate (Salis et al., 2009), etc. The naturally occurring materials used as carriers for lipase immobilization include: activated carbon (Moreno-Paraján & Giraldo, 2011; Naranjo et al., 2010) and carbon cloth (Naranjo et al., 2010), celite (Ji et al., 2010; Shah & Gupta, 2007); hydrotalcite (Yagiz et al., 2007; Zeng et al., 2009), zeolites (Yagiz et al., 2007), etc. The role of the nature of the support surface on the loading and the activity, as well as on the operational stability of the immobilized enzyme has been investigated in details.

Carrier	Immobilized lipase origin	Reference
Accurel	<i>Candida Antarctica</i>	Séverac et al., 2011; Tongboriboon et al., 2010
	<i>Candida rugosa</i>	Salis et al., 2008 ; Tongboriboon et al., 2010
	<i>Pseudomonas cepacia</i>	Salis et al., 2008 ; Tongboriboon et al., 2010
	<i>Pseudomonas sp.</i>	Cheirsilp et al., 2008
	<i>Pseudomonas fluorescens</i>	Salis et al., 2008, 2009
	<i>Pseudomonas fluorescens</i>	Tongboriboon et al., 2010
	<i>Mucor javanicus</i>	Salis et al., 2008
	<i>Penicillium roqueforti</i>	Salis et al., 2008
	<i>Penicillium camembertii</i>	Salis et al., 2008
	<i>Rhizopus oryzae</i>	Salis et al., 2008
Activated carbon	<i>Thermomyces lanuginosus</i>	Tongboriboon et al., 2010
	<i>Candida Antarctica</i>	Naranjo et al., 2010
Celite	<i>Candida rugosa</i>	Moreno-Paraján & Giraldo, 2011
	<i>Candida rugosa</i>	Shah & Gupta, 2007
	<i>Pseudomonas cepacia</i>	Shah & Gupta, 2007
Polystyrene	<i>Pseudomonas aeruginosa</i>	Ji et al., 2010
	<i>Pseudomonas fluorescens</i>	Shah & Gupta, 2007
Carbon cloth	<i>Pseudomonas cepacia</i>	Li & Yan, 2010
Poly(acrylonitrile)	<i>Pseudomonas cepacia</i>	23 Naranjo et al., 2010
Ceramics	<i>Pseudomonas cepacia</i>	16 Sakai et al., 2010
Pre-treated textile	<i>Pseudomonas cepacia</i>	Shah & Gupta, 2007
	<i>Candida sp.</i>	Chen et al., 2009; Li et al., 2010 ; Lu et al., 2007 and 2010
Hydrophilic resins	<i>Rhizomucor miehei</i>	De Paola et al., 2009
Silica	<i>Rhizomucor miehei</i>	Chen et al., 2009
	<i>Pseudomonas fluorescens</i>	Salis et al., 2009
Mg-Al hydrotalcites	<i>Saccharomyces cerevisiae</i>	Zeng et al., 2009
Resin D4020	<i>Penicillium expansum</i>	Li et al., 2009
Polymethacrylate	<i>Pseudomonas fluorescens</i>	Salis et al., 2009
Organosilicate	<i>Pseudomonas fluorescens</i>	Salis et al., 2009
Hydrotalcite	<i>Thermomyces lanuginosus</i>	Yagiz et al., 2007
Zeolites	<i>Thermomyces lanuginosus</i>	Yagiz et al., 2007

Table 1. Carrier used for lipases immobilization by adsorption.

3.2 Lipases immobilization by entrapment and/or encapsulation

Entrapment involves capture of the enzyme within a matrix of a polymer, although enzyme encapsulation refers to the formation of a membrane-like physical barrier around the enzyme preparation (Cao, 2005). The matrix is usually formed during the process of the immobilization. The enzyme entrapped in a gel matrix can be further encapsulated. Both processes require simple equipment and relatively inexpensive reagents. It is supposed that

enzymes immobilized by entrapment and/or encapsulation are more stable than the physically adsorbed ones. At the same time the immobilized enzymes maintain their activity and stability.

Numerous materials and techniques have been used for lipases entrapment and/or encapsulation. Some of the immobilization matrices developed during the last years (2005-2011) are enumerated in Table 2.

Carrier	Immobilized lipase origin	References
κ-carrageenan	<i>Candida Antarctica</i>	Jegannathan et al., 2010
	<i>Candida rugosa</i>	Jegannathan et al., 2010
	<i>Burkholderia cepacia</i>	Jegannathan et al., 2009, 2010
	<i>Pseudomonas fluorescens</i>	Jegannathan et al., 2010
	<i>Aspergillus niger</i>	Jegannathan et al., 2010
Silica gel	<i>Thermomyces lanuginosus</i>	Khor et al., 2010
	<i>R. miehei</i>	Macario et al., 2009
	<i>Pseudomonas cepacia</i>	Noureddini et al., 2005
Celite supported sol-gel	<i>Candida Antarctica</i>	Meunier & Legge, 2010
	Lipase NS44035	Meunier & Legge, 2010
Silica aerogel	<i>Candida Antarctica</i>	Nassreddine et al., 2008
	<i>Candida Antarctica</i>	Orçaire et al., 2006
	<i>Burkholderia cepacia</i>	Orçaire et al., 2006

Table 2. Carrier used for lipases immobilization by entrapment and/or encapsulation.

For instance, a simple technique for lipase encapsulation in κ-carrageenan by co-extrusion was suggested by Jegannathan et al. (2009, 2010). Carrageenan has been selected because of its availability, biodegradability, low cost, and lack of toxicity. It was found that at optimized reaction conditions a methyl ester conversion up to 100% could be achieved in transesterification of palm oil using the liquid core encapsulated lipase PS from *Burkholderia cepacia*. The immobilized lipase was stable and retained 82% relative transesterification activity after five cycles.

Another technique for lipase immobilization by entrapment and/or encapsulation, which has received a considerable attention in recent years, is the sol-gel process. The method involves an aqueous solution of the enzyme, a catalyst (NaOH, NaF, HCl), and an inorganic-organic matrix precursor (alkoxysilane). The hydrolysis and condensation of the precursor result in an amorphous silica matrix that covers the enzyme. The method has been applied for *R. miehei* lipase encapsulation within the micellar phase of a surfactant that is self-assembled with silica (Macario et al., 2009). It has been demonstrated that the enzyme preserves its mobility and activity. More over, because of the activation of the enzyme catalytic centre by the hydrophobic groups of the surfactant, the immobilized lipase was more active than its free form. In addition, the obtained ordered mesoporous structure improved the stability of the enzyme and decreased the rate of leaching.

Comprehensive characterization of sol-gel immobilized lipase has been performed by Noureddini et al. (2005). Lipase PS was entrapped within a sol-gel polymer matrix, prepared by polycondensation of hydrolyzed tetramethoxysilane and isobutyltrimethoxysilane. The immobilized lipase was stable and more active than the free lipase toward the transesterification of soybean oil.

Various supports could be used to improve the stability of the entrapped/encapsulated enzymes. Celite supported lipase sol-gels were investigated aiming such problems as

activity, stability and reusability of the enzyme (Meunier & Legge, 2010). The three types of Celite considered (R633, R632, and R647) were compared to unsupported lipase sol-gels. It has been established that sol-gel immobilized lipase supported on Celite R632 allowed achieving an average conversion of 60% per gram of material for 6 h, and exhibited an average initial lipase activity comparable to that of the unsupported sol-gel formulation.

Orçaire et al. (2006) report a technique for encapsulation of *Candida Antarctica* and *Burkholderia cepacia* lipases in silica aerogels reinforced with silica quartz fibre felt and dried by the CO₂ supercritical technique. The aerogel encapsulation permits maintaining the enzymes in a dispersion state similar to the dispersion prevailing in an aqueous solution, even in organic media, while agglomeration of the lipase occurs if it is used directly in the organic solvent. At present, sol-gel enzyme entrapment/encapsulation is considered to be the most successful immobilization technique for lipase immobilization.

3.3 Lipases immobilization by covalent attachment

Covalent attachment is a result of a chemical reaction between the active amino acid residues outside the active catalytic and binding site of the enzyme, and the active functionalities of the carrier (Cao, 2005). Although drastic and complicated, and strongly affected by the carriers' properties, covalent attachment is the most efficient technique for enzyme immobilization. Some carriers used for covalent lipase immobilization are displayed in Table 3.

Carrier	Immobilized lipase origin	References
Olive pomace	<i>Thermomyces lanuginosus</i>	Yücel, 2011
Resins	<i>Thermomyces lanuginosus</i>	Mendes et al., 2011
	<i>Pseudomonas fluorescens</i>	Mendes et al., 2011
Polymers	<i>Thermomyces lanuginosus</i>	Dizge et al., 2008, 2009a, 2009b
Polyurethane foam	<i>Thermomyces lanuginosus</i>	Dizge & Keskinler, 2008
Nb ₂ O ₅ and SiO ₂ -PVA	<i>Burkholderia cepacia</i>	Da Rys et al., 2010
Chitosan	<i>Candida rugosa</i>	Shao et al., 2008
		Ting et al., 2008
Lewatit	<i>Thermomyces lanuginosus</i>	Rodrigues et al., 2010
Silica	<i>Rhizopus orizae</i> + <i>Candida rugosa</i>	Lee and al., 2008
	<i>Enterobacter aerogenes</i>	Kumari et al., 2009
Magnetic nanostructures	<i>Candida rugosa</i>	Dussan et al., 2007, 2010
	<i>Thermomyces lanuginosus</i>	Xie & Ma, 2010

Table 3. Carrier used for lipases immobilization by covalent attachment

Yücel (2011) reports a method for *Thermomyces lanuginosus* lipase covalent binding on polyglutaraldehyde-activated olive pomace powder. The technique is cost effective, because of the low price of the support and because of the strong covalent bond formed, leading to enzyme stabilization without loss of activity, allowing the multiple reuse of the enzyme. Immobilized lipase was stable for 10 batches of pomace oil transesterification retaining more than 80% residual activity.

Among the other naturally occurring materials, chitosan is considered as appropriate for enzyme binding. Its membrane forming and adhesion ability, high mechanical strength and facility of forming insoluble in water thermally and chemically inert films make it suitable for lipase immobilization. For instance, *Candida rugosa* type VII lipase was fixed onto chitosan beads using a binary method consisting in the follows: (i) lipase

immobilization onto the hydroxyl groups of chitosan by activation with 1-ethyl-3-(3-dimethylaminopropyl) carbodiimide hydrochloride; (ii) immobilization of additional lipase molecules through their amino groups to chitosan by cross-linking with glutaraldehyde. The immobilized enzyme has been used to catalyse the hydrolysis of soybean oil. Then, the feedstock containing free fatty acids, mono-, di- and triglycerides was esterified with methanol in the presence of an acid catalyst to produce biodiesel. It has been demonstrated that the enzymatic/acid-catalyzed hybrid process uses milder reaction conditions and allows avoiding the inactivation of the immobilized enzyme by polar compounds and increase biodiesel yields.

A new method for the synthesis of hydrophobic microporous matrices for enzyme immobilization, namely styrene-divinylbenzene-polyglutaraldehyde and poly(styrene-divinylbenzene)-polyglutaraldehyde copolymers, applying High Internal Phase Emulsions (HIPE) technique has been developed by Dizge et al. (2008, 2009a, 2009b). *Thermomyces lanuginosus* lipase was successfully attached to the support by covalent binding. According to the authors, the copolymers could be prepared in a short time and in large amounts and shapes. The immobilization efficiency, defined as the ratio of the activity of the immobilized enzyme to the activity of the free enzyme was found to vary from 80% to 89%. The immobilized enzyme retained its activity during 10-15 repeated batch reactions.

Promising results in terms of enzyme thermal and operational stability improvement have been obtained using as supports for lipases immobilization silanized Nb₂O₅ and SiO₂-PVA (Da Rys et al., 2010), and glutaraldehyde or ethanolamine activated silica gels (Lee and al., 2008; Kumari et al., 2009). However, the stability of the immobilized enzyme depends not only on the chemical/physical nature of the carrier, but also on the binding mode, the binding number, and the position of the binding on the enzyme surface (Cao, 2005), among other. Mendes et al. (2011) and Rodrigues et al. (2010) demonstrate that the multipoint covalent attachment of *Thermomyces lanuginosus* lipase on Toyopearl AF-amino-650M resin and on aldehyde-Lewatit is an efficient strategy for enzyme stabilization. It has been demonstrated that *Thermomyces lanuginosus* lipase immobilized on glyoxyl-resin is between 27 and 31 times more stable than the soluble lipase (Mendes et al., 2011).

Another important issue provided by enzyme immobilization concerns the localization of the interaction in the zone where the maximum concentration of reagents is present and/or at the interface between the immiscible heterogeneous phases, regarding lipases. For this purpose, lipases (from *Candida rugosa* and *Thermomyces lanuginosus*) have been immobilized on magnetic nanostructures (Fe₃O₄) and localized by application of a magnetic field. In addition, the method favours the simple and fast separation of the enzyme from the reaction mixture. Thus, it allows the intensification of the process and the reduction of the production costs.

3.4 Cells immobilization

The technological and economic advantages of immobilized cells over immobilized enzymes are well known (D'Souza, 1982): higher operational stability, higher yields of enzyme activity after immobilization, greater resistance to environmental perturbations, greater potential for multistep processes, and lower effective enzyme cost (enzyme purification and extraction are avoided). Despite of these benefits, only few investigations on the use of immobilized cells in biodiesel synthesis are reported until now (Fukuda et al., 2009; Hama et al., 2006, 2007; Li et al., 2007; Oda et al., 2005; Tamalampudi et al., 2008). The research efforts were focused on the immobilization no more than of *Rhysopus oryzae* within porous biomass

support particles. The fixation was achieved spontaneously during batch cultivation. The applied technique (Atkinson et al., 1979) offers numerous advantages over other methods: the particles are reusable and mechanically resistant; additional reagents, aseptic handling of particles, and preproduction of cells are not necessary. It has been demonstrated that *Rhysopus oryzae* cells immobilized within biomass support particles can be used as low cost catalyst for biodiesel production.

4. Conclusion

Enzymatic approach to biodiesel production offers several advantages over the chemical catalysis currently applied. It is more efficient because of the enzyme specificity and selectivity, involves less energy consumption because of the mild reaction conditions, and is environmentally friendly because of the limited release of side products or wastes. Catalyst immobilization presents a number of additional benefits, such as repeated use of the enzymes, enhancement of their thermal and operational stability, localization of the interaction, effective control of the reaction parameters, etc., thus reducing the production cost and making the enzyme biodiesel synthesis an attractive alternative to other technologies. The present review provides an overview on the techniques applied for lipases immobilization.

5. References

- Adinarayana, K.; Bapi Raju, K. V. V. S. N.; Zargar, M. I. ; Devi, R. B.; Lakshmi, P. J. & Ellaiah, P. (2004). Optimization of process parameters for production of lipase in solid-state fermentation by newly isolated *Aspergillus* species, *Ind. J. Biotechnol.*, 3, 65-69
- Ahn, K.; Ye, S.; Chun, W.; Rah, H. & Kim, S. (2010). Yield and component distribution of biodiesel by methanolysis of soybean oil with lipase-immobilized mesoporous silica. *Microporous and Mesoporous Materials* doi:10.1016/j.micromeso.2010.11.008 (in press)
- Akoh, C.; Chang, Shu-Wei; Lee, Guan-Chiun & Shaw, Jei-Fu (2007). Enzymatic approach to biodiesel production. *J. Agric. Food Chem.* 55, 8995-9005
- ASTM D6751: American Society for Testing and Materials standard specification for biodiesel fuel (B 100) blend stock for distillate fuels
- Atkinson, B.; Black, G. M.; Lewis, P. J. S. & Pinches, A. (1979). Biological particles of given size, shape, and density for use in biological reactors. *Biotechnol. Bioeng.*, 21, 193-200
- Bajaj, A.; Lohan, P.; Jha, P. & Mehrotra, R. (2010). Biodiesel production through lipase catalyzed transesterification: An overview. *J. Mol. Catal. B: Enzymatic*, 62, 9-14
- Bisen, P.; Sanodiya, B.; Thakur, G.; Baghel, R. & Prasad, G. B. K. S. (2010). Biodiesel production with special emphasis on lipase-catalyzed transesterification. *Biotechnol. Lett.*, 32, 1019-1030
- Cao, L. (2005). *Carrier-bound immobilized enzymes. Principles, application and design*. Wiley-VCH, ISBN-10: 3-527-31232-3, Weinheim
- Chahinian, H.; Vanot, G.; Ibrik, A.; Rugani, N.; Sarda, L. & Comeau, L. C. (2000). Production of extracellular lipases by *Penicillium cyclopium* purification and characterization of a partial acylglycerol lipase. *Biosci. Biotechnol. Biochem.*, 64, 215-222

- Cheirsilp, B.; H-Kittikuna, A. & Limkatanyu, S. (2008). Impact of transesterification mechanisms on the kinetic modeling of biodiesel production by immobilized lipase. *Biochem. Eng. J.*, 42, 261–269
- Chen, Y.; Xiao, B.; Chang, J.; Fu, Y.; Lv, P. & Wang, X. (2009). Synthesis of biodiesel from waste cooking oil using immobilized lipase in fixed bed reactor. *Energy Conversion and Management*, 50, 668–673
- Da Rys, P.; Silva, G.; Mendes, A.; Santos, J. & Castro, H. (2010). Evaluation of the catalytic properties of *Burkholderia cepacia* lipase immobilized on non-commercial matrices to be used in biodiesel synthesis from different feedstocks. *Bioresource Technology*, 101, 5508–5516
- De Paola, M. G.; Ricca, E.; Calabrò, V.; Curcio, S. & Iorio, G. (2009). Factor analysis of transesterification reaction of waste oil for biodiesel production. *Bioresource Technology*, 100, 5126–513
- Demirbas, A. (2009). Progress and recent trends in biodiesel fuels. *Energy Conversion and Management*, 50, 14–34
- Dizge, N. & Keskinler, B. (2008). Enzymatic production of biodiesel from canola oil using immobilized lipase. *Biomass and Bioenergy*, 32, 1274–1278
- Dizge, N.; Keskinler, B. & Tanriseven, A. (2008). Covalent attachment of microbial lipase onto microporous styrene-divinylbenzene copolymer by means of poly glutaraldehyde. *Colloids and Surfaces B: Biointerfaces*, 66, 34–38
- Dizge, N.; Keskinler, B. & Tanriseven, A. (2009a). Biodiesel production from canola oil by using lipase immobilized onto hydrophobic microporous styrene-divinylbenzene copolymer. *Biochem. Eng. J.*, 44, 220–225
- Dizge, N.; Aydiner, C.; Imer, D.; Bayramoglu, M.; Tanriseven, A. & Keskinler, B. (2009b). Biodiesel production from sunflower, soybean, and waste cooking oils by transesterification using lipase immobilized onto a novel microporous polymer. *Bioresource Technology*, 100, 1983–1991
- D'Souza, S. F. (1989). Immobilized cells: techniques and applications. *Indian J. Microbiol.*, 29, 83–117
- Dussán, K.; Giraldo, O. & Cardona, C. (2007). Application of magnetic nanostructures in biotechnological processes: Biodiesel production using lipase immobilized on magnetic carriers. *Proceedings of European Congress of Chemical Engineering (ECCE-6)*, Copenhagen, 16–20 September 2007
- Dussan, K.; Cardona, C.; Giraldo, O.; Gutiérrez, L. & Pérez, V. (2010). Analysis of a reactive extraction process for biodiesel production using a lipase immobilized on magnetic nanostructures. *Bioresource Technology*, 101, 9542–9549
- Fjerbaek, L.; Christensen, K. & Norddahl, B. (2009). A Review of the Current State of Biodiesel Production Using Enzymatic Transesterification. *Biotechnol Bioeng.*, 102, 5, 1298–1315
- Foresti, M. L. & Ferreira M. L. (2004). Ethanol pretreatment effect and particle diameter issues on the adsorption of *Candida rugosa* lipase onto polypropylene powder. *Appl. Surf. Sci.*, 238, 86–90
- Fukuda, H.; Kondo, A. & Noda, H. (2001). Biodiesel fuel production by transesterification of oils. *J. Bioscience Bioeng.*, 5, 405–416
- Fukuda, H.; Kondo, A. & Tamalampudi, S. (2009). Bioenergy: Sustainable fuels from biomass by yeast and fungal whole-cell biocatalysts. *Biochem. Eng. J.*, 44, 2–12

- Ghaly, A. E.; Dave, D.; Brooks, M. S. & Budge, S. (2010). Production of biodiesel by enzymatic transesterification: Review. *Am. J. Biochem. Biotechnol.*, 6, 54-76
- Guncheva, M. & Zhiryakova, D. (2011). Catalytic properties and potential applications of *Bacillus* lipases. *J. Mol. Catalysis B: Enzymatic*, 68, 1-21
- Hama, S.; Tamalampudi, S.; Fukumizu, T.; Miura, K.; Yamaji, H.; Kondo, A. & Fukuda, H. (2006). Lipase localization in *Rhizopus oryzae* cells immobilized within biomass support particles for use as whole-cell biocatalysts in biodiesel-fuel production. *J. Bioscience Bioeng.*, 101, 328-333
- Hama, S.; Yamaji, H.; Fukumizu, T.; Numata, T.; Tamalampudi, S.; Kondo, A. Noda, H. & Fukuda, H. (2007). Biodiesel-fuel production in a packed-bed reactor using lipase-producing *Rhizopus oryzae* cells immobilized within biomass support particles. *Biochem. Eng. J.*, 34, 273-278
- Hasan, F.; Shah, A. & Hameed, A. (2009). Methods for detection and characterization of lipases: A comprehensive review. *Biotechnol. Adv.*, 27, 782-798
- Helwani, Z.; Othman, M. R.; Aziz, N.; Fernando, W. J. N. & Kim, J. (2009). Technologies for production of biodiesel focusing on green catalytic techniques: A review. *Fuel Processing Technology*, 90, 1502-1514
- Hiol, A.; Jonzo, M. D.; Rugani, N.; Druet, D.; Sarda, L. & Comeau, L. C. (2000). Purification and characterization of an extracellular lipase from a thermophilic *Rhizopus oryzae* strain isolated from palm fruit. *Enzyme Microb. Technol.*, 26, 421-30
- Jegannathan, K.; Jun-Yee, L.; Chan, E. & Ravindra, P. (2009). Design an immobilized lipase enzyme for biodiesel production. *J. Renewable and Sustainable Energy*, 1, 063101-1 - 063101-8
- Jegannathan K. Abang, S. (2008). Production of biodiesel using immobilized lipase-A critical review. *Critical Reviews in Biotechnology*, 28, 253-264
- Jegannathan, K.; Jun-Yee, L.; Chan, E. & Ravindra, P. (2010). Production of biodiesel from palm oil using liquid core lipase encapsulated in κ -carrageenan. *Fuel*, 89, 2272-2277
- Ji, Q.; Xiao, S.; He, B. & Liu, X. (2010). Purification and characterization of an organic solvent-tolerant lipase from *Pseudomonas aeruginosa* LX1 and its application for biodiesel production. *J. Mol. Catal. B: Enzymatic*, 66, 264-269
- Karanam, S. K. & Medicherla, N. R. (2008). Enhanced lipase production by mutation induced *Aspergillus japonicus*. *African J. Biotechnol.*, 7, 2064-2067
- Kashmiri, M. A.; Adnan, A.; Butt, B. W. (2006). Production, purification and partial characterization of lipase from *Trichoderma viride*. *African J. Biotechnol.*, 5, 878-882
- Khor, G.; Sim, J.; Kamaruddin, A. & Uzir, M. (2010). Thermodynamics and inhibition studies of lipozyme TL IM in biodiesel production via enzymatic transesterification. *Bioresource Technology*, 101, 6558-6561
- Kumari, A.; Mahapatra, P.; Garlapati, V. & Banerjee, R. (2009). Enzymatic transesterification of *Jatropha* oil. *Biotechnology for Biofuels*, 2:1, doi:10.1186/1754-6834-2-1
- Lee Jong Ho; Dong Hwan Lee; Jung Soo Lim; Byung-Hwan Um; Chulhwan Park; Seong Woo Kang & Seung Wook Kim (2008). Optimization of the process for biodiesel production using a mixture of immobilized *Rhizopus oryzae* and *Candida rugosa* lipases. *J. Microbiol. Biotechnol.*, 18, 1927-1931
- Li, N.; Zong, M.; Wu, H. (2009). Highly efficient transformation of waste oil to biodiesel by immobilized lipase from *Penicillium expansum*. *Process Biochemistry*, 44, 685-688

- Li, Q. & Yan, Y. (2010). Production of biodiesel catalyzed by immobilized *Pseudomonas cepacia* lipase from Sapium sebiferum oil in micro-aqueous phase. *Applied Energy*, 87, 3148–3154
- Li, W.; Du, W. & Liu, D. (2007). *Rhizopus oryzae* IFO 4697 whole cell catalyzed methanolysis of crude and acidified rapeseed oils for biodiesel production in tert-butanol system. *Process Biochemistry*, 42, 1481–1485
- Li, Z.; Deng, L.; Lu, J.; Guo, X.; Yang, Z. & Tan, T. (2010). Enzymatic synthesis of fatty acid methyl esters from crude rice bran oil with immobilized *Candida sp.* 99-125. *Chinese Journal of Chemical Engineering*, 18, 870–875
- Lima, V. M. G.; Krieger, N.; Sarquis, M. I. M.; Mitchell, D. A.; Ramos, L. P. & Fontana, J. D. (2003). Effect of nitrogen and carbon sources on lipase production by *Penicillium aurantiogriseum*. *Food Technol. Biotechnol.*, 41, 105–110
- Lu, J.; Nie, K.; Xie, F.; Wang, F. & Tan, T. (2007). Enzymatic synthesis of fatty acid methyl esters from lard with immobilized *Candida sp.* 99-125. *Process Biochemistry*, 42, 1367–1370
- Lu, J.; Deng, L.; Zhao, R.; Zhang, R.; Wang, F. & Tan, T. (2010). Pretreatment of immobilized *Candida sp.* 99-125 lipase to improve its methanol tolerance for biodiesel production. *J. Mol. Catal. B: Enzymatic*, 62, 15–18
- Macario, A.; Moliner, M.; Corma, A. & Giordano, G. (2009). Increasing stability and productivity of lipase enzyme by encapsulation in a porous organic-inorganic system. *Microporous and Mesoporous Materials*, 118, 334–340
- Man Xi Ao, Sini Mathew & Obbard, J. (2009). Biodiesel fuel production via transesterification of oils using lipase biocatalyst. *GCB Bioenergy*, 1, 115–125
- Marchetti, J. M.; Miguel, V. U. & Errazu, A.F. (2007). Possible methods for biodiesel production. *Renewable and Sustainable Energy Reviews*, 11, 1300–1311
- Mendes, A.; Giordano, R. C.; Giordano, R. L. C. & Castro, H. (2011). Immobilization and stabilization of microbial lipases by multipoint covalent attachment on aldehyde-resin affinity: Application of the biocatalysts in biodiesel synthesis. *J. Mol. Catal. B: Enzymatic*, 68, 109–115
- Meunier, S. & Legge, R. (2010). Evaluation of diatomaceous earth as a support for sol-gel immobilized lipase for transesterification. *J. Mol. Catal. B: Enzymatic*, 62, 54–58
- Moreno-Parajàn, J. C. & Giraldo, L. (2011). Study of immobilized candida rugosa lipase for biodiesel fuel production from palm oil by flow microcalorimetry. *Arabian Journal of Chemistry*, 4, 55–62
- Naranjo, J.; Córdoba, A.; Giraldo, L.; García, V. & Moreno-Parajàn, J. C. (2010). Lipase supported on granular activated carbon and activated carbon cloth as a catalyst in the synthesis of biodiesel fuel. *J. Mol. Catal. B: Enzymatic*, 66, 166–171
- Nassreddine, S.; Karout, A.; Christ, M. & Pierre, A. (2008). Transesterification of a vegetal oil with methanol catalyzed by a silica fibre reinforced aerogel encapsulated lipase. *Applied Catalysis A: General*, 344, 70–77
- Oda, M.; Kaieda, M.; Hama, S.; Yamaji, H.; Kondo, A.; Izumoto, E. & Fukuda, H. (2005). Facilitatory effect of immobilized lipase-producing *Rhizopus oryzae* cells on acyl migration in biodiesel-fuel production. *Biochem. Eng. J.*, 23, 45–51
- Orçaire, O.; Buisson, P. & Pierre, A. (2006). Application of silica aerogel encapsulated lipases in the synthesis of biodiesel by transesterification reactions. *J. Mol. Catal. B: Enzymatic*, 42, 106–113

- Noureddini, H.; Gao, X. & Philkana, R. S. (2005). Immobilized *Pseudomonas cepacia* lipase for biodiesel fuel production from soybean oil. *Bioresource Technology*, 96, 769–777
- Panalotov, I. & Verger, R. (2000). *Physical Chemistry of Biological Interfaces*. Marcel Dekker Inc., New York
- Powel, L. W. (1996). In *Industrial Enzymology*, T. Godfrey and S. West, Editors, 2nd ed. Stockton Press, NY
- Rajesh, E. M.; Arthe, R.; Rajendran, R.; Balakumar, C.; Pradeepa, N. & Anitha, S. (2010). Investigation of lipase production by *Trichoderma reesei* and optimization of production parameters. *EJEAFChe*, 9, 1177-1189
- Ranganathan, S.; Narasimhan, S. & Muthukumar, K. (2008). An overview of enzymatic production of biodiesel. *Bioresource Technology*, 99, 3975–3981
- Robles-Medina, A.; González-Moreno, P.A.; Esteban-Cerdán, L. & Molina-Grima, E. (2009). Biocatalysis: Towards ever greener biodiesel production. *Biotechnology Advances*, 27, 398–408
- Rodrigues, R. & Fernandez-Lafuente, F. (2010). Lipase from *Rhizomucor miehei* as an industrial biocatalyst in chemical process. *J. Mol. Catal. B: Enzymatic*, 64, 1–22
- Rodrigues, R.; Pessela, B.; Volpato, G.; Fernandez-Lafuente, R.; Guisan, J. & Ayub, M. (2010). Two step ethanolysis: A simple and efficient way to improve the enzymatic biodiesel synthesis catalyzed by an immobilized-stabilized lipase from *Thermomyces lanuginosus*. *Process Biochemistry*, 45, 1268–1273
- Sakai, S.; Yiping Liu, Y.; Yamaguchi, T.; Watanabe, R.; Kawabe, M. & Kawakami, K. (2010). Production of butyl-biodiesel using lipase physically-adsorbed onto electrospun polyacrylonitrile fibers. *Bioresource Technology*, 101, 7344–7349
- Salis, A.; Pinna, M.; Monduzzi, M. & Solinas, V. (2008). Comparison among immobilised lipases on macroporous polypropylene toward biodiesel synthesis. *J. Mol. Catal. B: Enzymatic*, 54, 19–26
- Salis, A.; Bhattacharyya, M.; Monduzzi, M. & Solinas, V. (2009). Role of the support surface on the loading and the activity of *Pseudomonas fluorescens* lipase used for biodiesel synthesis. *J. Mol. Catal. B: Enzymatic*, 57, 262–269
- Semwal, S.; Arora, A.; Badoni, R. & Tuli, D. (2011). Biodiesel production using heterogeneous catalysts. *Bioresour. Technol.*, 102, 2151-2161
- Séverac, E.; Galy, O.; Turon, F.; Pantele, C.; Condoret, J-S.; Monsan, P. & Marty, A. (2011). Selection of CalB immobilization method to be used in continuous oil transesterification: Analysis of the economical impact. *Enzyme and Microbial Technology*, 48, 61–70
- Shah, S. & Gupta, M. (2007). Lipase catalyzed preparation of biodiesel from Jatropha oil in a solvent free system. *Process Biochemistry*, 42, 409–414
- Shao, P.; Meng, X.; He, J. & Sun, P. (2008). Analysis of immobilized *Candida rugosa* lipase catalyzed preparation of biodiesel from rapeseed soapstock. *Food and Bioproducts Processing*, 86, 283–289
- Shukla, P. & Gupta, K. (2007). Ecological screening for lipolytic molds and process optimization for lipase production from *Rhizopus oryzae* KG-5. *J Appl. Sci. Environ. Sanit.*, 2, 35–42
- Tamalampudi, S.; Talukder, M.; Hama, S.; Numata, T.; Kondo, A. & Fukuda, H. (2008). Enzymatic production of biodiesel from Jatropha oil: A comparative study of

- immobilized-whole cell and commercial lipases as a biocatalyst. *Biochem. Eng. J.*, 39, 185–189
- Tan, T.; Lu, J.; Nie, K.; Deng, L. & Wang, F. (2010). Biodiesel production with immobilized lipase: A review. *Biotechnology Advances*, 28, 628–634
- Ting, W.; Huang, C.; Giridhar, N. & Wu, W. (2008). An enzymatic/acid-catalyzed hybrid process for biodiesel production from soybean oil. *J. Chinese Institute of Chemical Engineers*, 39, 203–210
- Tongboriboon, K.; Cheirsilp, P. & H-Kittikun, A. (2010). Mixed lipases for efficient enzymatic synthesis of biodiesel from used palm oil and ethanol in a solvent-free system. *J. Mol. Catal. B: Enzymatic*, 67, 52–59
- Treichel, H.; Oliveira, D.; Mazutti, M.; Di Luccio, M. & Oliveira, J. (2010). A Review on Microbial Lipases Production. *Food Bioprocess Technol.*, 3, 182-196
- Vardanega, R.; Remonato, D.; Arbter, F.; Polloni, A.; Rigo, E.; Ninow, L. N.; Treichel, H.; Oliveira, D. & Luccio, M. (2010). A Systematic study on extraction of lipase obtained by solid-state fermentation of soybean meal by a newly isolated strain of *Penicillium* sp. *Food Process. Technol.*, 3, 461-465
- Xie, W. & Ma, N. (2010). Enzymatic transesterification of soybean oil by using immobilized lipase on magnetic nano-particles. *Biomass and Bioenergy*, 34, 890-896
- Yagiz, F.; Kazan, D. & Nilgun Akin, A. (2007). Biodiesel production from waste oils by using lipase immobilized on hydrotalcite and zeolites. *Chem. Eng. J.*, 134, 262–267
- Yücel, Y. (2011). Biodiesel production from pomace oil by using lipase immobilized onto olive pomace. *Bioresource Technology*, 102, 3977–3980
- Zeng, H.; Liao, K.; Deng, X.; Jiang, H. & Zhang, F. (2009). Characterization of the lipase immobilized on Mg–Al hydrotalcite for biodiesel. *Process Biochemistry*, 44, 791–798

Progress in Vegetable Oils Enzymatic Transesterification to Biodiesel - Case Study

Ana Aurelia Chirvase¹, Luminita Tcacenco²,
Nicoleta Radu¹ and Irina Lupescu³

¹*The National Institute for Research & Development in Chemistry and Petrochemistry,*

²*The National Institute for Research & Development in Biological Sciences,*

³*The National Institute for Research & Development in Pharmaceutical Chemistry,
Romania*

1. Introduction

These days the interest of fuels preparing from sustainable natural resources is continuously increasing due to the rising prices of the fossil fuels and the political instability in the oil producing countries. The fuels manufacturing from local vegetal resources can sustain the every country' prosperity, including rural, agricultural, economically disadvantaged regions. Nowadays only the bioethanol and the biodiesel are already produced at industrial level from sustainable raw materials.

The biodiesel is manufactured by the chemically catalysed transesterification of the triglycerides from the vegetable oils, rapeseed oil in Europe and soya oil in USA. As the methanol is often used as alcohol reagent, the reaction is consequently named methanolysis. The most applied catalysts are alkalines (especially NaOH) or mineral acids. So the biodiesel represents the methyl esters of the fatty acids from the vegetable oils. The present diesel engines can normally use a mixture of diesel with 5% v/v biodiesel.

Biodiesel contains virtually no sulfur or aromatics, and use of biodiesel in a conventional diesel engine results in substantial reduction of unburned hydrocarbons, carbon monoxide and particulate matter. The production and use of biodiesel, compared to petroleum diesel, resulted in a 78.5% reduction in carbon dioxide emissions. Moreover, biodiesel has a positive energy balance.

The chemical transesterification applied at industrial level has important advantages, but also limitations: in spite of the high conversion yields and the short reaction duration, the global transformation is energetically intensive, the glycerol recovery is difficult, the alkaline catalyst must be separated, the wastewaters are to be treated by a rather complex procedure, and both the free fatty acids and water can badly influence the reaction.

These unfavourable situations can be diminished by performing the enzymatic transesterification on conditions that: (a) the immobilised lipase used as biocatalyst must be as cheap as possible; (b) one can obtain the economic efficiency of the whole biotransformation process similar to that characteristic to the chemical process, these objectives being presented function of the research methodology and results. The comparison between the chemical way and the enzymatic way is presented in the Table 1.

Criterion	Alkaline catalysis process	Enzymatic proces
• Reaction temperature	60-70°C	30-40°C
• Free fatty acids from the vegetable oils	Saponification products	Methylic esters
• Water from the raw material	Reaction interference	No influence
• Methylic esters yield	Normal	Higher
• Glycerol recovery	Difficult	Easy
• Methylic esters purification	Repeated washing	No need
• Catalyst preparation price	Cheap	Relatively high

Table 1. Comparison between the alkaline catalysis and the enzymatic method for biodiesel preparation (Bajaj *et al.*, 2010)

The now-a-day technological progress regarding the enzymatic transesterification is demonstrated by the realisation of 2 industrial pilots in China (Moore 2008a, 2008b; Uthoff *et al.*, 2009) to apply this advanced methodology, though the biodiesel manufacture price still remains higher than the diesel price no matter the transesterification route, due to the raw materials high prices (Bisen *et al.*, 2010). Developments to meet the economical framework are needed, including: (a) the introduction of the enzymatic transesterification of plant oils as a part from a comprehensive technology of complete valorisation of the vegetable oil, meaning the application of the bio refinery concept; (b) the increase of the available vegetable oil quantity with limited interference with the vegetable oils' food use; (c) the possible preparation of methanol from natural resources.

2. State of the art in the domain of biodiesel preparation by enzymatic transesterification of vegetable oils

Other advantages of using lipases in biodiesel production are: (a) ability to work in very different media which include biphasic system, and monophasic system, (b) they are robust and versatile enzymes that can be produced in bulk because of their extracellular nature in most manufacturing system, (c) when the lipase is used in a packed bed reactor, no separation is necessary after transesterification, and (d) higher thermo stability and short-chain alcohol-tolerant capabilities of lipase make it very convenient for use in biodiesel production (Ghaly *et al.*, 2010). Until now the biodiesel manufactured by chemical catalysis is cheaper than the same product obtained by enzymatic catalysis, but in case of considering the pollution suppressing costs needed after the chemical process performing, the costs of both reaction' types could be comparable.

Enzymatic transesterification can be done with crude or purified vegetable oils, free fatty acids, residual grease from food industry or of animal origin, and residual vegetable oils from fry cooking. Beside methanol and ethanol one can also use as acyl acceptors the propanol, iso-propanol, butanol and iso-butanol. Many microorganisms, bacteria, yeasts or fungi can produce useful lipases for transesterification. Of these microorganisms, *Candida antarctica*, *Candida rugosa*, *Pseudomonas cepacia*, *Pseudomonas fluorescens*, *Rhizomucor miehei*, *Rhizopus chinensis*, *Rhizopus oryzae* and *Thermomyces lanuginosa* have produced the most effective lipases, able to perform the biotransformation with high yields. The combination of two or more lipases can increase the conversion in order to lower the cost. A combination of *Candida antarctica* and *Thermomyces lanuginosa* lipases was used to obtain a 95% conversion in methanolysis using a tert-butanol solvent. From the many lipases it is recommended to use those with reduced region specificity, but with higher substrate specificity.

The reaction can be realised either in organic solvents, or in solvent-free media (where there are only the substrates' mixture). Normally in organic solvents' systems the lipases can catalyse the biotransformation when the alcohol is added stepwise at the beginning (a „batch” system), by comparison with the free-solvent media, where the alcohol is added several times for maintaining a certain molar ratio with the oil concentration.

The **key factors affecting the enzymatic transesterification** are presented in the Figure 1.

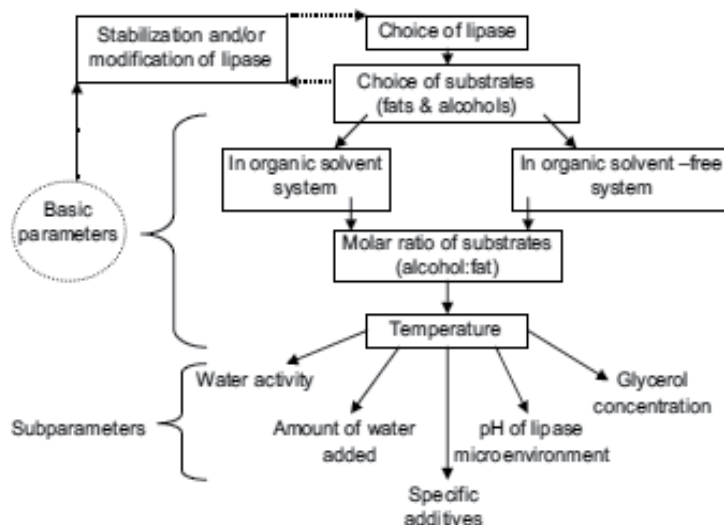


Fig. 1. Key factors of influence on the enzymatic transesterification (Antczak *et al.*, 2009)

There are two categories of enzymatic biocatalysts: (1) extracellular lipases (i.e. the enzyme has previously been recovered from the cultivation broth and then purified) especially from the microbial producers *Candida rugosa*, *Candida utilis*, *Candida antarctica* and *Pseudomonas cepacia*, generally bacteria and yeasts; (2) intracellular lipases which still remain either inside or attached to the cellular wall; in both cases the enzymes are immobilized directly or together with the whole cell and this use can eliminate downstream operations and assure the enzyme recycling.

The **extracellular lipases** are mostly produced by bacteria and yeasts and the large scale production of these lipases should be economical, fast, easy and efficient. Unfortunately, the cost of specific separation and purification operations is high enough. Still the majority of immobilized lipases that are commercially available are extracellular. The most commonly used is: Novozym 435 which is the lipase from *Candida antarctica*. Meanwhile the bacteria and yeasts can probably form growth associated lipases, in a first stage, linked to the cellular membranes, then released into the cultivation medium as extracellular enzymes.

When preparing the **intracellular lipases** the costly step of purification can be eliminated and this has led to using whole cells as biocatalysts. After the intracellular production of lipases the direct use of fungal cells immobilized within porous biomass support particles as a whole biocatalyst represents an attractive process for bulk production of biodiesel (Fjerbaek *et al.*, 2009)

The main criteria to choose between the two lipase types can be: (a) the bacteria and yeasts strains which biosynthesise extracellular lipases, can be considered as recommended producers based on the cultivation conditions, namely easy to apply and reproducible

aerobic bioprocesses; (b) using intracellular lipases slows down the transesterification process due to mass transfer limitations.

Immobilization of an enzyme must solve both mass transfer limitations types-internal or external (last case due to formation of an external film layer). Choice of the appropriate lipase immobilization technology is determined by the following objectives: (a) long term enzyme reuse; (b) easy enzyme recovery from the reaction medium; (c) improved activity and thermal, chemical and mechanical stability of the enzyme; (d) potential to run continuous processes. The immobilization support is to be as low cost as possible, condition which is difficult to be observed when the other ones should be fulfilled at the same time (Ghaly *et al.*, 2010). Among the great number of immobilization techniques, they can be classified under four general categories: (a) adsorption, (b) cross linking, (c) entrapment and (d) encapsulation. Adsorption seems to be the most attractive, as it is simplest and cheap, retaining high enzyme activity and allowing a good mass transfer, combined or not with the cross linking. The carriers used in adsorption via weak forces include: celite, cellulose, acrylic, silica gel, textile membranes, spherosil, sepharose, sephadex and siliconized glass. The major drawback of the adsorption is the low stability of the enzyme when adsorbed, which determines only limited reuse.

The **stability of the lipase** with low loss of the catalytic activity is the most important characteristic, when used in biodiesel preparation in connection with the enzyme **recovery and reuse**.

The most commonly used reactor type for the biodiesel enzymatic preparation is a batch-stirred tank reactor, though this biofuel must be considered as a commodity product and therefore produced in continuously operated installations. Possible alternative solutions could be packed bed reactors, fluid beds, expanding bed, recirculation membrane reactors. A wide range of configurations are applicable to perform the transesterification.

As the actual major technical limits of the enzymatic process are still the slower reaction rate by comparison with the alkaline catalysis and the risk of enzyme inactivation, with focus on process design and economy, the researchers calculate the productivity (kg biodiesel/kg enzyme) based on information from different studies and considering a range of enzyme prices from 12 to 185 USD/kg as acceptable, depending on the application characteristics, i.e. per each kg of biodiesel a biocatalyst cost of USD 0.025 could be of economic interest. An increased enzyme life of around 6 years would make enzymes competitive based on productivity again. To this must be added increased reactor costs as enzymes lead to longer space times than alkaline catalysts, but reduced separation costs and low waste water treatment costs will be the benefits.

3. Case study: Enzymatic transesterification of the rapeseed oil with yeast lipases

The chapter presents the research activity done by the authors regarding the rapeseed oil transesterification with yeast lipase, and is structured in three parts: lipase formation in aerobic bioprocessing; lipase recovery and immobilization; enzymatic transesterification with immobilized lipase produced by the yeast *Candida rugosa* DSM 70761.

3.1 Lipase formation

3.1.1 Materials and methods

Several bacteria and yeasts from own / international collections were tested for cell growth and enzyme formation, the cultivation conditions being: rotary shaker New Brunswick

Innova 40 at 300 rpm; temperature of 30°C; Erlenmeyer flasks of 500 mL with 150 mL medium. Before their cultivation for enzyme formation the microorganisms were grown on liquid media to develop preinoculum and inoculum stages of 24 hours duration, using an inoculation volume of 5-10 % V/V. Several cultivation media, specific for the studied strains, were tested and both the cellular growth and enzymatic activity were measured.

Microorganisms and cultivation media:

Bacteria: *Pseudomonas putida* (P. sp. 1) and *Pseudomonas aeruginosa* (P. sp. 3)

Yeasts: *Yarrowia sp.* / *Candida lipolytica* ATCC 8661, *Candida sp.* DG 8, *Pseudozyma aphidis* DSM 70725, and *Candida rugosa* DSM 70761.

M1 for bacteria: (variant a: no rapeseed oil; variant b: with 10 mL/L rapeseed oil)	M2 for yeasts	M3 for yeasts	M4 for yeasts
Glucose: 4 g/L	Glucose: 10 g/L	KH ₂ PO ₄ : 5 g/L	Malt extract: 3.78 g/L
Peptone: 0.5 g/L	Peptone : 10 g/L	(NH ₄) ₂ SO ₄ : 1 g/L	Peptone: 5 g/L
Yeast extract: 5 g/L	Yeast extract: 10 g/L	Yeast extract: 10 g/L	Tween 80: 4.33 g/L
Na ₂ SO ₄ : 2 g/L	NH ₄ Cl : 5 g/L	MgSO ₄ .7H ₂ O: 0.5 g/L	
KH ₂ PO ₄ : 1 g/L	Rapeseed oil: 5 g/L	Rapeseed oil: 20 g/L	Rapeseed oil: 33.7 g/L
K ₂ HPO ₄ : 3 g/L			
MgSO ₄ .7H ₂ O: 0.1 g/L			

Table 2. Cultivation media composition

The growth characteristics were evaluated by measuring OD₅₀₀; the lipase activity was determined by using the volumetric method (Tcacenco *et al.*, 2010), considering one unit of lipase activity as corresponding to 1 μmol of fatty acid obtained by the hydrolysis of the triglycerides from the rapeseed / olive oil, the reaction conditions being: temperature of 37°C, pH=7, duration of 60 minutes.

Isolation of extracellular lipase was made by centrifugation (1) and ammonium sulphate precipitation (2): (1) biosynthesis medium was centrifuged at 10 000 rpm for 30 min. at 4 °C. Clear supernatant was treated with benzamidine 2 mM and sodium azide 0.02% to prevent proteolysis and microbial attack and (2) the supernatant is precipitated with ammonium sulphate 30% at 0 °C, then left to stand for 24 hours for achieving precipitation and centrifuged at 10 000 rpm for 30 minutes at 4°C. The supernatant is precipitated again with 75% ammonium sulphate. After 24h, the sample is centrifuged again and the resulting product is dissolved in 8 ml TRIS buffer, pH 6.8. This crude enzyme is preserved in the freezer.

3.1.2 Results and discussion

1. Bacteria growth and enzyme formation

The growth of both bacteria is low, only *Pseudomonas aeruginosa* (P. sp.3) grows more on the medium variant M1b, so the use of both substrates-glucose and oil seems useful. Both bacterium strains have similar small lipase activity levels, the cultivation duration of 24 h being enough for the maximum lipase production, and there is no induction by the rapeseed oil (Fig. 2).

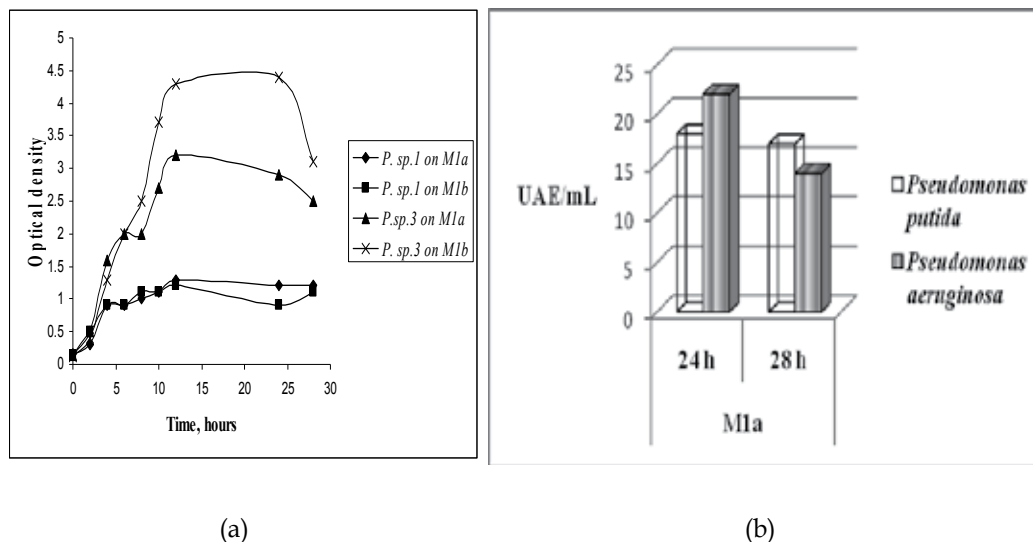


Fig. 2. Growth and lipase activity of bacteria *Pseudomonas putida* (*P. sp.1*) and *Pseudomonas aeruginosa* (*P. sp. 3*) on cultivation medium M1, a and b; (a) growth (OD); (b) lipase formation

2. Yeasts growth and lipase formation

Experimental variants:

A1: *Candida rugosa* DSM 70761 on M1, 48 h

A2: *Candida rugosa* DSM 70761 on M2, 48 h

B1: *Pseudozyma aphidis* DSM 70725 on M1, 48 h

B2: *Pseudozyma aphidis* DSM 70725 on M2, 48 h

C1: *Candida rugosa* DSM 70761 on M3, 48 h

C2: *Pseudozyma aphidis* DSM 70725 on M3, 48 h

D1: *Yarrowia (Candida lipolytica)* ATCC 8661 on M2, 24 h

D2: *Candida sp. DG 8* on M3, 24 h

For the cultivation medium M2 the growth rate for the yeasts *Candida rugosa* DSM 70761 and *Candida lipolytica* ATCC 8661 were higher and close enough: variant D1 *Yarrowia lipolytica* with the specific growth rate of 0.2 h^{-1} ; variant A2 *Candida rugosa* with the specific growth rate of 0.15 h^{-1} . But the final enzyme activity was higher for the second yeast: *Candida rugosa* final enzymatic activity of 289.0 UAE/mL by comparison with *Yarrowia lipolytica* enzymatic activity of 106.0 UAE/mL. At the same time the growth and lipase activity of both yeasts were much higher than those of the studied bacteria. So the immobilization study was to be performed with these already mentioned yeasts. In a first step, the preliminary transesterification results, obtained by thin layer chromatography, demonstrated that both lipases have high enough catalysis activities. After the confirmation of the transesterification capacity, it was of interest to develop appropriate immobilization techniques for these lipases, so to be able to use the immobilized enzymes in several cycles of biotransformation.

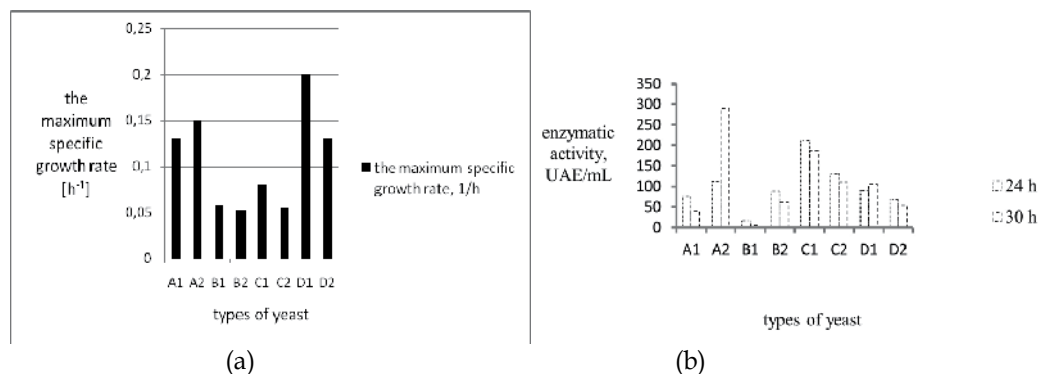


Fig. 3. The maximum specific rate and the lipase activity of the yeasts for the experimental variants A_i - D_i ($i=1, 2$); (a) max specific growth rate (μ^1); (b) lipase activity (UAE/mL) (Chirvase *et al*, 2010)

3.2 Lipase immobilization

3.2.1 Materials and methods

The techniques by physical adsorption were chosen due to the fact they are simple and cheap, so the price of the immobilized biocatalyst is expected to be low.

a. Lipase immobilization by adsorption on silicagel or celite support

The crude lipase obtained from *Yarrowia lipolytica* and *Candida rugosa* yeasts after the precipitation with 70% ammonium sulphate was dissolved in 0.05 M phosphate buffer, pH 7. Then the adsorbent was added until the limit activity in the supernatant is reached, respectively: for *Yarrowia lipolytica* 2.5 g silicagel G at 800 mL extract, 22 g of Celite in the same volume of extract and for *Candida rugosa* 11 g Celite at 800 ml extract. Adsorption duration was approx. 2 hours at ambient temperature and under mechanical stirring.

b. Lipase immobilization by adsorption on chitosan support

1. Cross-linking with glutaraldehyde:

30 mL chitosan 1% solution was prepared by adding 2mL CH_3COOH p.a. , 19.8 mL 0.5 N NaOH by heating to 50 °C and stirring for 10 minutes to complete dissolution of chitosan. 0.5 mL 25% of glutaraldehyde was added dropwise under high stirring. Microspheres thus obtained were filtered and washed with H_2O dist. and 0.05 M phosphate buffer, pH 7. 1g wet chitosan microspheres were used for immobilization; they were suspended in 2 mL 0.05 M phosphate buffer, pH 7 and mixed with 2mL solution of lipase (*Candida rugosa*) obtained by solving the crude enzyme precipitated with ammonium sulphate into 0.05 M phosphate buffer, pH 7, 1:5 (w / v) ratio. The mixture was stirred for 1 hour at 37 °C.

2. Cross-linking with carbodiimide:

1g wet chitosan particles was obtained by injecting 25 mL solution of 3% chitosan into 250 mL solution of NaOH 1N and C_2H_5OH 26%. The chitosan particles were suspended into 3 mL 0.75% carbodiimide solution, prepared in 0.05 M phosphate buffer, pH 6, 25 °C. After 10 minutes of activation, the particles were washed with distilled water and transferred to 10 mL 1% lipase solution immersed in 0.05 M phosphate buffer, pH 6. The adsorption duration was 60 minutes; then the immobilized enzyme was washed 3 times with distilled water.

3. Cross-linking with glutaraldehyde and reduction with sodium borohydride

A mixture was prepared from 0.5 g chitosan, 1.041 mL 2M acetic acid, 25 mL distilled water and 1.041 mL of 1M sodium acetate, maintained on water bath at 50°C with stirring. For the

immobilization of *Aspergillus niger* lyophilized lipase (Fluka), 0.1 g of lipase immersed in 0.5 M phosphate buffer, pH 5.6 was added to this mixture. Then 2.5 mL 50% glutaraldehyde dissolved in 25 mL double distilled water was added. The mixture rested for 30 minutes at 4 °C. 0.25 g sodium borohydride was added in portions, during 15 minutes, with ice pieces to low the temperature, and finally the mixture was filtrated in vacuum. The immobilized product thus obtained was washed with double distilled water and 0.5 M phosphate buffer, pH 5.6. Lipase activity and immobilization yield were evaluated for each application.


3.2.2 Results and discussion

The final activities and isolation yields obtained when the crude lipases were separated from the cultivation medium by precipitation with ammonium sulphate are presented in the Table 3. High efficient lipases isolation was done by precipitation of the cultivation medium of *Yarrowia lipolytica* yeast with $(\text{NH}_4)_2\text{SO}_4$, a yield of 95% was got for both variants (24 hr. and 28 hr.), while when the same procedure was applied for *Candida rugosa* samples the isolation yields were lower: 62% for 24 hr. extract and only 29.6% for 28 hr. extract.

No.	Strain / duration of bioprocessing	Extract volume (mL)	Initial activity (UEA)	Quantity $(\text{NH}_4)_2\text{SO}_4$ (g)	Final activity (UEA)	Isolation yield (%)
1.	<i>Candida rugosa</i> , 24 hr	20	3 820	14	2 368	62.0
2.	<i>Candida rugosa</i> , 28 hr	800	289 600	560	85 721	29.6
3.	<i>Yarrowia lipolytica</i> , 24 hr	20	2 320	14	2 204	95.0
4.	<i>Yarrowia lipolytica</i> , 28 hr	800	85 200	560	80 940	95.0

Table 3. The final activities and isolation yields determined for the crude lipases separated from the cultivation media of the yeasts strains *Candida rugosa* DSM 70761 and *Yarrowia* (*Candida lipolytica*) ATCC 8661

At a first step the preliminary transesterification results obtained by thin layer chromatography demonstrated both lipases have high enough catalysis activities.

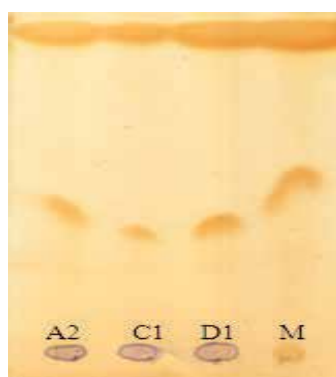

Legend:

A2-lipase from *Candida rugosa* DSM 70761/M2; C1-lipase from *Candida rugosa* DSM 70761/M3; D1-lipase from *Yarrowia lipolytica*/M2; M - Control, ester of oleic acid

Fig. 4. Thin layer chromatography of the products obtained by the transesterification

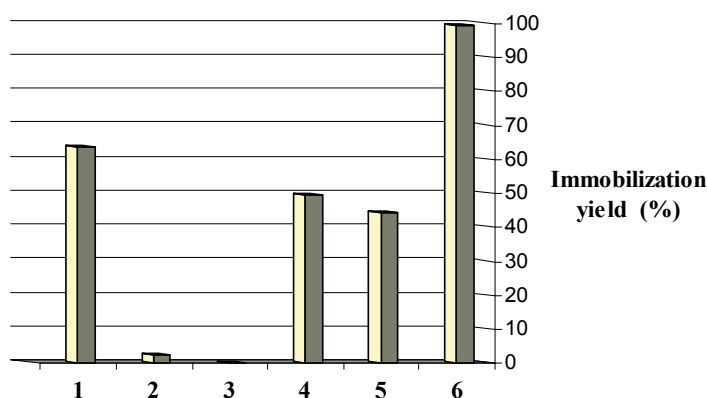


Fig. 5. Immobilization efficiency of the tested lipases (Tcacenco *et al*, 2010)

The experimental results are presented in the Figure 5, obtained with the described immobilization techniques for both crude lipases.

The immobilization techniques, characterized in the following table, were performed in comparison with the immobilization of a lipase from the fungus *Aspergillus niger*.

No	Lipase source	Immobilization technique
1	<i>Candida rugosa</i> , DSM 70761	Chitosan adsorption and cross-linking with glutaraldehyde
2	<i>Aspergillus niger</i> (Fluka)	Chitosan adsorption and cross-linking with carbodiimide
3	<i>Aspergillus niger</i> lyophilized lipase (Fluka)	Chitosan adsorption, cross-linking with glutaraldehyde and granulation with sodium borohydride
4	<i>Candida rugosa</i> , DSM 70761	Adsorption on Celite 545
5	<i>Candida rugosa</i> , DSM 70761	Adsorption on Silicagel G
6	<i>Yarrowia lipolytica</i> ATCC 8661	Adsorption on Celite 545

Table 4. Applied immobilization techniques

The experimental study regarding the immobilization of lipases gave interesting results: high yield of 99% obtained for the immobilization of *Yarrowia lipolytica* lipase by adsorption on Celite support, good yields of 63.26% for the immobilization of *Candida rugosa* lipase by adsorption on chitosan cross linked with glutaraldehyde and respectively 44 - 49% for the same lipase immobilized by adsorption on Celite or Silicagel. On the contrary the immobilization of *Aspergillus niger* lipase gave unsatisfactory results.

In order to improve the immobilization yield of the lipase from the yeast *Candida rugosa* DSM 70761 on Celite support a supplementary treatment with acetone as organic solvent

was done, the obtained results in comparison with the control procedure (without acetone adding) are presented in the following table.

No.	Support	Lipase (mL)	Initial activity		Final activity		Immobilization yield (%)
			UEA/mL	Total activity	UEA/mL	Total activity	
1.	Celite 545	800	362.0	289 600	840.2	142 841.7	49.32
2.	Celite 545 + acetone	1150	182.6	210 000	2537.2	204 246.2	97.26

Table 5. The immobilization yields of the lipase from the yeast *Candida rugosa* DSM 70761 on Celite support with / without acetone treatment

The acetone treatment had as consequence a big improvement of the immobilization yield on Celite from 49% to 97% in case of the lipase from *Candida rugosa* DSM 70761. It seems that the system hydration degree highly increases due to the support treatment with organic solvent, which determines a better adsorption of the enzyme. The improved procedure to get the immobilized biocatalyst was further applied in the research regarding the immobilized enzyme characteristics: static activity, operational activity, and transesterification performance.

The immobilized lipases from both yeasts *Yarrowia lipolytica* and *Candida rugosa* prepared by Celite adsorption were preserved in a freezer at -18°C and tested for static stability at different time duration. Results are presented in the Figure 6.

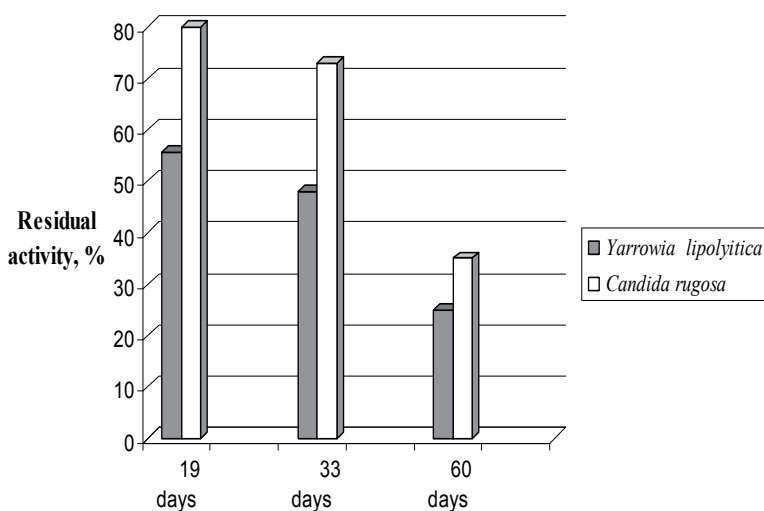


Fig. 6. Static stability determination by yield of the residual activity for the Celite adsorption immobilized lipases from *Yarrowia lipolytica* and *Candida rugosa*

The results demonstrated a higher static time stability for the Celite adsorption immobilized lipase from the yeast *Candida rugosa* DSM 70761, with 73% residual activity after more than 1 month, by comparison with only 48% residual activity for the immobilized lipase from the yeast *Yarrowia lipolytica* ATCC 8661.

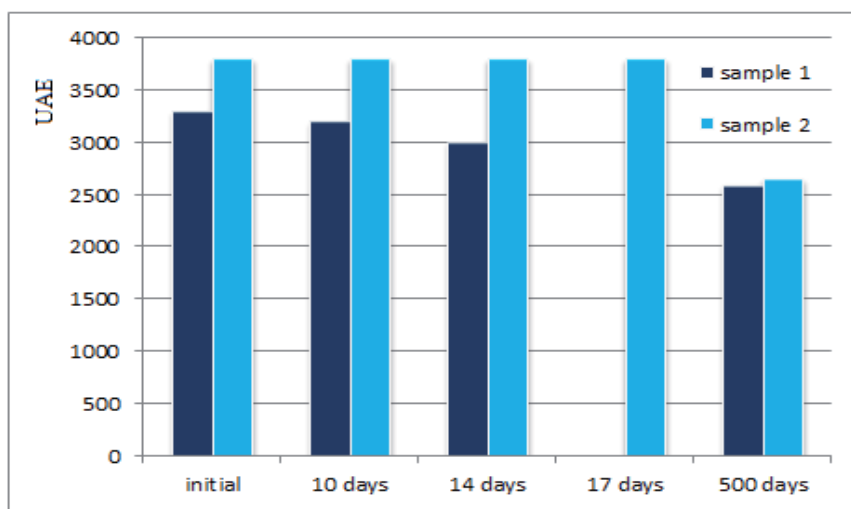


Fig. 7. The effect of the acetone treatment associated to Celite immobilization on the static activity of the immobilized lipase from *Candida rugosa* DSM 70761 (sample 1-no acetone treatment; sample 2-with acetone treatment)

The static stability for the enzyme from *Candida rugosa* DSM 70761 immobilized on Celite with / without acetone treatment was determined for a long period of time, the results being presented in the Figure 7. The biocatalyst obtained with the lipase from the above mentioned yeast immobilized on Celite 545 by physical adsorption with or without organic medium treatment presented a high static stability, when preserved in freezer. The residual activity was as high as 82% after 1 year and half, and after the first 2 weeks the residual activity was practically unchanged in both cases. These findings were considered as a selection criterion between the lipases from the two studied yeasts, so the lipase produced by *Candida rugosa* DSM 70761 with a better static stability was further used to continue the research. Firstly the biocatalyst prepared by the described procedure with the lipase from the yeast *Candida rugosa* DSM 70761 was tested for its operational activity. The test consisted of using the same biocatalyst quantity in several reaction cycles and measuring the enzymatic activity at the beginning and after each reaction phase. The results are presented in the following table.

No. of cycles	Initial activity (UEA/g)	Final activity (UEA/g)	Activity loss (%)
1.	705.00	606.72	13.34
2.	606.72	549.75	9.40
3.	549.75	481.36	12.44
4.	431.36	413.97	14.00

Table 6. Evolution of the operational activity of the lipase from *Candida rugosa* DSM 70761 immobilized on Celite 545

The results from the table indicate a biocatalyst half time of 5-6 reaction cycles, because after 4 cycles the residual activity was 58.71%.

3.3 Lipase transesterification

3.3.1 Materials and methods

The experimental study was done with rapeseed oil of Romanian origin or soya oil and by using the lipase from the yeast *Candida rugosa* DSM 70761 obtained in aerobic bio processing, isolated from the cultivation medium and immobilized by adsorption on Merck Celite support (lipase activity of 4701 UEA / g support).

The transesterification was done in two variants: (a) in anhydrous medium without organic solvents adding; (b) in hexane (Biosolve).

The experimental working procedure was: the transesterification reaction was performed in Erlenmayer flasks of 100 mL, containing the tested vegetable oil in a concentration to determine a final triglycerides content of 0.08 mol / L and methanol (this last reagent in molar ratios between 3:1 and 8:1 with the triglycerides substrate). The immobilized enzyme was added in a chosen concentration after a period of 30 minutes at 37°C. The reaction was done with continuous mixing of 250 rpm. Each 4 hours' sample from the liquid was analysed by thin layer chromatography and gas chromatography to determine the reaction advancement.

- a. Thin layer chromatography was done by using the Silicagel G on Al support as stationary phase and the migration solvent was a mixture of petroleum ether: ethylic ether: acetic acid = 80:30:1; the spots were put into evidence in a iodine vapour atmosphere.
- b. The fatty acids content in methylic esters was analysed by gas chromatography (GC) using a capillary column with a stationary phase composed from 5% phenyl - 95% methylpolysilane.

The apparatus was a gas chromatograph 6890N - AGILENT with FID detector and autosampler 7683B; column HP 5, L=30m; $\phi=0.32$ mm.

Reagents: N-hexane; the methylic esters of several fatty acids mostly presented in the vegetable oils (rapeseed oil or soya oil).

Working conditions:

- column temperature: initial temperature of 160°C, during 2min.; final temperature of 240°C, during 5min.; heating rate of 5° / min.
- injection temperature of 280°C.
- detector temperature of 300 °C.
- nitrogen flowrate of 2.0 mL / min.
- hydrogen flowrate of 40 mL / min.
- air flowrate of 370mL / min.
- nitrogen flowrate (make-up) of 25 mL / min.
- sample volume of 1 μ l.
- analysis duration of 23 min.

The evaluation is done by the determination of the content in palmitic, oleic, arachidonic and erucic acids. The external standard method is applied.

Three experimental models were studied:

- a. Batch enzymatic transesterification with methanol and without organic solvent, characterised by : vegetable oil concentration of 0.09 M; methanol concentration of 0.54 M (ratio of 8:1 methanol: triglycerides substrate); biocatalyst concentration of 5000 UEA / 100 mL reaction medium; reaction temperature of 37°C; mixing of 250 rpm; reaction total duration of 24 hr.

- b. "Semi-batch" enzymatic transesterification with methanol and without organic solvent, characterised by the same reaction conditions, except the fact that the methanol is added two times, each addition realizing a ratio between alcohol and the triglycerides substrate of 4:1.
- c. Batch enzymatic transformation in hexane characterized by: vegetable oil concentration 0.09M; methanol concentration 0.09 M; biocatalyst concentration 5000 UEA / 100 mL reaction medium; reaction temperature of 37°C; mixing of 250 rpm; reaction total duration of 24 hr.

3.3.2 Results and discussion

The most important transesterification results are presented in the Figure 8.

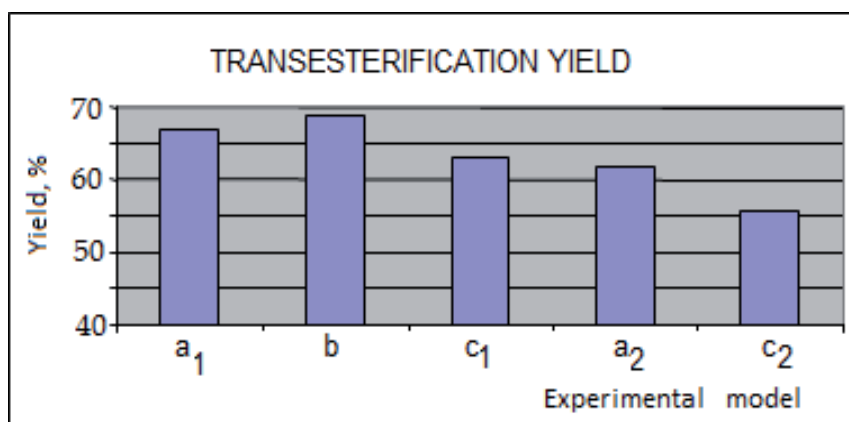


Fig. 8. The vegetable oils transesterification yield for the 3 experimental models: a₁-batch model without solvent, with soya oil; a₂-batch model without solvent, with rapeseed oil; b-semibatch model without solvent, with soya oil; c₁-batch model in hexane with soya oil; c₂-batch model in hexane with rapeseed oil

The transesterification was realised with the following biotransformation yields: 56-67 % for the experimental variant a, 69% for the variant b, and 56-63% for the variant c; these results can be improved by adequate optimization procedures to be applied for each technological phase, comprising enzyme obtaining in aerobic bioprocess, lipase immobilization and transesterification performing.

4. Conclusions

1. The main objectives of the research to replace the actual chemical transesterification with the enzymatic process are: (a) the preparation of cheap and stable immobilized lipases; (b) the realization of biotransformation systems characterized by the biocatalyst long use in many reaction cycles. One of the reasons to choose between extracellular or intracellular lipases is the immobilization of extracellular enzymes by physical adsorption, a low price technology, but imposing to improve the shorter duration. Moreover these lipases are normally biosynthesized by bacteria or yeasts, easier to cultivate in aerobic bioprocess than the intracellular lipases producing' fungi.

2. The lipases with advanced specificity are not useful in the transesterification to produce biodiesel; the most recommended are the lipases with reduced region specificity, but more developed specificity for the substrate.
3. The molar ratio of the substrates used in the biotransformation of vegetable oils to biodiesel must be determined for each studied system: alcohol – oil – lipase.
4. The rapeseed oil is of interest as raw material in the transesterification, as it is largely produced by the European agriculture and also in Romania, and at the same time it is used in the alkaline catalysed transformation. But in USA the soya oil is in charge.
5. The aerobic bio processing of several bacteria and yeasts from Romanian research collections or from international collections demonstrated that two yeasts, *Candida rugosa* DSM 70761 and *Yarrowia lipolytica* ATCC 8661 produced lipases characterized by high activity in simple and short duration cultivation. The media composition and the cultivation parameters were optimized for both yeasts' lipases formation.
6. The immobilisation techniques by physical adsorption were studied for the lipases from the above mentioned yeasts. First of all the extracellular lipases from the yeasts *Candida rugosa* DSM 70761 and *Yarrowia lipolytica* ATCC 8661 can be easily separated in the liquid fraction by centrifugation and further on the crude enzymes can be obtained by ammonium sulphate precipitation. The experimental study regarding the immobilization of lipases gave interesting results: high yield of 99% obtained for the immobilization of *Yarrowia lipolytica* lipase by adsorption on Celite support, good yields of 63.26% for the immobilization of *Candida rugosa* lipase by adsorption on chitosan cross linked with glutaraldehyde and respectively 44 - 49% for the same lipase immobilized by adsorption on Celite or Silicagel.
7. As the lipase from the yeast *Candida rugosa* DSM 70761 was immobilized on Celite 545 support with yields of 49 - 63%, and higher yields are obtained for the immobilization of the lipase from *Yarrowia lipolytica* ATCC 8661, and the immobilization procedure is easy and low price, the laboratory experimental model was developed on this support.
8. In order to improve the immobilization of the lipase of *Candida rugosa* DSM 70761, a treatment with acetone as organic solvent was introduced and this operation had as consequence a big increase of the immobilization yield on Celite from 49% to 97%.
9. A higher static stability was determined for the Celite adsorption immobilized lipase from the yeast *Candida rugosa* DSM 70761, with 73% residual activity after more than 1 month, by comparison with only 48% residual activity for the immobilized lipase from the yeast *Yarrowia lipolytica* ATCC 8661. The residual activity was as high as 82% after 1 year and half, and after the first 2 weeks the residual activity was practically unchanged for the first biocatalyst. These findings were considered as a selection criterion between the lipases from the two studied yeasts, so the lipase produced by *Candida rugosa* DSM 70761 with a better static stability was further used to continue the research.
10. This biocatalyst operational stability was also tested and the immobilized enzyme half time was of about 5-6 reaction cycles, as after 4 reaction cycles the residual activity was still 58.7%.
11. Three experimental models were considered to perform the transesterification: (a) batch enzymatic transesterification with methanol and without organic solvent; (b) "semi-batch" enzymatic transesterification with methanol and without organic solvent; (c) batch enzymatic transformation in hexane. The reaction yields were good enough for all the tested experimental models and for both -soya and rapeseed oils, the results variation being in the range of 56 - 69%. They can be improved by adequate

optimization procedures to be applied for each technological phase, comprising enzyme obtaining in aerobic bioprocess, lipase immobilization and transesterification.

Further research work is to be developed in two directions: (1) the use of the glycerol formed as by product in the transesterification process, especially as C source in several other bioprocesses; (2) as beside this product there are several others, the most important future research direction will be the technical application of the bio refinery concept realised for the vegetable oils extracted from many plants specific to each geographical area. A possible future bio refinery will integrate physical, chemical, and biological procedures for the biodiesel preparation, conversion of solid residue with high carbohydrates or protein content; glycerol use, the whole application being characterised by both high economic efficiency and reduction of solid or liquid residues.

5. Acknowledgment

This research was financially supported by the Romanian National Agency for Research under the Second National Program, Project 61-032/2007.

6. References

- Antczak M. S., Kubiak A., Antczak T., & Bielecki S. (2009), Enzymatic biodiesel synthesis – Key factors affecting efficiency of the process, *Renewable Energy*, Vol. 34, 1No. 4, pp.1185–1194, ISSN 0960-1481
- Bajaj A., L. Purva, Jha P. N., & Mehrotra R., (2010), Biodiesel production through lipase catalyzed transesterification: An overview, *Journal of Molecular Catalysis B: Enzymatic*, Vol. 62, No. 1, pp. 9–14, ISSN 1381-1169
- Bisen P. S., Sanodiya B. S., Thakur G. S., Baghel R. K., & Prasad G. B. K. S., (2010), Biodiesel production with special emphasis on lipase-catalyzed transesterification, *Biotechnological Letters*, Vol. 32, No. 10, pp. 1019-1030, ISSN 0141-5492
- Chirvase A. A., Ungureanu C., Tcacenco L., Radu N., (2010), Determination of Yeast Strains Characteristics as Lipase Providers for Enzymatic Transesterification to Biodiesel *Revista de Chimie*, Vol. 61, No.9, pp. 866-868, ISSN 0034-7752
- Fjerbaek L., Christensen K.V., & Norddahl B., (2009), A Review of the Current State of Biodiesel Production Using Enzymatic Transesterification, *Biotechnology and Bioengineering*, Vol. 102, No. 5, April 1, pp. 1298-1315, ISSN 1097-0290
- Ghaly A. E., Dave D., Brooks, & Budge S., (2010), Production of Biodiesel by Enzymatic Transesterification: Review, *American Journal of Biochemistry and Biotechnology*, Vol. 6, No 2, pp. 54-76, ISSN 1553-3468
- Moore A., (2008a), Biofuels are dead: long live biofuels (?) – Part one, *New Biotechnology*, Vol. 25, No. 1, pp. 6-13, ISSN 1871-6784
- Moore A., (2008b), Biofuels are dead: long live biofuels (?) – Part two, *New Biotechnology*, Vol. 25, No. 2/3, pp. 96-101, ISSN 1871-6784
- Tcacenco L., Chirvase A. A.,Berteau E., (2010), The preparation and immobilization of some yeast lipases for rapeseed oil transesterification to biodiesel, *Romanian Biotechnological Letters*, Vol. 15, No. 5, pp. 5631-5639, ISSN 1224-5984

Uthoff S., Broker D., Steinbuchel A., (2009), Current state and perspectives of producing biodiesel-like compounds by biotechnology, *Microbial Biotechnology*, Vol. 2, No. 5, pp. 551-565, ISSN 1751-7915

Adsorption in Biodiesel Refining - A Review

Carlos Vera, Mariana Busto, Juan Yori, Gerardo Torres,
Debora Manuale, Sergio Canavese and Jorge Sepúlveda
*INCAPE (FIQ, Universidad Nacional del Litoral-CÓNICET),
Argentina*

1. Introduction

Biodiesel is a petrodiesel substitute composed of a mixture of fatty acid methyl esters obtained by the transesterification of plant oils or animal fats with short chain alcohols such as methanol or ethanol. Despite its natural origin biodiesel is technically fully compatible with petroleum diesel, requiring virtually no changes in the fuel distribution system or the Diesel motor. Its production and use have increased significantly in many countries and are in nascent status in many others. Other advantages of biodiesel compared to petrodiesel are reduction of most exhaust emissions, biodegradability, higher flash point, inherent lubricity and domestic origin (Chang et al., 1996; Romig & Spataru, 1996; Wang et al., 2000).

Literature on the refining of biodiesel is abundant but concentrates almost exclusively on the transesterification steps for transforming fats and oils into esters of short alcohols and fatty acids. In this sense in the last years the most important advances in the reaction technology have been the development of continuous heterogeneous transesterification reactors (Bournay et al., 2005; Portilho et al., 2008) and the design of new robust non-catalytic processes for multifeedstock operation (Saka & Kusdiana, 2001; Saka & Minami, 2009).

In the case of the refining operations downstream and upstream the transesterification reactors the biodiesel literature is however scarce. Two are the reasons for this: (i) Feedstock pretreatment in the case of biodiesel is a mature technology developed decades ago for the production of edible oil. (ii) After natural triglycerides are converted into fatty acid methyl esters, the product mixture needs little chemical adjustment since many properties of these esters are ideal for the functioning of Diesel motors.

Some reports on post-reactor biodiesel refining have dealt with classical and simple techniques of purification, e.g. water washing (Karaosmanoglu et al., 1996). Others have indicated that adsorption technologies are particularly suited for the refining of biodiesel (Yori et al. 2007; Mazziere et al., 2008; Manuale et al. 2011). In order to elucidate the role of adsorption processes in the refining of biodiesel, this review studies some theoretical and practical aspects related to the functioning, design and operation of adsorbents and their application to the purification of biodiesel product and feedstocks.

2. The needs for refining of petrodiesel and biodiesel fuels

The objectives of Diesel fuel refining operations are aimed at improving the fuel combustion performance, maximizing the power delivered to the motor, increasing the engine life and reducing the emission of noxious compounds. The relevant properties involved are cetane

index, heat content, lubricity, viscosity, cold flow properties, oxidation stability and amount and kind of tailpipe emissions. Some properties are superior for biodiesel in comparison to petrodiesel and need no adjustment. This is the case of lubricity (93% film for biodiesel and 32% for petrodiesel), cetane index (45 for petrodiesel and 56 for biodiesel) and tailpipe emissions (Chang et al., 1996; Romig & Spataru, 1996). Other properties of biodiesel needing adjustment will be discussed in the next paragraphs.

Viscosity. Viscosity affects injector lubrication and atomization. Natural oils and fats (triglycerides) have excessive viscosity and cannot be easily injected; this is the main reason why they must be transformed into methyl esters. Even after transesterification the viscosity of biodiesel is higher than that of petrodiesel (5 cSt at 40 °C compared to 3 cSt), though it is considered enough low in international norms. A few reports have however indicated that additivations and chemical transformations could advantageously alter biodiesel viscosity. Nouredдини et al. (1998) found that addition of GTBE in amounts as big as 22% could not only lower the pour and cloud points of biodiesel but also its viscosity by 8%. Yori et al. (2006) studied the acid-catalyzed isomerization of methyl soyate and found that isomerization decreased pour and cloud points but adversely increased the viscosity.

Oxidation stability. The stability of a diesel fuel is related to the occurrence of undesired reactions during storage. In the case of petrodiesel routine oxidation tests as performed by ASTM D2274 detect the formation of minor amounts of insolubles that are due to the precipitation of polar compounds, mainly polycyclic acids, after their reaction with iron particles or oxygen (Díaz & Miller, 1990). In the case of biodiesel the problem is worse because unsaturated fatty acid chains are main components of the fuel and they are active in oxidizing reactions. In contact with oxygen, peroxides are formed that promote the formation of organic acids, and then of polymers (gums) that plug fuel lines and filters. Oxidative degradation during storage can also compromise fuel quality with respect to effects on kinematic viscosity, acid value, cetane number, total ester content, and formation of hydroperoxides, soluble polymers, and other secondary products (Du Plessis et al., 1985; Bondioli et al., 2002; Thompson et al., 1998). The increased acidity and peroxide values as a result of oxidation reactions can also cause the corrosion of fuel system components, the hardening of rubber components and the erosion of moving parts (Tang et al., 2008). By now the only method for increasing the biodiesel resistance to oxidation is to add synthetic or natural oxidation inhibitors such as tocopherols and hydroquinones. Other alternative way is the hydrogenation of the unsaturated chains. Compared to untreated soybean oil methyl esters, partially hydrogenated products have shown superior oxidative stability and similar specific gravity, but inferior low-temperature performance, kinematic viscosity and lubricity (Moser et al., 2007). In order to raise the saturated fraction of biodiesel other efforts have been carried out by distillation and crystallization (Falk & Meyer-Pittroff, 2004) and it is conceivable that the same could be done by adsorption over suitable materials.

Storage stability. Also related to the stability of biodiesel, some other minor components of biodiesel, the monoglycerides (MGs) and diglycerides (DGs) can form crystals during storage at low temperatures and precipitate. These crystals not only can clog fuel lines and fuel filters but due to their amphiphilic nature, their absence in the solution causes the precipitation of other unstable solvatable impurities such as glycerol.

Acidity. Acidity in petrodiesel is mainly related to the presence of naphthenic acids in the crudes. Acidity of biodiesel depends on a wider variety of factors and is influenced by the type of feedstock used and on its degree of refinement. Acidity can also be generated during the production process, e.g. by mineral acids introduced as catalysts or by free fatty acids

resulting from hydrolysis of soaps and esters. Biodiesel acidity also reflects the degree of fuel ageing during storage, as it gradually increases due to hydrolytic cleavage of ester bonds. High fuel acidity of biodiesel has been discussed in the context of corrosion and the formation of deposits within the engine, particularly in fuel injectors, by catalyzing polymerization in hot recycling fuel loops (Refaat, 2009). However the main problem associated with acids is the formation of soaps as it will be discussed later.

Carbonization properties. Formation of carbon deposits in the injectors of a Diesel engine is undesired; the tendency of a fuel to form these deposits being measured by the Conradson Carbon Residue (CCR) test (ASTM D189). In the case of petrodiesel CCR is related to the presence of aromatic and polyaromatic compounds, and is favorably reduced by hydrotreatment. In the case of biodiesel deposits formed in the injectors are related to polymerization of glycerol and glycerides. These polymers undergo further decomposition to carbon deposits and tarnishes over injectors and cylinders. In this sense the needed biodiesel refining step is the removal of free and bound glycerol to minimum values. ASTM D6751 constrains the iodine number of biodiesel to less than 112 on the same basis because olefinic chains are also reactive for polymerization. However this is not an issue in European norms (EN 14214).

Cold flow properties. In raw biodiesel the presence of wax-like, long acyl chains, poses the problem of crystallization when temperature is too low. Crystal nucleation is enhanced by the presence of MGs and DGs, mainly affecting the cloud point (van Gerpen et al., 1996). A first solution is to eliminate glycerides to negligible values. Other solutions for waxy FAMES are not without drawbacks: (i) Catalytic dewaxing (Yori et al., 2006) decreases the cetane number and increases the viscosity. (ii) Winterization for removing the waxy saturated fraction also removes the fraction with higher cetane and oxidizing stability. (iii) Commercial pour point depressants are reported to reduce the pour point of biodiesel but usually do not reduce its cloud point nor improve its filterability at low temperatures (Dunn et al., 1996). Fortunately, biodiesel-petrodiesel blends have cloud and pour points closer to those of petrodiesel. The saturated portion eliminated by winterization can also be used as a "summer fuel" if massive storage is available.

Refinery operation issues. Some specifications for feedstocks and intermediate streams in refineries are related to the correct functioning of process units. Sulfur reduction in the case of petroleum fuels is necessary not only to improve the quality of the final product but also to prevent the poisoning of catalysts in some hydroprocessing units (Ito and van Veen, 2006). In the case of biodiesel many undesired components are responsible for the malfunctioning of reactors and phase separators:

- Phosphorous, calcium, and magnesium are minor components typically associated with phospholipids and gums that act as emulsifiers or cause sediments, lowering yields during the transesterification process. Phosphorus typically leads to an increased difficulty in the separation of the biodiesel and glycerol phases (Anderson et al., 2003).

<i>Component</i>	<i>Crown Iron Works (USA)</i>	<i>Lurgi GmbH (Germany)</i>
<i>Moisture and volatiles</i>	0.05% max	0.1% max
<i>Acidity</i>	0.5% max	0.1% max
<i>Phosphorus total</i>	20 ppm max	10 ppm max
<i>Soap</i>	50 ppm max	n.a.
<i>Unsaponifiables</i>	1% max	0.8% max

Table 1. Quality requirements for the feedstock of two alkali homogeneous catalyst biodiesel production technologies (Anderson et al., 2003; Lurgi, 2011).

- FFAs and soaps. In the case of the alkali-catalyzed process, the dominant biodiesel technology, the presence of free fatty acids (FFAs) leads to the use of an increased amount of catalyst and other chemicals. It also increases the concentration of salt and water in the crude glycerol phase. Aside from the increased cost of chemicals, the presence of FFA causes a larger potential for soap formation and all the production issues associated with soap, including more difficult phase separations and more frequent cleaning of process vessels. Although FFA can be reacted in an acid-catalyzed reaction with methanol to form methyl esters, the amount of acid required is much higher than the amount of catalyst used in the transesterification of neutral oil. The reaction also does not go as far to completion as transesterification, which may lead to the resulting biodiesel product to be out of specification on FFA. Acid catalysis of FFA to methyl esters also results in higher salt and water formation. For all these reasons feedstock specifications for FFA have low limits.
- Unsaponifiable matter (UM) consists of plant sterols, tocopherols and hydrocarbons, with very small quantities of pigments and minerals. UM is limited in the feedstock of biodiesel processes mainly on the basis of its foaming properties that make separations difficult (see Table 1). The unsaponifiable matter is not affected by ester preparation, so it is likely to be present in similar amounts in biodiesel to its level in the crude feedstock. UM has no harmful effects except possibly for a change in the crystallization onset temperature (van Gerpen et al., 1996). For this reason UM is not limited in biodiesel norms. Some unsaponifiable compounds, such as the phytosterols, have antioxidizing capacities and they are useful for prolonging the storage life of biodiesel (Rabiei et al., 2007). A possible challenge for adsorption operations in this case could be the selective removal of impurities while not affecting these antioxidizing compounds.
- Water. Alkaline catalysts (NaOH, KOH, MeONa) react with water and oil to produce soaps. Acid catalysts (e.g. H₂SO₄) when hydrated reduce their effective acid strength and their catalytic activity. Water thus leads to deactivation and higher catalyst usage.

3. Refining of biodiesel feedstocks

Depending on their degree of refining, biodiesel feedstocks might need some or all the refining steps common to the refining of edible oils: (i) Degumming, that is necessary if large amounts of phosphatides are present in the feedstock, phosphoric acid and steam being used to swell the gums for further removal. (ii) Deodorization, that is used with feedstocks up to 30% FFA. It is basically a vacuum distillation at 240-270 °C and 2-5 mmHg, that removes aldehydes, ketones and smelly products, pesticides, fungicides, herbicides, etc. It also lightens up the product by destroying carotenoids. (iii) FFA reduction by many means, steam stripping, caustic stripping, solvent extraction, glycerolysis, acid esterification, etc. (iv) Bleaching, that is normally used to remove remaining impurities such as pigments, soaps, insolubles, peroxides, phospholipids and metals.

It must be noted however that biodiesel and edible oil have different quality specifications. This is especially true for color and odor, that are not an indication of technical quality of biodiesel. ASTM quality biodiesel can range from clear to black and have an unpleasant smell. This is more a consumer issue because it raises uncertainties. Color removal may need carbon filtration and bleaching while odor removal may need deodorization.

The degree of FFA reduction in biodiesel feedstocks needs special attention because it has a high dependence on the technology of biodiesel production used: (i) In the case of the non-

catalytic method that uses supercritical methanol at high temperatures and pressures, FFA content is not an issue, because triglycerides and FFAs react to form methyl esters with similar rates (Warabi et al., 2004). (ii) In the acid-catalyzed method feedstocks with up to 20% acidity can be completely reacted by acid catalysis with mineral acids though the kinetics are much slower (Loterio et al., 2005; Freedman, 1986). (iii) The alkali-catalyzed method (dissolved NaOH, KOH, MeONa, etc. catalysts) tolerates only 0.5% FFA in the feedstock (Table 1). However some producers accept feedstocks of up to 4% FFA and then use caustic stripping by the same catalyst in the reactor or caustic washing before the reactor to eliminate them from the reaction medium. The soap that goes into the glycerol phase or the wash water is hydrolyzed and reacted to biodiesel by acid-catalyzed transesterification in a separate reactor. (iv) In the acid-base method feedstocks with up to 20% acidity are first esterified in acid catalysis and then the reaction is continued with alkaline catalysis.

The use of adsorbents for the pretreatment of biodiesel raw materials is related to known techniques for edible oil refining. After pressing of oil seeds, and after degumming and caustic refining of the virgin oil, a step of bleaching is commonplace in order to improve the colour by adsorbing chlorophylls, carotenoids and other pigments, and the removal of other undesired components such as metals and free fatty acids, that contribute to the instability of the oil under oxidizing conditions. Bleaching of oils can be done with natural clays such as bentonite, smectite, montmorillonite, etc., or activated clays produced by acid treatment (Foletto et al., 2011). Clays are mainly used for removing high molecular weight organic compounds but their affinity for polar compounds and metals is low. In this sense most part of the metals is eliminated during the caustic refining of edible oils and in the subsequent water washing steps, while bleaching with clays does not practically modify the metal content (van Dalen & van Putte, 1992; Farhan et al., 1988).

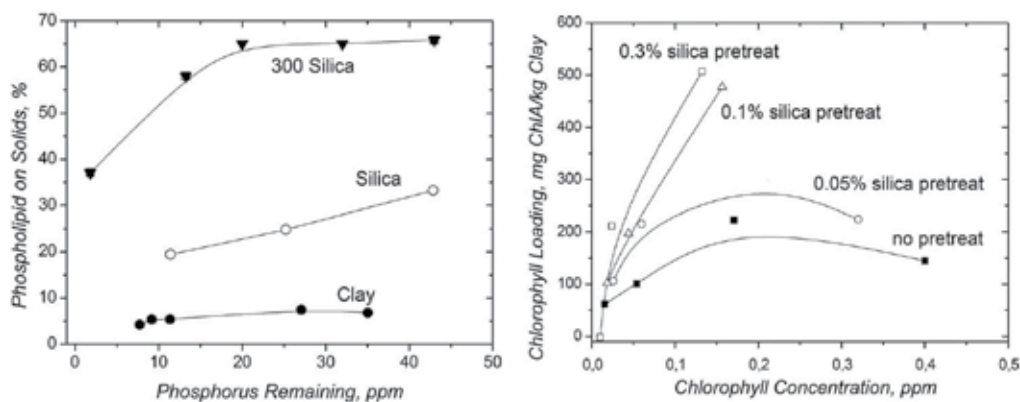


Fig. 1. Isotherms of adsorption of phosphatides on silica (left). Adsorption of chlorophyll on clay as a function of the silica adsorption pretreatment (right). Welsh et al. (1990).

Another adsorbent commonly used is silica, either alone or together with clays, though it is now accepted that best treatments should include some portions of both, since silicas adsorb preferably polar compounds and clays are more suitable for organic compounds. Treatment with silica has become increasingly widespread and silicas for edible oil refining have become highly tailored for this application, thus leading to the coining of the term "silica refining" (Welsh et al., 1990). The conditions for optimal silica refining can be

summarized as follows: (i) Oil temperature is raised to 70-90 °C. (ii) Silica is added at atmospheric pressure to the vessel containing the oil. (iii) The moisture content of the oil is reduced to 0.2-0.5% by evaporation, preferably in a vacuum. (iv) The contact time between the silica and the oil should be 10-15 min. (v) The moisture in the oil plays an important role in the mechanism responsible for transporting polar compounds from the oil to the silica, where they are trapped. (vi) After the removal of the polar contaminants the oil should be further dried if clays are to be used in the bleacher. During the vacuum drying process water is removed from the silica and the weight is reduced to even 40% of its original value; the solid reduces also in size and so does the load on the filters downstream the bleachers, which can then be operated at higher filtration flowrates and longer filtration cycles.

As silicas are far more efficient adsorbents for polar contaminants, if colour is not an issue (like in the case of biodiesel fuel) they can easily replace bleaching clays. If colour reduction is necessary then clays can be used in a second step after silicas have removed the polar contaminants. This reduces the amount of adsorbent used and enhances the quantity of oil produced because a lower quantity of filter cake is produced and oil losses are reduced. In this sense, a common industry perception is that 20-25% of oil is present in the filter cake but as oxidized and polymerized oil are not extracted in the extraction tests, the typical oil content in the cake can be as high as 40%.

The claimed advantages of silica (Grace, 2011) for refining biodiesel feedstocks are: (i) Lower costs of residue treatment by means of the reduction of effluents. (ii) Lower costs by elimination of washing steps. (iii) Lower product losses. (iv) Higher yield of the biodiesel fuel precursor. (v) Lower demand of catalyst in the transesterification reactor due to a lower FFA content. (vi) Lower consumption of acid for neutralization of the catalyst. (vii) Higher yield of biodiesel due to an enhanced separation of the glycerol and biodiesel phases (absence of soaps and glycerides). (viii) Purer glycerol due to a low content of impurities. (ix) Lower costs of production of biodiesel. (x) Quality improvement due to an enhanced stability (absence of metals and FFA).

One additional benefit of silica addition in the case of the caustic refining for oil treatment (e.g. for biodiesel alkaline processes of low FFA tolerance) is that water-wash centrifuges can be eliminated because silicas efficiently remove residual metals, phospholipids and soaps. These must be otherwise washed away to prevent them reaching the bleaching units.

4. Refining of crude biodiesel

After transesterification is completed, many contaminants can still be present in the biodiesel product depending on the technology of transesterification used (Table 2). Removal of these impurities will be treated separately in the next subsections.

4.1 Glycerides

Removal of glycerides from biodiesel is an important step of the process because key aspects of the quality of the fuel strongly depend on the content of bound glycerol. The ASTM D6751 and EN 14214 standards establish a maximum amount of 0.24-0.25% bound glycerol. Main problem with these compounds is that when heated they tend to polymerize forming deposits. They also increase the cloud point of biodiesel and they complicate the operation of liquid-liquid phase splitting units due to their amphiphilic nature.

<i>Impurity</i>	<i>Alkali-catalyzed</i>	<i>Acid-catalyzed</i>	<i>Supercritical</i>
<i>Soaps</i>	Yes. By neutralization of FFA with catalyst	After neutralization of the catalyst	If feedstock treatment was ineffective.
<i>Metals, P</i>	If feedstock treatment was ineffective.	If feedstock treatment was ineffective.	If feedstock treatment was ineffective.
<i>FFAs</i>	No	Yes. Due to incomplete esterification.	Yes. Due to hydrolysis of the feedstock.
<i>Monoglycerides</i>	Yes. Product of transesterification.	Yes. Product of transesterification.	Yes. Product of transesterification.
<i>Diglycerides</i>	Yes. Product of transesterification.	Yes. Product of transesterification.	Yes. Product of transesterification.
<i>Triglycerides</i>	Yes. Due to incomplete conversion.	Yes. Due to incomplete conversion.	Yes. Due to incomplete conversion.
<i>Glycerol</i>	Yes. Product of transesterification.	Yes. Product of transesterification.	Yes. Product of transesterification.

Table 2. Contaminants in biodiesel product depending on transesterification technology.

In the specific case of monoglycerides (MG), diglycerides (DG) and triglycerides (TG), they are the raw materials and the intermediates of the transesterification reaction. This is an equilibrium reaction with an equilibrium constant close to unity (D'Ippolito et al., 2007), that dictates that a methanol excess must be used to shift the equilibrium to the right and to decrease the concentration of triglycerides and intermediates in the final product mixture. Nouredini & Zhu (1997) and Darnoko & Cheryan (2000) studied the kinetics of transesterification of oil and they reported that the conversion value for the 1-step reaction of transesterification of soy oil with methanol in a stirred tank reactor, using a methanol-to-oil ratio of 6 was 80-87% at 1 h of time of reaction. Busto et al. (2006) indicated that in supercritical tubular reactors a methanol-to-oil ratio of 6 yields an equilibrium value of 94-95% at high Péclet numbers. In the case of processes with two reaction steps, after the final step of glycerol removal, the amount of TG, MG and DG is sufficiently low to almost comply with the ASTM D6751 limits. It can be however deduced that this final content of bound glycerol is a function of the methanol-to-oil ratio used in the reaction and the number of reaction steps. For the alkali catalyzed process with two reaction steps this methanol-to-oil ratio is 6. In the case of the supercritical method with one reaction step (Goto et al., 2004) the adequate methanol-to-oil molar ratio is reported to be 42. The final adjustment of the glycerides content is made in the standard industrial practice by water washing. Some authors however propose separating the glyceride fraction (Goto et al., 2004; D'Ippolito et al., 2007) and recycling it to the reactor.

One interesting issue is that of the relative concentration of MG, DG and TG in the final product. According to data of Nouredini and Zhu (1997) the equilibrium constants for the partial transesterification (producing 1 mol of FAME) of triglycerides, diglycerides and monoglycerides are $K_1=0.45$, $K_2=0.18$, $K_3=34.6$. TGs would therefore be thermodynamically more stable. It is however found in practice, probably because of kinetic limitations, that MGs and DGs are main impurities (He et al., 2007). This points to the adequacy of adsorption treatments since MGs are efficiently removed by adsorption over silica, even in the presence of water and soaps (Mazzieri et al., 2008).

Some points seem clear: (i) The final bound glycerol content is a function of the methanol-to-oil ratio. (ii) An adequate separation/recycling or removal/disposal of glycerides could

reduce the complexity of the process by reducing the methanol-to-oil ratio and the amount of recycled methanol. (iii) MG and DG should be the focus for reducing bound glycerol. Steps in the direction of (ii) have been hinted by D'Ippolito et al. (2007) and Manuale et al. (2011) for the supercritical method. The first proposed using 2 reaction steps with a low methanol-to-oil ratio (6-10), retaining glycerol and glycerides in packed bed adsorbers and recycling them to the reactor. The second indicated that the combination of 1-step reaction, a methanol-to-oil ratio of 15-20 and silica refining could produce EN14214 grade biodiesel.

4.2 Glycerol

Liquid-liquid equilibrium studies of biodiesel-methanol-glycerol mixtures have been undertaken in the past by Kimmel (2004), Negi et al. (2006) and Zhou & Boocook (2006). They determined that the equilibrium glycerol content in biodiesel depends strongly on the residual content of methanol acting as a cosolvent. When methanol is completely removed the free glycerol content depends only on the temperature, being approximately 0.2% at 25 °C and increasing linearly with temperature (Kimmel, 2004). Even if methanol is not present hydrophilic glycerol can be solubilized in the oil phase by amphiphilic MG and DG. These glycerides can separate from the oil during storage and precipitate as a result of temperature changes or long residence times. Glycerol then precipitates as a consequence of the reduced solubility, leading to the formation of deposits. Soluble glycerol is also a problem because glycerol polymerizes on hot surfaces (cylinders, injectors) with formation of deposits or "tarnishes". For all these reasons glycerol should be thoroughly removed.

Glycerol removal by adsorption was early performed by Griffin and Dranoff (1963) using sulfonic resin beads. Glycerol adsorption over polar surfaces is favored if dissolved in organic media that have little affinity for the adsorbent. Nijhuis et al. (2002) reported that adsorption of organic esters (e.g. biodiesel) over polar surfaces such as those of silica and Nafion resins, is negligible. Yori et al. (2007) studied the reversible adsorption of glycerol from biodiesel and reported that silica has a great capacity for glycerol removal, its saturation capacity being 0.13 g of glycerol per gram of adsorbent. When operated in packed beds, for a glycerol concentration of 0.11–0.25% typical of biodiesel streams issuing from gravity settling tanks, an effluent limit of $C/C^0=0.01$ and an entrance velocity of 11 cm min^{-1} , a 2 m high silica bed with 1/8" beads would have a net processing capacity of 0.01–0.02 $\text{m}^3_{\text{biodiesel}} \text{ kg}_{\text{silica}}^{-1}$. Much of the good performance of silica is related to the favorable thermodynamics of adsorption, since glycerol-silica displays an almost irreversible, square isotherm (Yori, 2008).

4.3 Soaps, salts and metals

Soaps are produced by the reaction of FFAs during the first steps of caustic refining of the fatty feedstock or by the reaction of the remaining FFAs with alkaline homogeneous catalysts in the transesterification reactor. These reactions lead to the formation of estearates, oleates, palmitates, etc. of sodium and potassium, that are amphiphilic substances that bring phase separation and plugging problems downstream the reactor. Other salts of sodium or potassium come from the neutralization of acid homogeneous catalysts in the acid-catalyzed process. These inorganic salts lead to corrosion in lines and vessels and they must also be completely eliminated in the final biodiesel product because of quality issues.

Metals are minor components in all oils as they are present as oligoelements in highly specialized molecules such as chlorophylls (magnesium) and porphyrins (magnesium, iron, manganese). Other sources of metals are the contamination from iron and copper surfaces

during the process of oil extraction or biodiesel production. Certain metals, such as cobalt, manganese and chromium, but particularly iron and copper, exhibit a prooxidant effect in oil. The manifestations of oxidation are flavor, color and odor deterioration. Copper is perhaps the most active catalyst, exhibiting noticeable oxidation properties at levels as low as 0.005 ppm (Flider & Orthofer, 1981). Though flavor, color and odor deterioration are probably not an issue for biodiesel, oxidation stability is indeed required.

For soaps, salts and metals, adsorption on silica adsorbents seems the most suitable means of removal (Welsh et al., 1990). Clays offer only a small adsorption capacity for soaps and an almost null capacity for metals.

4.4 Free fatty acids

FFAs have negligible values in biodiesel produced by the alkaline method. Depending on the efficiency of esterification they can be present in non-negligible amounts in biodiesel produced by the acid-catalyzed method or the supercritical method. Manuale et al. (2011) reacted different feedstocks with acidities ranging from 0.08 to 23.6% and found that the esterification with supercritical methanol (280 °C, 20=methanol-to-oil ratio) reduced the FFA content to 1-2.5% after 1 h and 0.4-0.6% after 1.5 h of reaction time. Reduction of the FFA content to values lower than those of the international norms can be done by washing. Adsorption however can prove simple, robust and efficient. For these application silicas are found to be superior than other adsorbents in both bleaching capacity and bleaching rate.

<i>Adsorbent</i>	<i>Adsorbent conc., mass %</i>	<i>Bleaching time, min</i>	<i>Adsorption capacity, g_{FFA} g_{ads}⁻¹</i>
<i>Virgin activated carbon</i>	5	720	6.0
<i>Mg doped activated carbon</i>	5	720	5.0
<i>Diatomaceous earth</i>	1	30	10.1
<i>Silica gel</i>	0.36	90	140.0

Table 3. Adsorbents capacity for FFA removal from biodiesel (Manuale et al., 2011).

5. Adsorption

In the last years there has been a great progress in adsorbent design and cyclic adsorption process developments, thus making adsorption an important separation tool (King, 1980). Adsorption is usually performed in columns packed with adsorbent but it can also be performed in stirred tanks with the adsorbent in suspension. The latter are usually known as bleachers since their most common application is the bleaching of edible oils with clays.

The high separating power of the chromatographic effect, achieved in adsorbent-packed columns, is a unique advantage of adsorption as compared to other separation processes. The high separating power is caused by the continuous contact and equilibration between the fluid and sorbent phases. If no diffusion limitations are considered, each contact is equivalent to an equilibrium stage (theoretical plate) and several hundreds or more of such equilibrium stages can be achieved within a short column. Adsorption is thus ideally suited for purification applications and difficult separations.

The adsorptive separation is achieved by one of three mechanisms: adsorption equilibrium, steric effect and kinetic effect. Most processes, especially those in solid-liquid phase, operate with the principle of adsorption equilibrium and hence they are called equilibrium

separation processes. In this processes the amount of adsorbate retained is primarily determined by the thermodynamic adsorbate-adsorbent activity with little regard to mass transfer phenomena. The steric effect derives from the molecular sieving properties of zeolites and other molecular sieves and can be taken as an extreme case of adsorption controlled by mass transfer phenomena. In this case either small or properly shaped molecules can diffuse into the adsorbent while other molecules are partially or totally excluded. Typical examples are the separation of linear and branched alkanes (Silva et al., 2000) or the dehydration of aqueous ethanol (Teo & Ruthven, 1986), both performed using molecular sieves. Kinetic separation is achieved by virtue of the differences in diffusion rates of different molecules. This kind of separation is mostly found in gas-gas separation as in the separation of the component gases of air (Ruthven & Farooq, 1990).

In the case of the biodiesel feedstock and product, the low elution rates in the packed columns makes the dynamic separation (kinetic effect) of no use for a practical separation. In the case of the steric effect this is expected to work fine for molecules differing widely in size and this could be the case for molecules of the organic and polar phases normally found at the outlet of the transesterification reactors. Triglycerides, diglycerides, monoglycerides, free fatty acids and fatty acid methyl esters have high molecular weights and long acyl chains and they are the main components of the organic phase. On the other side glycerol, water and methanol have small molecular sizes and could be retained in packed beds containing suitable adsorbents. Because of their relative high vapor pressure, water and methanol need a relatively few number of theoretical plates to be separated from the organic phase by distillation/evaporation (Zhang et al., 2003) and this is indeed the preferred method of water and methanol removal. However some reports on the use of hygroscopic adsorbents for biodiesel drying can be found (Lastella, 2005). Removal of glycerol from biodiesel using adsorbents has already been proved but only equilibrium adsorption on open pore adsorbents has been tried (Yori et al., 2007; Mazzieri et al., 2008). The use of the steric effect in the adsorption of water on zeolites has however been proposed for the drying of the methanol to be recycled to the biodiesel process (McDonald, 2001).

This leaves equilibrium adsorption as the main principle behind the adsorption refining of biodiesel and makes the adsorption isotherm as the main piece of information for the accurate design and scale-up of adsorption units. In this sense, though a lot of information is available for adsorption of impurities from plant oils (biodiesel feedstock) in relation to bleaching with clays (Hussin et al., 2011) or silicas (Rossi et al., 2003) only scarce information for purification of biodiesel by adsorption has been published (Manuale et al., 2011; Schmitt Faccini et al., 2011; Vasques, 2009; Mazzieri et al., 2008).

6. Adsorption isotherms

The function that describes the relation between the amount of adsorbate on the solid and its liquid-phase concentration is called adsorption equilibrium isotherm. Different functions can be used to describe this equilibrium. The Langmuir-type isotherm remains to be the most widely used for practical applications (Eq. 1).

$$\theta = \frac{q^*}{q_m} = \frac{K_L C^*}{1 + K_L C^*} \quad (1)$$

Only liquid phase applications will be discussed in this review and therefore also only liquid phase isotherms. The constant K_L is called Langmuir constant. C^* and q^* are the

equilibrium values of the bulk concentration of the adsorbate in the liquid phase and the concentration in the solid phase. θ is the fractional coverage of the surface and q_m the maximum or saturation load. At low pressures or in dilute solutions, the Langmuir isotherm reduces to a linear form, or Henry's law form (Eqs. 2-3).

$$\theta = K_L C^* \quad (2)$$

$$q = K_L C^* q_m = H C^* \quad (3)$$

All isotherms should reduce to the Henry's law form at extreme dilution. Since high dilution is the condition for many systems that need to be purified to extremely small amounts of certain impurities, the Henry's constant becomes the most important factor for purification. Both K_L and H are proportional to the exponential of the heat of adsorption ($-\Delta H$). For physical adsorption, ΔH is proportional to the bond energy between the adsorbate molecule and the adsorbent surface. Thus bond energy becomes critical for purification. Strong bonds are typical of adsorbate-adsorbent systems in ultrapurification.

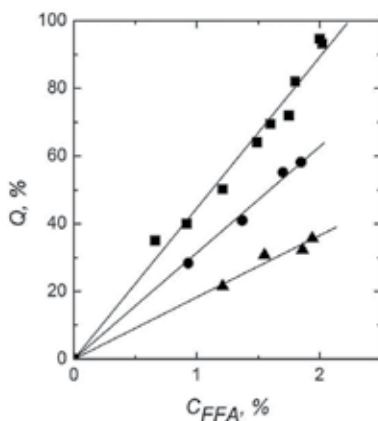


Fig. 2. Adsorption isotherm for silica TrySil 3000 at three different temperatures (Manuale, 2011). 70 °C (■), $H=44.6$. 90 °C (●), $H=31.4$. 110 °C (▲), $H=18.3$. $\Delta H=-5.7$ kCal mol⁻¹.

Zeldowitsch (1934) and previously Freundlich (1906) supplied an equation that is widely used to describe the data for heterogeneous adsorbents (Eq. 4).

$$q^* = K_F C^*{}^{1/n} \quad (4)$$

In this formula q^* and C^* are the equilibrium adsorbate concentrations in the solid and fluid phase, respectively. Zeldowitsch obtained this formula assuming an exponentially decaying function of site density with respect to ΔH , while Freundlich proposed it on an empirical basis. Freundlich's isotherm is customarily used to express the equilibrium concentration of metals and colorant bodies (chlorophylls, carotenes, etc.) in oils (Liu et al., 2008; Toro-Vázquez & Proctor, 1996) and is expected that it should also be convenient for the same adsorbates in biodiesel precursor oils and fats. In the case of the biodiesel product probably the fit of the data of adsorption of some impurities could also be good, but in this case the oil has already been refined before entering the transesterification reactor and in so diluted condition the Henry's linear isotherm could better apply.

To avoid indefinite increase in adsorption with concentration, the so-called Langmuir-Freundlich isotherm is sometimes proposed (Sips, 1948) (Eq. 5). This isotherm can be derived from the Langmuir isotherm by assuming each adsorbate molecule occupies n sites. It can also be considered as the Langmuir isotherm on nonuniform surfaces.

$$(q^*/q_m) = \frac{K_{LF} C^{*1/n}}{1 + K_{LF} C^{*1/n}} \quad (5)$$

Langmuir's formula has been successfully used to express the adsorption of glycerides from biodiesel over silica gel (Mazzieri et al., 2008). In the case of free fatty acids (FFAs) Nawar and Han (1985) also concluded that the Langmuir isotherm was followed by octanoic acid adsorption on silica. The better adjustment of free fatty acid (oleic, linoleic, etc.) adsorption over several solids by the Langmuir model (in comparison to Freundlich's) has also been reported by Proctor and Palaniappan (1990) and Cren et al. (2005, 2010).

The Langmuir and Langmuir-Freundlich isotherms for adsorption of single components are readily extended to an n -component mixture to yield the extended multicomponent Langmuir isotherm (Yang, 1997) (Eq. 6) and the so-called loading ratio correlation (LRC) (Yon & Turnock, 1971) (Eq. 7). In these equations it is assumed that the area occupied by one molecule is not affected by the presence of other species on the surface. This is not thermodynamically consistent but the equations remain nonetheless useful for design.

$$(q_i^*/q_{m,i}) = \frac{K_{L,i} C_i^*}{1 + \sum K_{L,i} C_i^*} \quad (6)$$

$$(q_i^*/q_{m,i}) = \frac{K_{LF,i} C_i^{*1/n}}{1 + \sum K_{LF,i} C_i^{*1/n}} \quad (7)$$

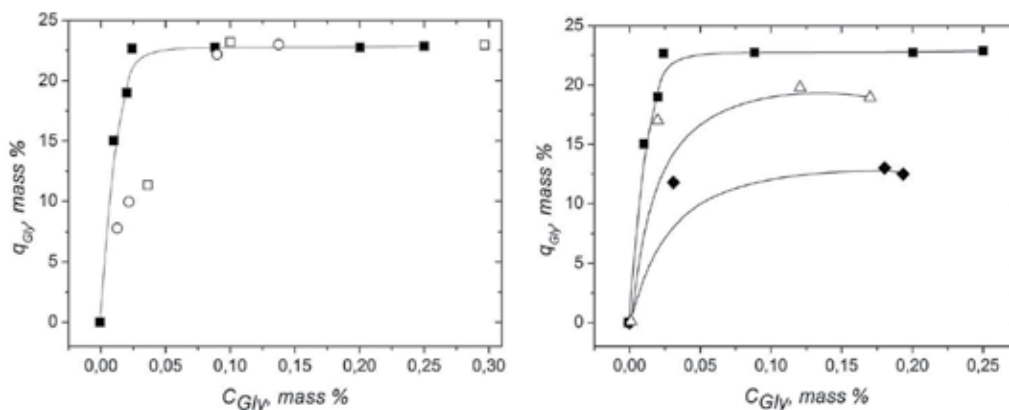


Fig. 3. Adsorption of glycerol over silica (Mazzieri et al., 2008). (■) Pure biodiesel. (□) Biodiesel spiked with water (944 ppm). (○) Biodiesel spiked with soap (270 ppm). (Δ) Biodiesel spiked with MG (7500 ppm). (◆) Biodiesel spiked with methanol (12000 ppm).

Mazzieri et al. (2008) used the multicomponent Langmuir isotherm to express the simultaneous adsorption of glycerol and monoglycerides. They found that adsorption of glycerol is not influenced by the presence of small amounts of water and soaps. Conversely the presence of MGs and/or methanol lowers the adsorption capacity of glycerol because of the competition of MGs for the same adsorption sites.

7. Mass transfer kinetics and models for adsorption in the liquid phase

It is generally recognized that transfer of adsorbates from the bulk of a liquid occurs in two stages. First molecules diffuse through the laminar film of fluid surrounding the particles and then they diffuse inside the pore structure of the particle. Most authors assume that the concentration gradient of any species along the film is linear and that the mass transfer to the adsorbent surface is proportional to the so-called film coefficient, k_f (Eq. 8). In this equation, q is the adsorbent concentration on the solid particle, r_p is the particle radius and ρ_p is the average density of the particle. C is the concentration of the adsorbate in the bulk of the fluid and C_s the value of adsorbate concentration on the surface. k_f is often predicted with the help of generalized, dimensionless correlations of the Sherwood (Sh) number that correlate with the Reynolds (Re) and Schmidt (Sc) numbers and the geometry of the systems. The most popular is that due to Wakao and Funazkri (1978) (Eq. 9).

$$\frac{\partial q}{\partial t} = \left(\frac{3k_f}{r_p \rho_p} \right) (C - C_s) \quad (8)$$

$$Sh = \frac{2r_p k_f}{D_m} = \left(2.0 + 1.1 Sc^{\frac{1}{3}} Re^{0.6} \right) \quad (9)$$

$$Sc = \frac{\mu}{D_M \rho} \quad (10)$$

In the case of the homogeneous surface diffusion model (HSDM) the equation of mass transport inside the pellet is that of uniform Fickian diffusion in spherical coordinates (Eq. 11). Sometimes this model is modified for system in which the diffusivity is seemingly not constant. The most common modification is to write the surface diffusivity, D_s , as a linear function of the radius, thus yielding the so-called proportional diffusivity model (PDM). A detailed inspection of the available surface diffusivity data indicates that surface diffusivity is similar but expectedly smaller than molecular diffusivity, D_M . Some values of D_M are presented in Table 4.

$$\frac{\partial q}{\partial t} = D_s \left(\frac{\partial^2 q}{\partial r^2} + \frac{2}{r} \frac{\partial q}{\partial r} \right) \quad (11)$$

In the case of fatty substances there is not much reported data on the values of surface diffusivity. Yang et al. (1974) found that stearic acid had a surface diffusivity on alumina of about 10^{-9} - 10^{-11} m^2s^{-1} depending on the hydration degree of the alumina. Allara and Nuzzo (1985) reported values of D_s of 10^{-10} - 10^{-11} for different alkanolic acids on alumina.

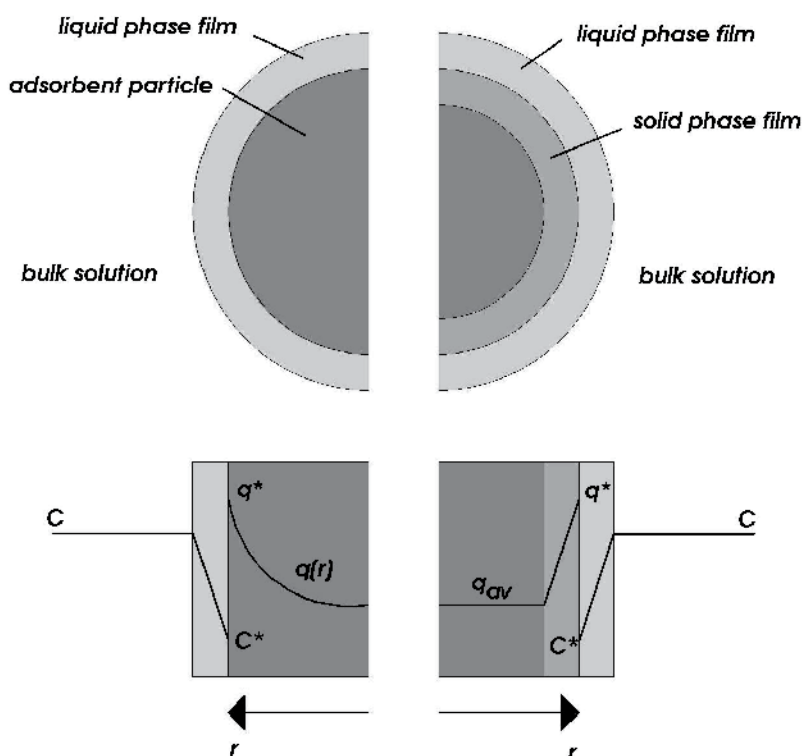


Fig. 4. Homogeneous surface diffusion (left) and linear driving force (right) models.

Molecule	$T, ^\circ\text{C}$	Solvent	$D_M, \text{m}^2 \text{s}^{-1}$	Reference
Stearic acid	130	Nut oil	4.2×10^{-10}	Smits (1976)
Oleic acid	130	Nut oil	3.7×10^{-10}	Smits (1976)
Monoolein	25	Water	1.3×10^{-10}	Geil et al. (2000)
Triolein, Tristearin	70	Triolein, tristearin	1.2×10^{-10}	Callaghan & Jolley (1980)
Sodium oleate	25	Sodium oleate	3.3×10^{-10}	Gajanan et al. (1973)
Sodium palmitate		Sodium palmitate	4.8×10^{-10}	Gajanan et al. (1973)
Glycerol	130	Biodiesel	6.18×10^{-9}	Kimmel (2004)

Table 4. Values of molecular diffusivity of several biodiesel impurities.

$$\frac{\partial q}{\partial t} = K_{LDF}(q^* - q_{av}) \quad (12)$$

In the case of the linear driving force model (LDFM) all mass transfer resistances are grouped together to give a simple relation (Eq. 12). q_{av} is the average adsorbate load on the pellet and is obtained by the time-integration of the adsorbate flux. q^* is related to C^* , through the equilibrium isotherm. It must be noted that in this formulation $q_s = q^*$ and $C_s = C^*$, indicating that the surface is considered to be in equilibrium. In the case of adsorption for refining of biodiesel, the LDF approximation has been used to model the adsorption of free

fatty acids over silicas (Manuale, 2011). FFA adsorption was found to be rather slow despite the small diameter of the particles used (74 microns). This was addressed to the dominance of the intraparticle mass transfer resistance. This resistance was attributed to a working mechanism of surface diffusion with a diffusivity value of about $10^{-15} \text{ m}^2 \text{ s}^{-1}$. The system could be modeled by a LDFM with an overall coefficient of mass transfer, $K_{LDF}=0.013\text{-}0.035 \text{ min}^{-1}$ (see Table 5). These values compare well with those obtained for the adsorption of sodium oleate over magnetite, $0.002\text{-}0.03 \text{ min}^{-1}$ (Roonasi et al., 2010).

<i>Adsorbent</i>	<i>T, °C</i>	<i>K_{LDF}, min⁻¹</i>	<i>Adsorbent</i>	<i>T, °C</i>	<i>K_{LDF}, min⁻¹</i>
<i>Silica TrySil 3000</i>	70	0.035	<i>Silica TrySil 300B</i>	70	0.032
	90	0.019		90	0.022
	110	0.013		110	0.018

Table 5. Values of the LDF overall mass transfer coefficient for the silica adsorption of free fatty acids from biodiesel at different temperatures (Manuale, 2011).

The authors provided a further insight into the internal structure of the LDF kinetic parameter by making use of the estimation originally proposed by Ruthven et al. (1994) for gas phase adsorption (Eq. 13). D_s is the intrapellet surface diffusivity and ε is the porosity of the pellet. The additivity of the intrapellet diffusion time (τ_D) and the film transfer time (τ_f) to give the total characteristic time ($1/K_{LDF}=\tau_{total}$) is sometimes questioned because of the large difference between them. In the case of the adsorption of oleic acid from biodiesel it was shown that $\tau_f \approx 0.07$ seconds (estimated) and $\tau_{total} \approx 1700$ seconds (experimental) indicating that the silica-FFA system is strongly dominated by intrapellet diffusion (Manuale, 2011).

$$\frac{1}{K_{LDF}} = \frac{r_p}{3k_f} + \frac{r_p^2}{15\varepsilon D_s} = \tau_f + \tau_D \quad (13)$$

The LDF model was first proposed by Glueckauf and Coates (1947) as an “approximation” to mass transfer phenomena in adsorption processes in gas phase but has been found to be highly useful to model adsorption in packed beds because it is simple, analytical, and physically consistent. For example, it has been used to accurately describe highly dynamic PSA cycles in gas separation processes (Mendes et al., 2001). Yet, a difference is sometimes found in the isothermal batch uptake curves on adsorbent particles obtained by the LDFM and the more rigorous HSDM. The LDF approximation has also been reported to introduce some error when the fractional uptake approaches unity (Hills, 1986). In practice however saturation values might never be approached because adsorption capacity is severely decreased due to unfavourable thermodynamics in the saturation range. The precision of LDFM can be also improved by using higher order LDF models (Álvarez-Ramírez et al., 2005).

8. Experimental breakthrough curves

Breakthrough curve. It is the “S” shaped curve that results when the effluent adsorbate concentration is plotted against time or volume. It can be constructed for full scale or pilot testing. The breakthrough point is the point on the breakthrough curve where the effluent adsorbate concentration reaches its maximum allowable concentration, which often corresponds to the treatment goal, usually based on regulatory or risk based numbers.

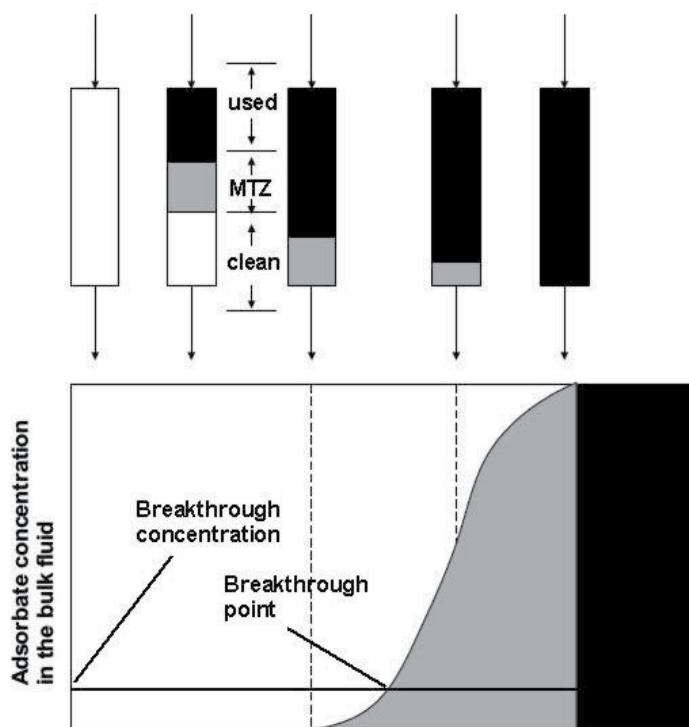


Fig. 5. Adsorption column zones. Relation to breakthrough curve.

Mass Transfer Zone. The mass transfer zone (*MTZ*) is the area within the adsorbent bed where adsorbate is actually being adsorbed on the adsorbent. The *MTZ* typically moves from the influent end toward the effluent end of the adsorbent bed during operation. That is, as the adsorbent near the influent becomes saturated (spent) with adsorbate, the zone of active adsorption moves toward the effluent end of the bed where the adsorbate is not yet saturated. The *MTZ* is generally a band, between the spent adsorbent and the fresh adsorbent, where adsorbate is removed and the dissolved adsorbate concentration ranges from C^o (influent) to C^e (effluent). The length of the *MTZ* can be defined as L_{MTZ} . When $L_{MTZ}=L$ (bed length), it becomes the theoretical minimum bed depth necessary to obtain the desired removal. As adsorption capacity is used up in the initial *MTZ*, the *MTZ* advances down the bed until the adsorbate begins to appear in the effluent. The concentration gradually increases until it equals the influent concentration. In cases where there are some very strongly adsorbed components, in addition to a mixture of less strongly adsorbed components, the effluent concentration rarely reaches the influent concentration because only the components with the faster rate of movement are in the breakthrough curve. Adsorption capacity is influenced by many factors, such as flow rate, temperature, and pH (liquid phase). The adsorption column can be considered exhausted when C^e equals 95 to 100% of C^o .

9. Model equations for flow in packed beds

We should start by writing the general equation for flow inside a packed bed, isothermal, and with no radial gradients (Eqs. 14-17). In these equations, u is the interstitial velocity

($u=U/\varepsilon_B$), where U is the empty bed space velocity and ε_B is the bed porosity. The last three equations are the "clean bed" initial condition and the Danckwartz boundary conditions for a closed system.

$$\frac{\partial C}{\partial t} - D_L \frac{\partial^2 C}{\partial z^2} + \frac{\partial(uC)}{\partial z} + \frac{1 - \varepsilon_B}{\varepsilon_B} \rho_p \frac{\partial q}{\partial t} = 0 \quad (14)$$

$$C(0, t) = C^0 \quad (15)$$

$$\frac{\partial C}{\partial z} = 0, \quad z = L \quad (16)$$

$$C(z, 0) = 0 \quad (17)$$

In order to solve a specific problem of adsorption, mass transfer kinetics equations must be added, such as those of the HSDM or LDFM. The film equation is customarily replaced in the general equation of flow along the bed (Eq. 14) and thus the total system is reduced. The system still remains rather complex and in most instances can only be solved numerically. For faster convergence and accuracy special methods can be used, such as orthogonal collocation, the Galerkin method, or finite element methods. The general solution of the system is a set of points of C as a function of z , t and r . Often much of this information is not necessary and only the fluid bulk concentration at the bed outlet as a function of time, i.e. the "breakthrough" curve, is reported.

In order to obtain analytical breakthrough curves some simplifications can be made. For example the first implication of a high intrapellet diffusion resistance in liquid-solid systems (as in biodiesel refining) is that the Biot number that represents the ratio of the liquid-to-solid phase mass transfer rate, takes very high values. In Biot's equation (Eq. 18), q^0 is the equilibrium solid-phase concentration corresponding to the influent concentration C^0 and r_p is the particle radius. The film resistance in high Bi systems can be disregarded; their breakthrough curves being highly symmetrical. Experimental symmetrical curves have indeed been found for the adsorption of glycerol over packed beds of silica (Fig. 6).

$$Bi = \frac{k_f r_p C^0}{D_s \rho_p q^0} \quad (18)$$

Another simplification is related to the longitudinal dispersion term in Eq. 14. D_L is usually calculated together with the film coefficient k_f by using the Wakao & Funazkri (1978) correlations for the mass transfer in packed beds of spherical particles (Eqs. 9 and 19). Due to the dependence of Sc on the molecular diffusivity, the value of D_L is dominated by D_M . The importance of D_L in systems of biodiesel flowing in packed bed adsorbers could be disregarded in attention to the value of the axial Péclet number (Eq. 22), since $Pe > 100$ in these systems. For very big Pe numbers the regime is that of plug flow (no backmixing) and when Pe is very small the backmixing is maximum and the flow equations are reduced to the equation of the perfectly mixed reactor (Busto et al., 2006).

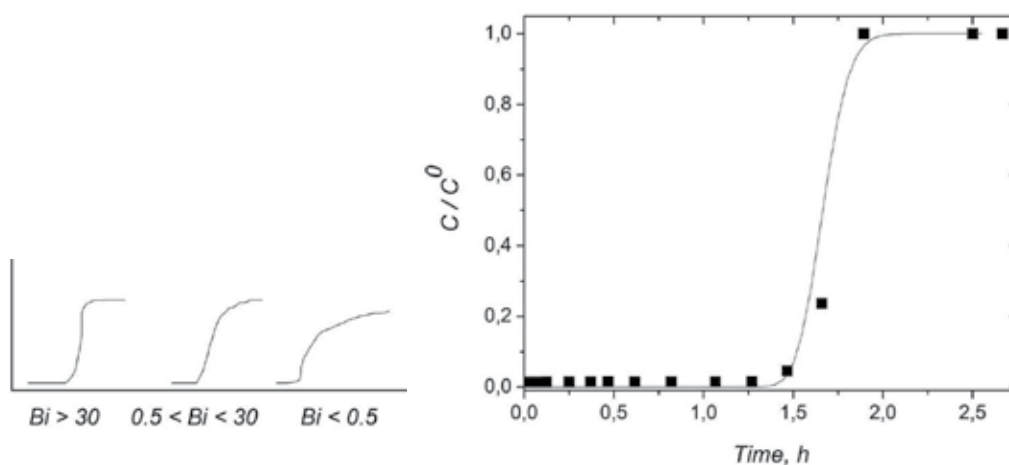


Fig. 6. Left: appearance of breakthrough curves as a function of the Biot number. Right: breakthrough curve for glycerol adsorption over silica (Yori et al., 2007).

$$\frac{D_L}{2\mu r_p} = \frac{20}{\text{Re Sc}} + 0.5 \quad (19)$$

$$Pe = \frac{uL}{D_M} \quad (20)$$

Another degree of complexity is posed by the nature of the isotherm equilibrium equation. Langmuir and Langmuir-Freundlich formulae are highly linear and propagate this non-linearity to the whole system. However some simplifications can be done depending on the strength of the affinity of the adsorbate for the surface and the range of concentration of the adsorbate of practical interest.

Sigrist et al. (2011) have indicated that Langmuir type isotherms for systems with high adsorbate/solid affinity can be approximated by an irreversible “square” isotherm ($q=q_m$), while systems in the high dilution regime can be represented by the linear Henry’s adsorption isotherm. Combining the linear isotherm or the square isotherm with the equations for flow and mass transfer along the bed, inside the pellet and through the film, analytical expressions for the breakthrough curve of biodiesel impurities over silica beds can be found (Table 6) (Yori et al., 2007).

For the square isotherm, the Weber and Chakravorti (1974) model is depicted in equations 21-25. A square, flat isotherm curve yields a narrow MTZ, meaning that impurities are adsorbed at a constant capacity over a relatively wide range of equilibrium concentrations. Given an adequate capacity, adsorbents exhibiting this type of isotherm will be very cost effective, and the adsorber design will be simplified owing to a shorter MTZ. Weber and Chakravorti took a further advantage of this kind of isotherm and simplified the intrapellet mass transfer resolution by supposing that the classical “unreacted core” model applied, i.e., that the surface layers could be considered as completely saturated and that a mass front diffused towards the “unreacted core”.

Isotherm	Film resistance	Intrapellet resistance	Adsorption	Biodiesel system	References
Linear	Yes	Fick, CD	Reversible	FFA-silica	Rasmusson & Neretnieks (1980)
Square	Yes	Fick, CD	Irreversible	Glycerol-silica	Weber & Chakravorti (1974)

Table 6. Breakthrough models for square and linear isotherms. CD: constant diffusivity.

$$\tau - N_p = \frac{15}{\sqrt{3}} \tan^{-1} \left[\frac{2(1-Q)^{1/3}}{\sqrt{3}} + 1 \right] - \frac{15}{2} \ln \left[1 + (1-Q)^{1/3} + (1-Q)^{2/3} \right] + 2.5 - \frac{5\pi}{2\sqrt{3}} + \left(\frac{N_p}{N_f} \right) \ln(Q+1) \quad (21)$$

$$\tau = \left[\frac{15 \varepsilon D_s}{r_p^2} \right] \left[\frac{C^0}{q_m} \right] (t - z/u). \quad (22)$$

$$N_p = \left[\frac{15 \varepsilon D_s}{r_p^2} \right] \left[\frac{1 - \varepsilon_B}{\varepsilon_B} \right] \left(\frac{z}{u} \right) \quad (23)$$

$$N_f = k_f \left[\frac{1 - \varepsilon}{\varepsilon} \right] \left(\frac{3z}{u r_p} \right) \quad (24)$$

$$Q = \frac{q}{q_s} = \frac{C}{C^0} \quad (25)$$

τ is the dimensionless time variable, Q is the fractional uptake, N_p is the pore diffusion dimensionless parameter and N_f is the film dimensionless parameter. The constant pattern condition is fulfilled in most of the span of the breakthrough experiments ($\tau > 5/2 + N_p/N_f$) except in the initial region when the pattern is developing. The simplified expression for dominant pore diffusion (high Bi) can be obtained by setting $(N_p/N_f)=0$.

For glycerol adsorption over silica Yori et al. (2007) provided a sensitivity study based on Weber and Chakravorti's model. These results are plotted in Figures 7 and 8. The influence of the pellet diameter (d_p) can be visualized in Figure 7 at two concentration scales. For small diameter (1 mm) the saturation and breakthrough points practically coincide and the traveling MTZ is almost a concentration step. For higher diameters the increase in the time of diffusion of glycerol inside the particles produces a stretching of the mass front and a more sigmoidal curve appears. The breakthrough point was defined as $C/C^0=0.01$ because for common C^0 values (0.1-0.25% glycerol in the feed) lowering the glycerol content to the quality standards for biodiesel (0.002%) demands that C/C^0 at the outlet is equal or lower than 1% the value of the feed. The results indicate that for a 3 mm pellet diameter the breakthrough time is reduced from 13 h to 8 h and that for a 4 mm pellet diameter this value is further reduced to 4.5, i.e. almost one third the saturation time. It can be inferred that the

pellet diameter has a strong influence on the processing capacity of the silica bed. Small diameters though convenient from this point of view are not practical. d_p is usually 3-6 mm in industrial adsorbers in order to reduce the pressure drop and the attrition in the bed.

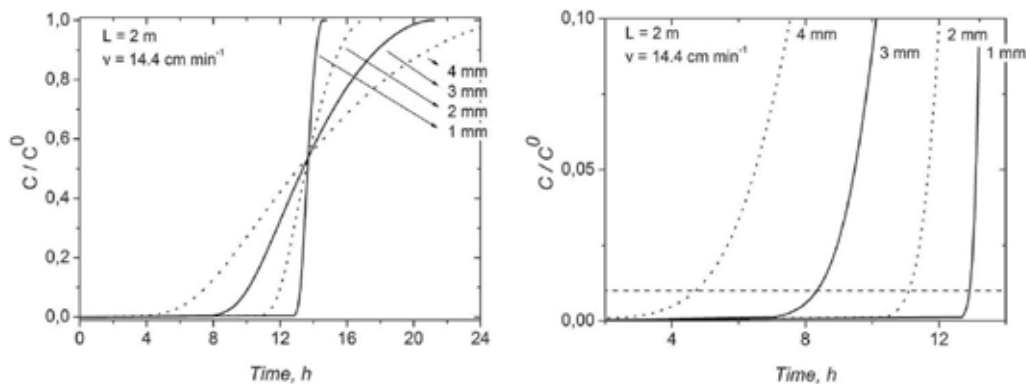


Fig. 7. Adsorption of glycerol from biodiesel. Breakthrough curves as a function of pellet diameter (d_p). Breakthrough condition $C/C^0=0.01$, $L=2$ m, $U=14.4$ cm min⁻¹.

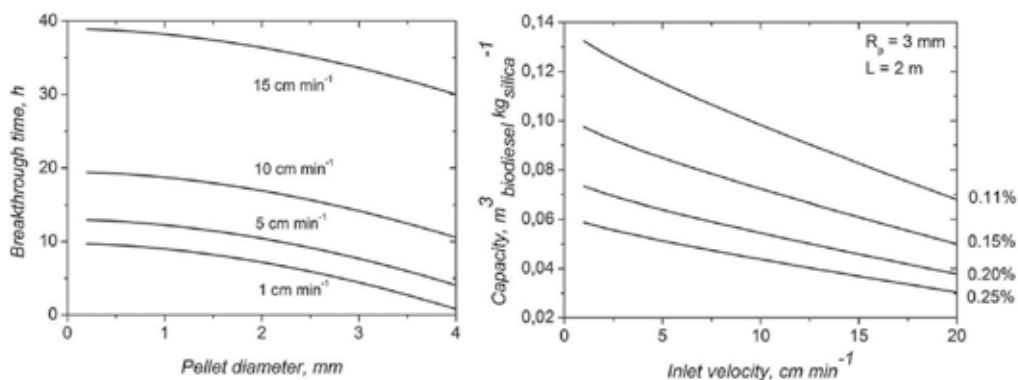


Fig. 8. Adsorption of glycerol from biodiesel. Left: breakthrough time as a function of U and d_p ($L=2$ m, $U=14.4$ cm min⁻¹). Right: influence of U and C^0 on the processing capacity ($d_p=3$ mm, $L=2$ m).

The combined influence of pellet diameter and inlet velocity on the breakthrough time is depicted in Figure 8 (left). The breakthrough time seems to depend on d_p^{-n} ($n>0$) and also on U^{-n} ($n>0$). This means that longer breakthrough times are got at smaller pellet diameters and smaller feed velocities. The processing capacity per unit kg of silica is displayed in Figure 8 (right) as a function of d_p and the inlet velocity, U^0 . When U^0 goes to zero the bed capacity equals q_m , and decreases almost linearly when increasing U^0 . For a typical solid-liquid velocity of 5 cm min⁻¹ the capacity decreases at higher glycerol concentration, but the silica bed is used more efficiently because the relative MTZ size is reduced.

$$y(\tau) = \frac{1}{2} \mu^0 \left(1 + \operatorname{erf} \left\{ \frac{(\ln(\tau) - \mu)}{(\sigma\sqrt{2})} \right\} \right) \quad (26)$$

$$Bi^* = \frac{k_f r_p}{HD_s \rho_s} \quad (27)$$

$$\Theta = \frac{\varepsilon_B LD_s}{u r_p^2} \quad (28)$$

The breakthrough curve for the linear isotherm model is depicted in equations (26-28). This is the Q-LND (quasi log normal distribution) approximation of Xiu et al. (1997) and Li et al. (2004), of the general solution of Rasmusson and Neretnieks (1980). This approximation is known to be valid in systems of high Bi. γ is the adimensional adsorbate concentration in the fluid phase, τ is the adimensional time, μ and σ parameters are functions of the Péclet number (Pe), the modified Biot number (Bi^*) and the time parameter (Θ).

10. Experimental scale-up of adsorption columns

The Rapid Small Scale Column Test (RSSCT) was developed to predict the adsorption of organic compounds in activated carbon adsorbents (Crittenden et al., 1991). The test is based upon dimensionless scaling of hydraulic conditions and mass transport processes. In the RSSCT, a small column (SC) loaded with an adsorbent ground to small particle sizes is used to simulate the performance of a large column (LC) in a pilot or full scale system. Because of the similarity of mass transfer processes and hydrodynamic characteristics between the two columns, the breakthrough curves are expected to be the same. Due to its small size, the RSSCT requires a fraction of the time and liquid volume compared to pilot columns and can thus be advantageously used to simulate the performance of the large column at a fraction of the cost (Cummings & Summers, 1994; Knappe et al., 1997). As such, RSSCTs have emerged as a common tool in the selection of adsorbent type and process parameters.

Parameters of the large column are selected in the range recommended by the adsorbent vendor. The RSSCT is then scaled down from the large column. Based on the results of the RSSCT, the designer develops detailed design and operational parameters. The selection and determination of the following parameters is required:

- Mean particle size: the designer must find an adequate mesh size, 100-140, 140-170, 170-200, etc., that can be used to successfully simulate the large column. Too small particles can however lead to high pressure losses and pumping problems.
- Internal diameter (ID) of column: 10-50 mm ID columns are preferred to keep all other column dimensions small and more important, to reduce the amount of time and eluate used. The $d_{SC}/d_{p,SC}$ should be higher than 50 to keep wall effects negligible.

RSSCT scaling equations have been developed with both constant (CD) and proportional (PD) diffusivity assumptions. The two approaches differ if D_s values are independent (for CD) or a linear function (for PD) of the particle diameter, d_p . Equations 29-30 can be used to select the small column (SC) RSSCT parameters based upon a larger column (LC) that is being simulated. t is the time span of the experiment for a common outlet concentration. For CD and PD scenarios the values for X are zero and one, respectively. Additional X values have been suggested based upon non-linear relationships between d_p and D_s .

$$\frac{EBCT_{SC}}{EBCT_{LC}} = \left(\frac{d_{p,SC}}{d_{p,LC}} \right)^{2-x} = \frac{t_{SC}}{t_{LC}} \quad (29)$$

$$X = \log \left(\frac{d_{p,SC}}{d_{p,LC}} \right) / \log \left(\frac{D_{s,SC}}{D_{s,LC}} \right) \quad (30)$$

- The spatial or interstitial velocities (U , u) are scaled based on the relation written in Eq. 31. However, this equation will result in a high interstitial velocity of water in the small column, and hence, high head loss. Crittenden (1991) recommended that a lower velocity in the small column be chosen, as long as the effect of dispersion in the small column does not become dominant over other mass transport processes. This limitation requires the $Re_{SC}Sc$ value remain in the range of 200-200,000, which is the mechanical dispersion range.

$$\frac{u_{SC}}{u_{LC}} = \left(\frac{d_{p,LC}}{d_{p,SC}} \right) \quad (31)$$

Variable	Small column	Large column
d_p	0.3 mm	3 mm
EBCT	105 s	2.9 h
U	2.4 mm s ⁻¹	0.24 mm s ⁻¹
L	25 cm	2.5 m
t_{run}	3 days	300 days

Table 7. Variables for a scaled-down constant diffusivity RSSCT packed with silica gel for adsorption of glycerol. Values for the small column taken from Yori et al. (2007).

In the case of biodiesel, no results of RSSCTs designed for scale-up purposes have been published so far, though some tests in small columns have been published (Yori et al., 2007). The validity of RSSCTs holds anyway. In this sense one first step for their use for scale-up purposes would be to determine the kind of D_s-d_p relation that holds, since it is unknown whether CD or PD approaches must be used. In order to show the usefulness of the technique, a procedure of comparison between a biodiesel large column adsorber and a scaled down laboratory column is made in Table 7.

11. Advantages of adsorption in biodiesel refining

As pointed out by McDonald (2001), Nakayama & Tsuto (2004), D'Ippolito et al. (2007), Özgül-Yücel & Turkay (2001) and others, the principal advantage of the use of adsorbers in biodiesel refining is that of reducing the amount of wastewater and sparing the cost of other more expensive operations such as water washing and centrifugation. For big refiners that can afford the cost of setting up a water treatment plant the problem of the amount of wastewater might not be an issue but this can be extremely important for small refiners.

In the common industrial practice water-washing is used to remove the remaining amounts of glycerol and dissolved catalyst, and also the amphiphilic soaps, MGs and DGs. Theoretically speaking if water-washing is used to remove glycerol and dissolved catalyst only, large amounts of water should not be required. However in the presence of MGs and DGs the addition of a small amount of water to the oil phase results in the formation of an emulsion upon stirring. Particularly when this operation is performed at a low temperature

separation of the aqueous phase from the emulsion becomes difficult. In order to prevent the formation of such an emulsion in the conventional water-washing practice a large amount of water must be used. Karaosmanoglu et al. (1996) concluded that a minimum of 3-5 grams of water per gram of biodiesel at 50 °C were needed to efficiently remove the impurities of the fuel (3000-5000 litres of water per Ton of biodiesel). These numbers should be considered typical of once-through water-washing operations but are not representative of closed-loop water washing schemes. Accurate numbers are included in Table 8.

It has been suggested that the methanol removal step needed for successful adsorption be performed before glycerol separation and under vacuum conditions (D'Ippolito et al., 2007; Bournay et al., 2005). The data in Table 8 suggests that the best operation of dry refining is that with cyclic reversible adsorption of glycerol/glycerides in twin packed beds, as early suggested (D'Ippolito et al., 2007).

	<i>Lurgi</i>	<i>Crown Iron</i>	<i>Dry</i>
Glycerol removal from biodiesel	Water wash column	Water mixer/settler	Packed bed, bleacher
Methanol removal from biodiesel	Water wash column	Steam Stripper	Vacuum flash drum
Methanol removal from wash water	Rectifier column	Rectifier column	Not needed
Final polishing by bleaching	n.a.	Yes	Not needed
Wash water consumption	200 kg Ton _{bio} ⁻¹	200 kg Ton _{bio} ⁻¹	None
Adsorbent consumption	n.a.	n.a.	11 kg Ton _{bio} ⁻¹ (bleacher) < 1 kg Ton _{bio} ⁻¹ (cyclic bed)

Table 8. Comparison of unit operations for two alkali-catalyzed processes (Lurgi, 2011; Crown Iron Works, 2011; Anderson et al., 2003) and a process with a “dry” step of adsorption of glycerol and glycerides (Manuale et al., 2011). Adsorbent consumption calculated for glycerol removal only (0.15% in raw biodiesel) (Yori et al., 2007).

Other advantages of adsorption are the low capital investment (provided common adsorbents are used), the absence of moving parts, the simplicity and robustness of operation. Possible drawbacks are the need for disposal and replacement of the spent adsorbent in the case of the use of bleaching tanks.

12. Adsorbers operation

12.1 Bleaching tanks

Manuale et al. (2011) used bleaching silicas for the removal of FFA in biodiesel in a series of tests in a stirred tank reactor under varying temperature and pressure conditions (70 and 110 °C, 760 and 160 mm_{Hg}). Their results confirm the pattern already seen in the case of the silica refining of edible oils. For the same adsorbent and in the presence of vacuum the influence of temperature is low. For example for TriSyl 3000 in vacuo, after 90 min, and from a similar initial acidity level (1.5%), the adsorbate load at two different temperatures is: $q_{70\text{ }^\circ\text{C}}=99.3\%$, $q_{110\text{ }^\circ\text{C}}=75.0\%$. Similarly, for TriSyl 300B, 90 min bleaching time, 1.7-1.9% initial acidity: $q_{70\text{ }^\circ\text{C}}=82.0$, $q_{110\text{ }^\circ\text{C}}= 69.0\%$. The trend is clear. Higher temperatures lead to lower

adsorption capacities. This is related to the fact that adsorption is exothermal and thus adsorption equilibrium is favored at low temperatures. In the absence of vacuum, adsorption is very low, one order of magnitude the value at 160 mm_{Hg}. Water adsorption reportedly inhibits the diffusion and adsorption inside the pore network of the silicas. At 90 °C or higher temperatures water desorption from an adsorbent dipped in oil can only proceed to a non-negligible extent in the presence of vacuum. Therefore if the adsorbent is not previously dehydrated, dehydration occurs simultaneously with adsorption during the bleaching experiment. In some cases the release of water from the silica goes directly into the biodiesel phase and the water content of the oil phase is increased.

These results indicate that surface diffusion of FFA over several adsorbents is very slow and the limiting step of the whole adsorption process. This leads to two negative consequences: (i) if a high level of FFA removal and a short bleaching time is required then big amounts of adsorbent must be used and these adsorbents are only partially used; (ii) if a total utilization of the adsorbent is desired, unconveniently high bleaching times must be used.

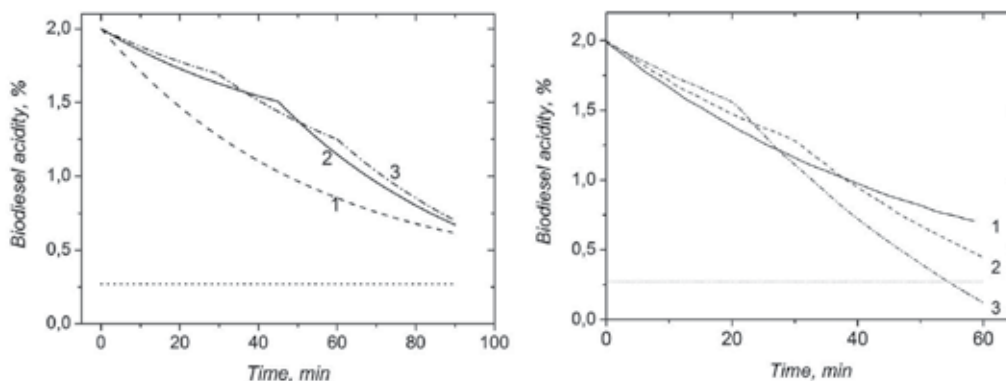


Fig. 9. Biodiesel acidity as a function of time and the number of countercurrent tank bleaching steps (1, 2 and 3) (Manuale, 2011). Adsorbent load=2%, initial biodiesel acidity=2%, $K_{LDF}=0.0188 \text{ min}^{-1}$. Left: Linear adsorption (Henry's law, $H=37.6$). Right: Irreversible adsorption (square isotherm). Dotted line: FFA European standard EN 14214, FFA limit.

Manuale et al. (2011) discussed the conditions for total total adsorbent utilization and for quasi complete FFA removal. They used the LDF model with both linear and square isotherms. They tested by simulation the use of serial cocurrent and countercurrent bleachers in order to assess their bleaching performance. The results are presented in Figure 9. In the case of the linear adsorption isotherm the use of countercurrent bleachers does not lead to a reduction of the adsorbent consumption. An effective reduction only occurs when the isotherm is square. These conclusions hold independently of the number of serial bleachers. Therefore when adsorption is strong and irreversible, spent adsorbents can be used advantageously to bleach streams highly contaminated while fresh adsorbents can be used to polish bleach the most lean streams. In the case of the linear isotherm the modulation of the adsorption capacity results in an operation that depends only on the bleaching time (all traces in Figure 9-left coincide at the end of the bleaching cycle).

Figure 10 is a plot of $q(t)$ for a train of countercurrent beds packed with adsorbents having a linear isotherm. The results show that all traces for the multistep operation are practically parallel to the 1-bleacher trace. Hence the adsorption capacity q is only a function of the

“total” bleaching time. No benefits can then be got from the multi-tank countercurrent bleaching operation. The only possibility of multiple units is that of parallel bleaching tanks working long times (e.g. 2 h) in order to increase the adsorbent usage.

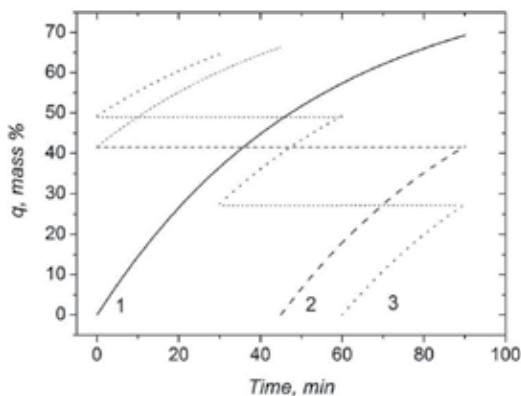


Fig. 10. Adsorbent load as a function of time and the number of counter-current bleaching steps (1, 2 and 3) (Manuale, 2011). Process conditions as in Figure 9.

12.2 Packed beds

Lead-lag operation. Most liquid phase packed beds are operated in series. This means passing all of the flow through one column bed, a lead column, and then passing flow through another similar sized column bed, the lag vessel. This method offers several advantages over a single column. The series configuration allows the maximum use of the adsorbent throughout the entire bed. This assumes that the MTZ is contained within a single properly sized packed bed. By placing two or more columns in series, the MTZ is allowed to pass completely through the first (lead) bed as the leading edge of the MTZ migrates into the second (lag) bed. By allowing this to happen, the maximum contaminant concentration is allowed to come into contact with adsorption sites in the lead vessel that require a greater concentration gradient to hold additional contamination. When the MTZ exits the lead vessel, that vessel is then exhausted, and requires change out with virgin or regenerated adsorbent. Even though the adsorption capacity of the lead vessel is exhausted, treatment continues in the lag vessel. Then, during change out, the lead vessel is taken off-line and the lag vessel is placed in the lead position. The former lead vessel is then replenished with adsorbent and then becomes the lag vessel and brought on-line. Further insights on the operation of serial and parallel adsorbers can be found elsewhere (Sigrist et al., 2011).

Regeneration. For the removal of glycerol and to a lower extent of MGs and DGs, the methanol concentration in the fluid is important. Methanol adversely affects the adsorption capacity because it increases the activity of glycerol and glycerides in the liquid phase. This was studied by Yori et al. (2007) with the method disclosed by Condoret (1997) and Bellot (2001). The method is based on the knowledge of the curves describing the variation in the glycerol activity with respect to its concentration, established separately for each phase (solid and liquid). Henry's constants were obtained from the slope of the isotherms in the diluted range using the UNIFAC method for calculating the liquid phase activity coefficients. The results are shown in Fig. 11 and indicate that for all practical purposes the adsorption of glycerol over silica is null at high methanol concentrations.

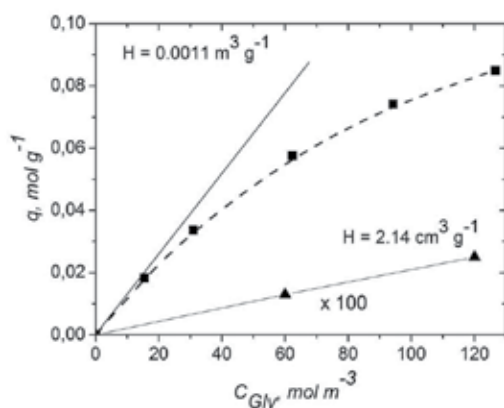


Fig. 11. Silica adsorption isotherms for the Gly-FAME (squares) and Gly-MeOH (triangles) systems. H values calculated from the slope of the traces. Yori et al. (2007).

The elution of 4 bed volumes of methanol through the exhausted packed bed is reported to restore the adsorbent capacity. Elimination of the adsorbed methanol from the silica was done by blowing nitrogen through the bed but could be performed using any other gas. Elimination of the solvent produced a decrease of the bed temperature because methanol evaporation needs 1104 J g^{-1} . This translates to $200 \text{ kJ kg}_{\text{silica}}^{-1}$ for the fully saturated silica and hence provisions should be made in order to maintain the bed temperature and prevent biodiesel flow problems at inconvenient low temperatures. In this sense flushing the bed with a hot gas seems the most suitable means for desorbing methanol.

$$(H / H^0) = e^{-\frac{\Delta H}{R} \left[\frac{1}{T_1} - \frac{1}{T_2} \right]} \quad (32)$$

The thus recommended way of regenerating the silica bed seems superior to other means used for regeneration of adsorbent packed beds, notably the thermal swing. A thermal swing with purified hot biodiesel could be used to regenerate the bed. Manuale et al. (2011) found that the silica adsorption of oleic acid from biodiesel has a heat of adsorption of $-5.7 \text{ KCal mol}^{-1}$. This is similar to reported values for similar systems (Sari & Iþýldak, 2006). In order to decrease the adsorption capacity 100 times ($H/H^0=0.01$, Eq. 32) the thermal swing should be $\Delta T=480 \text{ }^\circ\text{C}$. For mild regenerations with $H/H^0=0.1$ and $H/H^0=0.25$, the required thermal swings are still high, $\Delta T=200 \text{ }^\circ\text{C}$ and $\Delta T=140 \text{ }^\circ\text{C}$. The results indicate that though for the silica-FFA system adsorption is weak enough to yield a linear isotherm, the heat of adsorption is too high and discourages the use of a thermal swing for regeneration.

13. Conclusions

Adsorption is a robust and reliable operation for the refining of biodiesel and its feedstocks. Hydrophilic adsorbents seem the best choice, because most of the undesired impurities are polar. In this sense silicas offer a high saturation capacity (10-15%) for glycerol and glycerides, and enough affinity for soaps, FFA, metals and salts.

One advantage of adsorption units for the removal of glycerol, glycerides, soaps, phosphatides and metals from biodiesel and its feedstocks, is the reduction in wastewater

effluents and the sparing of washing, oil-water separation and wastewater treatment units. Other advantages are small capital expenditure, robustness and easiness of operation. Cost-effective means for the scale-up of packed bed adsorbers for biodiesel refining seem to be accurate models for flow and adsorption and scaled-down RSCCTs. Accurate models for flow and adsorption can be solved in their full complexity only with the aid of numerical calculations but analytical solutions for rapid design and sensitivity analysis can be got using approximations, such as the use of square and linear isotherms and LDF models. Further approximations can be obtained for low Biot and high axial Péclet numbers. The operation of adsorbers should minimize the consumption of adsorbent. From this point of view countercurrent bleaching tank arrays should be used but this mode of operation cannot be exploited in the case of adsorbents with linear isotherms. In the case of packed bed adsorbers common lead-lag setups of 2 or more serial columns are recommended.

14. Acknowledgements

This work was financed with the support of Universidad Nacional del Litoral (Grant PI-60-298, CAI+D 2009) and CONICET (National Research Council of Argentina).

15. References

- Allara, D.L. & Nuzzo, R.G. (1985) Spontaneously organized molecular assemblies. 1. Formation, dynamics, and physical properties of n-alkanoic acids adsorbed from solution on an oxidized aluminum surface. *Langmuir*, Vol 45, No 1, pp. 45-52.
- Álvarez-Ramírez, J., Fernández-Anaya, G., Valdés-Parada, F.J. & Ochoa-Tapia, J.A. (2005). Physical Consistency of Generalized Linear Driving Force Models for Adsorption in a Particle. *Industrial & Engineering Chemistry Research*, Vol. 44, No 17, pp. 6776-6783, ISSN 08885885.
- Anderson, D., Masterson, D., McDonald, B. & Sullivan, L. (2003). Industrial Biodiesel Plant Design and Engineering: Practical Experience. *Chemistry and Technology Conference, Session Seven: Renewable Energy Management, International Palm Oil Conference (PIPOC)*, 24-28 August 2003, Putrajaya Marriot Hotel, Putrajaya, Malaysia.
- Bellot, J.C., Choisnard, L., Castillo, E. & Marty, A. (2001). Combining solvent engineering and thermodynamic modeling to enhance selectivity during monoglyceride synthesis by lipase-catalyzed esterification. *Enz. Microb. Technol.*, Vol. 28, No 4-5, pp. 362-369, ISSN 0141-0229.
- Bondioli, P., Gasparoli, A., Bella, L. D. & Tagliabue, S. (2002). Evaluation of biodiesel storage stability using reference methods. *Eur. J. Lipid Sci. Tech.*, Vol. 104, No 12, pp. 777-784, ISSN 1438-9312.
- Bournay, L., Casanave, D., Delfort, B., Hillion, G. & Chodorge, J. (2005). New heterogeneous process for biodiesel production: A way to improve the quality and the value of the crude glycerin produced by biodiesel plants. *Catalysis Today*, Vol. 106, No. 1-4, pp. 190-192, ISSN 0920-5861.
- Busto, M., D'Ippolito, S.A., Yori, J.C., Iturria, M.E., Pieck, C.L., Grau, J.M. & Vera, C.R. (2006). Influence of the axial dispersion on the performance of tubular reactors during the non-catalytic supercritical transesterification of triglycerides. *Energy & Fuels*, Vol 20, No 6, pp. 2642-2647, ISSN 0887-0624.

- Callaghan, P.T., Jolley & K.W. (1980). Translational motion in the liquid phases of tristearin, triolein and trilinolein. *Chem. Phys. Lipids*, Vol. 27, No 1, pp. 49-56, ISSN 1016-0009.
- Chang, Y., van Gerpen, J.H., Lee, I., Johnson, L.A., Hammond, E.G. & Marley, S.J. (1996). Fuel properties and emissions of soybean oil esters as diesel fuel. *Journal of the American Oil Chemists' Society*, Vol. 73, No. 11, pp. 1549-1555, ISSN 0003-021X.
- Condoret, J.S., Vankan, S., Joulia, X. & Marty, A. (1997). Prediction of water adsorption curves for heterogeneous biocatalysis in organic and supercritical solvents. *Chem. Eng. Sci.*, Vol. 52, pp. 213-220, ISSN 0009-2509.
- Cren, E.C. & Meirelles, A.J.A. (2005). Adsorption Isotherms for Oleic Acid Removal from Ethanol + Water Solutions Using the Strong Anion-Exchange Resin Amberlyst A26 OH. *J. Chem. Eng. Data*, Vol. 50, No 5, pp 1529-1534
- Cren, E.C., Morelli, A.C., Sanches, T., Rodrigues, C.E. & Meirelles, A.J.A. (2010). Adsorption Isotherms for Removal of Linoleic Acid from Ethanolic Solutions Using the Strong Anion Exchange Resin Amberlyst A26 OH. *J. Chem. Eng. Data*, Vol. 55, No. 7, pp 2563-2566.
- Crittenden, J.C., Reddy, P.S., Arora, H., Trynoski, J., Hand, D.W., Perram, D.L. & Summers, R.S. (1991). Predicting GAC Performance With Rapid Small-Scale Column Tests. *Journal American Water Works Association*, Vol. 83, No. 1, pp. 77-87, ISSN 0003150X.
- Crown Iron Works (2011). Biodiesel Plants Technical Brochure.
- Cummings, L., & Summers, R.S. (1994). Using RSSCTs to Predict Field-Scale GAC Control of dbp Formation. *Journal American Water Works Association*, Vol. 86, No. 6, pp 88-97, ISSN 0003-150X.
- Darnoko, D. & Cheryan, M. (2000). Kinetics of palm oil transesterification in a batch reactor. *JAACS*, Vol. 77, No 12, pp 1263-1267, ISSN 0003-021X .
- Díaz, Z. & Miller, J.H. (1990). Removal of polar impurities from diesel and jet fuel. United States Patent 4,912,873.
- D'Ippolito, S.A., Yori, J.C., Iturria, M.E., Pieck, C.L. & Vera, C.R. (2007). Analysis of a Two-Step, Noncatalytic, Supercritical Biodiesel Production Process with Heat Recovery, *Energy & Fuels*, Vol. 21, No 1, pp 339-346, ISSN 0887-0624.
- Dunn, R. O., Shockley, M.W. & Bagby, M.O. (1996). Improving the low-temperature properties of alternative diesel fuels: Vegetable oil-derived methyl esters. *JAACS*, Vol. 73, pp. 1719-1728.
- Du Plessis, L. M.; de Villiers, J. B. M. & van der Walt, W. H. (1985). Stability studies on methyl and ethyl fatty acid esters of sunflowerseed oil. *JAACS*, Vol. 62, No 4, pp 748-752, ISSN 0003-021X .
- Falk, O. & Meyer-Pittroff, R. (2004). The effect of fatty acid composition on biodiesel oxidative stability. *European Journal of Lipid Science and Technology*, Vol 106, No 12, pp 837-843, ISSN 1438-7697
- Farhan, F.M., Rahmati, H. & Ghazi-Moghaddam, G. (1988). Variations of trace metal content of edible oils and fats during refining processes. *JAACS*, Vol. 65, No 12, pp. 1961-1962, ISSN 0003-021X .
- Flider, F.J. & Orthoefer, F.T. (1981). Metals in soybean oil. *JAACS*, Vol. 58, No. 3, 270-272, ISSN 0003-021X.
- Foletto, E.L., Colazzo, G.C., Volzone, C. & Porto, L.M. (2011). Sunflower oil bleaching by adsorption onto acid-activated bentonite. *Brazilian Journal of Chemical Engineering*, Vol. 28, No. 1, pp. 169-174, ISSN 0104-6632.

- Freedman, B., Butterfield R. O. & Pryde E. H. (1986). Transesterification kinetics of soybean oil. *JAOCS*, Vol. 63, No 10, pp 1375-1380, ISSN 0003-021X.
- Freundlich, H. (1906). Über die Adsorption in Lösungen. *Z. Phys. Chem.*, Vol 57, pp 385-470.
- Geil, B., Feiweier, T., Pospiech, E.M., Eisenblätter, J., Fujara, F. & Winter, R. (2000). Relating structure and translational dynamics in aqueous dispersions of monoolein. *Chemistry and Physics of Lipids*. Vol. 106, No 2, pp. 115-126, ISSN 0009-3084 .
- Glueckauf, E. & Coates, J. (1947). Theory of chromatography. Part IV. The influence of incomplete equilibrium on the front boundary of chromatograms and on the effectiveness of separation. *J. Chern. Soc.*, pp. 1315-1321.
- Goto, V., Sasaki, T. & Takagi, K. (2004). Method and apparatus for preparing fatty acid esters. US Patent 6,812,359.
- Grace Davison, TriSyl silica for edible oil refining, Technical Brochure, 2005.
- Griffin, R.P. & Dranoff, J.S. (1963). The rate of glycerol absorption by ion exchange resins. *AIChE Journal*, Vol. 9, No 2, pp, 283-&, ISSN 0001-1541.
- He, H., Sun, S., Wang, T. & Zhu, S. (2007). Transesterification kinetics of soybean oil for production of biodiesel in supercritical methanol. *JAOCS*, Vol. 84, No. 4 pp. 399-404, ISSN 0003-021X.
- Hills, J.H. (1986). An investigation of the linear driving force approximation to diffusion in spherical particles. *Chemical Engineering Science*, Vol. 41, No 11, pp. 2779-2785.
- Hussin, F., Kheireddine, M. & Wan Daud, W.M.A. (2011). Textural characteristics, surface chemistry and activation of bleaching earth: A review. *Chemical Engineering Journal*, Vol. 170, No 1, pp. 90-106, ISSN 1385-8947.
- Ito, E., Rob van Veen, J.A. & Ng, F.T.T. (2006). On novel processes for removing sulphur from refinery streams. *Catalysis Today*, Vol. 116, No. 4, pp 446-460, ISSN 0920-5861.
- Karaosmanoglu, F., Cigizoglu, K.B., Tuter, M. & Ertekin, S. (1996). Investigation of the Refining Step of Biodiesel Production. *Energy & Fuels*, Vol. 10, No. 4, pp. 890-895, ISSN 0887-0624.
- Kimmel, T., Doctoral Thesis, Technical University of Berlin, 2004.
- King, C. J. (1980). Separation Processes, 2nd Ed., McGraw-Hill, ISBN 9780070346123, New York, USA.
- Knappe, D.R.U., Snoeyink, V.L., Roche, P., Prados, M.J. & Bourbigot, M.M. (1997). The effect of preloading on rapid small-scale column test predictions of atrazine removal by GAC adsorbers. *Water Research*, Vol. 31, No 11, pp. 2899-2909, ISSN 0043-1354.
- Lastella, J.M. (2005). System for removal of methanol from crude biodiesel fuel. United States Patent Application 20050188607.
- Li, P., Xiu, G. & Rodrigues, A.E. (2004). Modeling breakthrough and elution curves in fixed beds of inert core adsorbents: analytical and approximate solutions. *Chem. Eng. Sci.*, Vol. 59, No. 15, pp. 3091-3103, ISSN 0009-2509.
- Liu, Y., Huang, J. & Wang, X. (2008). Adsorption Isotherms for Bleaching Soybean Oil with Activated Attapulgite. *JAOCS*, Vol. 85, No 10, pp. 979-984, ISSN 0003-021X .
- Lotero, E., Liu, Y., Lopez, D.E., Suwannakarn, K., Bruce, D.A. & Goodwin, Jr., J.G. (2005). Synthesis of Biodiesel via Acid Catalysis. *Industrial & Engineering Chemistry Research*, Vol. 44, No 14, pp. 5353-5363, ISSN 0888-5885.
- Lurgi GmbH (2011). Biodiesel Plants Technical Bulletin. Frankfurt am Main, Germany.

- Manuale, D.L., Mazzieri, V.A., Torres, G., Vera, C.R. & Yori, J.C. (2011). Non-catalytic biodiesel process with adsorption-based refining. *Fuel*, Vol. 90, No 3, pp. 1188-1196, ISSN 0016-2361.
- Manuale, D.L. Tesis Doctoral, Universidad Nacional del Litoral, Santa Fe, Argentina, 2011.
- Mazzieri, V.A., Vera, C.R. & Yori, J.C. (2008) Adsorptive properties of silica gel for biodiesel refining. *Energy & Fuels*, Vol. 22, No 6, pp 4281-4284, ISSN 0887-0624.
- Mendes, A.M.M., Costa, C.A.V. & Rodrigues, A.E. (2001). Oxygen separation from air by PSA: modelling and experimental results. Part I: isothermal operation. *Separation and Purification Technology*, Vol. 24, No1-2, pp. 173-188, ISSN 1383-5866.
- McDonald, W.M. (2001). Process for dry synthesis and continuous separation of a fatty acid methyl ester reaction product. US Patent 6,262,285.
- Moser, B.R., Haas, M.J., Winkler, J.K., Jackson, M.A., Erhan, S.Z. & List, G.R. (2007). Evaluation of partially hydrogenated methyl esters of soybean oil as biodiesel. *Eur. J. Lipid Sci. Technol.*, Vol. 109, No 1, pp 17-24, ISSN 1438-7697.
- Nakayama, M. & Tsuto, K. (2004). Method of producing fatty acid alkyl ester for diesel fuel oil. European Patent EP 1 477 549.
- Nawar, W.W. & Han, L.B. (1985), Thermal oxidation of lipids in monolayers I. The nature of binding on silica, *JAOCs*, Vol. 62, No 11, pp 1596-1598, ISSN 0003-021X.
- Negi, D.S., Sobotka, F., Kimmel, T., Wozny, G. & Schomäcker, R. (2006). Liquid-liquid phase equilibrium in glycerol-methanol-methyl oleate and glycerol-monoolein-methyl oleate ternary systems. *Ind. Eng. Chem. Res.*, Vol. 45, No 10, pp. 3693-3696, ISSN 0888-5885.
- Nijhuis, T.A., Beers, A.E.W., Kapteijn, F. & Moulijn, J.A. (2002). Water removal by reactive stripping for a solid-acid catalyzed esterification in a monolithic reactor. *Chem. Eng. Sci.*, Vol. 57, No 9, pp. 1627-1632, ISSN 0009-2509.
- Noureddini, H., Dailey, W.R. & Hunt, B.A. (1998). Production of ethers of glycerol from crude glycerol the by-product of biodiesel production. *Advances in Environmental Research*, Vol. 2, No 2, pp 232-243.
- Noureddini, H. & Zhu, D. (1997). Kinetics of transesterification of soybean oil. *JAOCs*, Vol. 74, No 11, pp. 1457-1463, ISSN 0003-021X .
- Özgül-Yücel, S. & Turkey, S. (2001). Purification of FAME by rice hull ash adsorption. *JAOCs*, Vol. 80, No 4, pp. 373-376, ISSN 0003-021X
- Portilho, M.F., Vieira, J.A.V., Zotin, J.L. & Lima, M.S.S. (2008). Method for the production of biodiesel from vegetable oils and fats, using heterogeneous catalysts. United States Patent Application 20080295393.
- Proctor, A. & Palaniappan, S. (1990). Adsorption of soy oil free fatty acids by rice hull ash, *JAOCs*, Vol. 67, No 1, pp 15-17, ISSN 0003-021X.
- Rasmusson, A. & Neretnieks, I. (1980). Exact solution of a model for diffusion in particles and longitudinal dispersion in packed beds. *AIChE J.*, Vol. 26, No. 3, pp. 686-690, ISSN 0001-1541.
- Refaat, A.A. (2009). Correlation between the chemical structure of biodiesel and its physical properties. *Int. J. Environ. Sci. Tech.*, vol. 6, No 4, pp. 677-694, ISSN 1735-1472.
- Romig, C. & Spataru, A., (1996), Emissions and engine performance from blends of soya and canola methyl esters with ARB #2 diesel in a DDC 6V92TA MUI engine, *Bioresource Technology*, Vol. 56, No 1, pp 25-34, ISSN 0960-8524.

- Rossi, M., Gianazza, M., Alamprese, C. & Stanga, F. (2003). The role of bleaching clays and synthetic silica in palm oil physical refining. *Food Chemistry*, Vol. 82, No 2, pp. 291-296, ISSN 0308-8146.
- Roonasi, P., Yang, X. & Holmgren, A. (2010). Competition between Na oleate and Na silicate for a silicate/oleate modified magnetite surface studied by in situ ATR-FTIR spectroscopy. *J. Colloid. Interface Sci.* 343, No 2, pp. 546-552, ISSN 0021-9797.
- Ruthven, D.M. & Farooq, S. (1990). *Gas Separation & Purification*, Vol. 4, No 3, pp 141-148, ISSN 0950-4214 .
- Ruthven, D.M., Farooq, S. & Knaebel, K.S. (1994). Pressure Swing Adsorption. VCH Publishers, New York, ISBN 1560815175.
- Saka, S. & Minami, E. (2009). Biodiesel production with supercritical fluid technologies. *Handbook of Plant-Based Biofuels*, CRC Press, ISBN: 978-0-7890-3874-6.
- Saka, S. & Kusdiana, D. (2001). Biodiesel fuel from rapeseed oil as prepared in supercritical methanol. *Fuel*, Vol. 80, No 2, pp. 225-231, ISSN 0016-2361 .
- Sari, A. & Iþýldak, Ö. (2006). Adsorption properties of stearic acid onto untreated kaolinite. *Bull. Chem. Soc. Ethiop.*, Vol. 20, No 2, pp. 259-67, ISSN 1011-3924 .
- Schmitt Faccini, M., Espinosa da Cunha, M., Aranda Moraes, M.S., Krause, L.C., ManiqueI, M.C., Rodrigues, M.R.A., Benvenuti, E.V. & Caramão, E.B. (2011). Dry washing in biodiesel purification: a comparative study of adsorbents. *J. Braz. Chem. Soc.*, Vol. 22, No.3, pp 558-563, ISSN 0103-5053.
- Sigrist, M., Beldoménico, H., Tarifa, E.E., Pieck, C.L. & Vera, C.R. (2011). Modelling diffusion and adsorption of As species in Fe/GAC adsorbent beds. *J. Chem. Tech. Biotech.*, DOI: 10.1002/jctb.2638.
- Silva, J.A.C., Da Silva, F.A. & Rodrigues, A.E. (2000), Separation of n/iso paraffins by PSA, *Separation and Purification Technology*, Vol. 20, No 1, pp. 97-110, ISSN 1383-5866 .
- Sips, R. (1948). On the structure of a catalyst surface, *J. Chem. Phys.*, Vol. 16, No 5, pp 490-495, ISSN 0021-9606
- Smits, G. (1976). Measurement of the diffusion coefficient of free fatty acid in groundnut oil by the capillary-cell method. *JAOCS*, Vol. 53, No 4, pp. 122-124, ISSN 0003-021X .
- Tang, H.; Wang, A.; Salley, S. O. & Simon, K. Y., (2008). The Effect of Natural and Synthetic Antioxidants on the Oxidative Stability of Biodiesel. *JAOCS*, Vol. 85, No 4, pp 373-382, ISSN 0003-021X.
- Teo, W.K. & Ruthven, D.M. (1986). Adsorption of water from aqueous ethanol using 3-A° molecular sieves. *Ind. Eng. Chem. Process Des. Dev.*, Vol. 25, No. 1, pp. 17-21, ISSN 0196-4305.
- Thompson, J. C., Peterson, C. L., Reece, D. L. & Beck, S. M. (1998). Two-year storage study with methyl and ethyl esters of rapeseed. *Am. Soc. Agric. Eng.*, Vol. 41, No 4, pp 931-939, ISSN 0001-2351 .
- Toro-Vázquez, J.F. & Proctor A. (1996). The freundlich isotherm in studying adsorption in oil processing. *JAOCS*, Vol. 73, No 12, pp. 1627-1633, ISSN : 0003-021X.
- van Dalen, J.P. & van Putte, K.P.A.M. (1992). Adsorptive refining of liquid vegetable oils. *Congrès DGF-Meeting No 48*, Vol. 94, NS2, pp. 567-570, ISSN 0931-5985 .
- van Gerpen, J.H., Hammond, E.G., Johnson, L.A., Marley, S.J., Yu, L., Lee, I. & Monyem, A. (1996). Determining the Influence of Contaminants on Biodiesel Properties. *Final Report for the Iowa Soybean Promotion Board*, Iowa State University, July 31.

- Vasques, E. (2009). Adsorção de glicerol, mono e diglicerídeos presentes no biodiesel produzido a partir do óleo de soja. Master Thesis, UFPR.
- Wakao, N. & Funazkri, T. (1978) Effect of fluid dispersion coefficients on particle-to-fluid mass transfer coefficients in packed beds. Correlation of Sherwood numbers. *Chem. Eng. Sci.*, Vol. 33, No 10, pp 1375-1384, ISSN 0009-2509 .
- Wang, W.G., Lyons, D.W., Clark, N.N., Gautam, M. & Norton, P.M. (2000). Emissions from nine heavy trucks fueled by diesel and biodiesel blend without engine modification. *Environ. Sci. Technol.*, Vol. 34, No 6, pp 933-939, ISSN 0013-936X .
- Warabi, Y., Kusdiana, D. & Saka, S. (2004). Reactivity of triglycerides and fatty acids of rapeseed oil in supercritical alcohols. *Biores. Technol.*, Vol. 91, No 3, pp. 283-287, ISSN 0960-8524 .
- Weber, T.W. & Chakravorti, R.K. (1974). Pore and solid diffusion models for fixed-bed adsorbers. *AIChE J.*, Vol. 20, No 2, pp. 228-237, ISSN 0001-1541 .
- Welsh, W.A., Bogdanor, J.M. & Toenebohen, G.J. (1990). Silica refining of oils and fats. In *Proceedings of the World Conference on Edible Fats and Oils Processing*, p. 89, Maastricht, The Netherlands, Oct. 1-7, 1989. Edited by D.R. Erickson.
- Xiu, G.H., Nitta, T., Li, P. & Jin, G. (1997). Breakthrough curves for fixed-bed adsorbers: quasi-lognormal distribution approximation. *AIChE J.*, Vol. 43, No 4, pp. 979-985, ISSN 0001-1541.
- Yang, R.T. (1997). Gas Separation by Adsorption Processes. Butterworth, 1987, reprinted by Imperial College Press, London.
- Yang, R.T., Fenn, J.B. & Haller, G.L. (1974). Surface diffusion of stearic acid on aluminum oxide. *AIChE J.*, Vol. 20, No 4, pp 735-742, ISSN 0001-1541 .
- Yon, C.M. & Turnock, P.H. (1971). Multicomponent adsorption equilibria on molecular sieves. *AIChE Symp. Ser.*, Vol. 67, No. 117, pp. 75-83.
- Yori, J.C., D'Amato, M.A., Grau, J.M., Pieck, C.L. & Vera, C.R. (2006). Depression of the cloud point of biodiesel by reaction over solid acids. *Energy & Fuels*, Vol. 20, No 6, pp 2721-2726, ISSN 0887-0624.
- Yori, J. C., D'Ippolito, S. A., Pieck, C. L. & Vera, C. R. (2007). Deglycerolization of Biodiesel Streams by Adsorption Over Silica Beds. *Energy & Fuels*, Vol. 21, No 1, pp 347-353, ISSN 0887-0624.
- Yori, J.C. (2008). Doctoral Thesis, UNED, Madrid, Spain.
- Zeldowitsch, J. (1934). Adsorption site energy distribution. *Acta Physicochim, URSS*, Vol. 1, pp 961-973.
- Zhang, Y., Dubé, M.A., McLean, D.D. & Kates, M. (2003). Biodiesel production from waste cooking oil: 1. Process design and technological assessment. *Bioresource Technology*, Vol. 89, No 1, pp 1-16, ISSN 0960-8524 .
- Zhou, W. & Boocock, D.G.B. (2006). Phase distributions of alcohol, glycerol, and catalyst in the transesterification of soybean oil. *JAACS*, Vol. 83, No 12, pp 1047-1052, ISSN 0003-021X.



Edited by Margarita Stoytcheva and Gisela Montero

The book “Biodiesel: Feedstocks and Processing Technologies” is intended to provide a professional look on the recent achievements and emerging trends in biodiesel production.

It includes 22 chapters, organized in two sections. The first book section: “Feedstocks for Biodiesel Production” covers issues associated with the utilization of cost effective non-edible raw materials and wastes, and the development of biomass feedstock with physical and chemical properties that facilitate its processing to biodiesel. These include Brassicaceae spp., cooking oils, animal fat wastes, oleaginous fungi, and algae. The second book section: “Biodiesel Production Methods” is devoted to the advanced techniques for biodiesel synthesis: supercritical transesterification, microwaves, radio frequency and ultrasound techniques, reactive distillation, and optimized transesterification processes making use of solid catalysts and immobilized enzymes. The adequate and up-to-date information provided in this book should be of interest for research scientist, students, and technologists, involved in biodiesel production.

Photo by Toa55 / iStock

IntechOpen

